

# SmartH



# Hello, Smart Home









# Pet feeder with HD camera

## Instructions


### Precautions

1. Read this instruction manual carefully before operation;
2. Indoor use only.
3. This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
4. Children should be supervised to ensure that they do not play with the appliance.
5. The instructions for appliances having a part of class III construction supplied from a detachable power supply unit shall state that the appliance is only to be used with the power supply unit provided with the appliance.
6. DO NOT expose the feeder to sunlight, as the sunlight will affect the built-in infrared sensor to cause feeding result misreading.
7. Do not drop anything other than dry food into the food hopper. Otherwise, there is a risk of dysfunction or mistaken feeding;
8. Place the feeder on the floor. To prevent the feeder from being hit by pets, it is recommended to place the feeder at the corner or against the wall;
9. Please shield or organize the power cord well to prevent the pet from biting the cable and causing dangerous situations such as electric shock;
10. Do not disassemble or modify the device yourself;
11. This product is only suitable for DRY FOOD, and WET FOOD is prohibited;
12. This feeder is suitable for cats or small and medium-size dogs;
13. The pet food's shape and density will cause some deviations from the food hopper's capacity and the feeding unit's quantity;
14. After each fill-up of the hopper, there may be deviation of two portions at the initial feeding time. It is recommended to calibrate manually! (Click the manual feeding button until food is fed!)
15. Some power banks are not compatible with or not suitable for the pet feeder: a, please make sure when the power bank connects to the feeder alone, it can activate automatically; b, connect the feeder to the power adapter first, then connect the power bank. If the feeder does not draw current from the power bank (i.e. power bank does not wake up, stay in sleep mode), it is suitable to use with the pet feeder.

## Introduction

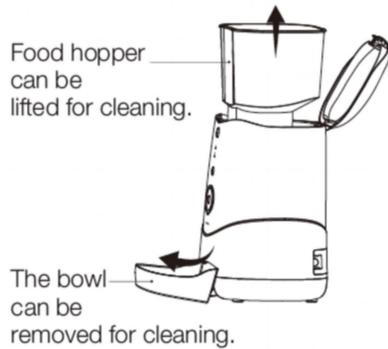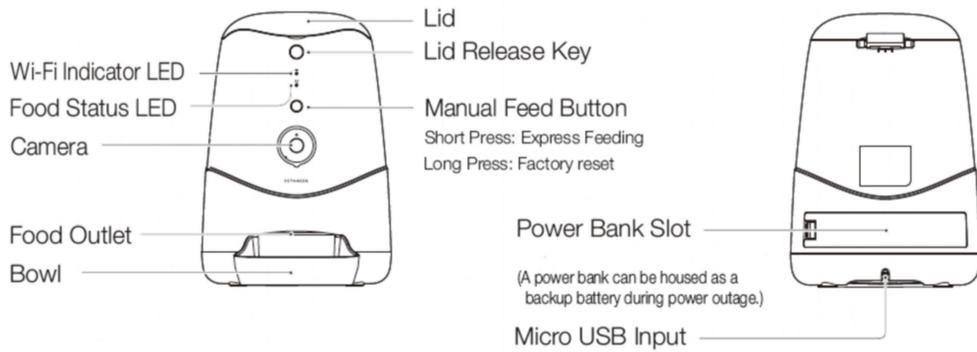


### Inside the box

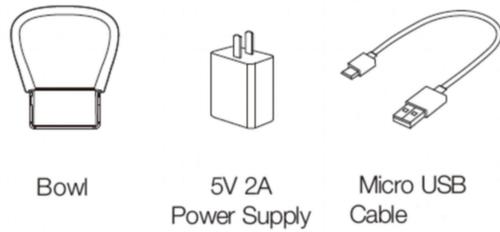

## Operation

### ① Power on the feeder

Unbox and connect the Micro USB cable to the power input port at the bottom of the feeder, then connect A/C adapter to a wall outlet.



### ② Bowl mounting

Slide the bowl into the feeder's outlet.



### ③ Lid releasing

Press the release key to lift up the lid.



### ④ Fill hopper with food

Pour food into the hopper and fill it.



### ⑤ Close the lid

Press down to close the lid




### ⑥ Manual feeding

Short press the manual feeding button to feed instantly.  
(Default quantity is one portion, customizable through App.)



# Set Up Router

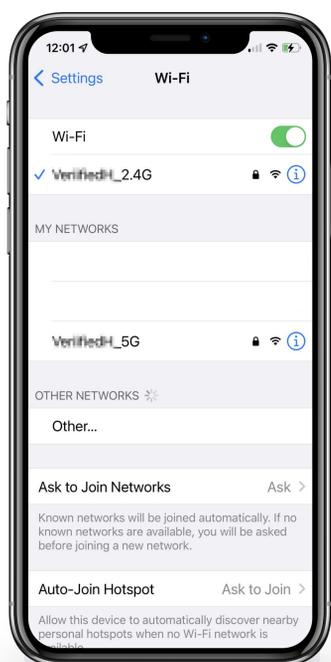

Please keep network available

2.4GHz

5GHz



The router supports the 2.4GHz WiFi (doesn't support the 5GHz), and is connected to the WiFi network. Please set the parameters of the router before connecting the WiFi network, and record the SSID and password of your WiFi.

# Install Free App

Download APP: scan the QR code below to download and install. Register and login: open the "MySmarth" APP to register and login according to the prompts.



## Customer Support





# Ready to work



Power on the feeder and wait for the Wi-Fi Indicator start blinking slowly along with a start-up sound. It may take a few minutes. (If not, please long press the Manual Feed Button to reset the device).



Two pairing modes are provided in the MySmartH app. The QR Code mode is the default mode, and the access point (AP) mode is the compatible mode. The user can tap the pairing mode drop-down list in the top-right corner of the page to switch between the pairing modes.

## The default mode is QR Code pairing mode

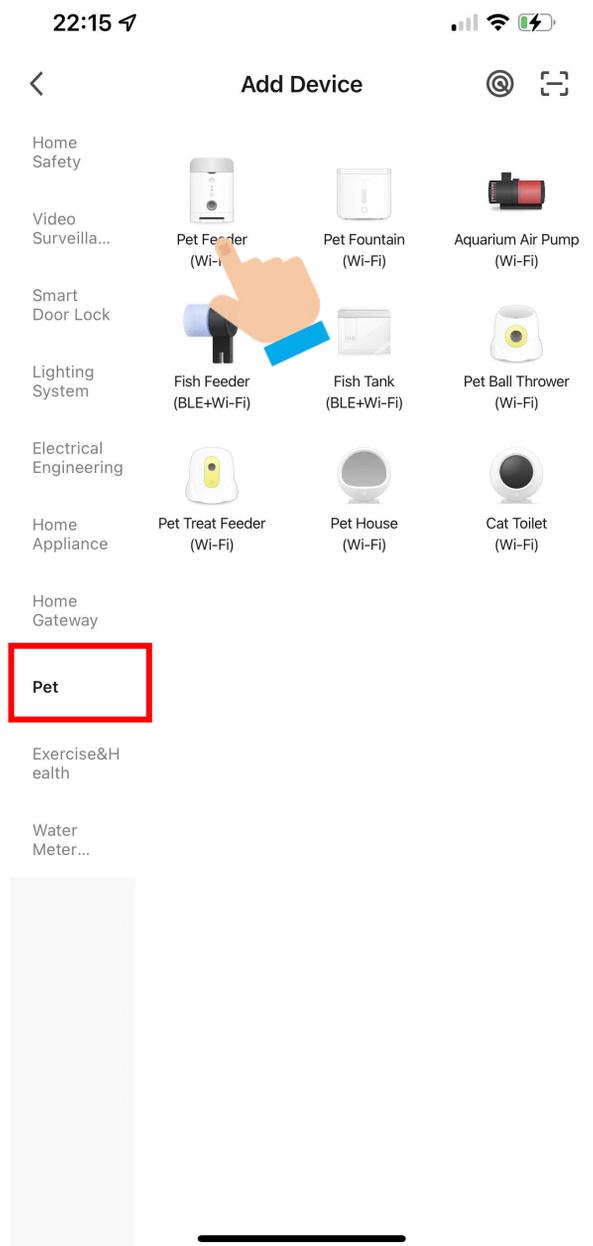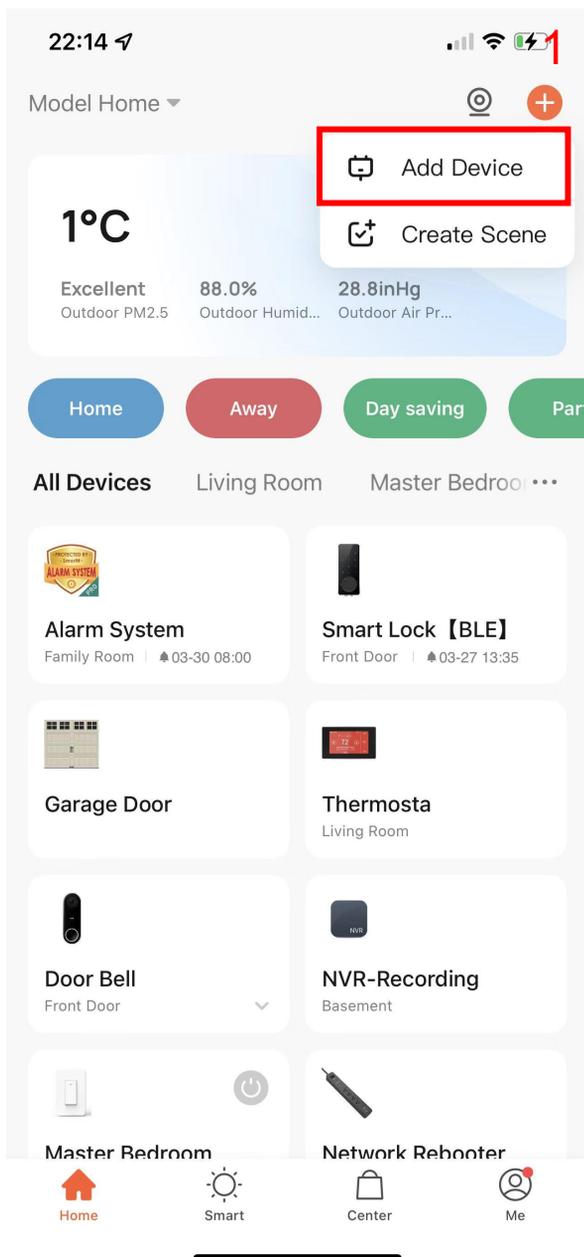



1. Open "MySmartH" APP, press the '+' in the upper right corner of the main screen;

2. Choose "Pet", click "Pet Feeder".

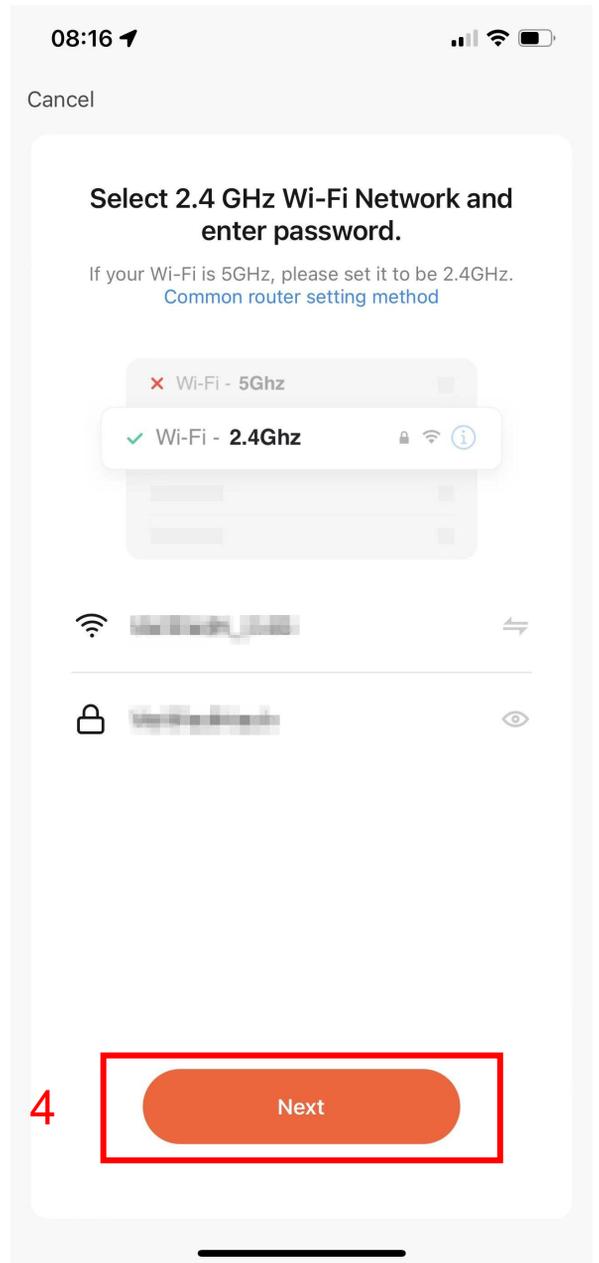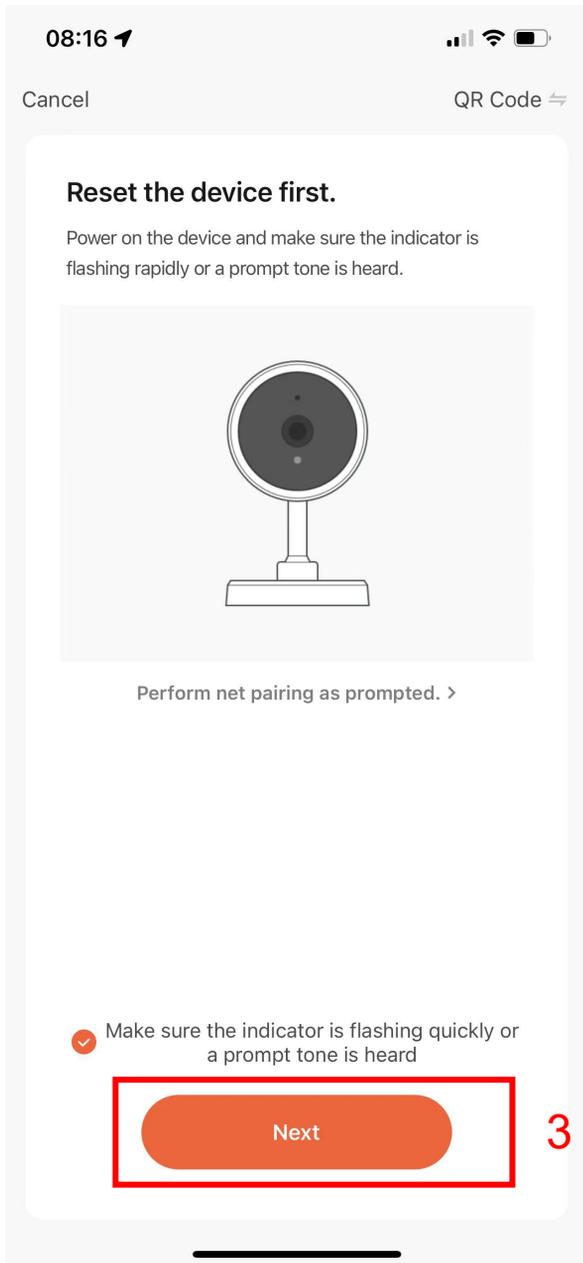

3. Click "Next step";

4. Choose WiFi and enter password and Tap "Next"

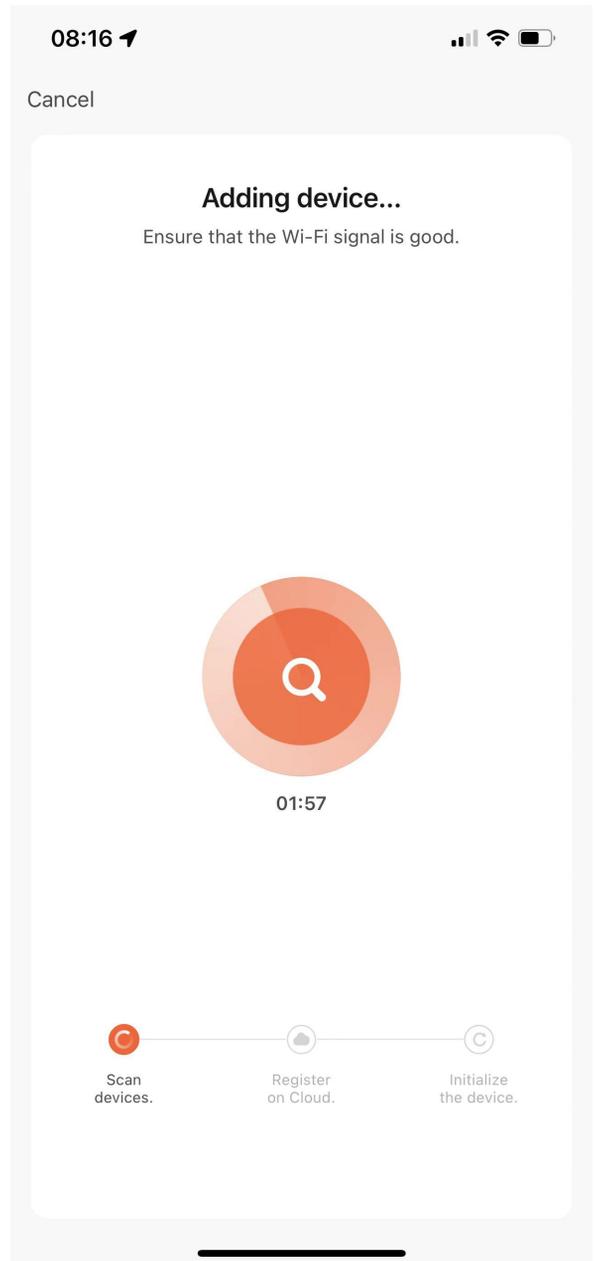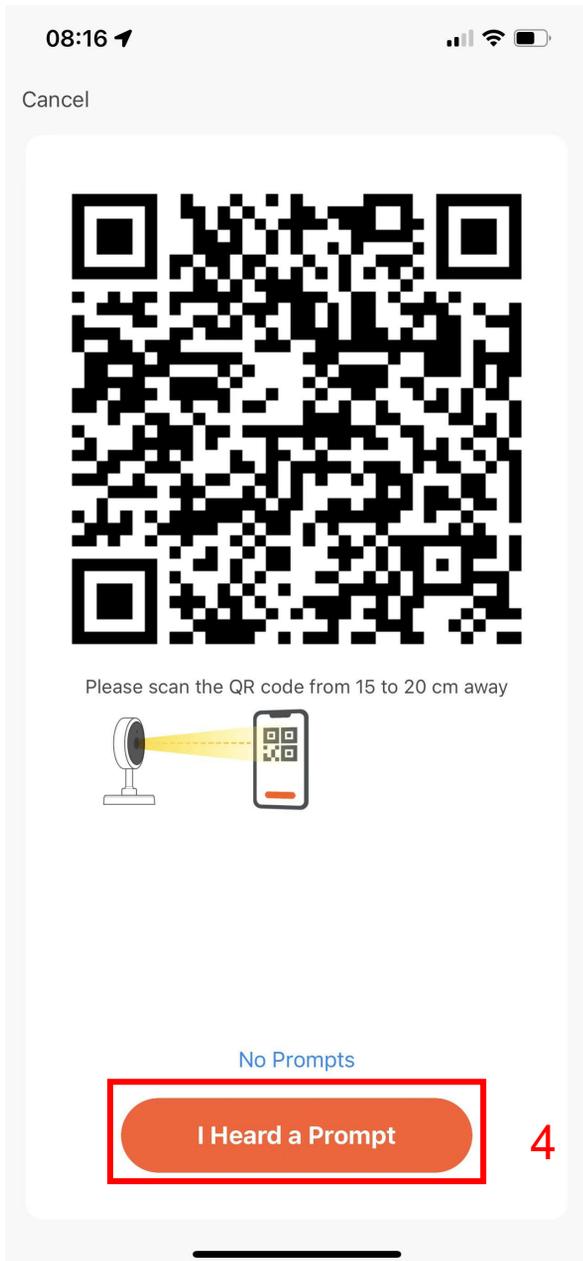

4. In this interface, you should scan the QR code in your phone with the Pet camera, when the Pet camera comes out "dong dong dong". And you click "I heard a prompt".

00:24



Done

5

Added.



Smart Camera

Device added successfully

Living Room

Master Bedroom

Office

Dining Room

Kitchen

Garage

Basement

Front Door

Family Room

22:48



Model Home



1°C

Excellent  
Outdoor PM2.5

89.0%  
Outdoor Humid...

28.8inHg  
Outdoor Air Pr...

Home

Away

Day saving

Part

All Devices

Living Room

Master Bedroom ...



Alarm System

Family Room | 03-30 08:00



Smart Lock [BLE]

Front Door | 03-27 13:35



Garage Door



Thermosta

Living Room



Door Bell

Front Door



NVR-Recording

Basement



Pet Feeder

Kitchen



Master Bedroom

Master Bedroom



Home



Smart





Center



Me

5. When connecting, you should make sure your router, mobile, and camera are as close as possible. When Pet Feeder added successfully.

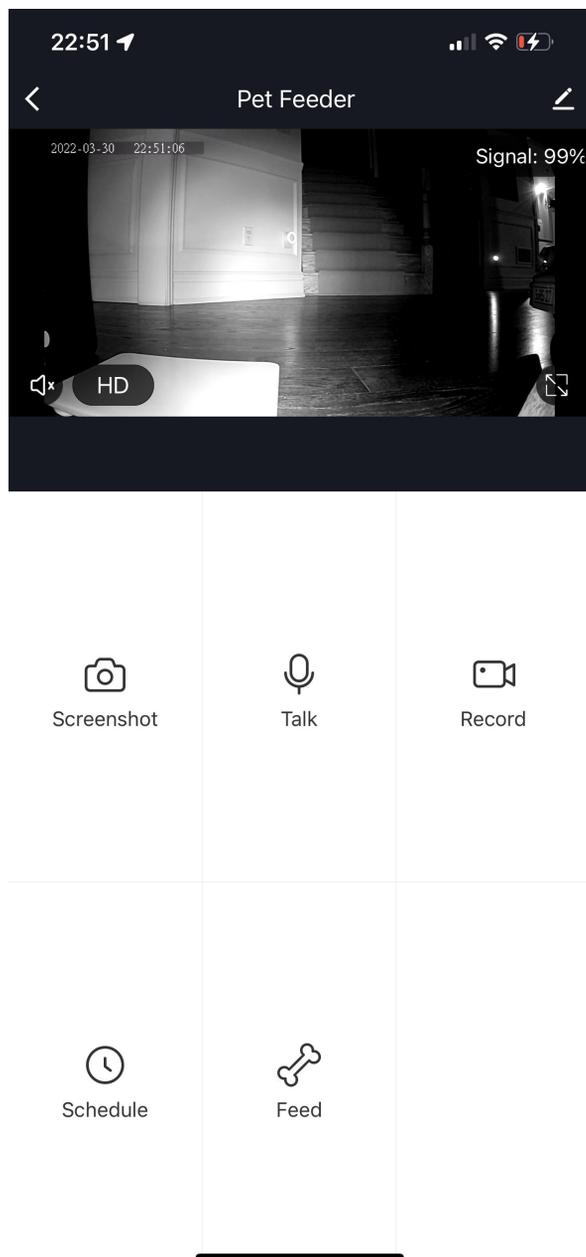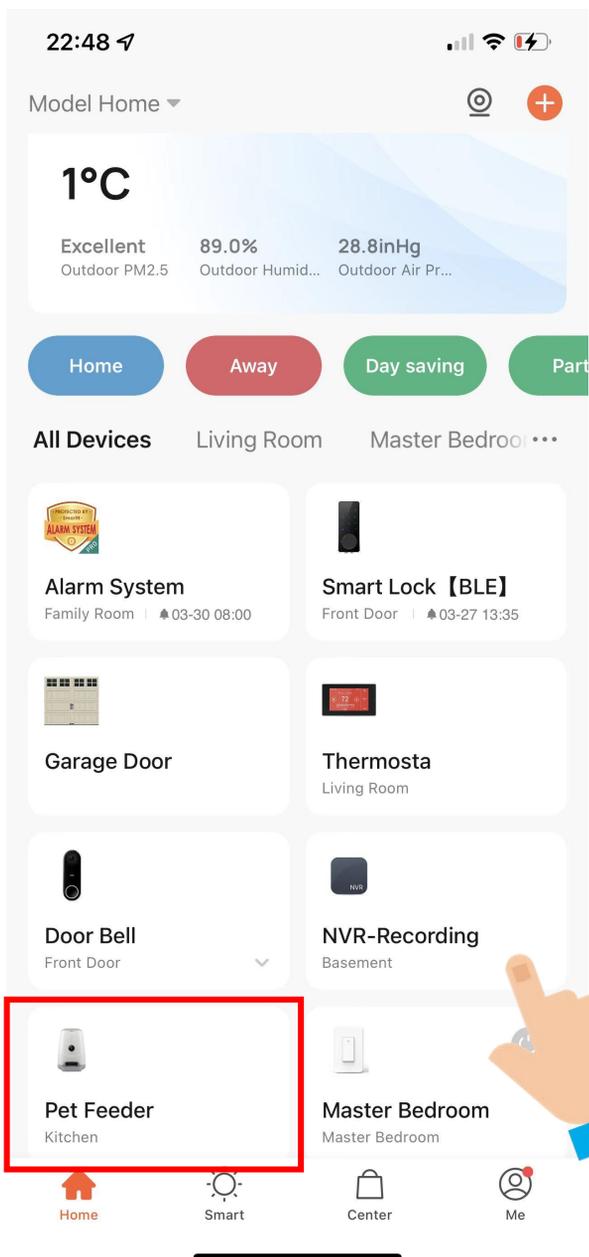

Now your Pet Feeder is successfully added to MySmartH app.




# Manually add Wi-Fi devices in AP mode

**If the connection fails, please try AP mode**

If a dual-band network that supports both 2.4 GHz and 5 GHz bands is used, the AP mode can be used to add devices.

In AP mode, follow the instructions to enable the indicator to blink slowly, select Confirm the indicator is blinking slowly, and then tap Next.


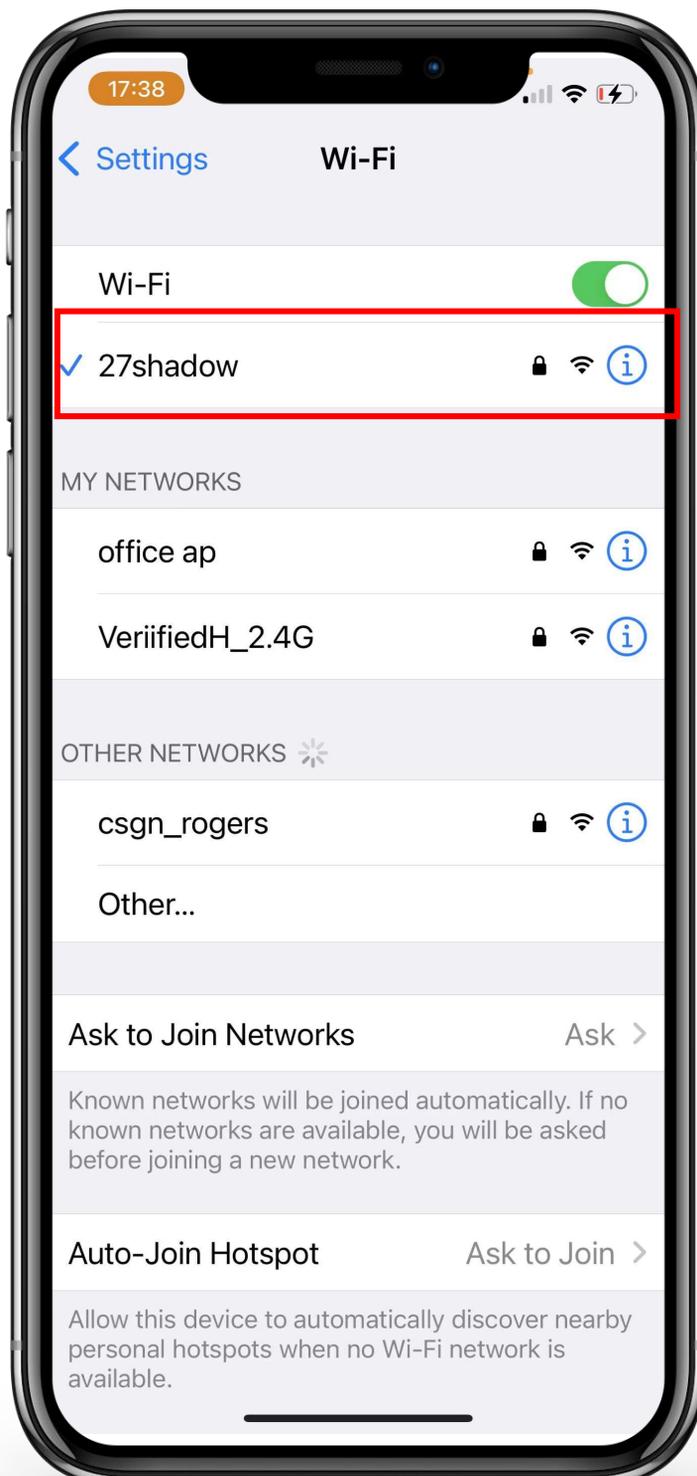


# Ready to work





Power on the feeder and wait for the Wi-Fi Indicator start blinking slowly along with a start-up sound. It may take a few minutes. (If not, please long press the Manual Feed Button to reset the device).

# Connect the Pet Feeder to MySmarth App

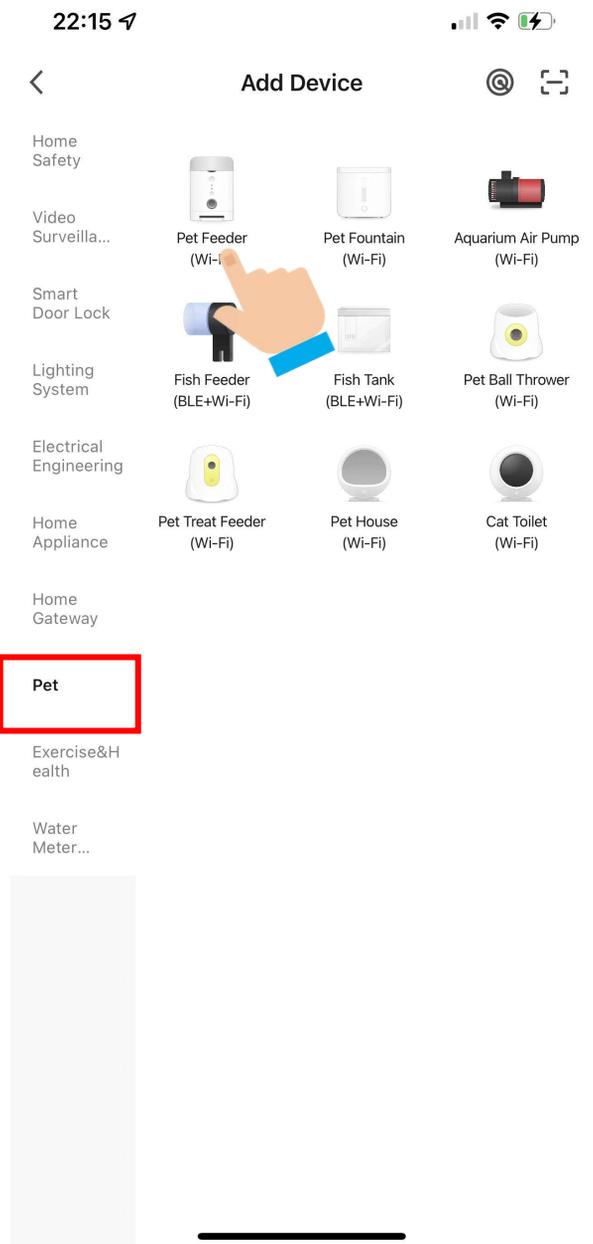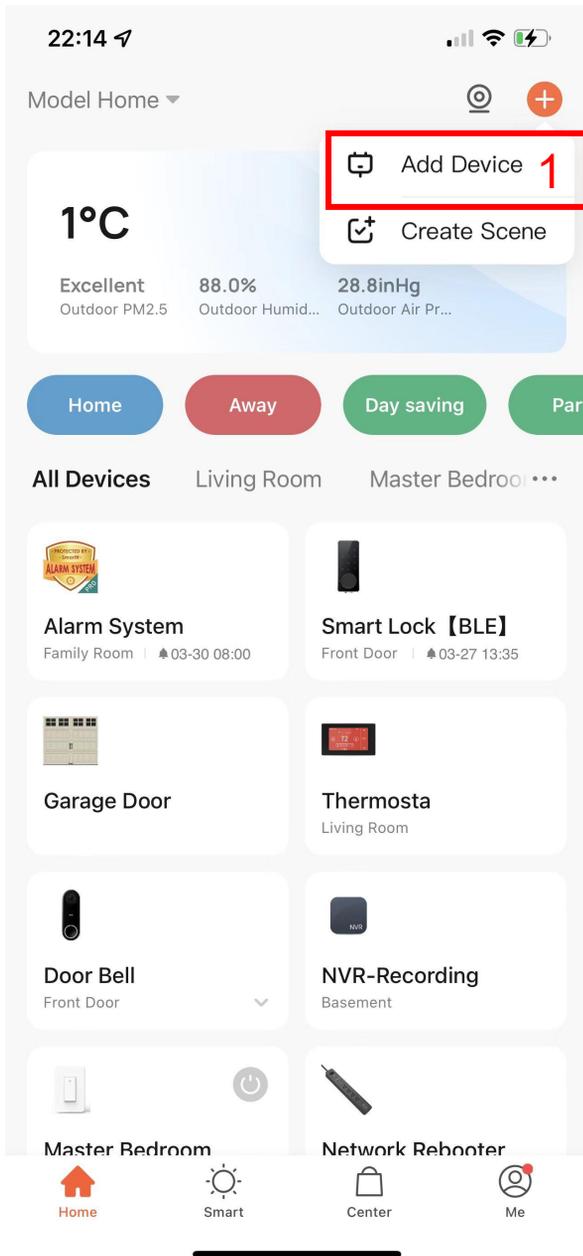



1. Open "MySmarthH" APP, press the '+' in the upper right corner of the main screen;

2. Choose "Pet", click "Pet Feeder".

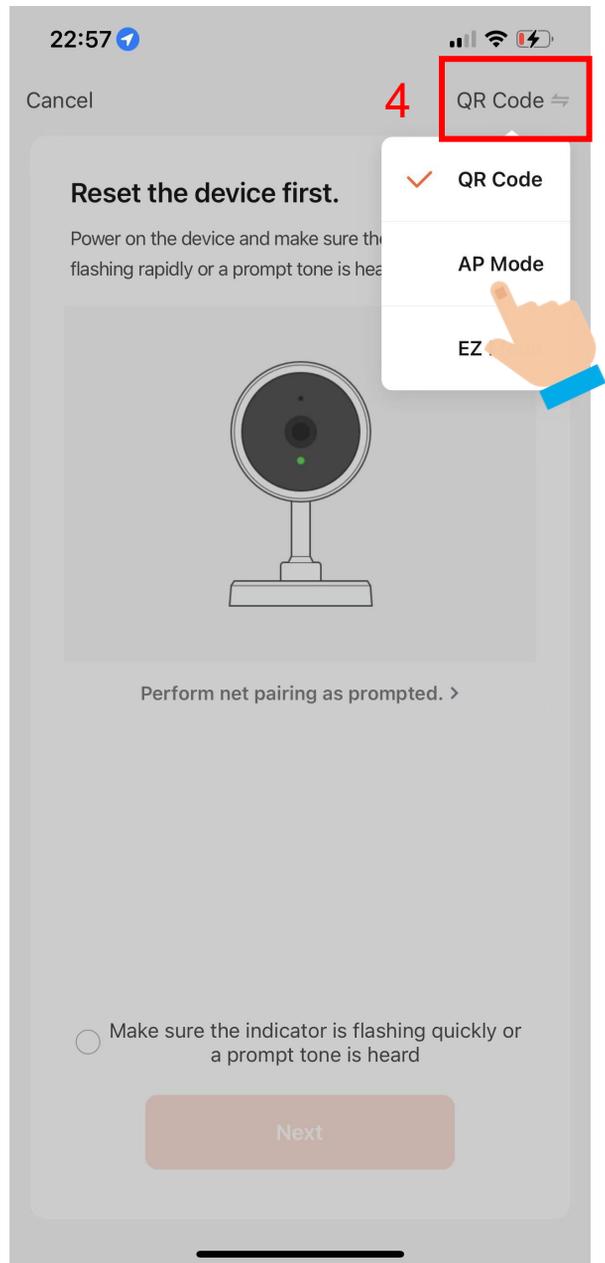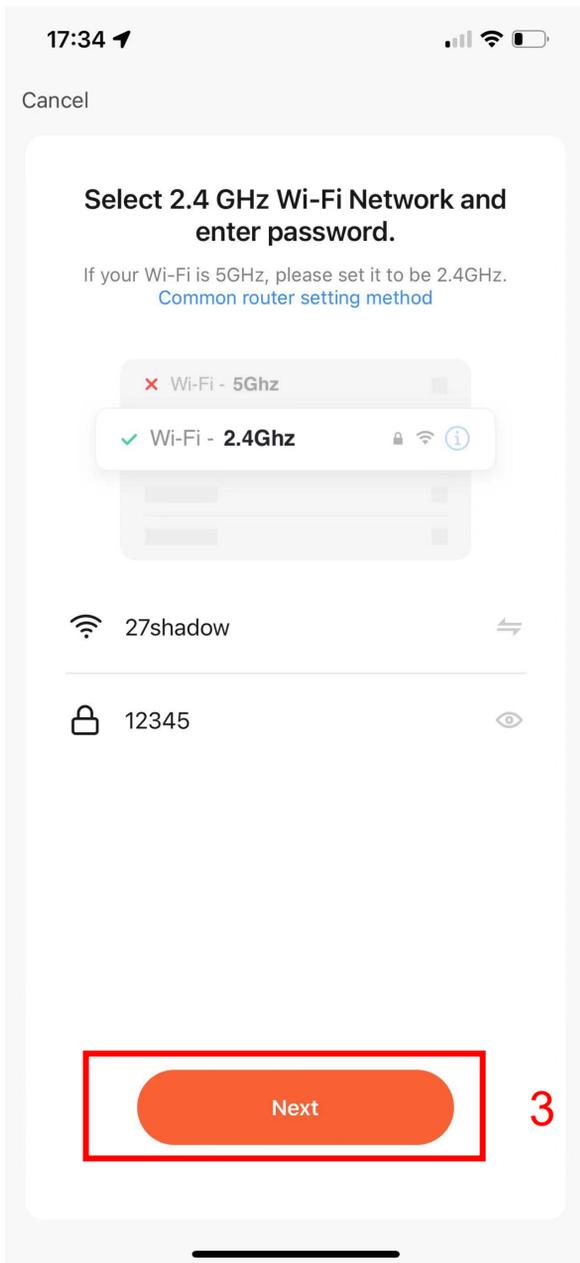

3. Choose WiFi and enter password and Tap “Next”;


4. Tap"AP Mode"in upper right screen;

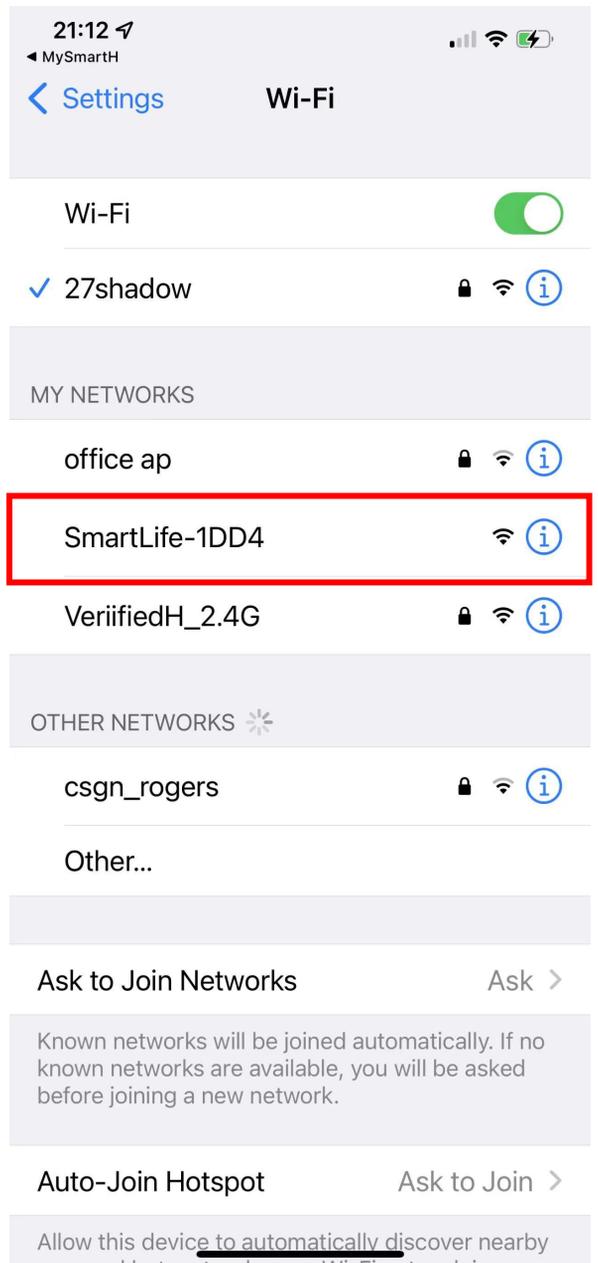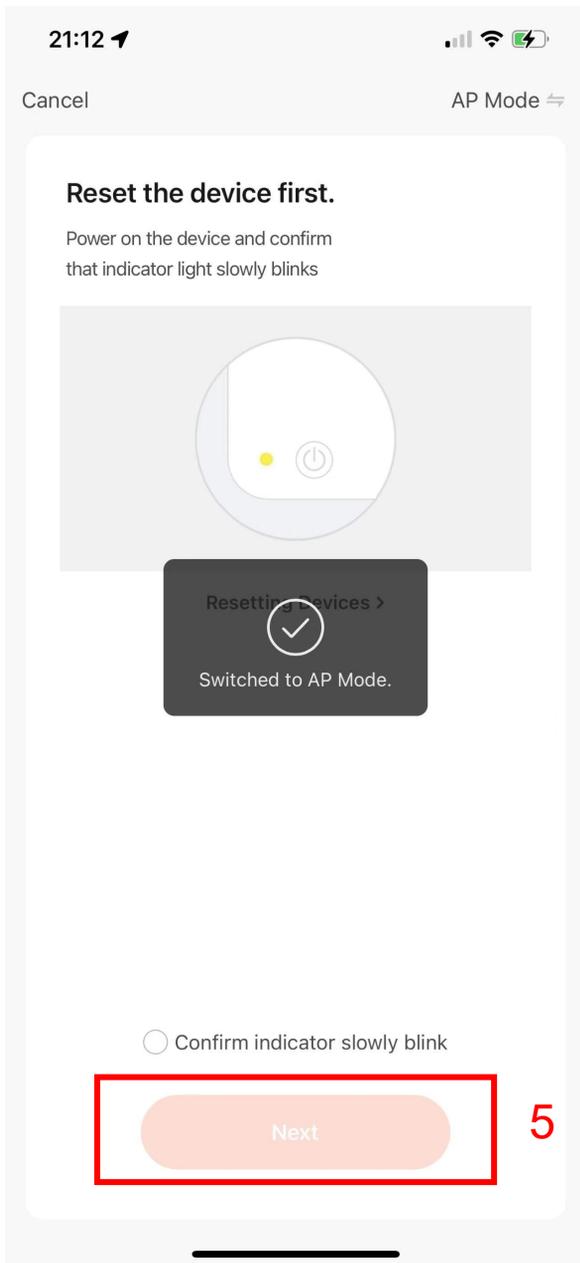

5. Tap "Next";

6. Click "SmartLife-1DD4";



In AP mode, on the Wi-Fi setting page of the mobile phone, find the Wi-Fi hotspot starting with SmartLife.

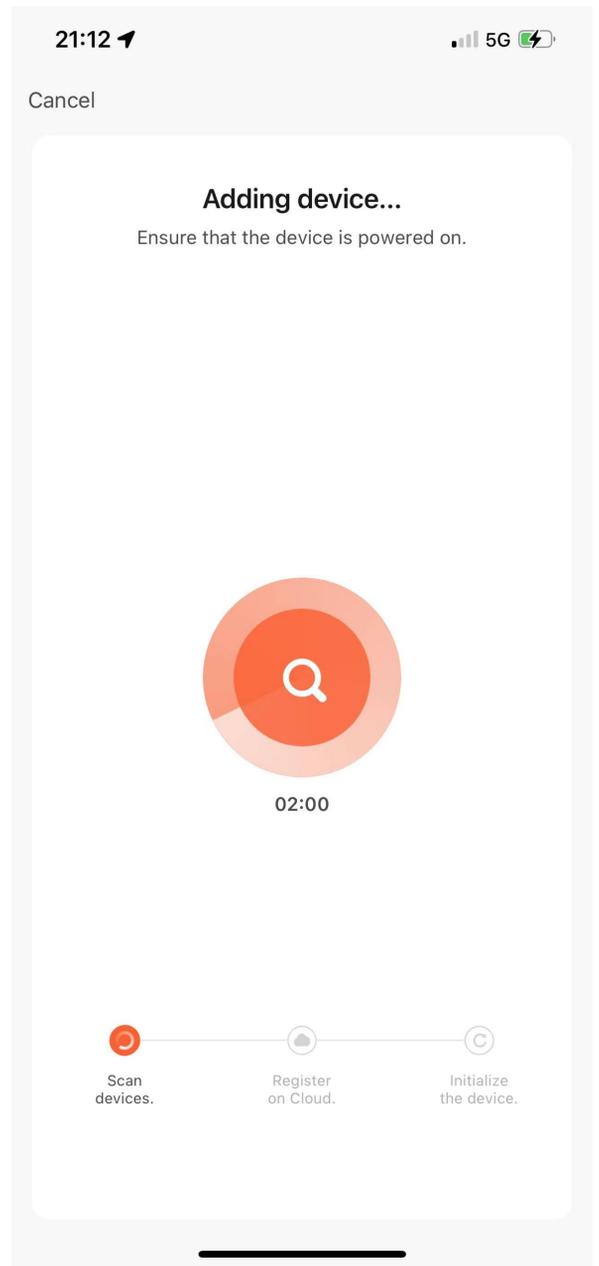



7. Tap the Wi-Fi hotspot to connect the mobile phone to it.

8. After a successful connection, go back to the app to start pairing.

The device pairing page on the app appears again and the pairing process continues.

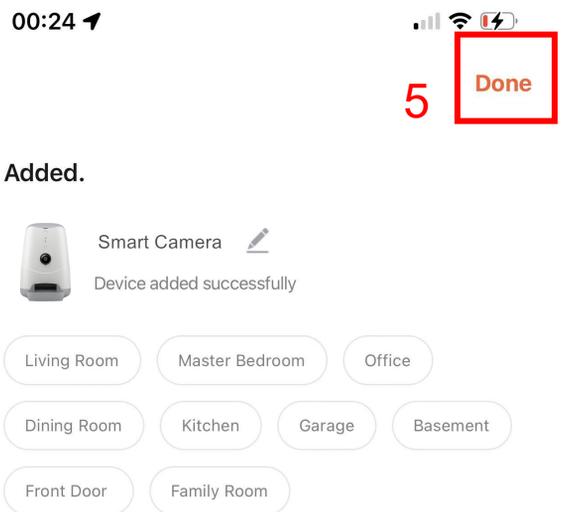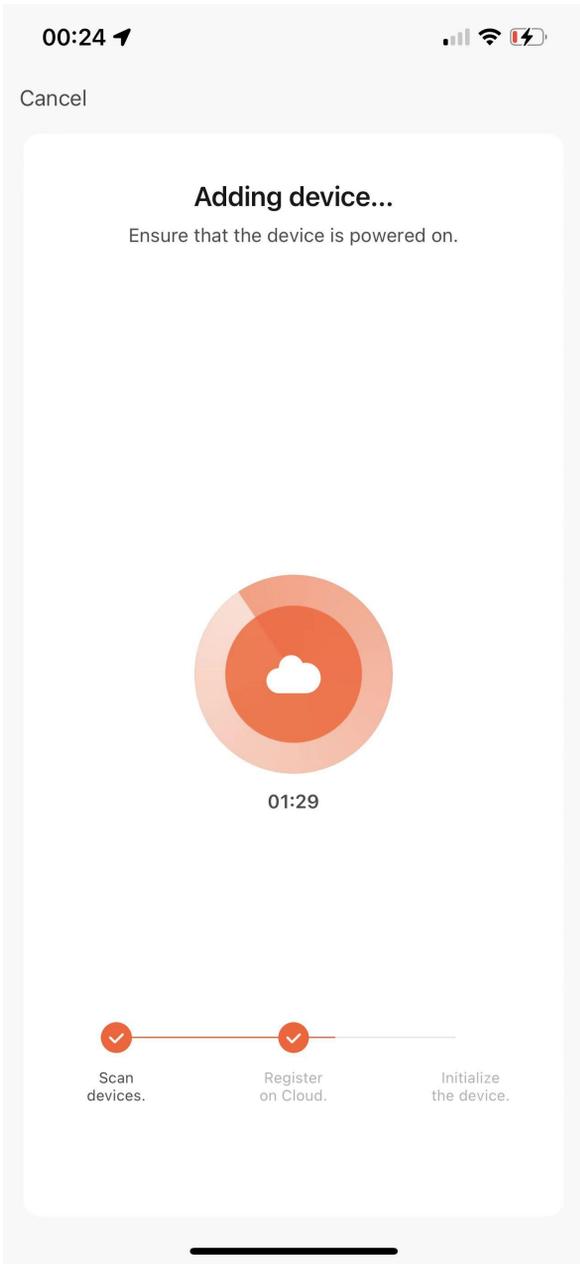

5. Tap "Done";

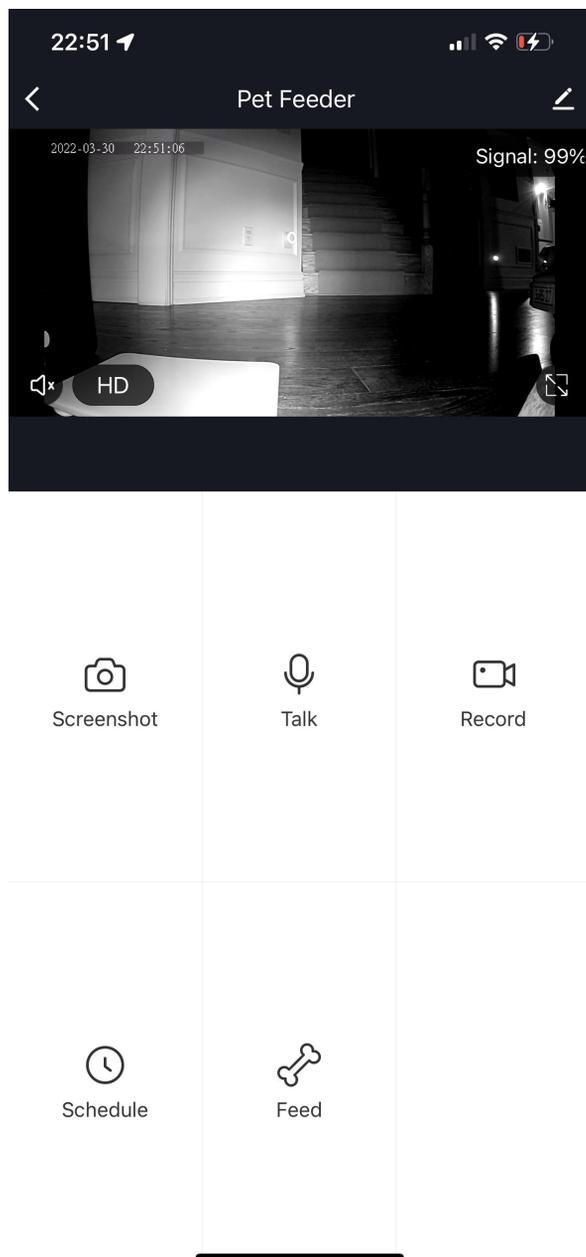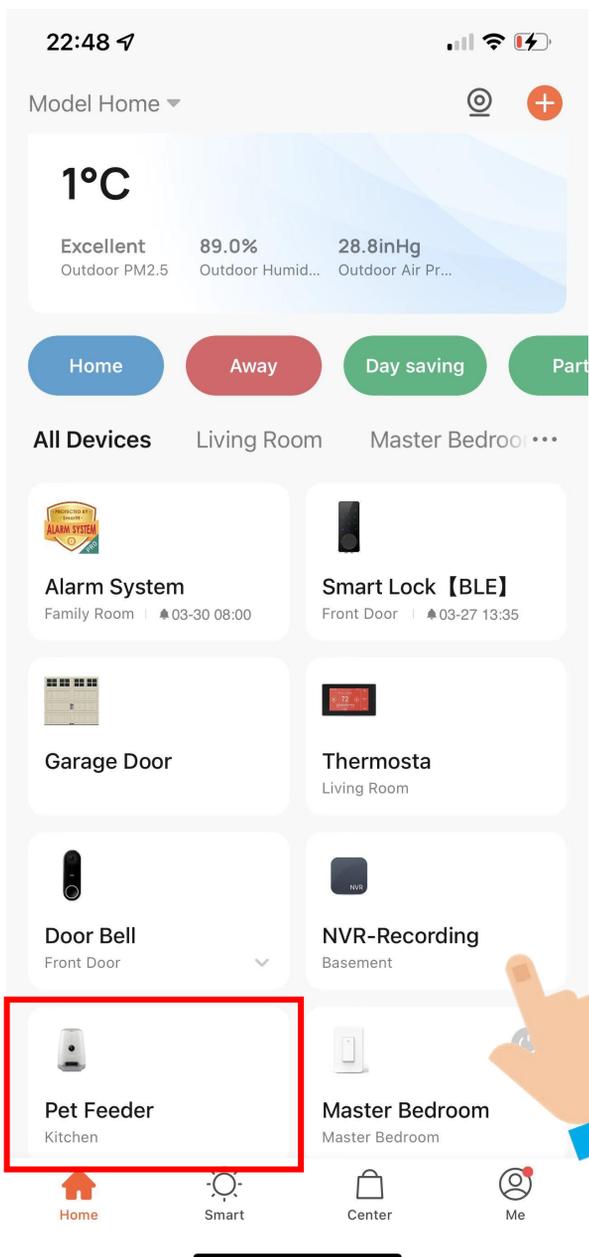

Now your Pet Feeder is successfully added to MySmartH app.

