
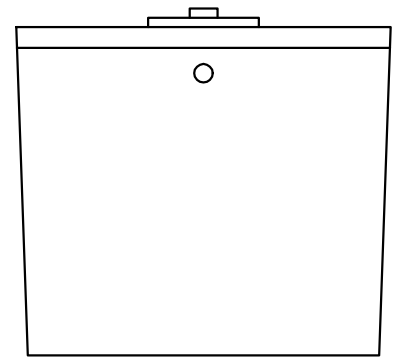


- NOTES:
1. CONCRETE STRENGTH = MIN. 4500 PSI
 2. #4 REBAR ON 1' CENTER
 3. "POLYLOK" PIPE SEALS CAST IN TANK
 4. MASTIC SEALANT IN TANK JOINT
 5. TANKS CAN BE MODIFIED UPON REQUEST
 6. DROP IN BAFFLES MADE TO SPECIFICATIONS
 7. POURED IN BAFFLE ON OUTLET END POSSIBLE

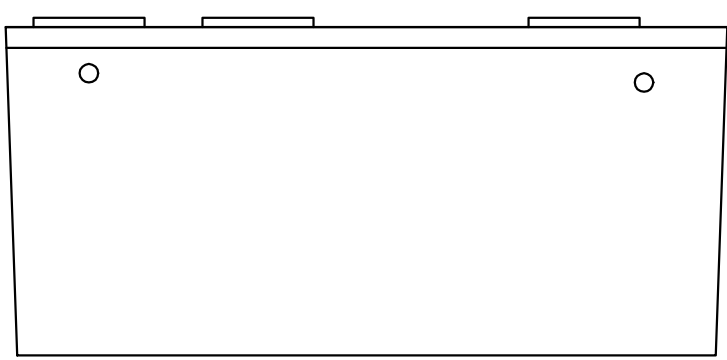

APPROX. WEIGHT:
 TOP = 4,868 lb
 BOTTOM = 13,857 lb
 TOTAL = 18,725 lb

GAL. PER IN = 44.5
 SETTLING CHAMBER #1 = 725 Gal.
 (TREATMENT SIDE)
 CHAMBER #2 = 1456 Gal.
 ACTUAL GAL. TO OUTLET = 2,181
 FULL CAPACITY = 2,715

<h1 style="margin: 0;">CT JAMISON SEPTIC</h1> <p style="margin: 0;">CALLAWAY, VIRGINIA PH: 540-483-5944</p>	<h2 style="margin: 0;">MicroFast .90</h2>		Date Feb. 3, 2020
	2000 GAL TS TANK		