



# PRODUCT PORTFOLIO

Version 1.05



# Content


In-house R&D/Quality Control	3-4
Customized Solutions designing team	5
Technical Support	6
HMS/AMS	7
<b>Product Range</b>	<b>8-31</b>
- IP Solution	8-16
- Guard+ Series	17-19
- Video Storage	20
- HD Solution	21-24
- Body worn Solution	25
- Mobile DVR Solution	26
- PoE Ethernet Switches	27
- Consumer Series	28-29
- Video Door Phone/Time & Attendance	30-31

# In-house R&D team

pro-actively caters to the dynamic market demands

## Product specification

- Documentation of product design
- Costing of components and sourcing
- Roadmap of product life cycle
- Gauging market demand



## Engineering Validation & Testing

- Firmware & application development
- Server integration
- Creation of prototype with subsequent OEM discussions




## Design Validation & Testing

- Hardware & software integration
- Beta testing for ironing out bugs

## Production Validation & Testing

- Rigorous testing iterations for checking operating performance
- Production trial runs for checking manufacturing process efficiency
- Final software release after eliminating all bugs

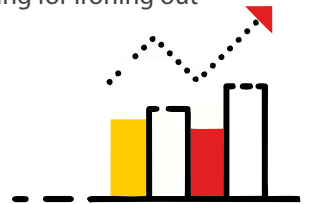

## Mass Production

- Regular monitoring with numerous quality checks
- Sample testing for detecting and fixing defective products
- Cost optimization process for reducing manufacturing cost



## Regular Monitoring

- Regular software upgrades & bug fixes for ensuring smooth user experience
- Phasing out of product at end of lifecycle




# In-house Quality Control

A dedicated in-house quality control team ensures quality across the wide spectrum of offered products



## Basic inspection

- Colour
- Housing material
- Matching specifications
- Label printing

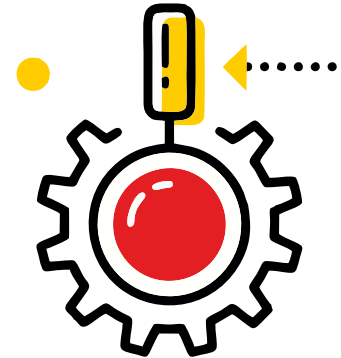


## Quality inspection

- Light test
- Lens focus test
- IR board and sensor check
- Water proofing
- Audio test
- Drop test



## Packaging inspection

- Camera box printing
- Logo printing
- Carton label check
- Manual check
- Hologram check
- Packaging of right accessories



## Detailed report on anomalies

Dedicated team that undertakes the same stringent process every time to ensure quality



## Customized Solutions Designing Team




We have a customized solutions designing team that earnestly crafts tailor-made solutions for all the different verticals ranging from banking to even the oil and gas industry after having done thorough field work and perfectly understanding the specific requirements of any given premises, may it be a shopping mall, a judicial court or entire multi-acred educational institutes. Our designing team is recognized for exceptional technical solutions and with integrated, extensible and flexible designs, they profulfil the evolving business requirements.

A photograph of a call center environment. In the foreground, a woman with dark hair in a ponytail, wearing glasses and a headset with a microphone, is looking towards the right. Behind her, several other agents are visible, also wearing headsets and working at their desks. The background is slightly blurred, showing office plants and a red wall.


## Technical Support & Customer Service Cell

CP PLUS has designed and structured a proficient tech support team to enhance the customer experience and to resolve any occurring issues instantaneously. The team provides support for the entire range of CP PLUS products for the better part of the day every weekday. The support is also provided in 24x7. 2500 callers are satisfied on a regular basis through assisting the troubleshooting of products and setting up of new products as well provided information about the way different technologies work.

# Local Customize Software Solution

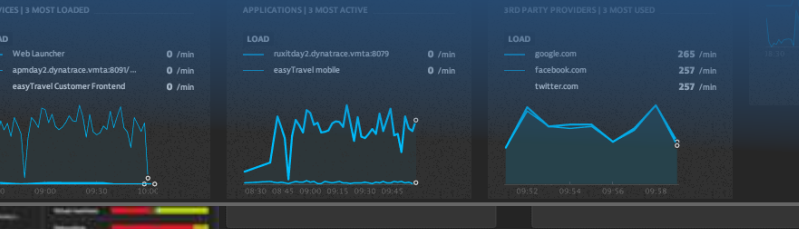

## Health Monitoring System (HMS)

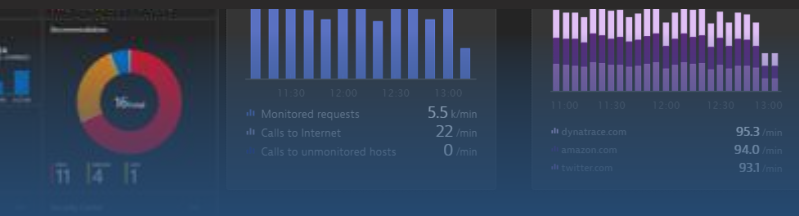

Ensuring the smooth functioning of surveillance systems is crucial for the efficiency of a security solution. While monitoring the performance of a small security setup is easily possible, the complex systems that involve multiple cameras and recorders, pose a serious challenge.

The Health Monitoring System by CP PLUS provides a real-time health status of your surveillance devices; it keeps you notified of the perceived critical issues and potential problems such as device going offline, hard drive failure, recording status, network outages, tampering, etc. Investing in the HMS helps you detect system issues automatically. It enables instant reporting of live incidents, reduces system downtime since issues are detected and rectified at the onset and provides daily system supports as well as live status web page view.

CP PLUS provides the HMS solution software which comes complete with live system reporting, alerts and alarms for hard drive failure, recording status, network outages, tampering, etc.

## Attendance Monitoring Solution (AMS)



The Attendance Management Solution (AMS) is a cloud-based facilitation tool for employers and employees, to track attendance, leaves, late comings, holidays, leave applications, and conveyance time & costs on a daily/monthly basis.

By simply downloading the AMS application on smart phones, employees can mark their attendance from anywhere, wherein their location and login time is captured using GPS. Employers, on the other hand, can keep a track of the regularity, attendance and punctuality of employees from anywhere, anytime. Ready access to the consolidated data of all employees with regard to their attendance, leaves and conveyance, in one place, helps them generate employee-efficiency reports and computes salaries with ease. AMS effectively plugs the loopholes of traditional tracking systems and provides transparency as well as comfort to both the employer and employees.

# INTELLIGENT IP SOLUTION



## 2 MP Distribution Series

### CP-UNC-DA21PL3-V3

2MP Full HD IR Network Dome Camera



- ▶ Features:
  - 1/2.8" 2MP PS CMOS Image Sensor
  - Max. 2MP (1920 × 1080)@25/30fps
  - Instastream/Smart H.265 Dual-stream encoding
  - DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
  - 3.6mm fixed lens (2.8mm Optional)
  - IR Range of 30 Mtrs, IP67, PoE
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-TA21PL3-V3

2MP Full HD IR Network Bullet Camera



- ▶ Features:
  - 1/2.8" 2MP PS CMOS Image Sensor
  - Max. 2MP (1920 × 1080)@25/30fps
  - Instastream/Smart H.265 Dual-stream encoding
  - DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
  - 3.6mm fixed lens (2.8mm Optional)
  - IR Range of 30 Mtrs, IP67, PoE
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-TB21L3-MDS

2MP Full HD WDR IR Network Bullet Camera



- ▶ Features:
  - 1/2.8" 2MP PS CMOS Image Sensor
  - Max. 25/30fps@2MP (1920×1080)
  - Instastream & H.265 dual-stream encoding
  - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
  - 3.6mm fixed lens (2.8mm Optional)
  - IR Range of 30 Mtrs, IP67, Micro SD Card, PoE
  - Support Starlight Function
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-VB21L3-MDS

2 MP Full HD WDR IR Vandal Dome Camera



- ▶ Features:
  - 1/2.8" 2MP PS CMOS Image Sensor
  - Max. 25/30fps@2MP (1920×1080)
  - Instastream & H.265 dual-stream encoding
  - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
  - 3.6mm fixed lens (2.8mm Optional)
  - IR Range of 30 Mtrs, IP67, IK10, Micro SD Card, PoE
  - Support Starlight Function
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-TA21L5C-V/TA21L8C-V

2MP Full HD IR Network Bullet Camera



- ▶ Features:
  - 1/2.8" 2MP PS CMOS Image Sensor
  - Max. 2MP(1920 x 1080)@25/30fps
  - Instastream & H.265 dual-stream encoding
  - DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
  - 3.6mm lens (6mm, 8mm, optional)
  - IR Range of 50/80 Mtrs, IP67, PoE
  - Support Built-in Mic
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-DA21PL3C-V3

2MP Full HD IR Network Dome Camera



- ▶ Features:
  - 1/2.8" 2MP PS CMOS Image Sensor
  - Max. 25/30fps@2MP (1920×1080)
  - Instastream & H.265 dual-stream encoding
  - DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
  - 3.6mm fixed lens (2.8mm Optional)
  - IR Range of 30 Mtrs, IP67, PoE
  - Support Built-in Mic
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-TA21PL3C-V3

2MP Full HD IR Network Bullet Camera



- ▶ Features:
  - 1/2.8" 2MP PS CMOS Image Sensor
  - Max. 25/30fps@2MP (1920×1080)
  - Instastream & Smart H.265 dual-stream encoding
  - DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
  - 3.6mm fixed lens (2.8mm Optional)
  - IR Range of 30 Mtrs, IP67, PoE
  - Support Built-in Mic
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

## 4 MP Distribution Series

### CP-UNC-DA41PL3-D

4MP WDR IR Network Dome Camera - 30Mtr.



- ▶ Features:
  - 1/3" 4MP PS CMOS Image Sensor
  - Max. 4MP (2560 × 1440)@25/30fps, and 4MP (2688 × 1520)@20fps
  - Instastream & H.265 dual-stream encoding
  - WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
  - 3.6mm fixed lens (2.8mm Optional)
  - IR Range of 30 Mtrs, IP67, PoE
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro



<p><b>CP-UNC-DA41PL3-V3</b> 4MP IR Network Bullet Camera</p>  <p><b>▶ Features:</b></p> <ul style="list-style-type: none"> <li>• 1/3" 4MP PS CMOS Image Sensor</li> <li>• Max. Output 4MP(2560 × 1440)@25/30fps</li> <li>• Instastream, H.265, Smart H.264, H.264 dual stream encoding</li> <li>• DWDR, Day/Night(ICR), 3D-NR, ROI, AWB, AGC, BLC, HLC</li> <li>• 3.6mm fixed lens (2.8mm optional)</li> <li>• IR Range of 30 Mtrs, IP67, PoE</li> <li>• Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro</li> </ul>	<p><b>CP-UNC-DA41ZPL4-MD</b> 4MP WDR IR Network Dome Camera - 40Mtr.</p>  <p><b>▶ Features:</b></p> <ul style="list-style-type: none"> <li>• 1/3" 4MP PS CMOS Image Sensor</li> <li>• Max. 4MP@25/30fps</li> <li>• Instastream &amp; H.265 dual-stream encoding</li> <li>• WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AGC, BLC, HLC</li> <li>• 2.8mm~12mm Motorized lens</li> <li>• IR Range of 40 Mtrs, IP67, Micro SD Card, PoE</li> <li>• Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro</li> </ul>	<p><b>CP-UNC-DB41L3C-MD</b> 4MP WDR IR Network Dome Camera</p>  <p><b>▶ Features:</b></p> <ul style="list-style-type: none"> <li>• 1/3" 4MP CMOS Image Sensor</li> <li>• Instastream &amp; H.265 triple-stream encoding</li> <li>• Max. 25/30fps@4MP</li> <li>• 2.8mm fixed lens (3.6mm optional)</li> <li>• WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC</li> <li>• IR Range of 30 Mtrs., IP67, PoE, Built-in Mic, Micro SD Card,</li> <li>• Support Starlight Function</li> <li>• Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro</li> </ul>	<p><b>CP-UNC-TB41L3-MDS</b> 4 MP WDR IR Network Bullet Camera</p>  <p><b>▶ Features:</b></p> <ul style="list-style-type: none"> <li>• 1/3" 4MP CMOS Image Sensor</li> <li>• Instastream &amp; H.265 triple-stream encoding</li> <li>• Max. 25/30fps@4MP</li> <li>• 2.8mm fixed lens (3.6mm optional)</li> <li>• WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC</li> <li>• IR Range of 30 Mtrs., IP67, Built-in IR LED, Micro SD Card, PoE</li> <li>• Support Starlight Function</li> <li>• Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro</li> </ul>
<p><b>CP-UNC-TA41PL3-D</b> 4MP WDR IR Network Bullet Camera - 30Mtr.</p>  <p><b>▶ Features:</b></p> <ul style="list-style-type: none"> <li>• 1/3" 4MP PS CMOS Image Sensor</li> <li>• Max. 4MP (2560 × 1440)@25/30fps, and 4MP (2688 × 1520)@20fps</li> <li>• Instastream &amp; H.265 dual-stream encoding</li> <li>• WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC</li> <li>• 3.6mm fixed lens (2.8mm Optional)</li> <li>• IR Range of 30 Mtrs, IP67, PoE</li> <li>• Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro</li> </ul>	<p><b>CP-UNC-TA41ZPL5-MD</b> 4MP WDR IR Network Bullet Camera - 50Mtr.</p>  <p><b>▶ Features:</b></p> <ul style="list-style-type: none"> <li>• 1/3" 4MP PS CMOS Image Sensor</li> <li>• Max. 4MP@25/30fps</li> <li>• Instastream &amp; H.265 dual-stream encoding</li> <li>• WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AGC, BLC, HLC</li> <li>• 2.8mm~12mm Motorized lens</li> <li>• IR Range of 50 Mtrs, IP67, Micro SD Card, PoE</li> <li>• Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro</li> </ul>	<p><b>CP-UNC-VB41L3-MDS</b> 4 MP WDR IR Network Vandal Dome Camera</p>  <p><b>▶ Features:</b></p> <ul style="list-style-type: none"> <li>• 1/3" 4MP CMOS Image Sensor</li> <li>• Instastream &amp; H.265 triple-stream encoding</li> <li>• Max. 25/30fps@4MP</li> <li>• 2.8mm fixed lens (3.6mm optional)</li> <li>• WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC</li> <li>• IR Range of 30 Mtrs., IP67, IK10, Micro SD Card, PoE</li> <li>• Support Starlight Function</li> <li>• Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro</li> </ul>	<p><b>CP-UNC-TB41L5-MDS</b> 4MP WDR IR Bullet Camera</p>  <p><b>▶ Features:</b></p> <ul style="list-style-type: none"> <li>• 1/3" 4MP PS CMOS Image Sensor</li> <li>• 4MP (2560 × 1440)@25/30fps</li> <li>• Instastream/H.265/H.264+/H.264 triple Stream Video Compression</li> <li>• WDR(120dB), Day/Night (ICR), 2D/3D-DNR, AWB, AGC, BLC, HLC</li> <li>• 6mm Lens (3.6mm optional)</li> <li>• IR Range of 50 Mtrs, IP67, Micro SD Card</li> <li>• Support Starlight Function</li> <li>• Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro</li> </ul>
<p><b>CP-UNC-TA41PL3C-D</b> 4MP WDR IR Network Bullet Camera</p>  <p><b>▶ Features:</b></p> <ul style="list-style-type: none"> <li>• 1/3" 4MP PS CMOS Image Sensor</li> <li>• Max. 4MP (2560 × 1440)@25/30fps</li> <li>• Instastream &amp; H.265 Dual-stream encoding</li> <li>• WDR(120dB), Day/Night (ICR), 3D-NR, ROI, AWB, AGC, BLC, HLC</li> <li>• 3.6mm fixed lens (2.8mm Optional)</li> <li>• IR Range of 30 Mtrs, IP67, PoE</li> <li>• Support Built-in Mic</li> <li>• Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro</li> </ul>	<p><b>CP-UNC-DA41PL3C-D</b> 4MP WDR IR Network Dome Camera</p>  <p><b>▶ Features:</b></p> <ul style="list-style-type: none"> <li>• 1/3" 4MP PS CMOS Image Sensor</li> <li>• Max. 4MP (2560 × 1440)@25/30fps</li> <li>• Instastream &amp; H.265 Dual-stream encoding</li> <li>• WDR(120dB), Day/Night (ICR), 3D-NR, ROI, AWB, AGC, BLC, HLC</li> <li>• 3.6mm fixed lens (2.8mm Optional)</li> <li>• IR Range of 30 Mtrs, IP67, PoE</li> <li>• Support Built-in Mic</li> <li>• Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro</li> </ul>	<p><b>CP-UNC-TA41L5C-D-V3</b> 4MP IR Network Bullet Camera</p>  <p><b>▶ Features:</b></p> <ul style="list-style-type: none"> <li>• 1/2.7" 4MP PS CMOS Image Sensor</li> <li>• Max. 4MP (2688 × 1520) @20fps</li> <li>• Instastream &amp; H.265 dual-stream encoding</li> <li>• WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC</li> <li>• 3.6mm lens (6mm optional)</li> <li>• IR Range of 50 Mtrs, IP67, PoE</li> <li>• Support Built-in Mic</li> <li>• Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro</li> </ul>	<p><b>CP-UNC-TA41L8C-D-V3</b> 4MP IR Network Bullet Camera</p>  <p><b>▶ Features:</b></p> <ul style="list-style-type: none"> <li>• 1/2.7" 4MP PS CMOS Image Sensor</li> <li>• Max. 4MP (2688 × 1520) @20fps</li> <li>• Instastream &amp; H.265 dual-stream encoding</li> <li>• WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC</li> <li>• 3.6mm lens (6mm, 8mm optional)</li> <li>• IR Range of 80 Mtrs, IP67, PoE</li> <li>• Support Built-in Mic</li> <li>• Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro</li> </ul>
<p><b>5 MP Distribution Series</b></p>			
<p><b>CP-UNC-DA51L3C</b> 5MP IR Network Dome Camera</p>  <p><b>▶ Features:</b></p> <ul style="list-style-type: none"> <li>• 1/2.7" 5MP PS CMOS Image Sensor</li> <li>• Max. 5MP (2880 × 1620)@20fps</li> <li>• Instastream &amp; H.265 dual-stream encoding</li> <li>• DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC</li> <li>• 3.6mm lens (2.8mm optional)</li> <li>• IR Range of 30 Mtrs, IP67, PoE</li> <li>• Support Built-in Mic</li> <li>• Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro</li> </ul>	<p><b>CP-UNC-TA51L3C</b> 5MP IR Network Bullet Camera</p>  <p><b>▶ Features:</b></p> <ul style="list-style-type: none"> <li>• 1/2.7" 5MP PS CMOS Image Sensor</li> <li>• Max. 5MP (2880 × 1620)@20fps</li> <li>• Instastream &amp; H.265 dual-stream encoding</li> <li>• DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC</li> <li>• 3.6mm lens (2.8mm optional)</li> <li>• IR Range of 30 Mtrs, IP67, PoE</li> <li>• Support Built-in Mic</li> <li>• Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro</li> </ul>	<p><b>CP-UNC-VB51L3-MDS</b> 5 MP WDR IR Network Vandal Dome Camera</p>  <p><b>▶ Features:</b></p> <ul style="list-style-type: none"> <li>• 1/2.7" 5MP CMOS Image Sensor</li> <li>• Instastream &amp; H.264+ Dual-stream encoding</li> <li>• Max. 20fps@5MP</li> <li>• 2.8 mm fixed lens (3.6mm optional)</li> <li>• WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC</li> <li>• IR Range of 30 Mtrs, IP67, IK10, Starlight, SD Card, PoE</li> <li>• Support Starlight Function</li> <li>• Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro</li> </ul>	<p><b>CP-UNC-TB51L3-MDS</b> 5 MP WDR IR Network Bullet Camera</p>  <p><b>▶ Features:</b></p> <ul style="list-style-type: none"> <li>• 1/2.7" 5MP CMOS Image Sensor</li> <li>• Instastream &amp; H.264+ Dual-stream encoding</li> <li>• Max. 20fps@5MP</li> <li>• 2.8 mm fixed lens (3.6mm optional)</li> <li>• WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC</li> <li>• IR Range of 30 Mtrs, IP67, Starlight, SD Card, PoE</li> <li>• Support Starlight Function</li> <li>• Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro</li> </ul>

## 8 MP Distribution Series

### CP-UNC-DA81L3C

8MP IR Network Dome Camera



- Features:
- 1/2.7" 8MP PS CMOS Image Sensor
  - Max. 8MP (3840 × 2160)@15fps
  - Instastream & H.265 dual-stream encoding
  - DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
  - 3.6mm lens (2.8mm optional)
  - IR Range of 30 Mtrs, IP67, PoE
  - Support Built-in Mic
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-VB81L3-MDS

8 MP WDR IR Network Vandal Dome Camera



- Features:
- 1/2.7" 8MP CMOS Image Sensor
  - Instastream & H.264+ Dual-stream encoding
  - Max. 15fps@8MP
  - 2.8 mm fixed lens (3.6mm optional)
  - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
  - IR Range of 30 Mtrs, IP67, IK10, Starlight, SD Card, PoE
  - Support Starlight Function
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-TA81L3C

8MP IR Network Bullet Camera



- Features:
- 1/2.7" 8MP PS CMOS Image Sensor
  - Max. 8MP (3840 × 2160)@15fps
  - Instastream & H.265 dual-stream encoding
  - DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
  - 3.6mm lens (2.8mm optional)
  - IR Range of 30 Mtrs, IP67, PoE
  - Support Built-in Mic
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-TB81L3-MDS

8 MP WDR IR Network Bullet Camera



- Features:
- 1/2.7" 8MP CMOS Image Sensor
  - Instastream & H.264+ Dual-stream encoding
  - Max. 15fps@8MP
  - 2.8 mm fixed lens (3.6mm optional)
  - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
  - IR Range of 30 Mtrs, IP67, Starlight, SD Card, PoE
  - Support Starlight Function
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

## Fisheye Series

### CP-UNC-EE51L1C-VMD

5MP Panoramic Network IR Fisheye Camera



- Features:
- 1/2.7" 5MP progressive scan CMOS Image Sensor
  - Instastream & H.265 triple-stream encoding
  - Max. 25fps@5MP(2592×1944)
  - WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
  - 1.4mm fixed lens, Built-in Mic, Micro SD Card, PoE
  - IR Range of 10 Mtr.
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-VB21ZL4C-VMDS

2MP Full HD Network IR Vandal Dome Camera



- Features:
- 1/2.8" 2MP PS CMOS Image Sensor
  - Instastream, H.265, Smart H.264+, Dual stream encoding
  - Max. Output 2MP(1920×1080)@25/30fps
  - WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, HLC, BLC
  - 2.7mm-13.5mm Motorized Lens
  - IR Range of 40 Mtrs.
  - Support Built in Mic, Micro SD Card,IP67,IK10, SMD Plus
  - Support Starlight Function
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-VC21ZL4C-VMDS

2MP Full HD WDR Network IR Vandal Dome Camera



- Features:
- 1/2.8" 2MP PS CMOS Image Sensor
  - Instastream and H.264+ triple-stream encoding
  - Max. 2MP (1920×1080)@25/30fps
  - WDR(120dB), Day/Night (ICR), EIS, Defog, 3D-DNR, ROI, AWB, AGC, BLC, HLC
  - 2.7mm-13.5mm Motorized Lens
  - IR Range of 40 Mtrs
  - Support Built-in Mic, Micro SD Card, IP67, IK10, PoE
  - Support Starlight Function
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-VD21ZL4C-VMDS

2MP Full HD Network IR Vandal Dome Camera



- Features:
- 1/2.8" 2MP PS CMOS Image Sensor
  - AI Instastream, Instastream, H.265, H.264 encoding
  - Max. Outputs 2 MP (1920 × 1080) @50/60fps
  - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
  - 2.7mm-13.5mm Motorized Lens
  - IR Range of 40 Mtrs
  - Built in Mic, Micro SD Card, IP67, IK10, SMD 3.0
  - Support Starlight Function
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-TB21ZL6C-VMDS

2MP Full HD Network IR Bullet Camera



- Features:
- 1/2.8" 2MP PS CMOS Image Sensor
  - Instastream, H.265, Smart H.264+, Dual stream encoding
  - Max. Output 2MP(1920×1080)@25/30fps
  - WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC
  - 2.7mm-13.5mm Motorized Lens
  - IR Range of 60 Mtrs.
  - Support Built in Mic, Micro SD Card, IP67, IK10, SMD Plus
  - Support Starlight Function
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-TB21ZL6S-VMDS

2MP Full HD WDR IR Network Bullet Camera



- Features:
- 1/2.8" 2MP PS CMOS Image sensor
  - Max. 25/30fps@2MP (1920×1080)
  - Instastream and H.264+ Encoding
  - WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
  - 2.7mm~13.5mm Motorized Lens
  - IR Range upto 60 Mtrs, IP67, IK10(Optional), Micro SD Card, PoE
  - Supports Starlight Function
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-TD21ZL5-VMD

2 MP Full HD WDR IR Network Bullet Camera



- Features:
- 1/2.8" 2MP CMOS Image Sensor
  - Instastream & H.265 triple-stream encoding
  - Max. 25/30fps@2MP
  - 2.7 -13.5mm Motorized lens
  - WDR(120dB), Day/Night(ICR), 3D-DNR, AWB, AGC, BLC, HLC
  - IR Range of 50 Mtrs., IP67, IK10, PoE, Micro SD Card
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-TD21ZL6C-VMDS

2MP IR Bullet Network Camera



- Features:
- 1/2.8" 2MP PS CMOS Image Sensor
  - AI Instastream, Instastream, H.265, Smart H.264 encoding
  - Max. Output 2MP(1920×1080)@50/60fps
  - WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, HLC, BLC
  - 2.7mm-13.5mm Motorized Lens
  - IR Range of 60 Mtrs.
  - Built in Mic, Micro SD Card, IP67, IK10(Optional), SMD 3.0
  - Support Starlight Function
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-TE21ZL5P-VMD

2MP Full HD WDR IR Network Bullet Camera



- Features:
- 1/1.8" 2Megapixel PS CMOS Image Sensor
  - Instastream/ H.265 / H.264+ / H.264 Quad-stream encoding
  - Max 25/30fps@1080P(1920×1080)
  - WDR(140dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
  - 2.7mm ~12mm motorized lens
  - IR Range of 50 Mtrs., Support Micro SD Card IP67, IK10, PoE, ePoE
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-VB21ZL4-VMDS

2MP Full HD WDR IR Network Vandal Dome Camera



- Features:
- 1/2.8" 2MP CMOS Image Sensor
  - Instastream & H.265 triple-stream encoding
  - Max. 25/30fps@2MP
  - 2.7 -13.5mm Motorized lens
  - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
  - Support Starlight Function
  - IR Range of 40 Mtrs, IP67, IK10, Micro SD Card, PoE
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-VE21ZL4P-VMD

2MP Full HD WDR IR Network Vandal Dome Camera



- Features:
- 1/1.8" 2Megapixel PS CMOS Image Sensor
  - Instastream/ H.265 / H.264+ / H.264 Quad Stream encoding
  - Max 25/30fps@1080P(1920×1080)
  - WDR(140dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
  - 2.7mm ~12mm motorized lens
  - IR Range of 40 Mtrs., Micro SD Card IP67, IK10, PoE, ePoE
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-BE21C-VMDF

2MP Full HD AI WDR Box Camera



- Features:
- 1/1.8" 2Megapixel Progressive scan CMOS
  - Max. 50/60fps@1080P(1920 × 1080)
  - C/Cs Mount lens
  - WDR(140dB), Day/Night (ICR), 3D-DNR, Defog, EIS, AWB, AGC, BLC, HLC
  - Instastream and H.264+ triple-stream encoding
  - Auto back focus (ABF) , Support Micro SD Card, PoE
  - 2/1 Alarm in/out, 1/1 audio in/out (Built-in Mic)
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

## 4 MP Project Series

### CP-UNC-VB41ZL4C-VMDS

4MP Network IR Vandal Dome Camera



- Features:
- 1/2.9" 4MP PS CMOS Image Sensor
  - Instastream, Smart H.264, Dual stream encoding
  - Max. Output 4MP(2688 × 1520)@20 fps and 2560 × 1440@25/30 fps
  - WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC
  - 2.7mm-13.5mm Motorized Lens
  - IR Range of 40 Mtrs
  - Built in Mic, IP67, IK10, Micro SD Card, SMD Plus
  - Support Starlight Function
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-VD41ZL4C-VMDS

4MP Network IR Vandal Dome Camera



- Features:
- 1/3" 4MP PS CMOS Image Sensor
  - AI Instastream, Instastream, H.265, H.264 encoding
  - Max. 4 MP (2688 × 1520) @25/30fps
  - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
  - 2.7mm-13.5mm Motorized Lens
  - IR Range of 40 Mtrs
  - Built in Mic, Micro SD Card, IP67, IK10, SMD 3.0
  - Support Starlight Function
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-TB41ZL6C-VMDS

4MP Network IR Bullet Camera



- Features:
- 1/2.9" 4MP Progressive CMOS Image Sensor
  - Instastream, Smart H.264, Dual stream encoding
  - Max. 4 MP (2688 × 1520)@20 fps, 2560 × 1440@25/30 fps
  - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC
  - 2.7mm-13.5mm Motorized Lens
  - IR Range of 60 Mtrs.
  - Built in Mic., Micro SD Card, IP67, IK10 (optional), SMD Plus
  - Support Starlight Function
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-TB41ZL6-VMDS

4MP WDR IR Network Bullet Camera



- Features:
- 1/3" 4MP CMOS Image Sensor
  - Instastream & H.265 triple-stream encoding
  - Max. 25/30fps@4MP
  - 2.7~13.5mm Motorized lens
  - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
  - IR Range of 60 Mtrs., IP67, PoE, Micro SD Card,
  - Support Starlight Function
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-TD41ZL6C-VMDS

4MP Network IR Bullet Network Camera



- Features:
- 1/3" 4MP PS CMOS Image Sensor
  - AI Instastream, Instastream, H.265, Smart H.264 encoding
  - Max. 4MP(2688 × 1520)@25/30 fps
  - WDR(120dB), Day/Night (ICR), 3D-NR, ROI, AWB, AGC, HLC, BLC
  - 2.7mm-13.5mm Motorized Lens
  - IR Range of 60 Mtrs.
  - Support Built in Mic, Micro SD Card, IP67, IK10(Optional), SMD 3.0
  - Support Starlight Function
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-TD41ZL5-VMD

4 MP WDR IR Network Bullet Camera



- Features:
- 1/2.8" 4MP CMOS Image Sensor
  - Instastream & H.265 triple-stream encoding
  - Max. 25/30fps@4MP
  - 2.7~13.5mm Motorized lens
  - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
  - IR Range of 50 Mtrs., IP67, IK10, PoE, Micro SD Card
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-VB41ZL4-VMDS

4MP WDR IR Network Vandal Dome Camera



- Features:
- 1/3" 4MP CMOS Image Sensor
  - Instastream & H.265 triple-stream encoding
  - Max. 25/30fps@4MP
  - 2.7~13.5mm Motorized lens
  - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
  - IR Range of 40 Mtrs., IP67, IK10, PoE, Micro SD Card
  - Support Starlight Function
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-VC41ZL4-VMDS

4 MP WDR IR Network Vandal Dome Camera



- Features:
- 1/2.7" 4MP CMOS Image Sensor
  - Instastream & H.265 triple-stream encoding
  - Max. 25/30fps@4MP
  - 2.7~13.5mm Motorized lens
  - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
  - IR Range of 40 Mtrs., IP67, IK10, Micro SD Card, PoE
  - Support Starlight Function
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-BG41C-VMD

4MP AI Network Box Camera



- Features:
- 1/1.8" 4MP PS CMOS Image Sensor
  - Max. outputs 4MP(2688×1520)@50fps/60fps
  - C/CS Mount Lens
  - WDR(140dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
  - Instastream/H.265/Smart H.264+/H.264 coding
  - Support Built-in Mic, Micro SD Card, PoE+, ePoE
  - With deep learning algorithm, it supports people counting, face detection, perimeter protection etc
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-TG41ZL6-VMD

4MP AI IR Network Bullet Camera



- Features:
- 1/1.8" 4MP PS CMOS Image Sensor
  - Max. outputs 4MP(2688×1520)@50fps/60fps
  - 2.7-12mm motorized lens
  - WDR(140dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
  - Instastream/H.265/Smart H.264+/H.264 coding
  - IR Range of 60 Mtrs, IP67, IK10, Micro SD Card, PoE+
  - With deep learning algorithm, it supports people counting, face recognition, perimeter protection etc
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-VG41ZL4-VMD

4MP AI IR Network Vandal Dome Camera



- Features:
- 1/1.8" 4MP PS CMOS Image Sensor
  - Max. outputs 4MP(2688×1520)@50fps/60fps
  - 2.7-12mm motorized lens
  - WDR(140dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
  - Instastream/H.265/Smart H.264+/H.264 coding
  - IR Range of 40 Mtrs, IP67, IK10, Micro SD Card, PoE+
  - With deep learning algorithm, it supports people counting, face recognition, perimeter protection etc
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-TE42ZL12P-VMDS

4MP AI WDR IR Network Bullet/Box Camera



- Features:
- 1/1.8" 4MP PS CMOS Image Sensor
  - Max. 4MP(2688 × 1520)@30fps
  - Instastream, H.265, Smart H.264+ Triple-Stream encoding
  - WDR(120dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
  - 10mm~ 40mm Motorized Lens
  - Support Starlight Function
  - IR Range of 120 Mtrs, Micro SD Card, IP67, IK10, ePoE, PoE, SMD 3.0
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

## 5 MP WDR Project Series

### CP-UNC-VB51ZL4-VMDS

5 MP WDR IR Network Vandal Dome Camera



- Features:
- 1/2.7" 5MP CMOS Image Sensor
  - Instastream & H.265 triple-stream encoding
  - Max. 20fps@5MP
  - 2.7~13.5mm Motorized lens
  - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
  - IR Range of 40 Mtrs, IP67, IK10, Micro SD Card, PoE
  - Support Starlight Function
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-TB51ZL6-VMDS

5 MP WDR IR Network Bullet Camera



- Features:
- 1/2.7" 5MP CMOS Image Sensor
  - Instastream & H.265 triple-stream encoding
  - Max. 20fps@5MP
  - 2.7~13.5mm Motorized lens
  - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
  - IR Range of 60 Mtrs, IP67, Micro SD Card, PoE
  - Support Starlight Function
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

## 8 MP WDR Project Series

### CP-UNC-VB81ZL4-VMDS

8 MP WDR IR Network Vandal Dome Camera



- Features:
- 1/2.7" 8MP CMOS Image Sensor
  - Instastream & H.265 triple-stream encoding
  - Max. 15fps@8MP
  - 2.7~13.5mm Motorized lens
  - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
  - IR Range of 40 Mtrs, IP67, IK10, Micro SD Card, PoE
  - Support Starlight Function
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-TB81ZL6-VMDS

8 MP WDR IR Network Bullet Camera



- Features:
- 1/2.7" 8MP CMOS Image Sensor
  - Instastream & H.265 triple-stream encoding
  - Max. 15fps@8MP
  - 2.7~13.5mm Motorized lens
  - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
  - IR Range of 60 Mtrs, IP67, Micro SD Card, PoE
  - Support Starlight Function
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

## CP-UNC-VE81ZL4P-VMDS

8MP AI WDR IR Network Vandal Dome Camera



- ▶ Features:
- 1/1.8" 8MP PS CMOS Image Sensor
- Outputs Max. 8MP (3840×2160)@25/30fps
- Instastream & H.265 triple-stream encoding
- Support Starlight Function
- WDR(120dB), Day/Night (ICR), 3D-DNR, Defog, ROI, AWB, AGC, BLC, HLC
- 2.7-12mm Motorized lens, IR Range of 40 Mtrs, Micro SD Card, IP67, IK10, ePoE, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

## CP-UNC-TE81ZL6E-VMDS

8MP AI WDR IR Network Bullet Camera



- ▶ Features:
- 1/1.8" 8MP PS CMOS Image Sensor
- Outputs Max. 8MP (3840×2160)@25/30fps
- Instastream & H.265 triple-stream encoding
- Support Starlight Function
- WDR(120dB), Day/Night (ICR), 3D-DNR, Defog, ROI, AWB, AGC, BLC, HLC
- 2.7-12mm Motorized lens, IR Range of 60 Mtrs, Micro SD Card, IP67, IK10, ePoE, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

## 2 MP ePoE Project Series

### CP-UNC-VE21ZL4E-VMD

2MP Full HD AI WDR IR Vandal Dome Camera



- ▶ Features:
- 1/2.8" 2Megapixel PS CMOS Image Sensor
- Instastream/ H.265 / H.264+ / H.264 triple-stream encoding
- Max 25/30fps@1080P(1920×1080)
- 2.7mm ~13.5mm motorized lens
- WDR(120dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
- IR Range of 40 Mtrs., Support ePoE, PoE, IP67, IK10, Micro SD Card
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-TE21ZL5E-VMD-V2

2MP AI WDR IR Network Bullet Camera



- ▶ Features:
- 1/2.8" 2Megapixel PS CMOS Image Sensor
- Instastream & H.265 triple-stream encoding
- Max. 25/30fps@1080P (1920 × 1080)
- 2.7-13.5mm Motorized lens
- WDR(120dB), Day/Night (ICR), 3D-DNR, Defog, ROI, EIS, AWB, AGC, BLC, HLC
- IR Range of 50 Mtrs, Micro SD Card, IP67, IK10, ePoE, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-TE21ZL15E-VMD-V2

2MP AI WDR IR Network Bullet Camera



- ▶ Features:
- 1/2.8" 2MP PS CMOS Image Sensor
- Instastream & H.265 triple-stream encoding
- Max. 25/30fps@1080P (1920 × 1080)
- 5.3~64mm motorized lens
- WDR(120dB), Day/Night (ICR), 3D-DNR, Defog, ROI, EIS, AWB, AGC, BLC, HLC
- IR Range of 150 Mtrs, Micro SD Card, IP67, IK10, ePoE, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-TE21ZL20E-VMD

2 MP Full HD WDR IR Network Bullet Camera



- ▶ Features:
- 1/2.8" 2MP CMOS Image Sensor
- Instastream & H.265 triple-stream encoding
- Max. 50/60fps@2MP
- 5.3mm ~64mm motorized lens
- WDR(120dB), Day/Night(ICR), 3DNR,AWB,AGC,BLC
- IR Range of 200 Mtrs, IP67, IK10, Micro SD Card, ePoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-BE21CE-VMD

2 MP Full HD WDR AI Network Box Camera



- ▶ Features:
- 1/2.8" 2MP CMOS Image Sensor
- Instastream & H.265 triple-stream encoding
- Max. 25/30fps@2MP
- Auto back focus(ABF)
- WDR(120dB), Day/Night(ICR), 3DNR, Defog, EIS, AWB,AGC,BLC
- Micro SD Card, PoE, Built-in Mic
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

## 4 MP ePoE Project Series

### CP-UNC-VE41ZL4E-VMD

4MP WDR AI IR Network Vandal Dome Camera



- ▶ Features:
- 1/1.8" 4Megapixel PS CMOS Image Sensor
- Instastream & H.265 triple-stream encoding
- Max 25/30fps@(2688 × 1520)
- 2.7mm~12mm Motorized lens
- WDR(140dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
- IR Range of 40 Mtrs, Micro SD Card, IP67, IK10, ePoE, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

## FishEye

### CP-UNC-TE41ZL5E-VMD-V2

4MP WDR AI IR Bullet Camera



- ▶ Features:
- 1/1.8" 4MP PS CMOS Image Sensor
- Instastream & H.265 triple-stream encoding
- 25/30fps@(2688 × 1520)
- 2.7-12mm motorized lens
- WDR(140dB), Day/Night (ICR), 3D-DNR, Defog, EIS, AWB, AGC, BLC, HLC
- IR Range of 50 Mtrs, Micro SD Card, IP67, IK10, ePoE, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-EH4K121L1-VM

12 MP Network Fisheye Camera



- ▶ Features:
- 1/1.7" 12MP CMOS Image Sensor
- H.265 & H.264 triple-stream encoding
- Max. 25fps@12MP
- 1.98mm fixed lens
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- IR Range of 10 Mtrs., IP67, IK10, PoE, Micro SD Card
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

## 2 MP PTZ Distribution Series

### CP-UNP-E2521L15-DAP

2 MP 25x WDR Network IR PTZ Camera



- Features:
- 1/2.8" 2MP CMOS Image sensor
  - Max. 50/60fps@2MP
  - 4.8mm~120mm Lens (25x Zoom)
  - WDR(120dB), 3D DNR, Day/Night(ICR), AWB, AGC, BLC, HLC
  - H.265/H.264 / MJPEG dual-stream encoding
  - Up to 300 Presets, 8 auto scan, 8 tour, 5 pattern, 8 auto pan
  - IR Range of 150 Mtr., IP66, PoE+, Auto Tracking
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNP-F3021L20-DAP

2 MP 30x WDR Network IR PTZ Camera



- Features:
- 1/2.8" CMOS Image sensor
  - Max. 50/60fps@1080P
  - 4.5mm~135mm Lens (30x Zoom)
  - WDR(120dB), 3D DNR, Day/Night(ICR), AWB, AGC, BLC, HLC
  - Instastream /H.265/H.264+ /H.264 dual-stream encoding
  - Up to 300 Presets, auto scan, 8 tour, 5 pattern, auto pan
  - IR Range of 200 Mtr., IP67, IK10, PoE+, Auto Tracking
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNP-F4521L25-DFP

2MP 45x WDR IR Network PTZ Camera



- Features:
- 1/2.8" 2MP PS CMOS Image sensor
  - Max. 25/30fps@1080P
  - 3.95mm~177.7mm (45x Zoom)
  - WDR(120dB), 2D/3D-DNR, Day/Night (ICR), EIS, Defog, ROI, BLC, HLC
  - Support Starlight Technology
  - IR Range of 250Mtr., IP67, IK10, Built-in 7/2 alarm in/out, Micro SD Card, Support PoE+
  - Up to 300 presets, 8 tour, 5 pattern, 5 auto scan
  - Support Face detection, SMD Plus, Auto-Tracking
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNP-D2521L10-DN

2MP 25x WDR Network IR PTZ Camera



- Features:
- 1/2.8" 2MP CMOS Image sensor
  - Max. 25/30fps@1080P
  - 4.8mm~120mm lens (25x Zoom)
  - WDR(120dB), 3D-DNR, Day/Night (ICR), ROI, Defog, AWB, BLC, HLC
  - Instastream, H.265; Smart H.264+; H.264B; H.264M; H.264H; MJPEG (Sub Stream)
  - Up to 300 presets, 5 auto scan, 8 tour, 5 pattern
  - IR Range of 100 Mtr., Built-in 2/1 alarm in/out, IP66, Support PoE+
  - Support Face Detection, SMD Plus
  - Support Starlight Function

## 4 MP PTZ Distribution Series

### CP-UNP-F4521L25-DAP

2MP 45x WDR Network IR PTZ Camera



- Features:
- 1/2.8" 2MP CMOS Image sensor
  - Max. 50/60fps@2MP
  - 3.95mm~177.7mm Lens (45x Zoom)
  - WDR(120dB), Day/Night(ICR), 2D/3D-DNR, Defog, ROI, EIS, AGC, BLC, HLC
  - Instastream /H.265/H.264+ /H.264 dual-stream encoding
  - Up to 300 Presets, auto scan, 8 tour, 5 pattern, auto pan
  - IR Range of 250 Mtr., IP67, IK10, Micro SD Card, Auto Tracking PoE+
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNP-E3241L15-DFP

4MP WDR 32x IR Network PTZ Camera



- Features:
- 1/2.8" 4MP CMOS Image sensor
  - Max. 25/30fps@4MP
  - 4.8mm~156mm Lens (32x Zoom)
  - WDR(120dB), 2D/3D-DNR, Day/Night (ICR), EIS, Electronic Defog, ROI, AGC, AWB, BLC, HLC
  - Support Starlight Technology
  - IR Range of 150 Mtr., Built-in 2/1 alarm in/out, IP67, IK10, Micro SD Card, PoE+, Up to 300 Presets, Auto scan, 8 Tour, 5 Pattern, Auto Scan
  - Support Face Detection, SMD PLUS, Deep-learning-based auto tracking and perimeter protection
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNP-F4541L25-DAS

4MP WDR 45x IR Network PTZ Camera



- Features:
- 1/2.8" 4MP CMOS Image sensor
  - Max. 25/30fps@4MP
  - 3.95mm~177.75mm (45x Zoom)
  - WDR(120dB), 2D/3D-DNR, Day/Night (ICR), EIS, Defog, ROI, AGC, AWB, BLC, HLC
  - Support Starlight Technology
  - IR Range of 250 Mtr., Built-in 7/2 alarm in/out, IP67, IK10, Micro SD Card, Auto Tracking, PoE+
  - Up to 300 presets, Auto scan, 8 Tour (up to 32 presets per tour), 5 Pattern, 5 Auto pan
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

## 5 MP PTZ Project Series

### CP-UNP-3051L20A

5MP 30x Network IR PTZ Camera



- Features:
- 1/1.9" 5MP CMOS Image sensor
  - Max. 25/30fps@5MP
  - 6mm~180mm Lens (30x Zoom)
  - DWDR, Day/Night(ICR), 3D DNR, Defog, EIS, ROI, BLC, HLC, AGC
  - H.265/H.264+ /H.264 dual-stream encoding
  - Up to 300 Presets, auto scan, 8 tour, 5 pattern, auto pan
  - IR Range of 200 Mtr., IP67, IK10, PoE+, Auto Tracking
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

## Highend PTZ Project Series

### CP-UNP-F4521L30-DAP

2MP 45x WDR Network IR PTZ Camera



- Features:
- 1/2.8" CMOS Image sensor
  - Max. 50/60fps@2MP
  - 3.95mm~177.7mm Lens (45x Zoom)
  - WDR(120dB), Day/Night(ICR), Ultra DNR, Auto iris, Auto focus, Defog, ROI, EIS, AGC, BLC, HLC
  - Instastream /H.265/H.264+ /H.264 dual-stream encoding
  - Up to 300 Presets, auto scan, 8 tour, 5 pattern, auto pan
  - IR Range of 300 Mtr., IP67, Micro SD Card, Auto Tracking Support Hi-PoE
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNP-F4521R55-DAP

2MP 45x Laser WDR Network PTZ Camera



- Features:
- 1/2.8" CMOS Image sensor
  - Max. 50/60fps@2MP
  - 3.95mm~177.7mm Lens (45x Zoom)
  - WDR(120dB), Day/Night(ICR), Ultra DNR, Auto iris, Auto focus, Defog, ROI, EIS, AGC, BLC, HLC
  - Instastream /H.265/H.264+ /H.264 dual-stream encoding
  - Up to 300 Presets, auto scan, 8 tour, 5 pattern, auto pan
  - IR Range of 550 Mtr., IP67, Micro SD Card, Auto Tracking Support Hi-PoE
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNP-F4821L45-DAP

2 MP 48x WDR Network IR PTZ Camera



- Features:
- 1/1.9" 2MP CMOS Image sensor
  - Max. 50/60fps@1080P
  - 5.7mm~275mm Lens (48x Zoom)
  - WDR(120dB), 2D/3D-DNR, ICR, EIS, ROI, Defog
  - Instastream/H.265/H.264+ /H.264 triple-stream
  - Up to 300 Presets, auto scan, 8 tour, 5 pattern
  - IR Range of 450 Mtr., IP67, Hi-PoE, Micro SD Card, Auto Tracking
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNP-H4041L45-DAP

4MP 40x WDR Network IR PTZ Camera



- Features:
- 1/1.8" 4MP CMOS Image sensor
  - Max. 25/30fps@4MP
  - 5.6mm~223mm Lens (40x Zoom)
  - WDR(120dB), ICR, 2D/3D-DNR, Defog, ROI, EIS
  - Instastream/H.265/H.264+ /H.264 triple-stream
  - Up to 300 Presets, auto scan, 8 tour, 5 pattern
  - IR Range of 450 Mtr., IP67, Micro SD Card, Auto Tracking, Hi-PoE
  - Support Starlight Function
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNP-E3041L15-DAP

4MP 30x WDR Network IR PTZ Camera



- Features:
- 1/3" 4MP PS CMOS Image sensor
  - Max. 25/30fps@4MP
  - Powerful 30x Optical and 16x Digital zoom
  - WDR(120dB), 3D-DNR, Day/Night(ICR), EIS, Defog, ROI, BLC, HLC
  - Up to 300 presets, auto scan, 8 tour, 5 pattern, auto pan, IR Range of 150 Mtr., IP66, Support PoE+
  - Instastream/H.265/H.264+ /H.264 dual stream encoding
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNP-H4081L45-DAP

8MP 40x WDR Network IR PTZ Camera



- Features:
- 1/1.8" 8MP CMOS Image sensor
  - Max. 25/30fps@4K
  - 5.6mm~223mm Lens (40x Zoom)
  - WDR(120dB), ICR, 2D/3D-DNR, Defog, ROI, EIS
  - Instastream/H.265/H.264+ /H.264 triple-stream
  - Up to 300 Presets, auto scan, 8 tour, 5 pattern
  - IR Range of 450 Mtr., IP67, Micro SD Card, Auto Tracking, Hi-PoE
  - Support Starlight Function
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

## Anti-Corrosion PTZ Project Series

### CP-UNP-F3021U-DAP

2MP 30x WDR Anti-Corrosion Network PTZ Camera



- Features:
- 1/2.8" 2MP CMOS Image sensor
  - Max. 50/60fps@2MP
  - 4.5mm~135mm Lens (30x Zoom)
  - WDR(120dB), ICR, 2D/3D-DNR, Defog, ROI, EIS
  - Instastream/H.265/H.264+ /H.264 triple-stream
  - Up to 300 Presets, auto scan, 8 tour, 5 pattern
  - 316L Stainless Steel, IP68, IK10, Micro SD Card, Auto Tracking, IVS, NEMA 4X, PoE
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNP-Z3021U-D

2MP 30x WDR Anti-Corrosion IR Network Camera



- Features:
- 1/2.8" 2MP CMOS Image sensor
  - Max. 50/60fps@2MP
  - 4.5mm~135mm Lens (30x Zoom)
  - WDR(120dB), ICR, 2D/3D-DNR, Defog, ROI, EIS
  - Instastream/H.265/H.264+ /H.264 triple-stream
  - 316L Stainless Steel, IR Range of 100 Mtr., IP68, Micro SD Card, PoE
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

## Positioning PTZ Project Series

### CP-UNP-P4521L35-DAP

2MP 45x WDR Network IR Positioning System



- ▶ Features:
- 1/2.8" 2MP CMOS Image sensor
- Max. 50/60fps@2MP
- 3.95mm~177.7mm Lens (45x Zoom)
- WDR(120dB), ICR, 2D/3D-DNR, Defog, ROI, EIS
- Instastream/H.265/H.264+/H.264 triple-stream
- Up to 300 Presets, auto scan, 8 tour, 5 pattern
- IR Range of 350 Mtr., IP68, Micro SD Card, Auto Tracking, IVS, NEMA 4X, Hi-PoE
- Support Starlight Function
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNP-P4821L45-DA

2MP 48x WDR Network IR Positioning System



- ▶ Features:
- 1/1.8" 2MP CMOS Image sensor
- Max. 50/60fps@2MP
- 5.7mm~275mm Lens (48x Zoom)
- WDR(120dB), ICR, 2D/3D-DNR, Defog, ROI, EIS
- Instastream/H.265/H.264+/H.264 triple-stream
- Up to 300 Presets, auto scan, 8 tour, 5 pattern
- IR Range of 450 Mtr., IP66, Micro SD Card, Auto Tracking, IVS
- Support Starlight Function
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNP-P4821L93-DA

2MP 48x WDR Network Laser Positioning System



- ▶ Features:
- 1/1.8" 2MP CMOS Image sensor
- Max. 50/60fps@2MP
- 5.7mm~275mm Lens (48x Zoom)
- WDR(120dB), ICR, 2D/3D-DNR, Defog, ROI, EIS
- Instastream/H.265/H.264+/H.264 triple-stream
- Up to 300 Presets, auto scan, 8 tour, 5 pattern
- Laser Range of 1200 Mtr., IP66, Micro SD Card, Auto Tracking, IVS, Wiper
- Support Starlight Function
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNP-P2521L15-DAP

2MP 25x WDR Network IR Positioning System



- ▶ Features:
- 1/2.8" 2MP CMOS Image sensor
- Max. 50/60fps@2MP
- 4.8mm~120mm Lens (25x Zoom)
- WDR(120dB), ICR, 2D/3D-DNR, Defog, ROI, EIS
- Instastream/H.265/H.264+/H.264 triple-stream
- Up to 300 Presets, auto scan, 8 tour, 5 pattern
- IR Range of 150 Mtr., IP67, IK10, Micro SD Card, Auto Tracking, IVS, PoE+
- Support Starlight Function
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

## Explosion-proof Project Series

### CP-UNC-ST21ZL10-VMD

2MP 30x Explosion-proof IR Network Camera



- ▶ Features:
- 1/2.8" 2MP PS CMOS Image sensor
- Max. 50/60fps@1080P
- Powerful 30x Optical zoom and 16x Digital zoom
- WDR(120dB), 2D/3D DNR, Day/Night (ICR), ROI, EIS, Defog, AGC, BLC, HLC
- 304 stainless steel housing
- H.265 Video Compression
- IR distance up to 100mtr., IP68
- Support Starlight Technology
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNP-S3021L10-D

2MP 30x Explosion-proof IR Network PTZ Camera



- ▶ Features:
- 1/2.8" 2MP PS CMOS Image sensor
- Max. 50/60fps@1080P
- Powerful 30x Optical and 16x Digital zoom
- WDR(120dB), 2D/3D-DNR, Defog, EIS, Day/Night (ICR), AGC, BLC, HLC
- 316L Stainless Steel Housing
- H.265 Video Compression
- Up to 256 presets, 5 Scan, 8 Tour
- IR Range of 100 Mtr., Built-in 2/1 alarm in/out, IP68
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNP-S3021-D

2MP 30x Explosion-proof Network Positioning PTZ Camera



- ▶ Features:
- 1/2.8" 2MP PS CMOS Image sensor
- Max. 50/60fps@1080P
- Powerful 30x Optical and 16x Digital zoom
- WDR(120dB), 2D/3D DNR, Day/Night (ICR), ROI, EIS, Defog, AGC, BLC, HLC
- 316L Stainless Steel Housing
- Instastream/H.265/H.264+/H.264
- Up to 256 Presets, 5 auto scan, 8 tour
- Built-in 2/1 alarm in/out, IP68
- Starlight Technology
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

## Distribution NVR Series

### CP-UNR-104F1/108F1

4/8 Ch. Network Video Recorder



- Features:
- 4/8 channel IP camera input
  - Max 80Mbps Network Bandwidth
  - Instastream/H.265/H.264+/H.264 codec decoding
  - Up to 8MP Resolution
  - Support 1 SATA HDDs up to 8TB, 2 USB Ports
  - HDMI / VGA simultaneous video output
  - Support Multi-brand network cameras
  - ONVIF Version 2.4 conformance
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNR-208F2-I

8 Ch. AI Network Video Recorder



- Features:
- 8 Channel IP video access
  - Instastream / H.265/H.264+ /H.264/MJPEG
  - Max. decoding capability: 6 × 1080p@30fps. Supports adaptive decoding
  - 1-channel face detection and recognition (AI by NVR); 1-channel perimeter protection (AI by NVR); up to 10 face databases and 5,000 face images
  - AI by camera: Face detection and recognition, perimeter protection and SMD
  - Support 2 SATA HDDs up to 10TB Each, 2 USB Ports
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNR-4K2082

8 Ch. 4K H.265 Network Video Recorder



- Features:
- 8 Channel IP Camera Input
  - H.265/H.264 codec decoding
  - Max 80Mbps incoming bandwidth
  - Support up to 8MP Resolution Preview & Playback
  - Support Multi-brand network cameras
  - HDMI / VGA simultaneous video output
  - Support 2 SATA HDDs up to 12TB, 2 USB ports
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNR-4K4082-V2

8 Ch. 4K Network Video Recorder



- Features:
- 8 Channel IP Camera Input
  - H.265/H.264 codec decoding
  - Max 80Mbps incoming bandwidth
  - Support up to 8MP Resolution Preview & Playback
  - Support Multi-brand network cameras
  - HDMI / VGA simultaneous video output
  - Support 2 SATA HDDs up to 12TB, 2 USB ports
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNR-216F2-I

16Ch. AI Network Video Recorder



- Features:
- 16 Channel IP video access
  - Instastream/ H.265/H.264+ /H.264/MJPEG
  - Max. decoding capability: 6 × 1080p@30fps. Supports adaptive decoding
  - 1-channel face detection and recognition (AI by NVR); 1-channel perimeter protection (AI by NVR); up to 10 face databases and 5,000 face images
  - AI by camera: Face detection and recognition, perimeter protection and SMD
  - Support 2 SATA HDDs up to 10TB Each, 2 USB Ports
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNR-4K2161-V2

16 Ch. 4K Network Video Recorder



- Features:
- 16 Channel IP Camera Input
  - H.265/H.264 codec decoding
  - Max 80Mbps incoming bandwidth
  - Support up to 8MP Resolution Preview & Playback
  - Support Multi-brand network cameras
  - HDMI / VGA simultaneous video output
  - Support 1 SATA HDDs up to 6TB, 2 USB ports
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNR-4K4164-I

16 Ch. 4K Network Video Recorder



- Features:
- Up to 16 channel IP camera input
  - Access, storage or forwarding at 256 Mbps (160 Mbps when AI function enabled)
  - Instastream/H.265/Smart H.264+/H.264/MJPEG
  - AI by NVR: 1-channel face detection and recognition; 2-channel perimeter protection; up to 10 face databases and 20,000 face images; 4-channel SMD Plus
  - AI by Camera: Face detection and recognition, perimeter protection; SMD Plus; ANPR; people counting; stereo analysis; heat map
  - Support 4 SATA HDDs up to 10TB Each, 2 USB Ports
  - 1 HDMI / 1 VGA simultaneous video output
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNR-4K5164/4K5324-V2

16/32 Ch. 4K Network Video Recorder



- Features:
- 16/32 Channel IP Camera Input
  - Instastream/H.264+/MJPEG/MPEG4 codec decoding
  - Max 320Mbps incoming bandwidth
  - Support up to 12MP Resolution Preview & Playback
  - Support Multi-brand network cameras
  - 2 HDMI / 2 VGA simultaneous video output
  - Support 4 SATA HDDs up to 10TB Each, 3 USB(2 USB 3.0), 1 eSATA Port, 1 RS485, 1 RS232
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNR-4K4322-V3

32Ch. H.265 4K Network Video Recorder



- Features:
- 32 channel IP camera input
  - Instastream/H.265/H.264+/H.264 codec decoding
  - Max. decoding capability: 8 × 1080p@30fps. Supports adaptive decoding
  - AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD
  - Support 2 SATA HDDs up to 10TB Each, 2 USB Ports
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNR-4K4322-V2

32 Ch. H.265 4K Network Video Recorder



- Features:
- 32 Channel IP Camera Input
  - H.265/H.264 dual codec decoding
  - Max 200Mbps incoming bandwidth
  - Support up to 8MP Resolution Preview & Playback
  - Support Multi-brand network cameras
  - HDMI / VGA simultaneous video output
  - Support 2 SATA HDDs up to 12TB, 2 USB (1 USB3.0)
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNR-4K4162-V3

16 Ch. H.265 4K Network Video Recorder



- Features:
- 16 channel IP camera input
  - Instastream/H.265/H.264+/H.264
  - Max. decoding capability: 8 × 1080p@30fps. Supports adaptive decoding
  - Support 2 SATA HDDs up to 10TB Each, 2 USB Ports
  - VGA/HDMI simultaneous video output
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNR-4K4324-I

32 Ch. H.265 4K Network Video Recorder



- Features:
- 32 channel IP camera input
  - Access, storage or forwarding at 256 Mbps (160 Mbps when function enabled)
  - Support 4 SATA HDDs up to 10TB Each, 2 USB Ports
  - AI by NVR: 1-channel face detection and recognition; 2-channel perimeter protection; up to 10 face databases and 20,000 face images; 4-channel SMD Plus
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNR-4K5644-V2

64 Ch. H.265 4K Network Video Recorder



- Features:
- 64 channel IP camera input
  - Instastream/H.265/H.264+/H.264/MJPEG
  - Max 320Mbps incoming bandwidth
  - Up to 12MP resolution preview and playback
  - Support 4 SATA HDDs up to 10TB Each, 3 USB Ports (2 USB 3.0, 1 USB 2.0)
  - 2 HDMI / 2 VGA simultaneous video output
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNR-4K564R8-V2

64 Ch. H.265 4K Network Video Recorder



- Features:
- 64 Channel IP Camera Input
  - H.265/H.264/MJPEG/MPEG4 codec decoding
  - Max 320Mbps incoming bandwidth
  - Support up to 12MP Resolution Preview & Playback
  - Support Multi-brand network cameras
  - 2 HDMI / VGA simultaneous video output
  - Support 8 SATA HDDs up to 48TB, 4 USB(2USB3.0, 2USB2.0), Support RAID 0/1/5/6/10
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNR-4K5082/4K5162/4K5322-V2

8/16/32 Ch. 4K Network Video Recorder



- Features:
- 8/16/32 Channel IP Camera Input
  - Instastream/H.264+/MJPEG/MPEG4 codec decoding
  - Max 320Mbps incoming bandwidth
  - Support up to 12MP Resolution Preview & Playback
  - Support Multi-brand network cameras
  - HDMI / VGA simultaneous video output
  - Support 2 SATA HDDs up to 10TB Each, 2 USB(1 USB 3.0), 1 RS485, 1 RS232
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNR-4K564R4-V2

64 Ch. H.265 4K Network Video Recorder



- Features:
- 64 Channel IP Camera Input
  - Instastream/H.264+/MJPEG/MPEG4 codec decoding
  - Max 320Mbps incoming bandwidth
  - Support up to 12MP Resolution Preview & Playback
  - Support Multi-brand network cameras
  - 2 HDMI / 1 VGA simultaneous video output
  - Support 4 SATA HDDs up to 32TB, 3 USB(1 USB 2.0), Single RAID 0/1/5/6/10
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

## CP-UNR-7256R16-F4

Intelligent Video Surveillance Server



- ▶ Features:
  - 256-channel IP video access
  - Max 512 Mbps incoming bandwidth
  - Instastream; Smart H.264+; H.265; H.264
  - Up to 48-channel face recognition with normal IPC, Up to 160-channel face recognition with face detection IPC
  - Up to 48-channel video metadata, Up to 50 face databases with 500,000 face pictures in total
  - Supports RAID 0/1/5/6/10/50/60
  - 16HDD SATA Slots 3.0/SAS. Max. 16TB/HDD
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

## CP-UNR-7256R16D-EA

Intelligent Video Surveillance Server



- ▶ Features:
  - 256-channel IP video access
  - Max 768Mbps incoming bandwidth
  - Instastream/Smart H.264+/H.265/H.264
  - Support 3 HDMI/1 VGA video output
  - Supports RAID 0/1/5/6/10/50/60
  - 16HDD SATA Slots 3.0/SAS. Max. 16TB/HDD
  - Redundant Power Supply
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

## CP-UNS-7216DR-V2

Powerful Surveillance Management Centre



- ▶ Features:
  - Powerful Surveillance Management Centre
  - Supports up to 1000 video channels per server and it can extend the devices by distribution system
  - Auto-Register 500 devices and 1000 channels
  - Total Video Device and Channel 500 devices and 1000 channels
  - Support 15HDD disks (3.5") for Video or Picture storage (8TB per HDD)
  - Face Capture, ANPR Event with Picture, ANPR Vehicle Blocklist, Face Capture
  - Single, Raid 0/1/5/6/10

## Project NVR Series

### CP-UNR-4K632R8/4K664R8-V2

32/64 Ch. H.265 4K Network Video Recorder



- ▶ Features:
  - 32/64 Channel IP Camera Input
  - H.265/H.264 dual codec decoding
  - Max 384Mbps incoming bandwidth
  - Support up to 12MP Resolution Preview & Playback
  - Support Multi-brand network cameras
  - Support 8 SATA HDDs up to 64TB, 4 USB ports, 1 eSATA port, Support RAID 0/1/5/6/10/50/60
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNR-4K664R8-EV2

64 Ch. H.265 4K Network Video Recorder



- ▶ Features:
  - 64 Channel IP Camera Input
  - H.265/H.264/MJPEG codec decoding
  - Max 384Mbps incoming bandwidth
  - Support up to 12MP Resolution Preview & Playback
  - Support 8 SATA HDDs up to 8TB Each, 4 USB (2 USB 2.0, 2 USB 3.0), Support RAID, 1 eSATA port, 1 RS485, 1 RS232, Support hot-Swap, Redundant power supply module adopted
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNR-4K664R16-EV2

64 Ch. H.265 4K Network Video Recorder



- ▶ Features:
  - 64 Channel IP Camera Input
  - H.265/H.264/MJPEG codec decoding
  - Max 384Mbps incoming bandwidth
  - Support up to 12MP Resolution Preview & Playback
  - Support 16 SATA HDDs up to 8TB Each, 4 USB (2 USB 2.0, 2 USB 3.0), Support RAID, Support iSCSI & Mini SAS, 1 eSATA port, 1 RS485, 1 RS232, Support hot-Spare, Redundant power supply module adopted
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNR-4K532R8-V2

32 Ch. H.265 4K Network Video Recorder



- ▶ Features:
  - 32 Channel IP Camera Input
  - H.265/H.264/MJPEG/MPEG4 codec decoding
  - Max 320Mbps incoming bandwidth
  - Support up to 12MP Resolution Preview & Playback
  - 2 HDMI / VGA simultaneous video output
  - Support 8 SATA HDDs up to 48TB, 4 USB (2USB3.0, 2USB2.0), Support RAID 0/1/5/6/10
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNR-4K6128R8-V2

128 Ch. H.265 4K Network Video Recorder



- ▶ Features:
  - 128 Channel IP Camera Input
  - H.265/H.264/MJPEG codec decoding
  - Max 384Mbps incoming bandwidth
  - Support up to 12MP Resolution Preview & Playback
  - Support 8 SATA HDDs up to 48TB, 4 USB (2USB3.0, 2USB2.0), Support RAID 0/1/5/6/10, 1 eSATA Port, 1 RS485, 1 RS232, Support Hot-Swap
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNR-4K6128R16-V2

128 Ch. H.265 4K Network Video Recorder



- ▶ Features:
  - 128 Channel IP Camera Input
  - H.265/H.264/MJPEG dual-stream encoding
  - Max 384Mbps incoming bandwidth
  - Support up to 12MP Resolution Preview & Playback
  - Support Multi-brand network cameras
  - 2 HDMI / VGA simultaneous video output
  - Support 16 SATA HDDs up to 96TB, 4 USB (2 USB 2.0, 2 USB 3.0), Support RAID, Support iSCSI & Mini SAS, 1 eSATA port, Support 16 hot-swap HDDs
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNR-4K6128R16-EV2

128 Ch. H.265 4K Network Video Recorder



- ▶ Features:
  - 128 Channel IP Camera Input
  - H.265/H.264/MJPEG dual-stream encoding
  - Max 384Mbps incoming bandwidth
  - Support up to 12MP Resolution Preview & Playback
  - Support Multi-brand network cameras
  - 2 HDMI / VGA simultaneous video output
  - Support 16 SATA HDDs up to 96TB, 4 USB (2 USB 2.0, 2 USB 3.0), Support RAID, Support iSCSI & Mini SAS, 1 eSATA port, Support 16 hot-swap HDDs, Redundant power supply module adopted
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

## PoE NVR

### CP-UNR-4K4042-P4V3

4Ch. H.265 4K Network Video Recorder with 4PoE Port



- ▶ Features:
  - 4 channel IP camera input
  - Instastream/H.265/H.264+/H.264/MJPEG
  - Max. decoding capability: 4 x 1080p@30fps. Supports adaptive decoding
  - AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD, Support 4 PoE Ports
  - Support 2 SATA HDDs up to 10TB Each, 2 USB Ports
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNR-4K4082-P8V3

8Ch. H.265 4K Network Video Recorder with 8 PoE Port



- ▶ Features:
  - 8 channel IP camera input
  - Instastream/H.265/H.264+/H.264/MJPEG
  - Max. decoding capability: 8 x 1080p@30fps. Supports adaptive decoding
  - AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD, Support 8 PoE Ports
  - Support 2 SATA HDDs up to 10TB Each, 2 USB Ports
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNR-4K4162-P16V3

16Ch. H.265 4K Network Video Recorder with 16 PoE Ports



- ▶ Features:
  - 16 channel IP camera input
  - Instastream/H.265/H.264+/H.264
  - Max. decoding capability: 8 x 1080p@30fps. Supports adaptive decoding
  - AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD, Support 16 PoE Ports
  - Support 2 SATA HDDs up to 10TB Each, 2 USB Ports
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro



# INTELLIGENT GUARD+ SERIES



## 2 MP - Network Series

### CP-UNC-DA21L2-GP-V2

2MP Full-color Guard+ Network IR Dome Camera



- ▶ Features:
- 1/2.8" 2Megapixel PS CMOS Image Sensor
- Max. 2MP(1920 x 1080)@25/30fps
- Instastream & H.265 dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm lens (2.8mm optional)
- IR Range of 20 Mtrs., IP67, PoE
- Built-in LEDs
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

### CP-UNC-TA21L2-GP-V2

2MP Full-color Guard+ Network IR Bullet Camera



- ▶ Features:
- 1/2.8" 2Megapixel PS CMOS Image Sensor
- Max. 2MP(1920 x 1080)@25/30fps
- Instastream & H.265 dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm lens (2.8mm optional)
- IR Range of 20 Mtrs., IP67, PoE
- Built-in LEDs
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

### CP-UNC-DA21L2C-GP-V3

2MP Full-color Guard+ Network IR Dome Camera



- ▶ Features:
- 1/2.8" 2Megapixel PS CMOS Image Sensor
- Max. Output 2MP(1920 x 1080)@25/30fps
- Instastream, H.265 and H.264 dual-stream encoding
- DWDR, Day/Night(ICR), 3D-NR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm optional)
- Built in Mic, Built-in LEDs, Support IP67, PoE
- Illumination Range 15 Mtrs.
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-TA21L2C-GP-V3

2MP Full-color Guard+ Network IR Bullet Camera



- ▶ Features:
- 1/2.8" 2Megapixel PS CMOS Image Sensor
- Max. Output 2MP(1920 x 1080)@25/30fps
- Instastream, H.265 and H.264 dual-stream encoding
- DWDR, Day/Night(ICR), 3D-NR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm optional)
- Built in Mic, Built-in LEDs, Support IP67, PoE
- Illumination Range 15 Mtrs.
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

## 4MP - Network Series

### CP-UNC-TA41L2C-GP

4 MP Full-color Guard+ Network IR Bullet Camera



- ▶ Features:
- 1/3" 4MP PS CMOS Image Sensor
- Max. Output 4 MP (2560 x 1440)@25/30fps
- Instastream, H.265, H.264, dual-stream encoding
- WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm optional)
- Built-in Mic
- Illuminator Range of 15 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-DA41L2C-GP

4 MP Full-color Guard+ Network IR Dome Camera



- ▶ Features:
- 1/3" 4MP PS CMOS Image Sensor
- Max. Output 4 MP (2560 x 1440)@25/30fps
- Instastream, H.265, H.264, dual-stream encoding
- WDR(120dB), Day/Night (ICR), 3D-DNR,ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm optional)
- Built-in Mic
- Illuminator Range of 15 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-DC41PL3C-MDGP

4MP WDR Full-Color Guard+ Network Dome Camera



- ▶ Features:
- 1/2.7" 4MP PS CMOS Image Sensor
- Max. 4MP (2688 x 1520)@30fps
- Instastream/ H.265 Triple-stream encoding
- WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC
- 3.6mm fixed lens (2.8mm optional)
- Support IP67, Micro SD Card, PoE
- Support Built-in Mic, SMD Plus
- Support Built-in warm LED, max. Illumination distance: 30Mtr.
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UNC-TC41L3C-AGP

4MP WDR Full-Color Guard+ Network Bullet Camera



- ▶ Features:
- 1/2.7" 4Megapixel PS CMOS Image Sensor
- Max. 4MP (2688 x 1520)@30fps
- Instastream/ H.265 Triple-stream encoding
- WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm Fixed Lens (2.8mm Optional)
- Support IP67, Micro SD Card, PoE
- Support Built-in Mic, SMD Plus
- Support Built-in warm lights, max. Illumination distance: 30Mtr.
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

**2.4 MP - Analog Series**

**CP-GPC-D24L2-S**

2.4MP Full HD IR Guard+ Dome Camera - 20 Mtr.



- Features:
- 1/2.9" 2.4MP CMOS Image sensor
  - Max 25/30fps@2.4MP
  - 3.6mm lens (6mm Optional)
  - Support low illumination, warm light day night full color
  - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
  - Max. IR Range of 20 Mtr., IP66

**CP-GPC-T24PL2-S**

2.4MP Full HD IR Guard+ Bullet Camera - 20 Mtr.



- Features:
- 1/2.9" 2.4MP CMOS Image sensor
  - Max 25/30fps@2.4MP
  - 3.6mm lens (6mm Optional)
  - Support low illumination, warm light day night full color
  - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
  - Max. IR Range of 20 Mtr., IP66

**CP-GPC-DA24PL2-SE**

2.4MP Full-color Guard+ Dome Camera - 20Mtr.



- Features:
- 1/2.8" 2.4MP CMOS Image Sensor
  - Max. 30fps@2.4MP
  - 3.6mm Lens (2.8mm Optional)
  - CVI/CVBS/AHD/TVI switchable
  - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
  - Illumination Range of 20 Mtrs, Ip67
  - Support Full-color Starlight

**CP-GPC-TA24PL2-SE**

2.4MP Full-color Guard+ Bullet Camera - 20Mtr.



- Features:
- 1/2.8" 2.4MP CMOS Image Sensor
  - Max. 30fps@2.4MP
  - 3.6mm Lens (2.8mm Optional)
  - CVI/CVBS/AHD/TVI switchable
  - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
  - Illumination Range of 20 Mtrs, Ip67
  - Support Full-color Starlight

**CP-GPC-T24L4-V5**

2.4MP Full HD IR Guard+ Bullet Camera - 40 Mtr.



- Features:
- 1/2.9" 2.4MP CMOS Image Sensor
  - Max 25/30fps@2.4MP
  - 3.6mm lens (6mm Optional)
  - Support low illumination, warm light day night full color
  - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
  - Max. IR Range of 40 Mtr., IP66

**CP-GPC-TA24L5-SE**

2.4MP Full-color Guard+ Bullet Camera - 50Mtr.



- Features:
- 1/2.8" 2.4MP CMOS Image Sensor
  - Max. 25/30fps@2.4MP
  - 3.6mm Lens (2.8mm Optional)
  - CVI/CVBS/AHD/TVI switchable
  - DWDR, 2D-DNR, AWB, AGC, BLC, HLC
  - Illumination Range of 50 Mtrs, Ip67
  - 24/7 color imaging

**CP-GPC-T24L8-V5**

2.4MP Full HD IR Guard+ Bullet Camera - 80 Mtr.



- Features:
- 1/2.9" 2.4MP CMOS Image Sensor
  - Max 25/30fps@2.4MP
  - 8mm lens (6mm, 3.6mm Optional)
  - Support low illumination, warm light day night full color
  - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
  - Max. IR Range of 80 Mtr., IP66

**CP-GPC-T24FL8-V5**

2.4MP Full HD IR Guard+ Bullet Camera - 80 Mtr.



- Features:
- 1/2.9" 2.4MP CMOS Image Sensor
  - Max 25/30fps@2.4MP
  - 2.8-12mm Varifocal Lens
  - Support low illumination, warm light day night full color
  - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
  - Max. IR Range of 80 Mtr., IP66

**5MP - Analog Series**

**CP-GPC-D50L2-S**

5MP Full HD IR Guard+ Dome Camera - 20 Mtr.



- Features:
- 1/2.7" 5MP CMOS Image Sensor
  - Max 25/30fps@5MP
  - 3.6mm Lens (6mm Optional)
  - Support low illumination, warm light day night full color
  - Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
  - Support Starlight Function
  - IR Range of 20 Mtrs, IP66

**CP-GPC-DA50PL2-SE**

5MP Full-color Guard+ Dome Camera - 20Mtr.



- Features:
- 1/2.7" 5MP CMOS Image Sensor
  - Max. 25/30fps@5MP
  - 3.6mm Lens
  - CVI/CVBS/AHD/TVI switchable
  - DWDR, 2D-DNR, AWB, AGC, BLC, HLC
  - Illumination Range of 20 Mtrs, IP67
  - 24/7 color imaging

**CP-GPC-DA50PL2C-SE**

5MP Full-color Guard+ Dome Camera - 20Mtr.



- Features:
- 1/2.7" 5MP CMOS Image Sensor
  - Max. 25/30fps@5MP
  - 3.6mm Lens
  - Built-in Mic
  - CVI/CVBS/AHD/TVI switchable
  - DWDR, 2D-DNR, AWB, AGC, BLC, HLC
  - Illumination Range of 20 Mtrs, Ip67
  - 24/7 color imaging

**CP-GPC-T50PL2-S**

5MP Full HD IR Guard+ Bullet Camera - 20 Mtr.



- Features:
- 1/2.7" 5MP CMOS Image Sensor
  - Max 25/30fps@5MP
  - 3.6mm Lens (6mm Optional)
  - Support low illumination, warm light day night full color
  - Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
  - Support Starlight Function
  - IR Range of 20 Mtrs, IP66

**CP-GPC-TA50PL2C-SE**

5MP Full-color Guard+ Bullet Camera - 20Mtr.



- Features:
- 1/2.7" 5MP CMOS Image Sensor
  - Max. 25/30fps@5MP
  - 3.6mm Lens
  - Built-in Mic
  - CVI/CVBS/AHD/TVI switchable
  - DWDR, 2D-DNR, AWB, AGC, BLC, HLC
  - Illumination Range of 20 Mtrs, Ip67
  - 24/7 color imaging

**CP-GPC-TA50PL2-SE**

5MP Full-color Guard+ Bullet Camera - 20Mtr.



- Features:
- 1/2.7" 5MP CMOS Image Sensor
  - Max. 25/30fps@5MP
  - 3.6mm Lens
  - CVI/CVBS/AHD/TVI switchable
  - DWDR, 2D-DNR, AWB, AGC, BLC, HLC
  - Illumination Range of 20 Mtrs, IP67
  - 24/7 color imaging

**CP-GPC-D50L3-V5**

5MP Full HD IR Guard+ Dome Camera - 30 Mtr.



- Features:
- 1/2.7" 5MP CMOS Image sensor
  - Max 20fps@5MP
  - 3.6mm lens (6mm Optional)
  - Support low illumination, warm light day night full color
  - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
  - Max. IR Range of 30 Mtr., IP66

**CP-GPC-T50L4-V5**

5MP Full HD IR Guard+ Bullet Camera - 40 Mtr.



- Features:
- 1/2.7" 5MP CMOS Image sensor
  - Max 20fps@5MP
  - 3.6mm lens (6mm Optional)
  - Support low illumination, warm light day night full color
  - DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
  - Max. IR Range of 40 Mtr., IP66

**CP-GPC-TA50L5-SE**

SMP Full-color Guard+ Bullet Camera - 50Mtr.



- ▶ Features:
- 1/2.7" 5MP CMOS Image Sensor
- Max. 25/30fps@5MP
- 6mm Lens
- CVI/CVBS/AHD/TVI switchable
- DWDR, 2D-DNR, AWB, AGC, BLC, HLC
- Illumination Range of 50 Mtrs, IP67
- 24/7 color imaging

**CP-GPC-T50L8-V5**

SMP Full HD IR Guard+ Bullet Camera - 80 Mtr.



- ▶ Features:
- 1/2.7" 5MP CMOS Image sensor
- Max 20fps@5MP
- 8mm lens (6mm, 3.6mm Optional)
- Support low illumination, warm light day night full color
- DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
- Max. IR Range of 80 Mtr., IP66

**CP-GPC-T50F18-V5**

SMP Full HD IR Guard+ Bullet Camera - 80 Mtr.



- ▶ Features:
- 1/2.7" 5MP CMOS Image sensor
- Max 20fps@5MP
- 2.8-12mm Varifocal Lens
- Support low illumination, warm light day night full color
- DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
- Max. IR Range of 80 Mtr., IP66

**CP-GPC-DA50L2-ME**

SMP Full HD IR Guard+ Dome Camera - 20Mtr.



- ▶ Features:
- 1/2.7" 5MP CMOS Image Sensor
- HD and SD output switchable
- Max 20fps@5MP
- 2.8mm Lens (3.6mm optional)
- 10m/110°detecting range/angle
- DWDR, Day/Night(ICR), 2D-DNR,AWB, AGC, BLC, HLC
- IR Range of 20 Mtrs, IP67

**CP-GPC-TA50L2-ME**

SMP Guard+ Active Deterrence Bullet Camera - 20 Mtr.




- ▶ Features:
- 1/2.7" 5MP CMOS Image Sensor
- HD and SD output switchable
- Max 20fps@5MP
- 2.8mm Lens (3.6mm Optional)
- 10m/110°detecting range/angle
- DWDR, Day/Night(ICR), 2D-DNR,AWB, AGC, BLC, HLC
- IR Range of 20 Mtrs, IP67

**CP-GPC-TA50L2S-ME**

SMP Guard+ Active Deterrence Bullet Camera - 20 Mtr.



- ▶ Features:
- 1/2.7" 5MP CMOS Image Sensor
- HD and SD output switchable
- Max 20fps@5MP
- 2.8mm Lens (3.6mm Optional)
- Built-in PIR, 10m/110°detecting range/angle
- DWDR, Day/Night(ICR), 2D-DNR,AWB, AGC, BLC, HLC
- IR Range of 20 Mtrs, IP67

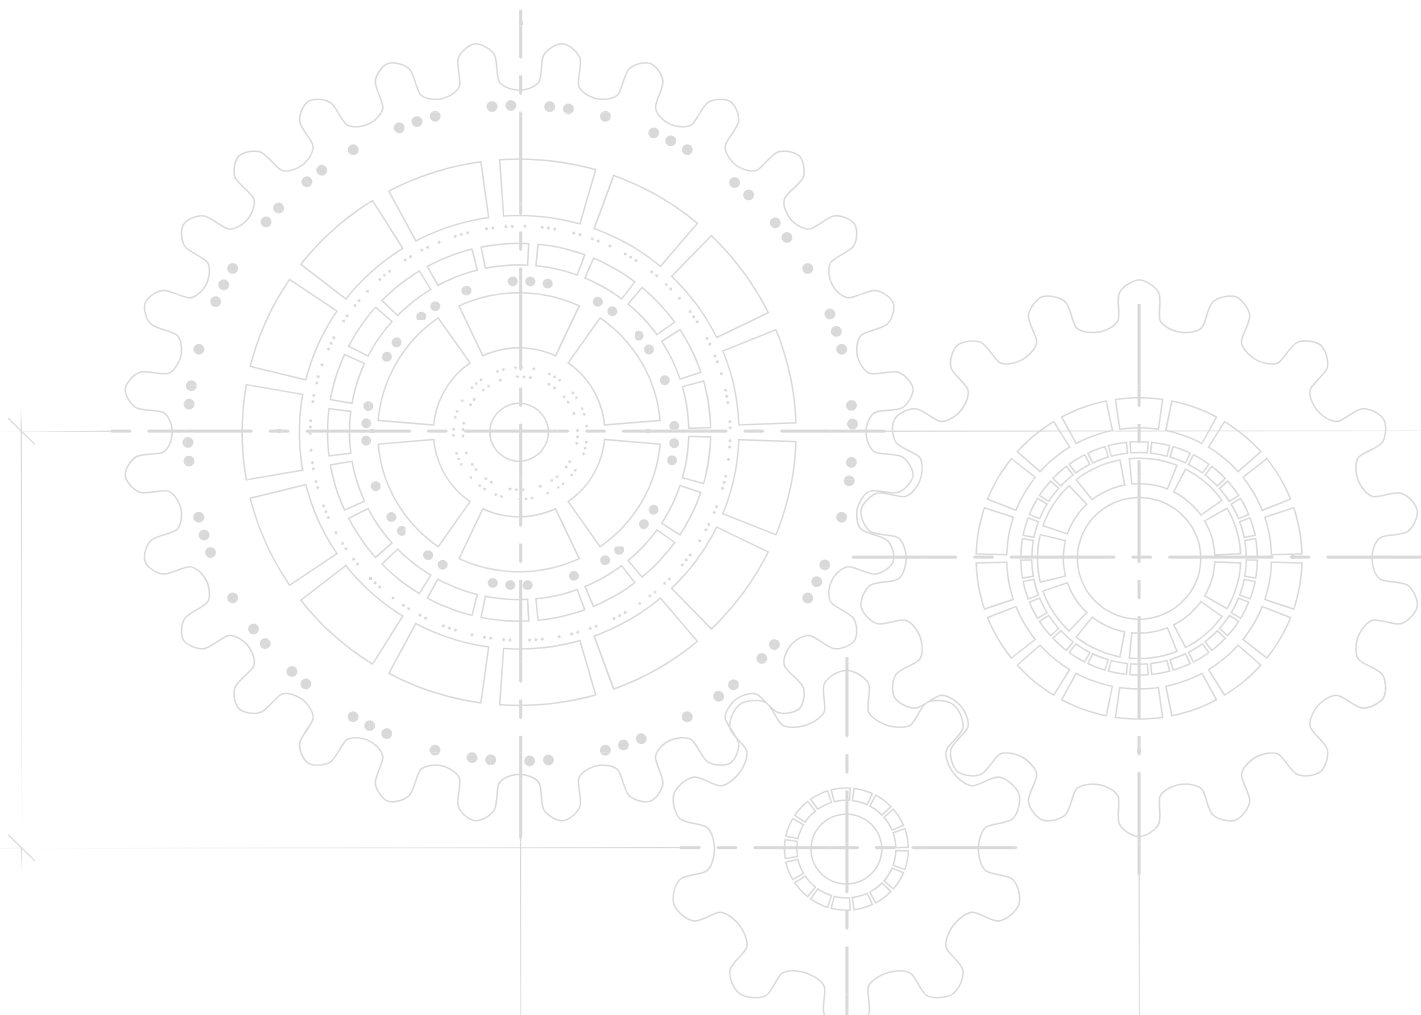

# VIDEO STORAGE



## Video Storage

### CP-UVS-6167R

16-HDD Enterprises Video Storage



- ▶ Features:
  - Max 512 IP Camera Inputs
  - 16 HDDs, SATA, Hot-Swap
  - Max 1024Mbps Incoming/recording Bandwidth
  - iSCSI and Mini SAS for Expanded Storage Space
  - Supports RAID 0/1/3/4/5/6/10/50/60/JBOD, Hotspare
  - Redundant Power Supply

### CP-UVS-6247R

24-HDD Enterprise Video Storage



- ▶ Features:
  - Max 512 IP Camera Inputs
  - 24 HDDs, SATA, Hot-Swap
  - Max 1024Mbps Incoming/recording Bandwidth
  - iSCSI and Mini SAS for Expanded Storage Space
  - Supports RAID 0/1/3/4/5/6/10/50/60/JBOD, Hotspare
  - Redundant Power Supply

### CP-UVS-G24R-D

24-HDD Enterprise Video Storage with Dual Controller



- ▶ Features:
  - Max 512 IP Camera Inputs
  - Dual Controller architecture
  - 24 HDDs, SAS, Hot-Swap
  - Max 1024Mbps Incoming/recording Bandwidth
  - iSCSI and Mini SAS for Expanded Storage Space
  - Supports RAID 0/1/3/4/5/6/10/50/60/JBOD, Hotspare
  - Redundant Power Supply
  - Support standard iSCSI Protocol Storage
  - 24 HDDs, Up to 10 TB capacity for each HDD

### CP-UVS-6367R

36-HDD Enterprise Video Storage



- ▶ Features:
  - Max 320 IP Camera Inputs
  - 36 HDDs, SATA, Hot-Swap
  - Max 640 Mbps Incoming/recording Bandwidth
  - iSCSI and Mini SAS for Expanded Storage Space
  - Redundant Power Supply
  - Supports RAID 0/1/3/4/5/6/10/50/60/JBOD, Hotspare
  - 320-channel (640Mbps) incoming and recording, 160-channel (320Mbps) forwarding, 32-channel (64Mbps) playback

### CP-UVS-6487R

48-HDD Enterprise Video Storage




- ▶ Features:
  - Max 320 IP Camera Inputs
  - 48 HDDs, SATA, Hot-Swap
  - Max 640Mbps Incoming/recording Bandwidth
  - iSCSI and Mini SAS for Expanded Storage Space
  - Supports RAID 0/1/3/4/5/6/10/50/60/JBOD, Hotspare
  - Redundant Power Supply
  - Support standard iSCSI Protocol Storage

### CP-UVS-G48R-D2

48-HDD Embedded Video Storage



- ▶ Features:
  - Max 512 IP Camera Inputs
  - Max 1024 Mbps incoming/recording/forwarding bandwidth
  - Dual-controller, Active-Active, 64-bit High-performance multi-core processor
  - Supports RAID 0/1/5/6/10/50/60, JBOD, Hot spare
  - 1+1 redundant 80PLUS platinum power supply
  - Supports Automatic Network Replenishment (ANR), SAS cascade for expanded storage space

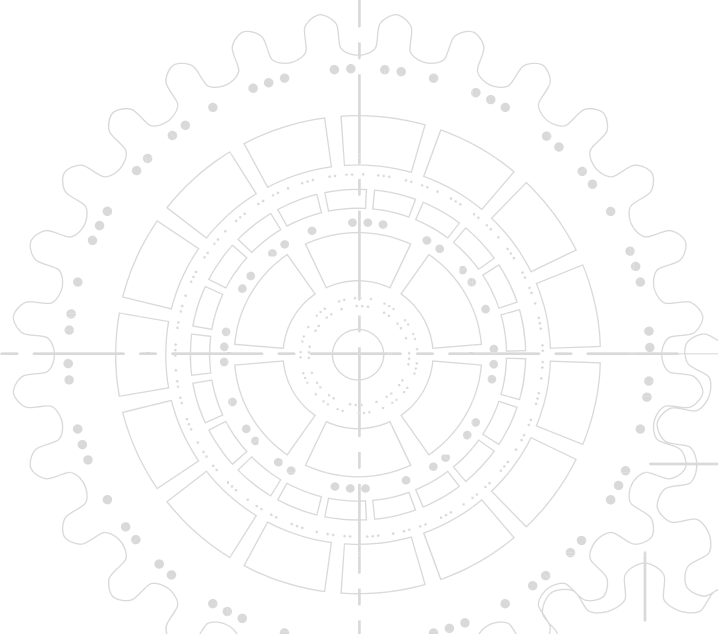

# ALL-IN ONE HD SOLUTION



## 2.4 MP Series

### CP-USC-DA24L2

2.4MP IR Dome Camera - 20 Mtr.



- ▶ Features:
- 1/2.7" 2.4 MP CMOS Image sensor
- HD and SD output switchable
- Max 25/30fps@2.4MP(1928×1088)
- 3.6mm fixed lens (6mm optional)
- Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
- DWDR, Day/Night(ICR), AWB, AGC, BLC
- Max. IR LEDs length 20m

### CP-USC-TA24L2

2.4MP IR Bullet Camera - 20 Mtr.



- ▶ Features:
- 1/2.7" 2.4 MP CMOS Image sensor
- HD and SD output switchable
- Max 25/30fps@2.4MP(1928×1088)
- 3.6mm fixed lens (2.8mm, 6mm optional)
- Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
- DWDR, Day/Night(ICR), 2D-DNR, AWB, AGC, BLC
- Max. IR LEDs length 20m, IP67

### CP-USC-TA24L3-D

2.4MP WDR IR Bullet Camera - 30Mtr.



- ▶ Features:
- 1/2.9" 2.4MP PS CMOS Image Sensor
- Max 25/30fps@2.4MP
- WDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm, 6mm optional)
- IR Range of 30 Mtrs., IP67
- OSD Menu, control over coaxial cable, 2D-DNR
- HD, SD, and Two Others Analog formats output switchable

### CP-USC-TA24R8-D

2.4 MP WDR Array Bullet Camera - 80Mtr.



- ▶ Features:
- 1/2.9" 2.4MP CMOS Image Sensor
- Max 25/30fps@2.4MP
- WDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
- 3.6mm fixed lens ( 6mm, 8mm optional)
- IR Range of 80Mtrs., IP67
- OSD Menu, control over coaxial cable, 2D-DNR
- HD, SD and Two Analog format Output switchable

### CP-USC-TA24ZL6

2.4MP Full HD IR Bullet Camera - 60Mtr.



- ▶ Features:
- 1/2.7" 2.4MP CMOS PS Image Sensor
- Max. 30fps@2.4MP
- DWDR, Day/Night(ICR), 2D-DNR, AWB, AGC, BLC, HLC
- 2.7-12mm Motorized lens
- Max. IR length 60m, IP67, Smart IR
- OSD Menu, control over coaxial cable, 2D-DNR
- HD and SD output switchable

### CP-USC-TA24L8C

2.4MP IR Bullet Camera - 80 Mtr.



- ▶ Features:
- 1/2.7" 2.4 MP CMOS Image sensor
- HD and SD output switchable
- Max 25/30fps@2.4MP(1928×1088)
- 3.6mm fixed lens (2.8mm, 6mm optional)
- Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
- DWDR, Day/Night(ICR), 2D-DNR, AWB, AGC, BLC
- Max. IR LEDs length 80m, Built-in Mic, IP67

### CP-USC-TD24FL6-V3

2.4MP IR Bullet Camera - 60Mtr.



- ▶ Features:
- 1/2.7" 2.4MP PS CMOS Image Sensor
- Max 25/30fps@2.4MP
- DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
- 2.7mm~12mm Vari-focal Lens
- IR Range of 60Mtrs., Smart IR, IP67
- OSD Menu, control over coaxial cable, 2D-DNR
- HD, SD and Two Analog format Output switchable

### CP-USC-VA24ZR3

2.4MP IR Vandal Dome Camera - 30Mtr.



- ▶ Features:
- 1/2.7" 2.4MP PS CMOS Image Sensor
- Max 25/30fps@2.4MP
- DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
- 2.7mm~12mm Motorized Lens
- IR Range of 30Mtrs., Smart IR, IP67, IK10
- OSD Menu, control over coaxial cable, 2D-DNR
- CVI/CVBS/AHD/TVI switchable

## 5 MP Series

### CP-USC-DC51PL2-V3

5MP IR Dome Camera - 20Mtr.



- ▶ Features:
- 1/2.7" 5MP CMOS Image Sensor
- Max. 25fps@5MP (16:9 video output)
- DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm optional)
- IR Range of 20 Mtrs.
- OSD Menu, control over coaxial cable, 2D-DNR
- CVI/CVBS/AHD/TVI Switchable

### CP-USC-TC51PL2-V3

5MP IR Bullet Camera - 20Mtr.



- ▶ Features:
- 1/2.7" 5MP CMOS Image Sensor
- Max. 25fps@5MP (16:9 video output)
- DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm optional)
- IR Range of 20 Mtrs., IP67
- OSD Menu, control over coaxial cable, 2D-DNR
- CVI/CVBS/AHD/TVI Switchable

### CP-USC-DA50ZL6C-DS

5MP Full HD WDR IR Cosmic Dome Camera - 60Mtr.



- ▶ Features:
- 1/2.7" 5MP CMOS Image Sensor
- Max. 20fps@5MP
- WDR(100dB), Day/Night(ICR), 2D-DNR, AWB, AGC, BLC,HLC
- 2.7-12mm Motorized lens
- Max. IR length 60m, IP67, Smart IR, Built-in mic
- Support Starlight Function
- OSD Menu, control over coaxial cable, 2D-DNR
- HD and SD output switchable

### CP-USC-TA50ZL6C-DS

5MP Full HD WDR IR Cosmic Bullet Camera - 60Mtr.



- ▶ Features:
- 1/2.7" 5MP CMOS Image Sensor
- Max. 20fps@5MP
- WDR(100dB), Day/Night(ICR), 2D-DNR, AWB, AGC, BLC,HLC
- 2.7-12mm Motorized lens
- Max. IR length 60m, IP67, Smart IR, Built-in mic
- Support Starlight Function
- OSD Menu, control over coaxial cable, 2D-DNR
- HD and SD output switchable

### CP-USC-TA50L3-S

5MP IR Bullet Camera - 30Mtr.



- ▶ Features:
- 1/2.7" 5MP Progressive scan CMOS Image Sensor
- Max 25fps@5MP (16:9 video output)
- DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
- 3.6mm Fixed lens (2.8mm optional)
- IR Range of 30Mtrs., Smart IR, IP67
- Support Starlight Function
- CVI/CVBS/AHD/TVI switchable

### CP-USC-DC51PL2C

5MP IR Dome Camera - 20Mtr.



- ▶ Features:
- 1/2.7" 5MP Progressive scan CMOS Image Sensor
- Max 25fps@5MP (16:9 video output)
- DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
- 3.6mm Fixed lens (2.8mm optional)
- IR Range of 20 Mtrs., Smart IR
- Support Built-in Mic
- CVI/CVBS/AHD/TVI switchable

### CP-USC-TC51PL2C

5MP IR Bullet Camera - 20Mtr.



- ▶ Features:
- 1/2.7" 5MP Progressive scan CMOS Image Sensor
- Max 25fps@5MP (16:9 video output)
- DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
- 3.6mm Fixed lens (2.8mm optional)
- IR Range of 20 Mtrs., IP67
- Support Built-in Mic
- CVI/CVBS/AHD/TVI switchable

## FishEye

### CP-UVC-EB50L1C-D

5MP WDR IR HDCVI FishEye Camera - 10 Mtr.



- ▶ Features:
- 1/2.8" 5MP progressive scan CMOS
- Max. 20fps@5MP
- WDR(120dB), Day/Night (ICR), 2D/3D DNR, AWB, AGC, BLC, HLC
- Panoramic fisheye lens
- OSD Menu, control over coaxial cable, 2D/3D-DNR
- Support Built-in Mic
- IR Range of 10 Mtr., Smart IR

## HDCVI Series

### CP-UVC-TC4K08ZL10-VD

8 MP WDR HDCVI IR Bullet Camera - 100 Mtr.



- ▶ Features:
- 8 MP PS CMOS Image Sensor
- HD & SD Switchable, OSD menu over Coaxial cable
- Max 15fps@8MP
- 3.7-11mm Motorized lens
- WDR(120dB), Day/Night(ICR), 2D/3D DNR, AWB, AGC, BLC, HLC
- IR Range of 100 Mtrs., IP67, IK10

### CP-UVC-TC4K08ZL10H-VD

8 MP WDR HDCVI IR Bullet Camera - 100 Mtr.



- ▶ Features:
- 8 MP PS CMOS Image Sensor
- HD & SD Switchable, OSD menu over Coaxial cable
- Max 15fps@8MP
- 3.7-11mm Motorized lens
- WDR(120dB), Day/Night(ICR), 2D/3D DNR, AWB, AGC, BLC, HLC
- IR Range of 100 Mtrs., IP67, IK10

### CP-UVC-VC4K08ZL5-VD

8 MP WDR HDCVI IR Vandal Dome Camera - 50 Mtr.



- ▶ Features:
- 8 MP PS CMOS Image Sensor
- HD & SD Switchable, OSD menu over Coaxial cable
- Max 15fps@8MP
- 3.7-11mm Motorized lens
- WDR(120dB), Day/Night(ICR), 2D/3D DNR, AWB, AGC, BLC, HLC
- IR Range of 50 Mtrs., IP67, IK10

### CP-UVC-VC4K08ZL5H-VD

8 MP WDR HDCVI IR Vandal Dome Camera - 50 Mtr.



- ▶ Features:
- 8 MP PS CMOS Image Sensor
- HD & SD Switchable, OSD menu over Coaxial cable
- Max 15fps@8MP
- 3.7-11mm Motorized lens
- WDR(120dB), Day/Night(ICR), 2D/3D DNR, AWB, AGC, BLC, HLC
- IR Range of 50 Mtrs., IP67, IK10

## 2.4 MP Series

### CP-UVC-BC4K08C-D

8 MP WDR HDCVI Box Camera



- ▶ Features:
- 8 MP PS CMOS Image Sensor
- HD & SD Switchable, OSD menu over Coaxial cable
- HDMI:4K@30fps,BNC:4K@15fps
- M43 Lens
- WDR(140dB), Day/Night(ICR), 2D/3D DNR, AWB, AGC, BLC, HLC
- Built-in Mic

### CP-UVC-EC4K08L2C-D

8 MP WDR HDCVI IR Fisheye Camera - 15 Mtr.



- ▶ Features:
- 8 MP PS CMOS Image Sensor
- HD & SD Switchable, OSD menu over Coaxial cable
- Max 15fps@8MP
- 2.5mm Lens
- WDR(120dB), Day/Night(ICR), 2D/3D DNR, AWB, AGC, BLC, HLC
- IR Range of 15 Mtrs., Built-in Mic, IP67, IK10

### CP-UVC-RC4K08L2-VD

3X2MP Multi-Lens Panoramic WDR HDCVI IR Camera - 20 Mtr.



- ▶ Features:
- Three 1/2.8" 2MP PS CMOS Image Sensor
- HD & SD Switchable, OSD menu over Coaxial cable
- Max 15fps@4K,25fps@4MP
- 3.6mm Lens
- WDR(120dB), Day/Night(ICR), 2D/3D DNR, AWB, AGC, BLC, HLC
- IR Range of 20 Mtrs., IP67, IK10

### CP-VAC-D24L2-V5

2.4 MP Full HD IR Dome Camera - 20 Mtr.



- ▶ Features:
- 1/2.7" 2.4MP HD Color Image Sensor
- Plug-n-Play HD/SD Camera
- Max 25/30fps@2.4MP
- 3.6mm fixed Lens
- Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
- DWDR, Day/Night(ICR), 3D-DNR, AWB, AGC, BLC
- IR Range of 20 Mtr.

## CP-VAC-T24PL2-V5

2.4 MP Full HD IR Bullet Camera - 20 Mtr.



- Features:
- 1/2.7" 2.4MP HD Color Image Sensor
  - Plug-n-Play HD/SD Camera
  - Max 25/30fps@2.4MP
  - 3.6mm fixed Lens
  - Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
  - DWDR, Day/Night(ICR), 3D-DNR, AWB, AGC, BLC
  - IR Range of 20 Mtr., IP66

## CP-VAC-T24RS-V5

2.4 MP Full HD Array Bullet Camera - 50 Mtr.



- Features:
- 1/2.7" 2.4 MP HD Color Image Sensor
  - Plug-n-Play HD/SD Camera
  - Max 25/30fps@2.4MP
  - 6mm Lens (8mm Optional)
  - Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
  - DWDR, Day/Night(ICR), 3D-DNR, AWB, AGC, BLC
  - Array Range of 50 Mtr., IP66

## H.265 1SATA Series

### CP-UVR-0401/0801/1601E1-HC

4/8/16 Ch. 1080P Lite H.265 DVR



- Features:
- 4/8/16 Ch. Video, 1 Ch. Audio
  - Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
  - Support upto 2/6MP IP Camera
  - Instastream/H.265 dual-stream video compression
  - 1 SATA port up to 6TB, 2 USB Ports, 1 RJ45
  - HDMI / VGA simultaneous video output
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UVR-0401/0801/1601E1-IC

4/8/16Ch. 1080N Digital Video Recorder



- Features:
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
  - Max 5/10/18 channels IP camera inputs, each channel up to 2/6MP; Max 20/40/72Mbps Incoming Bandwidth
  - Support 1 SATA HDD up to 6TB Each, 2 USB Ports
  - 1 HDMI / 1 VGA Simultaneous Video Output
  - Instastream/H.265 dual-stream video compression
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UVR-0401/0801/1601F1-IC

4/8/16Ch. 5M-N Digital Video Recorder



- Features:
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
  - Max 6/12/24 channels IP camera inputs, each channel up to 6MP; Max 32/64Mbps Incoming Bandwidth
  - Support 1 SATA HDD up to 16TB Each, 2 USB Ports
  - 1 HDMI / 1 VGA Simultaneous Video Output
  - Instastream/H.265 dual-stream video compression
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UVR-0401L1-4KI3

4Ch. 4K-N/5MP Digital Video Recorder



- Features:
- Supports HDCVI/AHD/TVI/CVBS/IP signals
  - Support each channel upto 8MP IP Camera
  - Max 64Mbps Incoming Bandwidth
  - 1 SATA port, up to 16TB, 2 USB Ports
  - AI Instastream, Instastream, H.265 dual-stream Video Compression
  - Up to 1 channel video stream (analog channel) human face recognition, Up to 4 channels video stream (analog channel) Perimeter Protection
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UVR-0801L1-4KV2

8 Ch. 4K Digital Video Recorder



- Features:
- Support HDCVI/AHD/TVI/CVBS/IP video inputs
  - Max 12 channels IP camera inputs, each channel up to 8MP
  - Max 48Mbps Incoming Bandwidth
  - Support 1 SATA HDD up to 8TB, 2 USB Ports
  - HDMI / VGA Simultaneous Video Output
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UVR-0808/1616K1-I3

8/16 Ch. 5M-N Digital Video Recorder



- Features:
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
  - Max 12/24 channels IP camera inputs, each channel up to 6MP; Max 64/128 Mbps incoming bandwidth
  - AI Instastream/Instastream/ H.265 dual-stream encoding
  - Up to 1/2 channels video stream (analog channel) human face recognition, Up to 8/16 channels video stream (analog channel) SMD Plus.
  - Support 1 SATA HDDs up to 16TB each, 2 USB Ports
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UVR-0401/0801E1-CV2

4/8Ch. 1080N Digital Video Recorder



- Features:
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
  - Max 5/10 channels IP camera inputs, each channel up to 2MP/6MP; Max 20/40Mbps Incoming Bandwidth
  - Support 1 SATA HDD up to 6TB, 2 USB Ports
  - 1 HDMI / 1 VGA Simultaneous Video Output
  - Instastream/H.265/H.264+/H.264 video compression
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UVR-1601E2-I

16Ch. 1080P Lite Digital Video Recorder



- Features:
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
  - Max 18 channels IP camera inputs, each channel up to 6MP; Max 64 Mbps Incoming Bandwidth
  - Supports Full-channel AI-Coding
  - Support 2 SATA HDD up to 10TB Each, 2 USB Ports
  - 1 HDMI / 1 VGA Simultaneous Video Output
  - Instastream/H.265 video compression
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

## H.264 2SATA Series

### CP-UVR-1601K1-V5

16Ch. 1080P Digital Video Recorder



- Features:
- Support HDCVI/AHD/TVI/CVBS/IP signals
  - Support upto 5MP IP Camera
  - All Channel 1080P Lite Realtime or 1080P non-realtime recording
  - H.264+ /H.264 dual-stream Video Compression
  - HDMI / VGA Simultaneous Video Output
  - Support 1 SATA HDD up to 8TB, 2 USB Ports
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UVR-1601L2-4K

16 Ch. 4K Digital Video Recorder



- Features:
- Support HDCVI/AHD/TVI/CVBS/IP signals
  - Support upto 8MP IP Camera
  - Max 96Mbps Incoming Bandwidth
  - H.264+ /H.264 dual-stream Video Compression
  - HDMI / VGA Simultaneous Video Output
  - Support 2 SATA HDD up to 16TB, 2 USB Ports
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

## H.265 2SATA Series

### CP-UVR-1601K2-I3

16Ch. 5M-N/1080P Digital Video Recorder



- Features:
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
  - Max 24 channels IP camera inputs, each channel up to 6MP; Max 128 Mbps incoming bandwidth
  - Instastream/ H.265 dual-stream video compression
  - Up to 2 channels video stream (analog channel) human face recognition, Up to 16 channels video stream (analog channel) SMD Plus
  - Support 2SATA HDDs up to 16TB Each, 2USB Ports
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### CP-UVR-1601/3201E2-H

16/32 Ch. 1080P Lite H.265 DVR



- Features:
- 16/32 Ch. Video, 1 Ch. Audio
  - Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
  - Support upto 6MP IP Camera
  - H.265 video compression
  - 2 SATA port up to 10TB Each, 2 USB Ports, 1 RJ45, 1 RS485
  - HDMI / VGA simultaneous video output
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### H.265 4K 1SATA Series

#### CP-UVR-3201E2-I

32 Ch. 1080N/720P Digital Video Recorder



- ▶ Features:
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- Max 16 channels IP camera inputs, each channel up to 6MP; Max 128 Mbps incoming bandwidth.
- Supports 8-channel AI Instastream
- AI Instastream/ Instastream/ H.265 dual-stream video compression
- Up to 16 channels video stream (analog channel) SMD Plus
- Support 2 SATA HDDs up to 16TB Each, 2 USB Ports
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

#### CP-UVR-3201K2-I3

32 Ch. 5M-N Digital Video Recorder



- ▶ Features:
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- Max 32 channels IP camera inputs, each channel up to 6MP; Max 128Mbps incoming bandwidth
- AI Instastream/ Instastream/ H.265 dual-stream video compression.
- Up to 2 channels video stream (analog channel) human face recognition, Up to 16 channels video stream (analog channel) SMD Plus
- Support 2 SATA HDDs up to 16TB Each, 2 USB Ports
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

#### CP-UVR-0401/0801/1601L1B-4KH

4/8/16 Ch. 4K H.265 DVR



- ▶ Features:
- 4/8/16 Ch. Video, 1 Ch. Audio
- Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
- Support upto 8MP IP Camera
- Instastream/H.265 dual-stream video compression
- 1 SATA port up to 10TB, 2 USB Ports, 1 RJ45, 1 RS485
- HDMI / VGA simultaneous video output
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

#### CP-UVR-0401/0801L1-4KH

4/8 Ch. 4K H.265 DVR



- ▶ Features:
- 4/8 Ch. Video, 1 Ch. Audio
- Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
- Support upto 8MP IP Camera
- Instastream/H.265 dual-stream video compression
- 1 SATA port up to 10TB, 2 USB Ports, 1 RJ45, 1 RS485
- HDMI / VGA simultaneous video output
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### H.265 4K 2SATA Series

#### CP-UVR-0801/1601L2-4KH

8/16 Ch. 4K H.265 DVR



- ▶ Features:
- 8/16 Ch. Video, 1 Ch. Audio
- Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
- Support upto 8MP IP Camera
- Instastream/H.265 dual-stream video compression
- 2 SATA port up to 10TB Each, 2 USB Ports, 1 RJ45, 1 RS485
- HDMI / VGA simultaneous video output
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### H.265 4/8SATA Series

#### CP-UVR-0804/1604/3204K4-H

8/16/32 Ch. Digital Video Recorder



- ▶ Features:
- Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
- Support upto 6/8MP IP Camera
- Max 48/96/128Mbps Incoming Bandwidth
- Instastream/ H.265 dual-stream Video Compression
- HDMI / VGA Simultaneous Video Output
- Support 4 SATA HDD up to 10TB Each, 3 USB Ports
- 4/8/16 channels support Tripwire and Intrusion; First 2 channels support Object Abandoned and Missing
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

#### CP-UVR-3216K8-H

32 Ch. 1080P H.265 DVR



- ▶ Features:
- 32 Ch. Video, 16 Ch. Audio
- Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
- Support upto 8MP IP Camera
- Instastream/H.265 dual-stream video compression
- 8 SATA port up to 10TB Each, 4 USB Ports, 1 RJ45, 1 RS485
- HDMI / VGA simultaneous video output
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

### H.264 Series

#### CP-UVR-0401/0801E1-CS

4/8 Ch. 1080P Lite DVR



- ▶ Features:
- 4 /8Ch. Video, 1 Ch. Audio
- Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
- Support upto 2MP IP Camera
- 1 SATA port up to 6TB, 2 USB Ports, 1 RJ45
- HDMI / VGA simultaneous video output
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro



# BODY WORN SOLUTION



## Body Worn Camera

### CP-UBC-2147

Body Worn Camera



- ▶ Features:
  - Android 9.0
  - 2.0" touch screen
  - 8-core 1.8 GHz High-Performance CPU
  - Supports 1080p@30 fps recording, the image resolution up to 34MP
  - H.265/H.264 high compression coding.
  - Support 2G/3G/4G Cellular network, Wi-Fi, Bluetooth, NFC, GPS/GLONALL
  - Power saving mode optional, pre-record and post-record up to 60s.
  - 16GB internal storage and support external SD card
  - One press to record video/audio/alarm/PTT
  - Supports IP68, drop test 2 meters.

### CP-EDS-Y08

8 Port Docking Station with Screen



- ▶ Features:
  - 10 inches touch screen with resolution of 1920 x1200.
  - Support 8 channel camera for backup and recharge.
  - Support 1GB Ethernet port for data uploading.
  - Fast data export and battery recharge.
  - Support Android system.
  - Support upload data to the center FTP server

### CP-EBC-1073-K

4K Body Worn Camera



- ▶ Features:
  - Support 4K resolution for recording
  - 2.4 inch touch screen supported
  - H.265/H.264 video compression
  - Support built-in 4G for live video transmission
  - Support built-in Wi-Fi for uploading
  - Support built-in GPS for live tracking
  - Support optional G-sensor and Gyro
  - Support front and back two cameras
  - Hot-swappable 3050mAh lithium battery
  - Built-In storage can extend to 256GB
  - Support Network PTT function

### CP-DDS-N08

8 Port Docking Station



- ▶ Features:
  - 8 Port docking station for simultaneous video backup and charging
  - There are connection indicator on each port. Each port output current 1.2A
  - Interface- USB 2.0 for charging and backup and power switch power cable for dock station
  - 8pcs water proof mini USB ports
  - Dock station casing is metal and black paint craft with Hanging bracket

### CP-DBP-H20

Full HD Body Worn Camera



- ▶ Features:
  - 1080P color Video Recording
  - 1.8m drop test
  - Easy one-touch recording
  - 2" LCD screen with instant playback of video, photos or audio
  - Built-in high-quality microphone and speaker
  - 16GB/32GB/64GB/128GB Internal storage
  - IP65

### CP-UDS-N08

Data Collection Station/Data Collection Module



- ▶ Features:
  - Each CP-UDS-N08 contains 8 docks which can connect body camera CP-UBC-2147.
  - Each dock contains a cable with micro USB 2.0 interface.
  - Electronic lock design for each dock which can be unlocked only by authorized user.
  - Mechanical lock at the bottom which can be used to unlock docks.
  - Total bandwidth up to 128MB/s for data collection.
  - Two LED indicators on each dock which used to show the charging status and data collection status.

## Data Management Terminal

### CP-EDS-N06

6 Port Docking Station



- ▶ Features:
  - Support totally 10 cameras for backup simultaneously.
  - Support to charge totally 10 cameras at the same time.
  - Support to upload all the files to the center server manually or timing.
  - Support to export all the video files from body camera to local PC.
  - Support device password modification
  - Compatible with different models of body worn camera.

### CP-UA-M13T-R

Data Collection Station/Control Module



- ▶ Features:
  - Supports separate installation and removal. One control module can be connected to 4 data collection modules (32 MPTs).
  - With 13.3" 1920 × 1080 HD capacitive touch screen, it is easy to operate
  - Unlock the dock by face, fingerprint and password.
  - Built with a micro USB 2.0 interface; supports using retractable USB cable which can be replaced without opening the collection station.
  - With built-in lithium battery, when fully charged, you can unlock all docks at least once after the control module is powered off for 10 consecutive days.
  - Supports up to 6 HDDs of 10TB, and Raid 0/1/5/10.

# MOBILE DVR/ NVR SOLUTION



## Mobile DVR

### CP-UVR-0401F1-PGI

4 Ch. H.265 AI Mobile Video Recorder



- ▶ Features:
  - Supports 4-ch 2MP analog cameras and 4-ch 2MP IP cameras input
  - Support Instream/H.265 video compression
  - Support Penta-Brid (HDCVI/AHD/TVI/CVBS/IP) video input
  - Aviation connectors adopted
  - Support 1 HDD and 1 SD card, 3 USB Ports (2.0)
  - Supports DSM/ADAS/BSD
  - Support GPS and 3G/4G
  - VGA/TV (Din Connector) simultaneous video output
  - CMS Software: EMSS Pro, KVMS Pro (Live view and Playback)

### CP-UVR-0401F2-PGI

4 Ch. H.265 AI Mobile Video Recorder



- ▶ Features:
  - Supports 4-ch 2MP analog cameras and 1-ch 2MP IP cameras input
  - Support Instream/H.265 video compression
  - Aviation connectors adopted
  - Supports 2 SD cards (up to 256 GB for each), 2 USB Ports(2.0)
  - Supports DSM/ADAS/BSD
  - Support GPS and 3G/4G
  - Mobile Software: EMSS Pro, iCMOB/gCMOB (Live view and Playback)
  - CMS Software: EMSS Pro, KVMS Pro (Live view and Playback)

## Mobile NVR

### CP-UNR-404T1/408T2-AI

4/8 Ch. PoE H.265 AI Mobile Network Video Recorder



- ▶ Features:
  - Supports 4/8 Ch. 2MP PoE IP cameras input
  - Support Instream/H.265 video compression
  - Aviation connectors/ RJ45(Optional)
  - Support 1/2 HDD and 1 SD card, 3 USB Ports (2.0)
  - Supports DSM, face recognition or ANPR
  - Support GPS, Wi-Fi and 3G/4G
  - VGA/TV simultaneous video output
  - Mobile Software: EMSS Pro, iCMOB/gCMOB (Live view and Playback)
  - CMS Software: EMSS Pro, KVMS Pro (Live view and Playback)

## Mobile Camera

### CP-USC-WB24L2C-D

2.4MP Full HD IR Mobile Wedge Camera - 20Mtr.



- ▶ Features:
  - 1/2.8" 2.4MP CMOS Image Sensor (0.9071 centimeters)
  - Max 30fps@2.4MP
  - WDR(120dB), Day/Night(ICR), 3D/2D-DNR, AWB, AGC, BLC, HLC
  - 3.6mm fixed lens (2.8mm optional)
  - IR Range of 20 Mtrs., Smart IR, IP67, IK10
  - IP6K9K, Shock-proof
  - Audio in interface, Support Built-in Mic
  - HDCVI output (Aviation connector)
  - HD, SD and Two Analog format Output

### CP-UNC-WC21L5C-MDS

2MP Full HD WDR IR Network Wedge Camera



- ▶ Features:
  - 1/2.8" 2MP CMOS Image Sensor
  - Instream & H.265 triple-stream encoding
  - Max. 25/30fps@2MP
  - 2.8 mm fixed lens (3.6mm, 6mm optional)
  - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
  - IR Range of 50 Mtrs, IP67, IK10, Micro SD Card, PoE
  - Support Built-in Mic
  - Support Starlight Function
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro
  - M12 Connector

### CP-UNP-M3020L15-V2

2 MP Full HD Network Mobile Positioning System



- ▶ Features:
  - 1/2.8" 2MP CMOS Image Sensor (0.9071cm)
  - Max. 25/30fps@1080P
  - Powerful 30x Optical Zoom
  - DWDR, 2D/3D DNR, AGC, AWB, BLC, HLC
  - 4.5mm ~ 135mm Lens
  - IR Distance up to 150 Mtr., IP66
  - Up to 255 Presets, 8 Tour, 5 Pattern, 5 Auto scan
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro


### CP-UNP-3020R1

2 MP Full HD IP Mobile Portable PTZ Camera



- ▶ Features:
  - 1/2.8" 2MP CMOS Image Sensor (0.9071cm)
  - Pan range: 360° endless, speed up to 90°/s
  - Powerful 30x Optical Zoom
  - Supports Micro SD Card Upto 128 GB
  - 4.5mm ~ 135mm Lens
  - IR Distance up to 100 Mtr., IP66
  - Up to 256 Presets, 8 Tour
  - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

# PoE SWITCHES

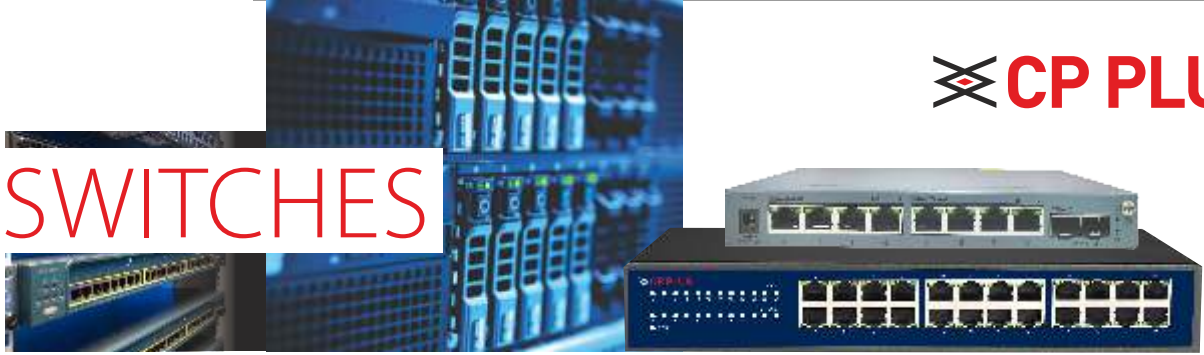

## 10/100 Unmanaged PoE Switch

### CP-ANW-HP4H2-N65

4EP + 2E 10/100Mbps AI PoE Switch



- Features:
- Using CAT.5 network patch cords support power for the wireless AP/CPE and IP/PTZ camera
  - Networking standard: IEEE802.3af/at/bt
  - PoE Watchdog AI Function: Detection front-end PoE cameras and PD, Automatic detection, Automatic restart
  - Support 60W PoE receiving power, free of power adapter & simplify power supply
  - 6KV lightning protection, 8KV surge protection, anti-reverse connection, over-current protection, over-voltage protection, over-temperature protection, Short circuit protection

### CP-ANW-HP8H1-N12

8EP + 1E 10/100Mbps AI PoE Switch



- Features:
- Using CAT.5 network patch cords support power for the wireless AP and IP camera
  - Networking standard: IEEE802.3af/at/bt
  - PoE Watchdog AI Function: Detection front-end PoE cameras and PD, Automatic detection, Automatic restart
  - Upload port automatic flip (Auto MDI / MDIX)
  - 6KV lightning protection, 8KV surge protection, anti-reverse connection, over-current protection, over-voltage protection, over-temperature protection, Short circuit protection

## 10/100/1000 Unmanaged PoE Switch

### CP-ANW-GPU16F2-N30

16 Gigabit Port + 2SFP 10/100/1000Mbps AI PoE Switch



- Features:
- Using CAT.5 network patch cords support power for the wireless AP and IP camera
  - Networking standard: IEEE802.3af/at/bt
  - PoE Watchdog AI Function: Detection front-end PoE cameras and PD, Automatic detection, Automatic restart.
  - Upload port automatic flip (Auto MDI/MDIX)
  - Network performance: Store-and-forward
  - Intelligent power distribution and secure power supply system
  - The port power is 60 watts, it is convenient for high-power device
  - Power Budget 300W

### CP-ANW-GPU24F2-N30

24 Gigabit Port + 2 SFP 10/100/1000Mbps AI PoE Switch



- Features:
- Using CAT.5 network patch cords support power for the wireless AP and IP Camera
  - Networking standard: IEEE802.3af/at/bt
  - PoE Watchdog AI Function: Detection front-end PoE cameras and PD, Automatic detection, Automatic restart
  - Upload port automatic flip (Auto MDI/MDIX)
  - Network performance: Store-and-forward
  - Intelligent power distribution and secure power supply system
  - The port power is 60 watts, it is convenient for high-power device
  - Power Budget 300W

### CP-ANW-HP16G2F1-N30

16EP+2G+1SFP AI PoE Switch



- Features:
- Using CAT.5 network patch cords support power for the wireless AP and IP camera
  - Networking standard: IEEE802.3af/at/bt
  - PoE Watchdog AI Function: Detection front-end PoE cameras and PD, Automatic detection, Automatic restart
  - Upload port automatic flip (Auto MDI / MDIX)
  - 6KV lightning protection, 8KV surge protection, anti-reverse connection, over-current protection, over-voltage protection, over-temperature protection, Short circuit protection
  - The port Max power Output is 60 watts, it is convenient for high-power device
  - Power Budget 300W

### CP-ANW-HP24G2-N30

24EP+2G AI PoE Switch



- Features:
- Using CAT.5 network patch cords support power for the wireless AP/CPE and PTZ/IP camera
  - Networking standard: IEEE802.3af/at/bt
  - PoE Watchdog AI Function: Detection front-end PoE cameras and PD, Automatic detection, Automatic restart
  - Upload port automatic flip (Auto MDI / MDIX)
  - 6KV lightning protection, 8KV surge protection, anti-reverse connection, over-current protection, over-voltage protection, over-temperature protection, Short circuit protection
  - Max. output power of the port is 60 watts, it is convenient for high-power device
  - Power Budget 300W

## 10/100/1000 Managed PoE Switch

### CP-ANW-GPM8F2-N12

8 Port Gigabit + 2 Port Gigabit SFP Layer 2 Managed PoE Switch



- Features:
- Supports IEEE 802.3i IEEE 802.3u IEEE802.3ab IEEE802.3z IEEE802.3x IEEE802.3at IEEE802.3af IEEE802.3az
  - 8 x Gigabit PoE+ Ports and 2 x Gigabit SFP
  - Supports MAC address auto learning and auto aging
  - Supports PoE power up to 30W for each PoE port, all power up to 120W
  - LED indicators for monitoring power, link/activity
  - Support QoS, port mirroring, link aggregation protocol

### CP-ANW-GPM24G4F4-N40

24 Port Gigabit + 4 Port Gigabit SFP Layer 2 Managed PoE Switch



- Features:
- Supports IEEE 802.3i, IEEE 802.3u, IEEE802.3ab, IEEE802.3z, IEEE802.3x, IEEE802.3at, IEEE802.3af, IEEE802.3az
  - 24 x Gigabit PoE+ Ports and 4 x Gigabit Combo
  - Supports MAC address auto learning and auto aging
  - Supports PoE power up to 30W for each PoE Port, all power up to 400W
  - LED indicators for monitoring power, link/activity
  - Store and forward mode operates.
  - Power Budget 400W

## Gigabit Industrial PoE Switch

### CP-ANW-GPI4F2-46

4 Port Industrial Gigabit PoE Switch With 2 Gigabit Fiber Port



- Features:
- RJ45 Port: 4 10/100/1000Base-Tx
  - Optical port: 2 1000Base-X (SFP)
  - Support IEEE 802.3 10Base-T, IEEE 802.3u 100Base-T, IEEE 802.3ab 1000Base-T, IEEE 802.3z 1000Base-X, IEEE 802.3af/at Ethernet standard
  - Support dual DC power backup, built-in over current protection
  - IP40 grade protection, corrugated high strength metal housing
  - Power supply support anti-reverse connection


### CP-ANW-GPI8F4-46

8 Port Industrial Gigabit PoE Switch With 4 Gigabit Fiber Port



- Features:
- RJ45 Port: 8 10/100/1000Base-Tx RJ45 ports
  - Optical port: 4 1000Base-X (SFP)
  - Support IEEE 802.3 IEEE 802.3i, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3z, IEEE 802.3ad, IEEE 802.3x, IEEE 802.1p, IEEE 802.1q, IEEE 802.3af, IEEE 802.3at Ethernet standard
  - Support dual DC power backup, built-in over current protection
  - IP40 grade protection, corrugated high strength metal housing
  - Power supply support anti-reverse connection

# CONSUMER SERIES

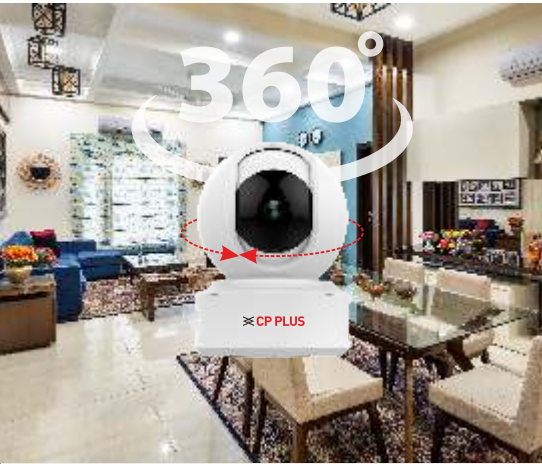

## 2 MP Series

### CP-E21

2 MP Wi-Fi PT Camera – 15 Mtr.



- Features:
- 2MP CMOS Image Sensor
  - 3.6mm Lens
  - H.264 High Profile Video Compression
  - Wi-Fi Support
  - Max 15fps@1080P
  - IR Distance of 15 Mtr.
  - Works with Alexa
  - Works with Google Assistant

### CP-E24A

2 MP Wi-Fi PT Camera – 15 Mtr.



- Features:
- 1/2.7" 2MP CMOS Image Sensor
  - 3.6mm Lens
  - H.264/H.265 Video Compression
  - Wi-Fi Support
  - Max 20fps@1080P
  - IR Distance of 15 Mtr.
  - Works with Alexa
  - Works with Google Assistant

### CP-E25A

2MP Wi-Fi PT Camera - 10 Mtr.



- Features:
- 1/4.5" 2MP CMOS Image Sensor
  - 4mm Lens
  - H.264 Video Compression
  - Support SD Card up to 128GB
  - IR Distance of 10 Mtr.
  - Max. 20fps@1080P
  - Wi-Fi Support
  - Works with Alexa
  - Works with Google Assistant

### CP-V21

2 MP Wi-Fi Bullet Camera -15 Mtr.



- Features:
- 2MP CMOS Image Sensor
  - 3.6mm Lens
  - H.264 High Profile Video Compression
  - Wi-Fi Support
  - Max 15fps@1080P
  - IR Distance of 15 Mtr
  - Works with Alexa
  - Works with Google Assistant

## 3 MP Series

### CP-E31A

3MP Wi-Fi PT Camera - 15 Mtr.



- Features:
- 1/3" 3MP CMOS Image Sensor
  - 4mm Lens
  - H.265 Video Compression
  - Wi-Fi Support
  - Max. 20fps@3MP
  - IR Distance of 15 Mtr.
  - Works with Alexa
  - Works with Google Assistant

## Wi-Fi Sensor

### CP-HAS-D33-W

Smart Wi-Fi Door Sensor



- Features:
- Support Wi-Fi Protocol: IEEE 802.11 b/g/n
  - Detection Distance: 20-30mm
  - Wi-Fi Networking: 2.4GHz
  - Report alarms to smart phone in real time
  - Installation can be done on Window and Doors

### CP-HAS-GM03-W

Smart Wi-Fi Gas Detector



- Features:
- Highly Stable Gas Sensor
  - Voice Prompt Support
  - Report alarms to smart phone in real time
  - Support Wi-Fi
  - Plug & Play

### CP-HAS-S1-W

Smart Wi-Fi Smoke Sensor



- Features:
- Alarm: When smoke concentration is detected, Red LED will flash quickly and the buzzer will give out with a quick alarm. It will also send alarms to connected smartphones in real-time.
  - Hush: When the smoke alarm is ringing, press the hush button and the device will enter hush mode for about 10 minutes.
  - Low Battery: When the battery is low, the red LED will flash once and the smoke alarm will issue the warning sound once every 53 seconds.

eezo Series

**CP-HAS-M99-W**

Smart Motion Sensor



- ▶ Features:
- Detection Angle: 90°
- Detecting Distance: Max. 9m under 25°C (detecting distance will be different, depending on environment temperature)
- Wi-Fi Protocol: IEEE 802.11 b/g/n
- Networking: Wi-Fi-2.4GHz
- Pet Protection Level: 11kg or less
- Working Temperature: -10°C~+50°C

**CP21**

2MP Wi-Fi Pan & Tilt Camera - 10 Mtr.



- ▶ Features:
- 1/2.7" 2MP Progressive CMOS Image Sensor
- 3.6mm fixed Lens
- H.265/H.264 Video Compression
- Support Wi-Fi
- Built-in Mic & Speaker
- Max. 25/30fps@1080P
- Night Vision of 10 Mtr.

**CB21**

2MP Wi-Fi Cube Camera - 10 Mtr.



- ▶ Features:
- 1/2.7" 2MP CMOS Progressive Image Sensor
- 2.8mm fixed Lens
- H.265/H.264 Video Compression
- Support Wi-Fi
- Built-in Mic & Speaker
- Max. 25/30fps@1080P
- Night Vision of 10 Mtr.

**CT21**

2MP Wi-Fi Full Color Bullet Camera - 30 Mtr.




- ▶ Features:
- 1/2.8" 2MP Progressive CMOS Image Sensor
- 2.8mm/3.6mm/6mm fixed Lens
- H.265/H.264 Video Compression
- Support Wi-Fi
- Built-in Mic
- Max. 25/30fps@1080P
- Support Ip67
- Night Vision of 30 Mtr.

**CT22**

2MP Wi-Fi Full Color Bullet Camera - 30 Mtr.



- ▶ Features:
- 1/2.8" 2MP Progressive CMOS Image Sensor
- 2.8mm/3.6mm/6mm Fixed Lens
- H.265/H.264 Video Compression
- Support Wi-Fi
- Support Built-in Mic
- Max. 25/30fps@1080P
- Support Ip67
- Night Vision of 30 Mtr.
- 2 Spot light

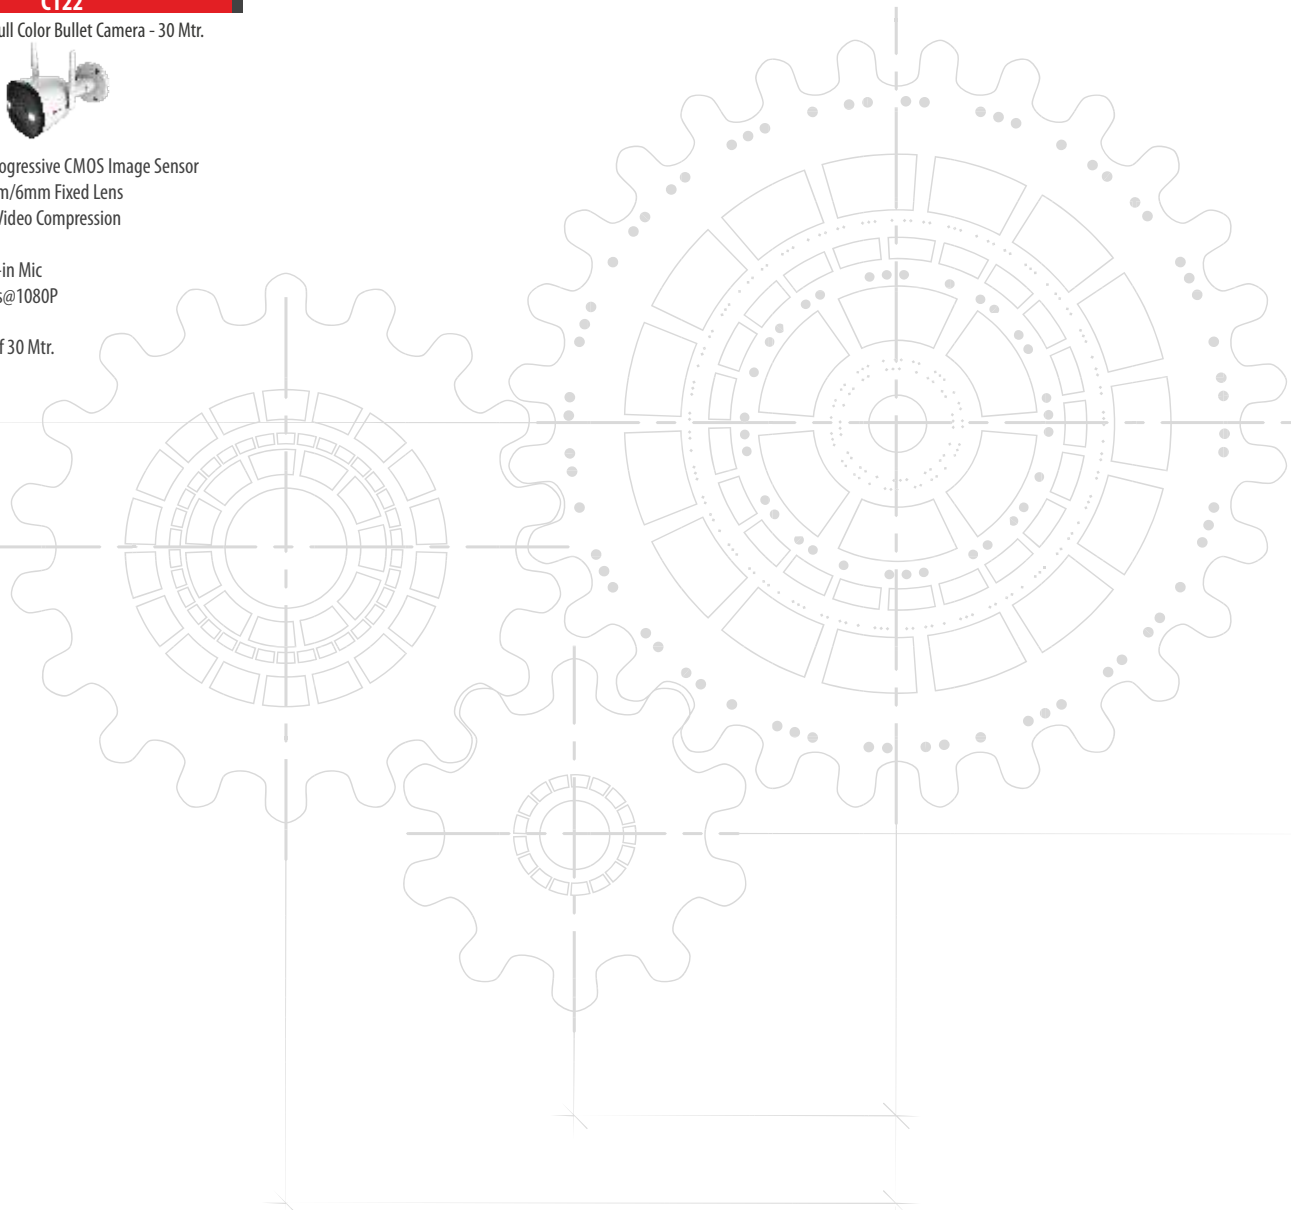


# INTELLIGENT VIDEO DOOR PHONE



## Villa Kit Range

### CP-UVK-701A


Video Intercom Kit



- ▶ Features:
  - 7" TFT screen
  - Video intercom function: Unlock, voice call, video call, volume adjustment
  - System Capacity: 2 door stations + 3 indoor monitors
  - Multiple bell sounds
  - Supports digital wide dynamic range (DWDR)

### CP-UVK-701MTA

Video Intercom Kit with Memory



- ▶ Features:
  - 7" TFT screen
  - Video intercom function: Unlock, voice call, video call, volume adjustment, doorway monitoring
  - System Capacity: 2 door stations + 3 indoor monitors
  - Multiple bell sounds
  - Supports digital wide dynamic range (DWDR)
  - In-Built Memory (200 Snapshots)

### CP-UVK-711M

IP Villa Door Station & Indoor Monitor



- ▶ Features:
  - High definition camera; WDR
  - IP65 (Silicone sealant is needed. For details, see the quick start guide.)
  - Supports auto IR illumination and D/N
  - Card/app remote/indoor monitor unlock
  - Supports two-way voice call; support calls between door stations and app
  - 10,000 cards

- IP Indoor Monitor
- IPC surveillance
  - Alarm integration
  - High performance

### CP-PVK-70TH

7" Color Video Door Phone Kit 7" Colour TFT-LCD Display



- ▶ Features:
  - 4 Wire System, Easy Installation
  - Feather-touch Keypad
  - Super Slim hands-free Model
  - High Resolution Colour Camera 700TVL, With IR LED for Night Vision
  - Rain Cover & Mount Angle Available
  - Support Additional 3 Indoor Units & 2 Outdoor Units, 1 CCTV In
  - Supports Intercom
  - Color Settings Adjustments

## Multi-Villa Range

### CP-PVK-70MTH1

7" Color Video Door Phone Kit With Memory



- ▶ Features:
  - 7" Colour TFT-LCD Display
  - Feather-touch Keypad
  - Super Slim hands-free Model With Memory (100 Snapshots)
  - High Resolution Colour Camera 700TVL, With IR LED for Night Vision
  - Rain Cover & Mount Angle Available
  - Support Additional 3 Indoor Units & 2 Outdoor Units, 2 CCTV In
  - Supports Intercom
  - 1 CCTV Out for Recording
  - Support 6 different melody

### CP-PAV-C341

4 Door Bell Outdoor Unit



- ▶ Features:
  - 1/4" Smart Sensor
  - 4 Monitor Button (4x3=12 monitors support)
  - One Lock Support
  - Angle of View: 90°

### CP-PVM-70T

7" Color Indoor Monitor



- ▶ Features:
  - 7" Colour TFT-LCD Display
  - Feather-Touch Keypad
  - Super Slim hands-free Model
  - Support Additional 3 Indoor Units & 2 Outdoor Units, 1 CCTV In
  - Color/Brightness Settings Adjustments etc
  - Supports Intercom
  - Do not disturb

### CP-UNB-CP22M

Apartment Outdoor Station



- ▶ Features:
  - HD CMOS Camera
  - Night vision & Voice indication
  - Video & Audio messaging
  - Local card opening
  - Stainless steel panel, IP54, IK07
  - Surface & Flush mounted

## Multi-Apartment Range

### CP-UHB-GP02

Guard Station



- Features:
- 10" TFT Capacitive Touch Screen, 1024x600
  - Alarm Intergration
  - Micro SD card optional, max 32GB
  - IPC surveillance
  - Record and snapshot (SD card needed)

### CP-UNB-RM701MTH-P

Digital Indoor Monitor



- Features:
- 7" TFT Capacitive touch screen, 1024 x 600
  - Alarm integration
  - IPC surveillance
  - Support standard PoE
  - High performance & Cost-effective
  - Embedded 8GB SD card
  - Color Options: White & Black

### CP-UNB-C01-P2

IP Villa Door Station



- Features:
- High definition camera; WDR
  - Operating temperature -30°C-60°C
  - IP65(Silicone sealant is needed. For details, see the quick start guide.)
  - Supports auto IR illumination and D/N
  - Card/app remote/indoor monitor unlock
  - Supports two-way voice call; support calls between door stations and app
  - 10,000 cards
  - Tamper Alarm
  - Support standard PoE power supply
  - Control two locks

## Time & Attendance

### CP-VTA-T2324-U

Fingerprint Time Attendance



- Features:
- LCD: 4" 480 x 320 Color Display
  - Hardware Platform: Ws306
  - Fingerprint capturing: Optical Sensor
  - Failed Recognition Rate: <=0.0001%
  - False Acceptance Rate: <=0.01%
  - Recognition Speed: 1s
  - Recognition ways: 1:1, 1:N
  - Fingerprint capacity: 500

### CP-VTA-F1043

Fingerprint Based Time Attendance Terminal



- Features:
- 2.8" TFT LCD Display
  - Support 1000 Fingerprints
  - Support 100000 Storage Capacity
  - Support Fingerprint, Password & ID Card

### CP-VTA-M1143

Face & Fingerprint Based Time Attendance Terminal




- Features:
- 2.8" HVGA Display
  - Support 1000 Face Recognition
  - Support 10000 Fingerprints
  - Support 200000 Storage Capacity
  - Support USB 2.0

### CP-VTA-T2124-CR

Fingerprint Access Control with EM Card



- Features:
- LCD: 2.8" TFT Color Display
  - Hardware Platform: Ws307
  - Fingerprint capturing: Optical Sensor
  - Failed Recognition Rate: <=0.0001%, False Acceptance Rate: <=0.01%, Recognition Speed:<1s, Recognition ways: 1:1, 1:N
  - Fingerprint capacity: 1000, EM Lock Supported
  - Management Record Capacity:1000, Storage Capacity:100000, Identification mode: Fingerprint, Password, EM Card

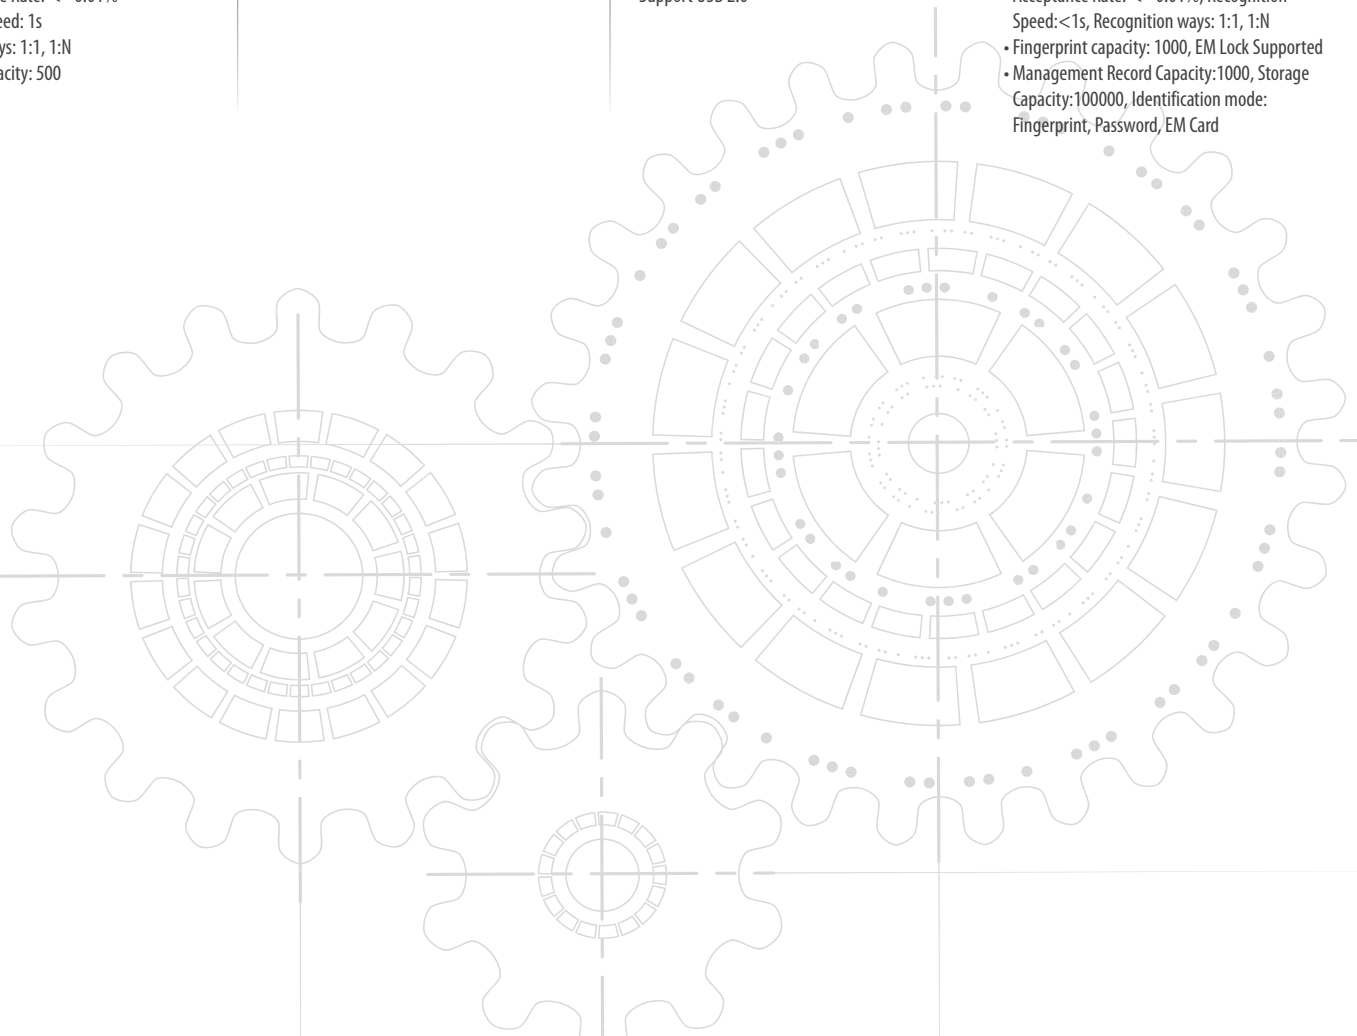



**CP PLUS Group**

AUSTRALIA | BANGLADESH | CHINA | CZECH REPUBLIC | GERMANY | HONGKONG | INDIA | INDONESIA | NIGERIA  
PAKISTAN | PHILIPPINES | SAUDI ARABIA | SINGAPORE | SOUTH AFRICA | SRI LANKA | TAIWAN | THAILAND | UAE | VIETNAM

[sales@cpplusworld.ae](mailto:sales@cpplusworld.ae) | [www.cpplusworld.ae](http://www.cpplusworld.ae)

