

# POWERCOMMAND® OTEC TRANSFER SWITCH

**POWERCOMMAND® 40-11 CONTROL | OPEN TRANSITION | 40 A-1200 A**  
**AUTOMATIC TRANSFER SWITCH**

---

## DESCRIPTION

The OTEC series transfer switch provides the basic features typically required for primary source and generator set monitoring, generator set starting and load transfer functions for emergency standby power applications. They are suitable for use in emergency, legally required, and optional standby circuits in commercial and light industrial applications. The OTEC transfer switch features the new PowerCommand® 40-11 control with a comprehensive feature list to suit a wide variety of ATS applications.

## FEATURES

**PowerCommand® 40-11 control** – A fully featured microprocessor-based control with LCD digital display and tactile-feel soft-switches for easy operation and screen navigation. Control highlights include front panel PC software configuration, three phase sensing on both sources, sync check, phase rotation and imbalance sensing, and event logging. Additional optional features include load shed from standby source, Modbus RTU and TCP network communication, and configurable output contact modules. Completely network compatible with the new Cummins transfer switch remote annunciator. Please see the S-6560 PowerCommand® 40-11 control specification sheet for the full description, benefits, and features.

**Programmed transition** – Open transition timing can be adjusted to completely disconnect the load from both sources for a programmed time period, as recommended by NEMA MG-1 for transfer of inductive loads.

**Advanced transfer switch mechanism** – Unique bi-directional linear actuator provides virtually frictionless constant force, straight-line transfer switch action during automatic operation.

**Positive interlocking** – Mechanical and electrical interlocking prevent source-to-source connection through the power or control wiring.

**Main contacts** – Heavy-duty silver alloy contacts used with multi-leaf arc chutes are rated for motor loads or total system load transfer. They require no routine contact maintenance. Continuous load current not to exceed 100% of switch rating and tungsten loads not to exceed 30% of switch rating.

**Ease of service and access** – Single-plug harness connection and compatible terminal markings simplify servicing. Access space is ample. Door-mounted controls are field-programmable; no special tools are required.


**Complete product line** – Cummins is a single source supplier with a wide range of equipment, accessories, and services to suit virtually any backup power application.

**Warranty and service** - Products are backed by a comprehensive warranty and a worldwide network of distributors with factory-trained service technicians.



## TRANSFER SWITCH MECHANISM

- Transfer switch mechanism is electrically operated and mechanically held in the Source 1 and Source 2 positions. The transfer switch incorporates electrical and mechanical interlocks to prevent inadvertent interconnection of the sources.
- Independent break-before-make action is used for both 3-pole and 4-pole simultaneously switched neutral. This design allows use of sync check operation when required, or control of the operating speed of the transfer switch for proper transfer of motor and rectifier-based loads (programmed transition feature).
- True 4-pole switching allows for proper ground (earth) fault sensing and consistent, reliable operation for the life of the transfer switch. The neutral poles of the transfer switch have the same ratings as the phase poles and are operated by a common crossbar mechanism, eliminating the possibility of incorrect neutral operation at any point in the operating cycle, or due to failure of a neutral operator.
- Electrical interlocks prevent simultaneous closing signals to normal and emergency contacts and interconnection of normal and emergency sources through the control wiring.
- High pressure silver alloy contacts resist burning and pitting. Separate arcing surfaces further protect the main contacts. Contact wear is reduced by multiple leaf arc chutes that cool and quench the arcs. Barriers

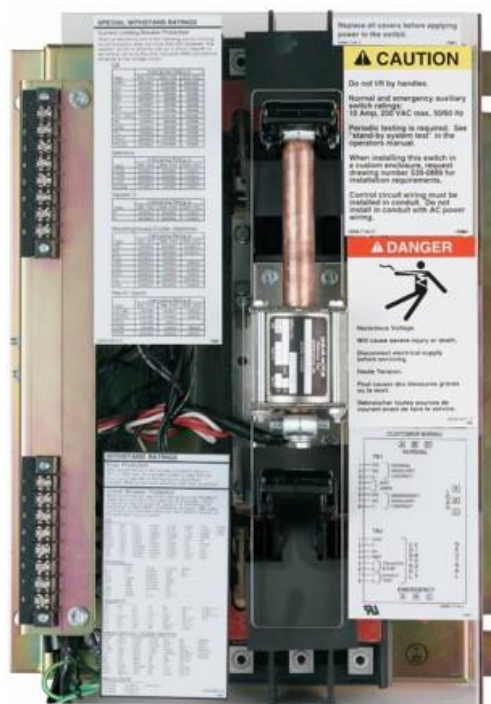

separate the phases to prevent interphase flashover. A transparent protective cover allows visual inspection while inhibiting inadvertent contact with energized components.

- Switch mechanism, including contact assemblies, is UL 1008 certified to verify suitability for applications requiring high endurance switching capability for the life of the transfer switch. Withstand and closing ratings are validated using the same set of contacts, further demonstrating the robust nature of the design.

## SPECIFICATIONS

Voltage rating	Up to 600 V AC, 50 or 60 Hz.
Arc interruption	Multiple leaf arc chutes provide dependable arc interruption.
Neutral bar	A full current-rated neutral bar with lugs is standard on enclosed 3-pole transfer switches.
Auxiliary contacts	Two isolated contacts (one for each source) indicating switch position are provided for customer use. Contacts are normally open, and close to indicate connection to the source. Wired to terminal block for easy access. Rated at 10 A Continuous and 250 V AC maximum.
Operating temperature	-22 °F (-30 °C) to 140 °F (60 °C)
Storage temperature	-40 °F (-40 °C) to 140 °F (60 °C)
Humidity	Up to 95 % relative, non-condensing
Altitude	Up to 10,000 ft (3,000 m) without derating
Surge withstand ratings	Voltage surge performance and testing in compliance with the requirements of IEEE C62.41 (Category B3) and IEEE C62.45.
Total transfer time (source-to-source)	Will not exceed 6 cycles at 60 Hz with normal voltage applied to the actuator and without programmed transition enabled.
Manual operation*	Transfer switch mechanisms are equipped with means to manually transfer. All sources must be de-energized before manual operation is attempted.

\*See Operator Manual for further details.

## TRANSITION MODES

**Open delayed transition** – In this transition mode the time required for the transfer switch to transfer between sources is adjustable so that the load- generated voltages decay to a safe level before connecting to an energized source. Recommended by NEMA MG-1 to prevent nuisance tripping breakers and load damage. Adjustable 0.5 secs - 10 minutes, and default 0.5 seconds.

**Open in-phase translation** – Initiates open transition transfer when in-phase monitor senses both sources are in phase (voltage, phase, and frequency). Operates in a break-before-make sequence. Includes ability to enable programmed transition as a backup. The module waits indefinitely for synchronization unless the 'Return to programmed transition' function is active in which case after 2 minutes it performs a programmed delayed transfer.

## UL 1008 WITHSTAND AND CLOSING RATINGS (WCR)

The transfer switches listed below must be protected by circuit breakers or fuses. Referenced drawings include detailed listings of specific breakers or fuse types that must be used with the respective transfer switches. Consult with your distributor/dealer to obtain the necessary drawings. Withstand and Closing Ratings (WCR) are stated in symmetrical RMS amperes.

### BREAKER PROTECTION

Frame	Amperage rating (A)	MOLDED CASE CIRCUIT BREAKER (MCCB) PROTECTION				SPECIAL CIRCUIT BREAKER PROTECTION		
		With specific manufacturers MCCB (kA at 480V)	With specific manufacturers MCCB (kA at 600V)	Max MCCB ratings (A)	Drawing reference	With specific Current limiting breakers (kA at 600V)	Max. Current limiting breakers CLB rating (A)	Drawing reference
A	40, 70, 125 (3-pole only)	14	14	225	A050J441	200	225	A048J566
	40, 70, 125 (4-pole only)	30	30	400	A048E949	200	400	A051D533
B	150, 225, 260	30	30	400	A048E949	200	400	A051D533
C	300, 400, 600	65	65	1200	A056M829	200	1200	A048J564
D	800, 1000	65	50	1400	A056M821	200	1400	A048J562
E	1200	85	65	1600	A056M825	200	1600	A048P186

### FUSE PROTECTION

Frame	Amperage rating (A)	WCR with current limiting fuses (kA)	Fuse size and type	Drawing reference
A	40, 70, 125 (3-pole only)	200	200 A, Class: J, RK1, RK5	A050J441
	40, 70, 125 (4-pole only)	200	1200 A Class L or T, or 600A class J, RK1, RK5	A048E949
B	150, 225, 260	200	1200 A Class L or T, or 600A class J, RK1, RK5	A048E949
C	300, 400, 600	200	1200 A Class L or T, or 600A class J, RK1, RK5	A056M829
D	800, 1000	200	2000 A Class L or 1200 A Class T or 600 A Class J, RK1, RK5	A056M821
E	1200	200	2000 A Class L or 1200 A Class T or 600 A Class J, RK1, RK5	A056M825

All WCR values are at 600 V

**TIME BASED RATINGS: 0.05S (3-CYCLES AT 60 HZ)**

Frame	Amperage rating (A)	WCR (kA at Vmax and below)	Max. MCCB rating (A)	Drawing reference
C	300, 400, 600	25 at 600 V	1200	A056M829
D	800, 1000	35 at 600 V	1400	A056M821
E	1200	42 at 600 V	1600	A056M825

**TRANSFER SWITCH LUG CAPACITIES**

Frame	Amperage rating (A)	Cables per phase	Certified Cable Size	Part Number
A	40, 70, 3-pole	1	#14 AWG - 2/0	0332-3084 **
			#12 AWG - 2/0	0332-3085 ***
	40, 4-pole	1	#14 AWG - 2/0	0332-3514-01
			#6 AWG - 300MCM	0332-3038
	125, 3-pole	1	#14 AWG - 2/0	0332-3084 **
			#12 AWG - 2/0	0332-3085 ***
B	150, 225	1	#6 AWG - 300MCM	0332-3038
	260	1	#6 AWG - 400MCM	0332-3039
C	300, 400	2*	3/0 - 600MCM & #4 AWG - 250MCM	0332-2704
	600	2	250 - 500MCM	0332-2660
D	800, 1000	4	250 - 500MCM	0332-2736
E	1200	4	500-750MCM ^	0332-2736 ****
			#2 AWG – 600MCM ^^	0332-1557 ****
			1/0 - 750MCM ^^	0332-3036

All lugs 90°C rated and accept copper or aluminum wire unless indicated otherwise.

Refer to the latest NFPA 70 Article 310 - Conductors for general wiring for the ampacity calculations.

\* One cable for each lug range listed

\*\* Load

\*\*\* Emergency and normal

\*\*\*\* See A030H735 drawing for lugs specifications

^ Compression lug adapter suitable for 500-750MCM (Optional feature N032-7)

^^ #2 AWG – 600MCM (Standard feature N045-7)

^^^ 1/0 - 750MCM (Optional feature N066-7)

**ENCLOSURE**

The transfer switch and control are wall-mounted in a key-locking enclosure. Wire bend space complies with NEC.

**DIMENSIONS – TRANSFER SWITCH IN UL TYPE 1 ENCLOSURE**

Frame	Amperage rating (A)	Height		Width		Depth		Weight	
		in	mm	in	mm	in	mm	lb	kg
A	40, 70, 125 3-pole	27	686	20.5	521	12	305	148	67
	40, 70, 125 4-pole	35.5	902	26	660	16	406	214	97
B	150, 225	35.5	902	26	660	16	406	214	97
	260	43.5	1105	28.5	724	16	406	238	108
C	300, 400, 600	54	1372	25.5	648	18	457	322	146
D	800, 1000	68	1727	30	762	19.5	495	448	203
E	1200	90	2286	39	991	27	698	862	391

**DIMENSIONS – TRANSFER SWITCH IN UL TYPE 3R, 4, 4X, OR 12 ENCLOSURES**

Frame	Amperage rating (A)	Height		Width		Depth		Weight		Cabinet Type
		in	mm	in	mm	in	mm	lb	kg	
A	40, 70, 125 3-pole	34	864	26.5	673	12.5	318	220	100	3R, 4
		46	1168	32	813	16	406	307	139	4X
		34	864	26.5	673	12.5	318	201	91	12
	40, 70, 125 4-pole	42.5	1080	30.5	775	16	406	304	138	3R, 4
		46	1168	32	813	16	406	335	152	4X
		42.5	1080	30.5	775	16	406	287	130	12
B	150, 225	42.5	1080	30.5	775	16	406	304	138	3R, 4
		46	1168	32	813	16	406	335	152	4X
		42.5	1080	30.5	775	16	406	287	130	12
	260	46	1168	32	813	16	406	322	146	3R, 4
		46	1168	32	813	16	406	335	152	4X
		46	1168	32	813	16	406	304	138	12
C	300, 400, 600	59	1499	27.5	699	16.5	419	415	188	3R, 4
		73.5	1867	32.5	826	19.5	495	520	236	4X
		59	1499	27.5	699	16.5	419	397	180	12
D	800, 1000	73.5	1867	32.5	826	19.5	495	588	267	3R, 4
		73.5	1867	32.5	826	19.5	495	588	267	4X
		73.5	1867	32.5	826	19.5	495	556	252	12
E	1200	90	2286	39	991	27	698	891	404	3R, 4
		90	2286	39	991	27	698	891	404	4X
		90	2286	39	991	27	698	873	396	12

**ENCLOSURE ACCESS FOR CABLE INSTALLATION AND MAINTENANCE**

All frames allow for top, side, and bottom cable entry. NEC Requires Minimum 36" Front Access. Additional front clearance is needed to remove the mechanism. Refer to the outline drawing.

**OTEC DRAWING PART NUMBERS**

Frame	Amperage rating (A)	Outline Drawing		
		Type 1, 3R, 12, 4, 4X (3 Pole)	Type 1, 3R, 12, 4, 4X (4 Pole)	Open Construction
A	40, 70, 125	A074K565	A074K632	A074K681
B	150, 225	A074K575	A074K587	
	260	A074K613	A074K634	
C	300, 400, 600	A074K635	A074K645	
D	800, 1000	A074K646	A074K658	
E	1200	A074K659		A074K695

## WIRING DIAGRAM PART NUMBERS

Frame	Amperage rating (A)	Wiring Diagram				
		Utility to Genset (120 – 480 V)	Utility to Genset (600 V)	Interconnection	Utility to Genset, Open Construction (120 – 480 V)	Utility to Genset, Open Construction (600 V)
A	40, 70, 125 (3-pole)	A074P733	A074P730	A065H780	A074P731	A074P732
	40, 70, 125 (4-pole)					
B	150, 225					
	260					
C	300, 400, 600					
D	800, 1000	A074P729				
E	1200					

## SUBMITTAL DETAIL

### Model

- 40, 70, 125 A, (3- and 4-pole)
- 150, 225, 260 A
- 300, 400, 600 A
- 800, 1000 A
- 1200 A

### Poles

- A028 Poles – 3 (solid neutral)
- A029 Poles – 4 (switched neutral)

### Application

- A035 Utility-to-genset

### Frequency

- A044 60 Hz
- A045 50 Hz

### Phase

- A041 single phase, 2-wire or 3-wire
- A042 three phase, 3-wire or 4-wire

### Voltage ratings

- R020 120V
- R038 190V
- R021 208V
- R022 220V
- R023 240V
- R024 380V
- R025 416V
- R035 440 V
- R026 480 V
- R027 600 V

### Enclosure

- B001 Type 1: Indoor use, provides some protection against dirt (similar to IEC type IP30)
- B002 Type 3R: Intended for outdoor use, provides some protection from dirt, rain, and snow (similar to IEC type IP34)
- B003 Type 4: Indoor or outdoor use, provides some protection from wind-blown dust and water spray (similar to IEC type IP65)
- B004 open construction: no enclosure - includes automatic transfer switch and controls.
- B010 Type 12: Indoor use, some protection from dust (similar to IEC type IP61).
- B025 Type 4X: Stainless steel, indoor or outdoor use, provides some protection from corrosion (similar to IEC Type IP65).

### Standards

- A046 UL 1008/CSA certification
- A080 IBC seismic certification

### Control voltage

- M033 12V, Genset starting voltage.
- M034 24V, Genset starting voltage.

### Control options

- M032 Elevator signal relay
- M081 MODBUS RS485 Communication module
- M079 integral control power supply provides DC voltage to control from source power.
- M086 Ethernet communication module
- L216 1X auxiliary relay I/O module
- L217 2X auxiliary relay I/O module

### Auxiliary relays

- Relays are UL Listed, and factory installed. All relays provide (2) normally closed isolated contacts rated 10A @ 600 VAC. Relay terminals accept (1) 18 gauge to (2) 12-gauge wires per terminal.
- L101 24 VDC coil - installed, not wired (for customer use).
- L102 24 VDC coil - emergency position – relay energized when switch is in source 2 (emergency) position.
- L103 24 VDC coil - normal position - relay energized when switch is in source 1 (normal) position.
- L201 12 VDC coil installed, not wired (for customer use)
- L202 12 VDC coil - emergency position – relay energized when switch is in source 2 (emergency) position.
- L203 12 VDC coil - normal position - relay energized when switch is in source 1 (normal) position.

### Optional Cable Lugs

- N032 Lug adapters, compression, ½ stab (1200A only)
- N045 Cable lugs, mechanical, 600 MCM, 4 per pole (1200A only)
- N066 Cable lugs, mechanical, 750 MCM, 4 per pole (1200A only)



**Miscellaneous**

- C027 Cover - guard
- M003 Terminal block - 30 points (not wired)

**Optional features**

- M080 Anti-condensation heater for outdoor enclosures
- L214 Load shed from standby source
- M085 Load power monitoring

**Accessories**

- AC-170 Accessories specification sheet
- A065L320 Control panel cover guard

**Request for quotation (RFQ)**

- Z555 Nonconfigurable spec [ETO]






**Warranty**

- G004 2-years, comprehensive
- G007 5-years, comprehensive
- G014 3-years, comprehensive
- G015 10-years, comprehensive

**Shipping**

- A051 Packing - export box (800 – 1000 A)

**CODES AND STANDARDS**

	All switches are UL 1008 Listed with UL 50E Type Rated cabinets and UL Listed CU-AL terminals.	<b>NEC®</b>	Suitable for use in emergency, legally required and Standby and Critical Operations Power Systems (COPS) applications per NEC 700, 701, 702 and 708.
	All switches comply with NEMA ICS 10.	<b>ISO®</b>	All switches are designed and manufactured in facilities certified to ISO 9001.
	All switches are certified to CSA C22.2 No. 178.1 switching of electrical energy in emergency or other systems, up to 600 VAC and 4 kA.	<b>IBC®</b>	All switches are certified to IBC 2018.
	All switches comply with IEEE 446 Recommended Practice for Emergency and Standby Power Systems.	<b>EMC</b>	Display controllers meet the following Electromagnetic Compatibility (EMC) standards: <ul style="list-style-type: none"> <li>• EN 61000-6-2 Generic Immunity Standard for the Industrial Environment.</li> <li>• EN 61000-6-4 Generic Emission Standard for the Industrial Environment.</li> </ul>
	All switches comply with NFPA 70, 99 and 110 (Level 1).		

**For more information, please contact your local Cummins distributor or visit [cummins.com](http://cummins.com).**

Our energy working for you.™

©2023 Cummins Inc.

S-6556 OTEC Spec Sheet NSE - PD00000752 - Rev. 02/25

All rights reserved. Cummins is a registered trademark of Cummins Inc. PowerCommand, AmpSentry, InPower and "Our energy working for you." are trademarks of Cummins Inc. Other company, product, or service names may be trademarks or service marks of others. Specifications are subject to change without notice.

