

LED LOW-BAY LUMINAIRES



ACCESSORIES

Image	Description
	J-Box Mounting Plate (Included)
	Suspension Mount Kit (Included)
	Alignment Bracket (Sold Separately)

FEATURE

- Working temperature: - 4°F ~ +104°F / -20°C ~ +40°C
- Suitable for damp location
- Lumen Maintenance over 70% @ 50,000+ Hours
- CRI: 80+; PF>0.9
- Beam Angle: 120°
- Body: White Finish. Aluminum Heatsink for Efficient Heat Dissipation
- Linkable: with wire harness connection kit included for connecting power between fixtures.
- Low-profile design with PMMA lens gives even no glare light distribution
- Watt and CCT adjustable to fit for different locations
- With option of build-in motion sensor or emergency backup driver


ODERING GUIDE

Model	Length	Watt	CCT	Lumens	Dimmable	DLC ID#	Voltage	OPTION
HY-4FT-LS100-3W3CCT	4FT	20/30/40W Selectable	3500K/400 0K/5000K Selectable	2600/3900/5 200 LM	0-10V	S-MQLCAS	120-277V	N/A
HY-4FT-LS100-3W3CCT(MS)								Motion Sensor
HY-4FT-LS100-3W3CCT(EM)								Emergency Backup
HY-4FT-LS100-3W3CCT(MS/EM)								Motion Sensor & Emergency Backup
HY-8FT-LS100-3W3CCT	8ft	40/50/60W Selectable		5200/6500/7 800 LM		S-V4A6H3		N/A
HY-8FT-LS100-3W3CCT(MS)								Motion Sensor
HY-8FT-LS100-3W3CCT(EM)								Emergency Backup
HY-8FT-LS100-3W3CCT(MS/EM)								Motion Sensor & Emergency Backup
HY-8FT-LS100-H-3W3CCT	8ft	40/60/80W Selectable	5200/780010 400 LM	S-0RSL7Y	N/A			
HY-8FT-LS100-H-3W3CCT(MS)					Motion Sensor			
HY-8FT-LS100-H-3W3CCT(EM)					Emergency Backup			
HY-8FT-LS100-H-3W3CCT(MS/EM)					Motion Sensor & Emergency Backup			


LED LOW-BAY LUMINAIRES

DIMENSION


8ft Front View




Side View



4ft Front View




Side View



PACKAGE INFO

Model. No.	HY-4FT-LS100-3W3CCT (XX)	HY-8FT-LS100-3W3CCT (XX) HY-8FT-LS100-H-3W3CCT (XX)
Size	4FT	8FT
QTY/PACK	4PCS/PACK	
Package Size	1285X190X195mm 50.59"X7.48"X7.68"	2505X190X195mm 98.62"X7.48"X7.68"
Package Weight	9.9kg/21.83 lbs	18.6kg/41.01 lbs
Package CBM	0.047609	0.09281
40GP Capacity	~4870PCS	~2490PCS
40HQ Capacity	~5710PCS	~2930PCS
45HQ Capacity	~6550PCS	~3360PCS

PHOTOMETRIC REPORT

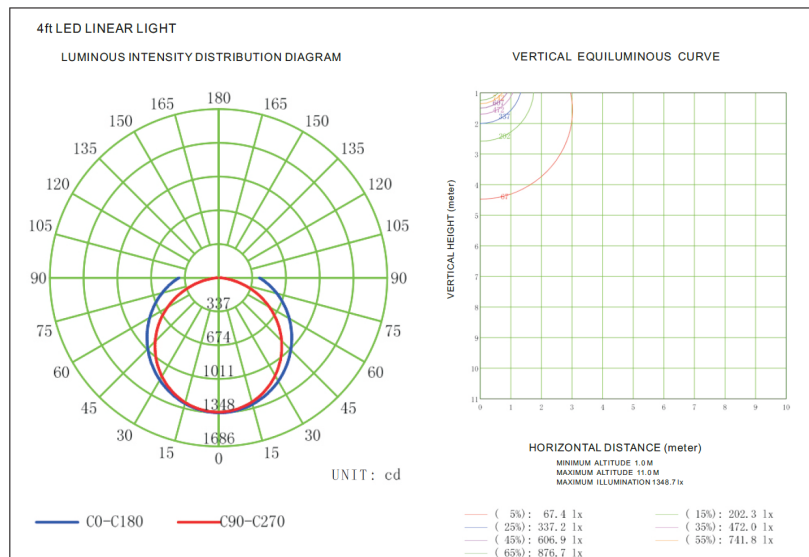


LED STRIP LOW-BAY LUMINAIRES

INSTALLATION


Surface Mount Installation

Choose the following two surface mount installation methods as needed


1

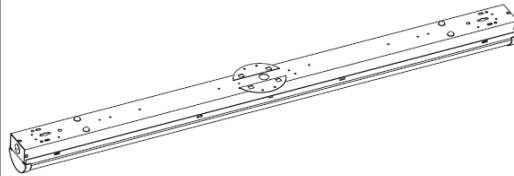


Direct installation with accessories

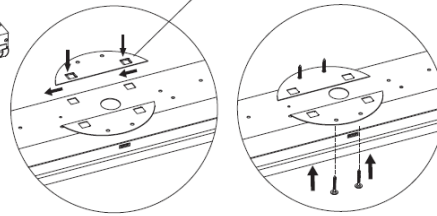


2

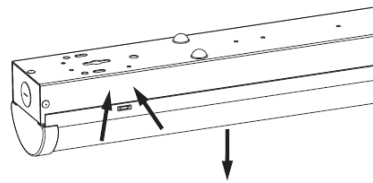


Disassemble the cover plate and install

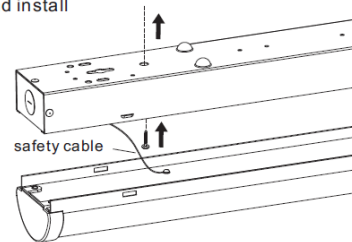


Suspension Installation

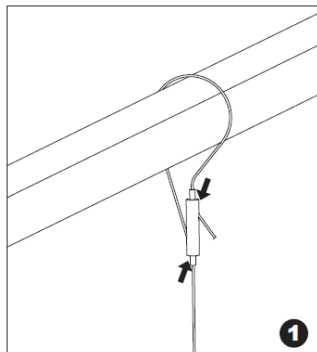

The upper connection

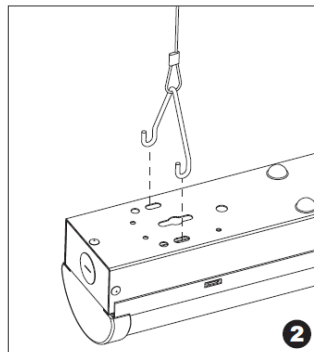

2

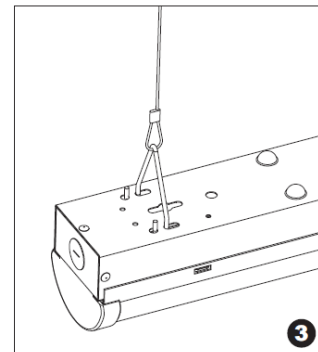


3

Connection to the luminaire


Connection Installation

Wire harness connecting

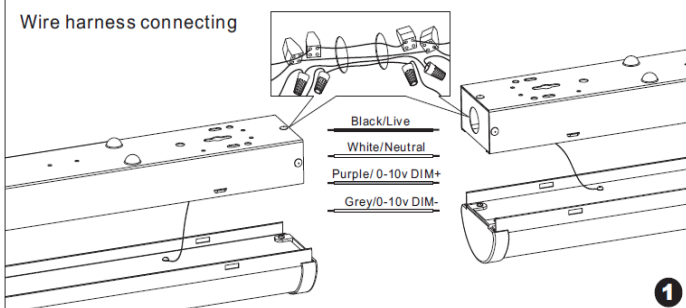


1

Connection plate (If needed)

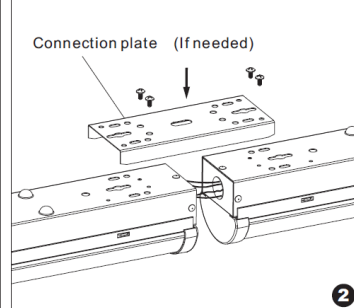


2

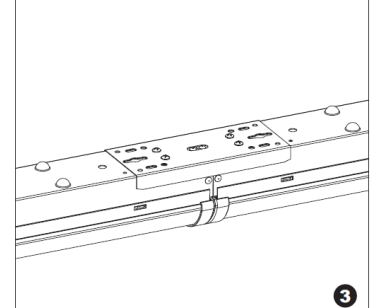


3

LED LOW-BAY LUMINAIRES


Build-In Motion Sensor Information

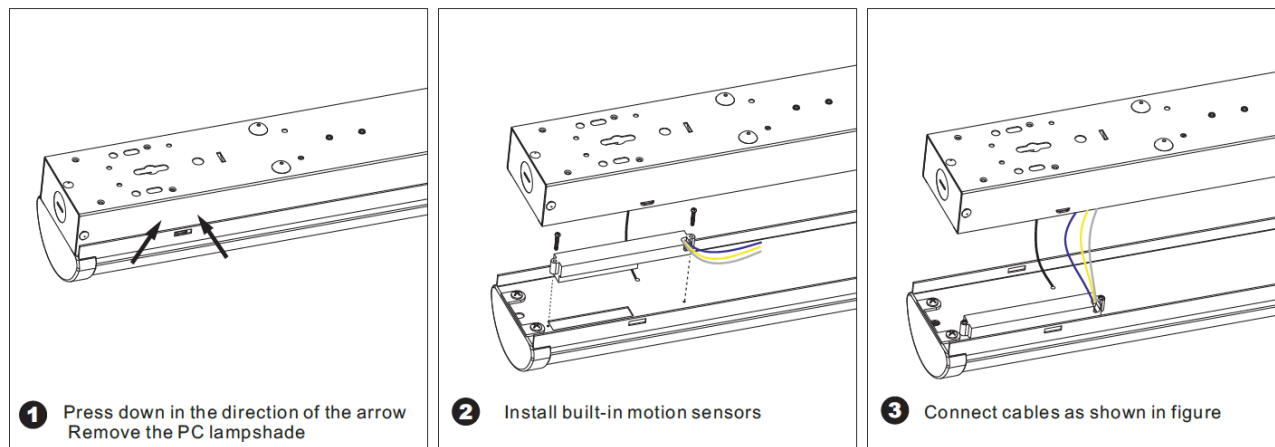

WIRING DIAGRAMS

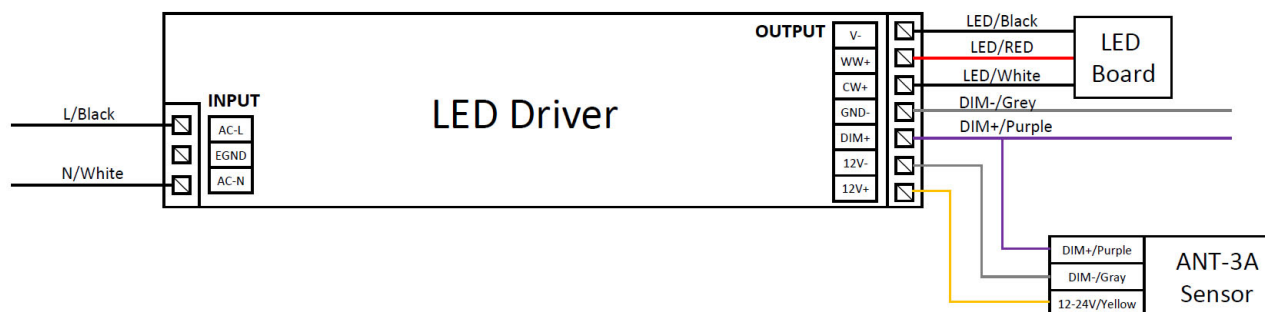

BUILT-IN MOTION SENSOR INFORMATION

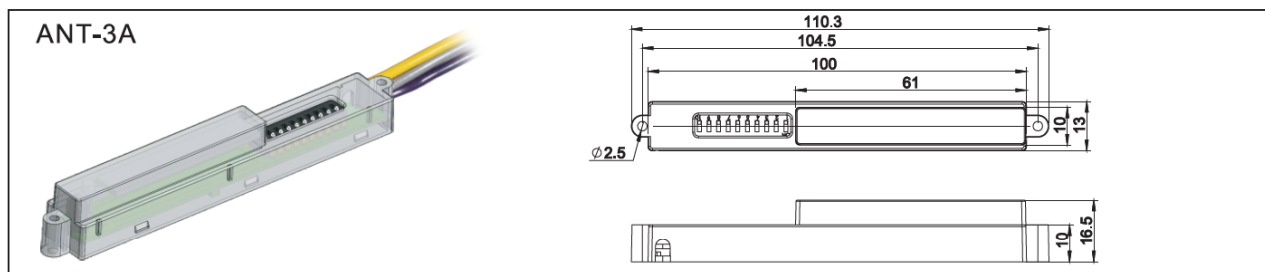

WARNING


NOTE: Warm up time is 15seconds. After the sensor connects input power first time, the light will keep on 15 seconds, then go to dimming to work normally.

NOTE: Factory Default Setting: 100% sensitivity, Hold on time: 10seconds, Daylight sensor is 30lux, Dimming level:30%, Dimming time: 60minutes.

NOTE: Any setting changed by DIP Switch or remote control, the led light that sensor connect will on/off as confirm.

PARAMETER SETTING BY DIP SWITCH


Consider the picture: 1, 2 set sensitivity; 3, 4 set hold time; 5, 6 set the lux; 7, 8 stand-by light level 9, 10 set stand-by time;



For detailed adjustment methods, please refer to the ANT-3A instruction manual

SPECIFICATIONS


Power supply	12V~24V DC, >50mA
HF System	5.8GHz±75MHz
Dim control output	0-10V, max. 25mA sinking current
Detection radius/angle	Max 17ft.(5.2m)/360°
Mounting height	Max 13ft(4m)
Remote range	50ft. (15m) indoor, no backlight
Humidity	Max. 95% RH
Temperature	-40°F ~ 158°F (-40°C ~ 70°C)

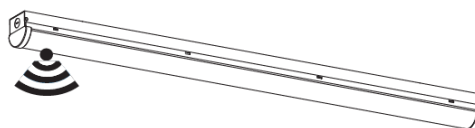


LED LOW-BAY LUMINAIRES

Build-In Emergency Information

EMERGENCY LED DRIVER INSTALLATION POSITION

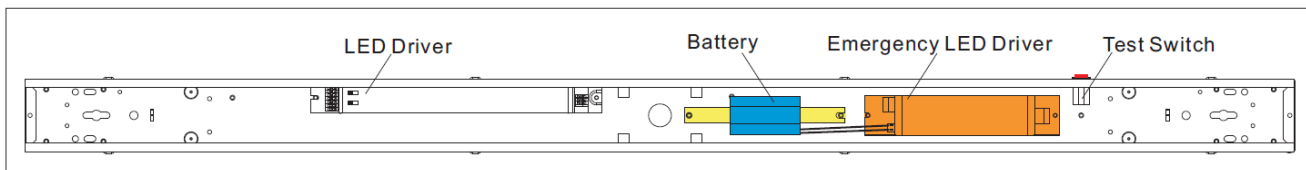

WIRING DIAGRAM

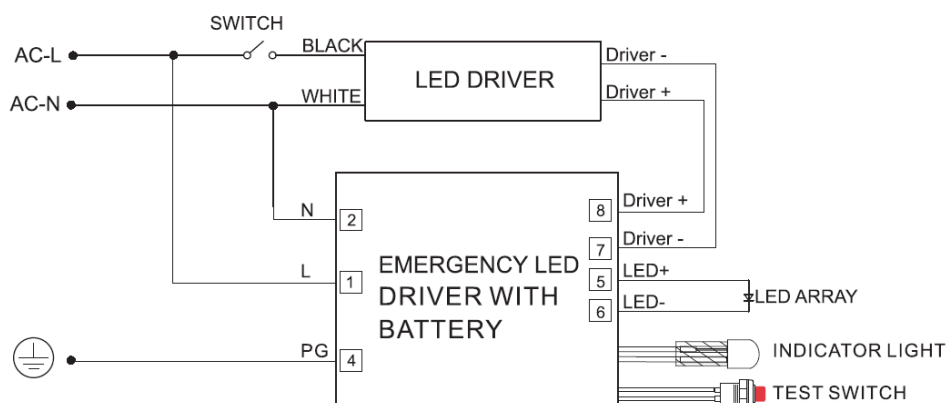

1. DO NOT MATE CONNECTOR UNTIL INSTALLATION IS COMPLETE AND AC POWER IS SUPPLIED.
2. TEST ACCESSORY LEADS-OBSERVE PROPER POLARITY WIRING.

EMERGENCY LED DRIVER INFORMATION

Specifications:



Specifications:

Universal Input Voltage	100-277Vac 50/60Hz
AC Input Current	100mA max.
AC Input Power Rating	7.0W max.
Output Current and Voltage	160-320mA 25-48Vdc
Output Power	8W
Emergency Time	≥1.5H
Full Warranty	5 Years
Test Switch Indicator Light	Illuminated Test Switch, indicator Light
Battery	Li-ion battery-7.4V/2500MAH
Battery Charging Current	250mA
Charging Time	≥24Hours
Temperature Rating (Ambient)	Li-ion 0°C to +40°C (32°F to 104°F)

AC Operation:

AC power is present, The LED load from the LED driver is normal power supply, AC LED driver output current can not exceed 150W or 4A, the emergency driver is charging in a standby mode, The green LED light on to indicate that it is charging.

Emergency operation:

When the AC power goes out, The emergency driver detects the AC power outage and automatically switch to the working emergency mode. The green LED off. When the AC power is restored, the emergency driver backs to AC power working and starts re-charging, the green LED light on.

Dimensions:

Case-7.4"x1.5"x1.14" (mounting center-7.0")
Battery 6.1"x1.57" (mounting center-5.66")

