



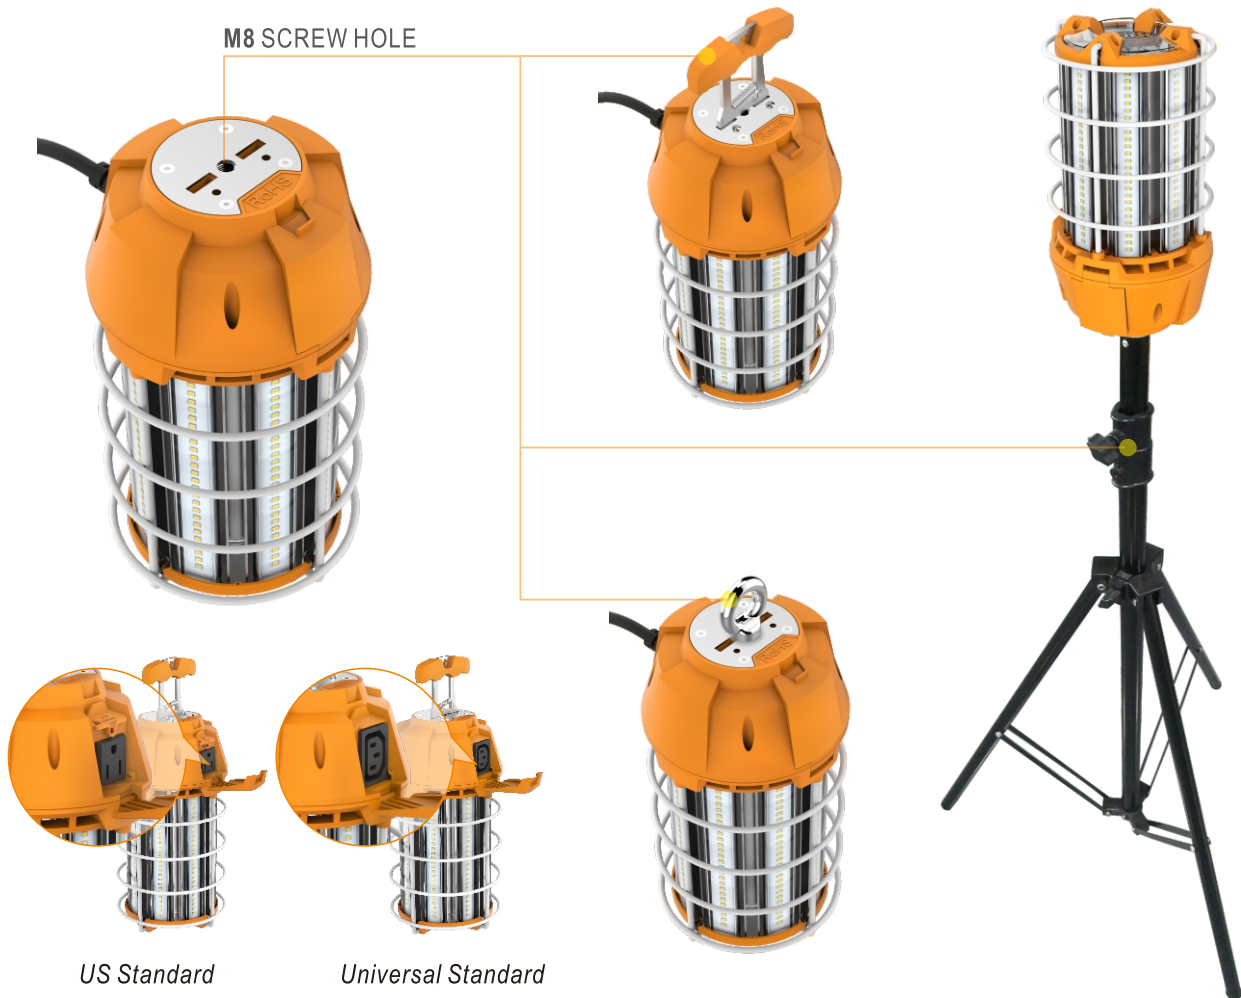


Specifications

Power	LED Chip	PF	CRI	Voltage	CCT	Lumen	Size mm (x0.0393=inch)	Operating temp (°C / °F)	Beam Angle	Weight (lbs=kgx2.2)	Certificate	Equal to
60W±10%	LUMILEDS 2835	≥ 0.9	≥ 80	100-277VAC 50~60Hz	3000-6000K	7200±10%	Φ130*233mm Φ 5.12"×9.17"	-30°~60°C -22°~140°F	360°	NW: 1.26kg GW: 2.0kg	LM80 CUL UL LM79	200W
100W±10%	LUMILEDS 2835	≥ 0.9	≥ 80	100-277VAC 50~60Hz	3000-6000K	12000±10%	Φ130*278mm Φ 5.12"×10.94"	-30°~60°C -22°~140°F	360°	NW: 1.66kg GW: 2.4kg	LM80 CUL UL LM79	400W
150W±10%	LUMILEDS 2835	≥ 0.9	≥ 80	100-277VAC 50~60Hz	3000-6000K	18000±10%	Φ130*308mm Φ 5.12"×12.16"	-30°~60°C -22°~140°F	360°	NW: 1.94kg GW: 2.7kg	LM80 CUL UL LM79	600W

Features




Customized LOGO position




Seeing as perfectly used with M8 screw tripod stands, so solve the problem while the work light installed in the place which the holder could not use




Various M8 screw threads for options

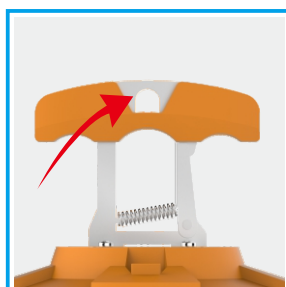


New hanging hole added on the handle to fix the fixture for option

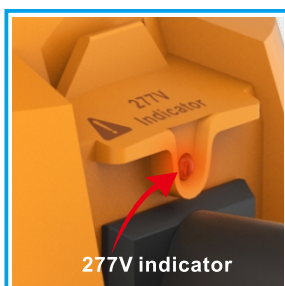


To identify the unmatched voltage power tools

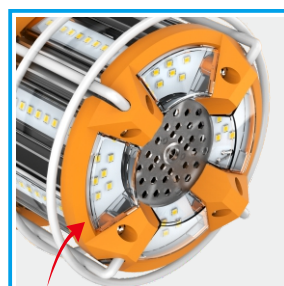

high elasticity PC material to consolidate the bottom of the cage

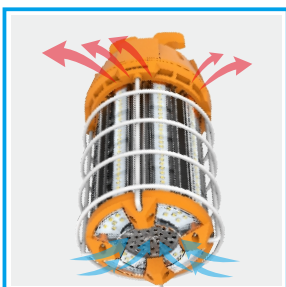


Air convection design between up and down of the lamp, promoting the heat dissipation function so that could ensure the lamp lifespan.


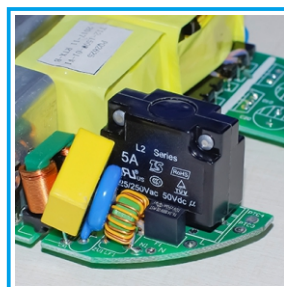


Smart fuse: reset once overload 5A


Dimensions

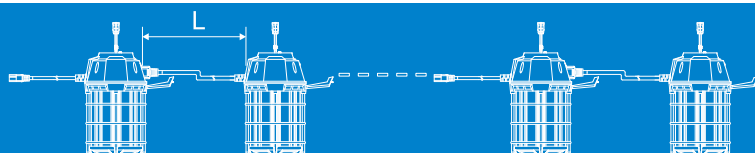


Cable standard length:
L=6 feet(1.8m)



60W

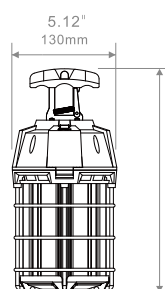

100W

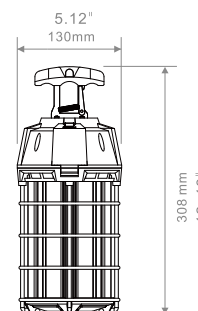


150W

Application



Packing

Wattage	Inner box size(mm) (x0.0393=inch)	N.W per lamp(kg) (lbs=kgx2.2)	G.W per box(kg) (lbs=kgx2.2)	G.W per Carton(kg) (lbs=kgx2.2)	Carton size(mm) (x0.0393=inch)	Quantity per carton
60W	273*210*173mm	1.26kg	2.00kg	8.10kg	288*435*361mm	4pcs
100W	318*200*173mm	1.66kg	2.40kg	9.90kg	333**415*361mm	4pcs
150W	348*200*173mm	1.94kg	2.70kg	11.0kg	363**415*361mm	4pcs

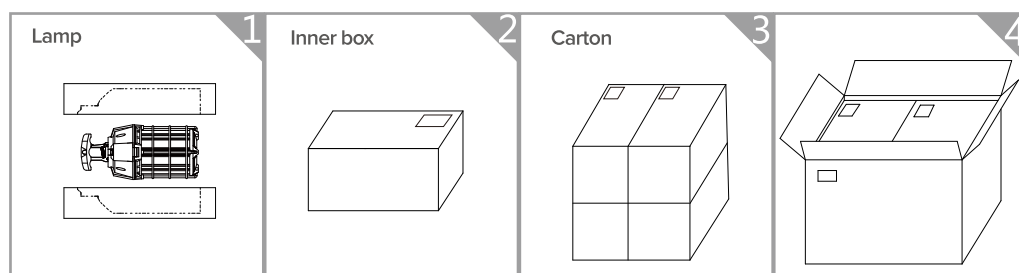

Pack Quantity
4PCS

⚠ CAUTIONS

- Risk of electric shock. Do not use where directly exposed to water.
- Do not power the 120VAC electric tools on this lamp.
- The temporary lighting are non-dimmable.
- Don't take apart the lamps without our permit.
- Please read the instruction manual carefully before installation.

