



WALL SECTION 13

13 1/2" = 1'-0"

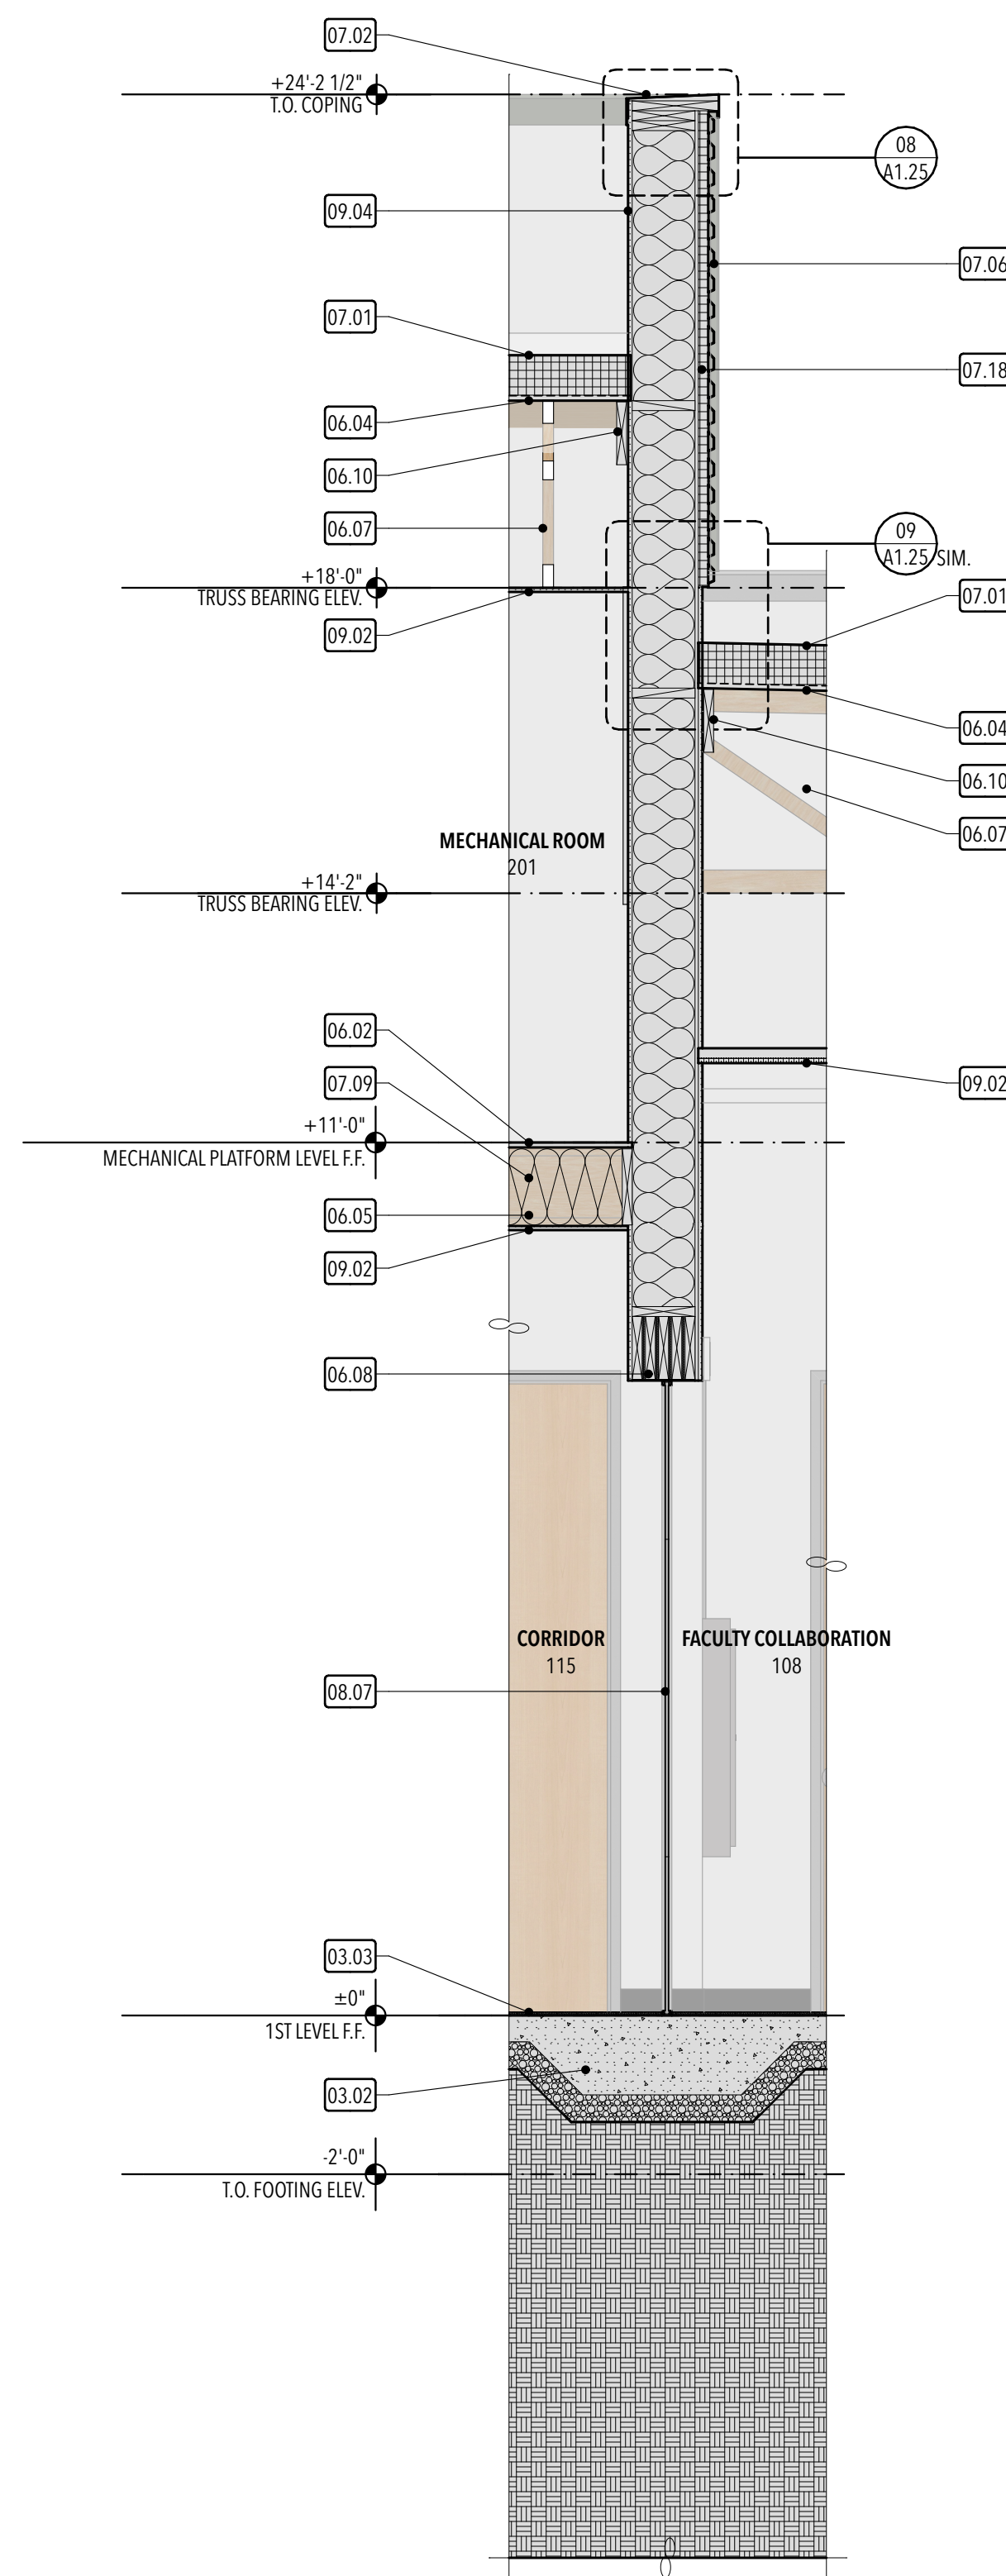

WALL SECTION 14

14 1/2" = 1'-0"

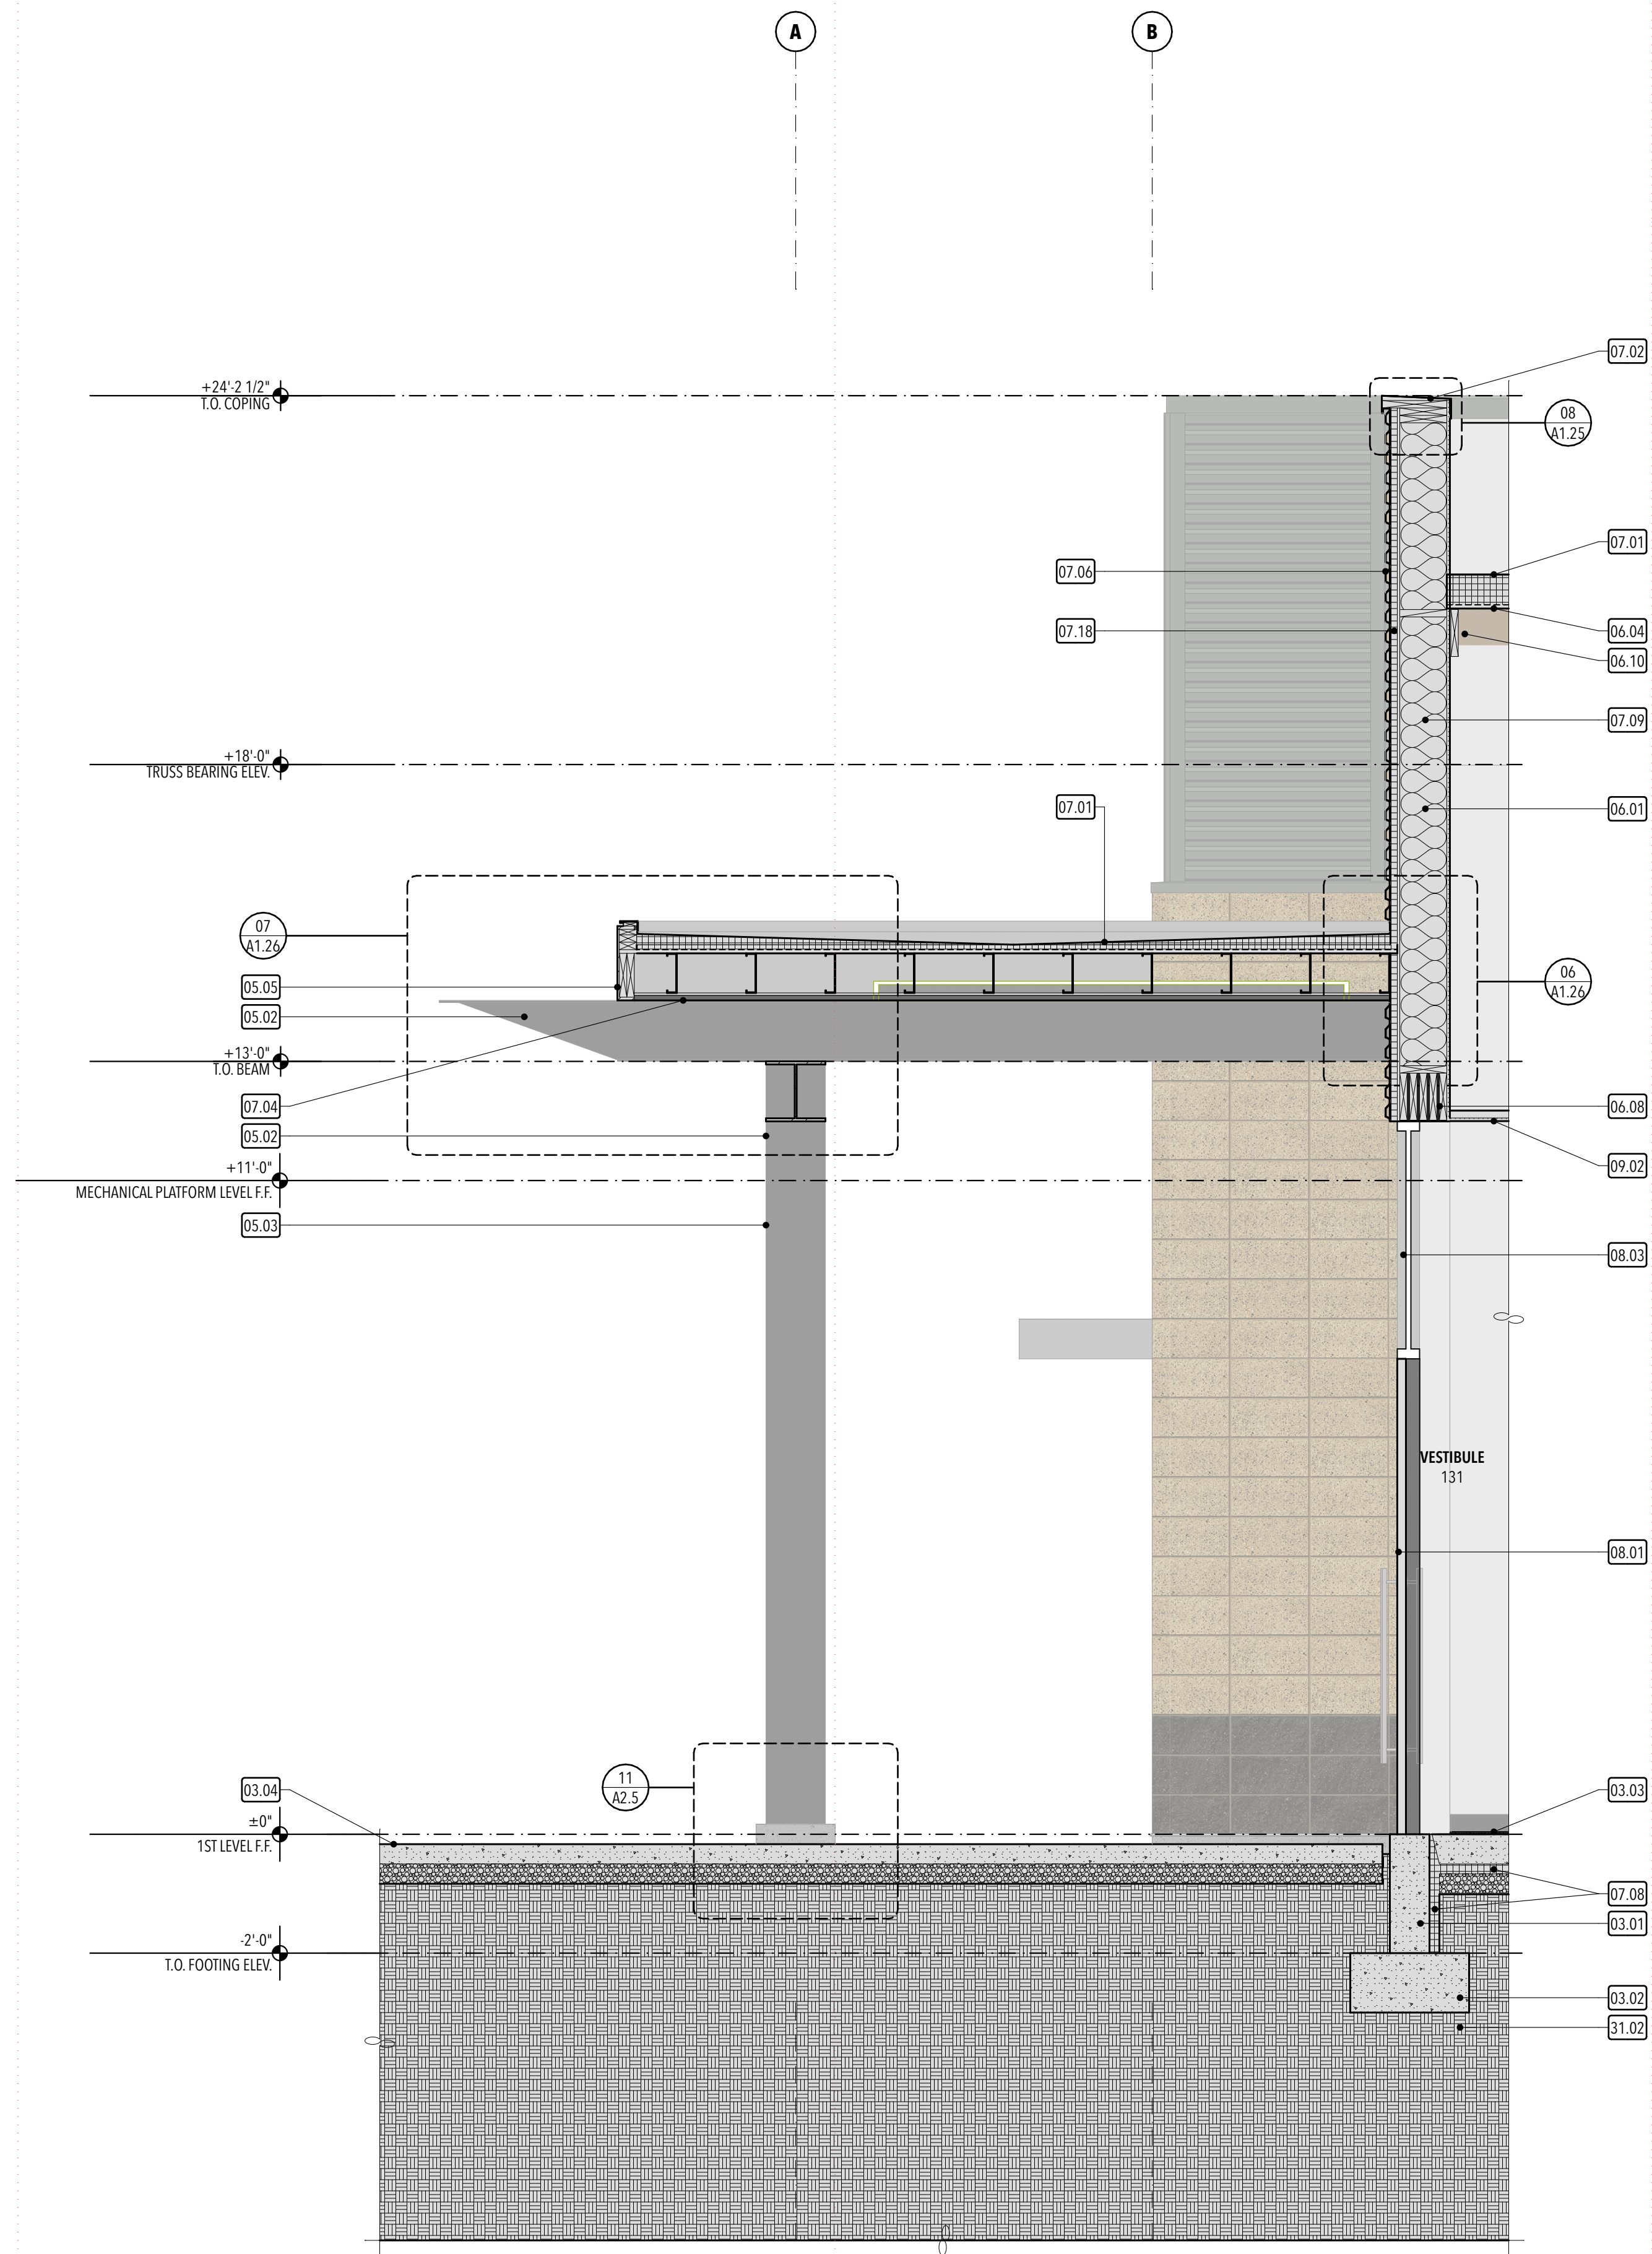


WALL SECTION 15

15 1/2" = 1'-0"

KEYED NOTES:

- 03.01 Concrete foundation wall - re: structural
- 03.02 Concrete footing - re: structural
- 03.03 4" concrete floor slab over vapor barrier over 4" gravel base - re: structural
- 03.04 4" concrete walk over 4" gravel base - re: civil
- 04.03 4" CMU veneer system (M01 Honed face) - re: Exterior Materials Legend
- 04.04 4" CMU veneer system (M02 Split face) - re: Exterior Materials Legend
- 05.02 Steel beam - re: structural. paint with high-performance paint system.
- 05.03 Steel column - re: structural. paint with high-performance paint system.
- 05.05 Steel fascia beam - re: structural. Paint with high-performance paint system to match storefront/sunshade color
- 06.01 Wood framed partition - re: partition types
- 06.02 Plywood floor sheathing - re: structural. Paint - re: finish schedule
- 06.04 Plywood roof sheathing - re: structural
- 06.05 Floor joist - re: structural
- 06.07 Pre-manufactured roof truss - re: structural
- 06.08 Wood header - re: structural
- 06.10 Wood framing - re: structural
- 07.01 80 mil PVC membrane roofing system fully adhered over recovery board over polyisocyanurate insulation (R-30 min.) over roof vapor barrier
- 07.02 Prefinished metal coping cap - re: 08/A1.25. Match wall panel finish
- 07.04 Prefinished metal split - match wall panel finish (flush 12" wide with flat lock seals)
- 07.06 24 ga. concealed fastener metal panel system, prefinished (MBCI Masterline 16 Panel or equivalent) - install as per manufacturer's recommendations
- 07.08 2" rigid foundation insulation - extend insulation 24" below slab at perimeter. Continue insulation between concrete floor slab and foundation to create 1/2" separation joint - re: exterior details.
- 07.09 Unfaced batt insulation
- 07.17 Prefinished metal flashing - match wall panel finish
- 07.18 2" rigid insulation over air/weather barrier over wall sheathing over wood framed partition - re: partition types
- 08.01 Scheduled door
- 08.03 Scheduled aluminum storefront system - re: window elevations
- 08.07 Interior glass partition system furnished and installed by Contractor - re: window elevations
- 09.02 Scheduled ceiling system
- 09.04 (1) layer 5/8" exterior gypsum sheathing
- 31.02 Geo piers where occurs - re: Structural and Geotechnical Report

STUDIO 333 ARCHITECTS
333 24TH STREET
OGDEN, UT 84401
801.394.3033

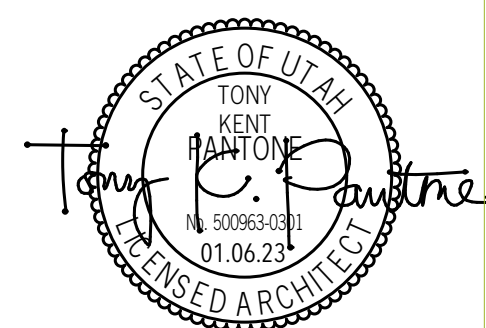

WEST FIELD SR SEMINARY
4383 W 2200 S, OGDEN, UT

NO.	DATE	DESCRIPTION

CONFORMED SET
DATE: 04.27.23
PROJECT NUMBER: 2154

