




SOLAR PRO 300ZA TW/CW

300W LED 15-30° zoom profile light

USER MANUAL


• Package and accessories •

1. 300W LED zoom profile light 15-30° 1 unit
2. 3 pin signal connector 1 pair
3. Power plug 1 pair



• Functions •

- ◆ Input voltage 100-240V 50-60HZ
- ◆ Power consumption 300W
- ◆ Manual zoom
- ◆ Zooming scale: 15-30°
- ◆ DMX dim or manual button dim
- ◆ 16 bit above no flicker linear dimming
- ◆ Inner size: 86×28.5×28.5cm
- ◆ Packing size: 99×30.5×31.5cm
- ◆ G.W.: 15kg
- ◆ N.W.: 13kg

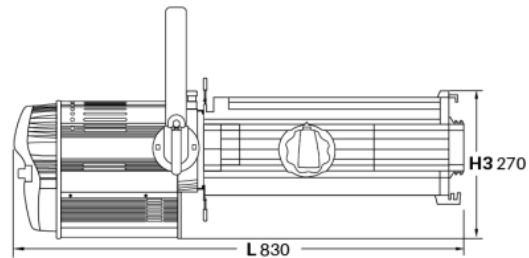

• Keys instruction •









→ Confirm
 → Function
 → Decrease
 → Increase

- ◆ Press Function key display different functions cyclically .
- ◆ Press decrease key and increase key to adjust each function's value.
- ◆ Press confirm key to confirm the function and value .

Special remind: when the multi units power cable mutual input / output connected, each group can connect 10 units, power cable must use 3 × 2.5² grounding.

• Screen display and its function •

No.	Screen	Function instruction
1	DMX-ADR 001 V	Already connect with DMX wire. press "" and "" keys can adjust address.
2	DMX-ADR 001 X	not connect with DMX wire. Can set master/slave connected, press "" key or "" key can adjust address you want.

3	ADJ-CW 255	Enter manual button dim mode press “  ” key and “  ” key to dim
4	DMX SING OFF/ON	Prior for DMX, press  ”or “  ” choose the function DMX SING ON/OFF, and ten press  to save/confirm the function
5	DMX KEEP OFF/ON	for DMX keep/off, press  ”or “  ” choose the function you want, and ten press  to save/confirm the function

• **DMX channels functions** •

Only 1 DMX channel 0-255 dim

• **Master/slave connect introduce** •

Set all units address same as “001”, off DMX signal, can set any unit as master, set functions on the master unit by the Function key all units are synchronal