



ARA CURTAIN BAR IP



USER MANUAL

**KEEP THIS USER MANUAL FOR FUTURE
NEEDS**

1. Maintenance

- To reduce the risk of electrical shock or fire, do not expose this unit to rain or moisture.
- Intermittently using will extend this item's service life.
- Please clear the fan ,fan net , and optical lens in order to keep good work state.
- Do not use the alcohol or any other organic solvent to wipe the shell.

2. Statement


The product has perfect performance and integrity packing. All users should be strictly complying with the warning and operating instructions as stated. Or we aren't in charge of any result by misusing. Any damage resulting by misuse is not within the Company's warranty. Any fault or problem caused by neglecting the manual is also not in the charge of dealers.

Note: All information is subject to change without prior notice.

3. Safety Precaution

- In order to guarantee the product's life, please don't put it in the damp places or even the environment over 60degrees.
- Always mount this unit in safe and stable matter.
- Install or dismantle should operate by professional engineer.
- Using lamp, the change rate of power voltage should be within $\pm 10\%$, If the voltage is too high, it will shorten the light's life; If it's not enough, will influence the effect.
- Please restart it 20 minutes later after turning off light , until full-cooling. Frequent switching will reduce the life span of lamps and bulbs; intermittent using will improve the life of bulbs and lamps.
- In order to make sure the product is used well, please read the Manual carefull

Fixture size

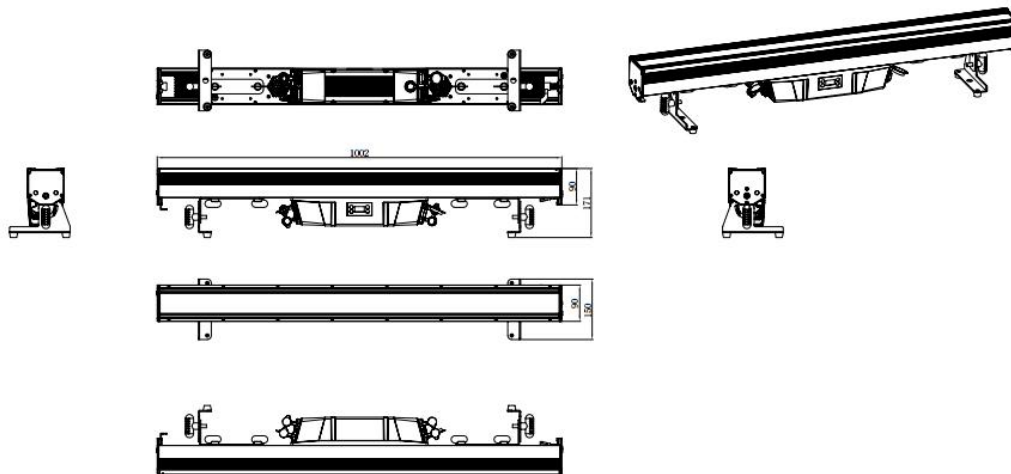

Technical parameters

Light source: 72x4W RGBW LED

Beam angle: 3°

Optical system

High transparency small angle lens optical system

Control and Program

4 touch buttons

Control panel: OLED display screen

Control mode: DMX512, RDM, Art Net, sACN

DMX channel mode: 4

Control channels: 9/41/144/153

Software upgrade:

updating software through a DMX connection

Electrical and Interface

Input voltage: 110-240V~50/60Hz

Power: 400 W

Power socket: waterproof power connector input/output

Signal interface:

3pin(5pin) XLR waterproof socket input/output

Dimention: 100.2*14.2*9cm

Net weight : 8kg

Work environment

operating temperature: -10°C to 40°C

Maximum surface temperature: 65°C

IP level: IP66

Install

Can be installed horizontally or vertically

Safety rope connection hole

Can be spliced left, right, up, and down

Factory configuration

user manual

Power cable/DMX cable

Omega

Safety rope

Optional accessories

Upper and lower splicing parts

Diffusion filter

Standing frame

●Channel list

CH Mode	Channel	Value	Function
9CH	1	000-255	Dimmer
	2	000-255	Strobe
	3	000-255	Red
	4	000-255	Green
	5	000-255	Blue
	6	000-255	White
	7	000-005	No function
		006-015	Macro1
		016-025	Macro2
		026-035	Macro3
		036-045	Macro4
		046-055	Macro5
		056-065	Macro6
		066-075	Macro7
		076-085	Macro8
		086-095	Macro9
		096-105	Macro10
		106-115	Macro11
		116-125	Macro12
		126-135	Macro13
		136-145	Macro14
		146-155	Macro15
		156-165	Macro16
		166-180	Macro17
		181-190	Macro18

		191-200	Macro19
		201-210	Macro20
		211-220	Macro21
		221-230	Macro22
		231-240	Macro23
		241-255	Macro24
	8	000-255	Program Speed
	9	000-255	Color Macros
41CH	1	000-255	Dimmer
	2	000-255	Red
	3	000-255	Green
	4	000-255	Blue
	5	000-255	White
	6	000-255	LED1 Dimmer
	7	000-255	LED2 Dimmer
	8	000-255	LED3 Dimmer
	9	000-255	LED4 Dimmer
	10	000-255	LED5 Dimmer
	...	...	...
	40	000-255	LED34 Dimmer
	41	000-255	LED35 Dimmer
144CH	1	000-255	Red1
	2	000-255	Green1
	3	000-255	Blue1
	4	000-255	White1
	5	000-255	Red2
	6	000-255	Green2
	7	000-255	Blue2
	8	000-255	White2
	...	...	...
	101	000-255	Red1
	103	000-255	Blue1
	105	000-255	Red2
	107	000-255	Blue2
153CH	1	000-255	Dimmer
	2	000-255	Strobe
	3	000-255	Red
	4	000-255	Green
	5	000-255	Blue
	6	000-255	White
	7	000-005	No function
		006-015	Macro1
		016-025	Macro2
		026-035	Macro3
		036-045	Macro4
		046-055	Macro5

		056-065	Macro6
		066-075	Macro7
		076-085	Macro8
		086-095	Macro9
		096-105	Macro10
		106-115	Macro11
		116-125	Macro12
		126-135	Macro13
		136-145	Macro14
		146-155	Macro15
		156-165	Macro16
		166-180	Macro17
		181-190	Macro18
		191-200	Macro19
		201-210	Macro20
		211-220	Macro21
		221-230	Macro22
		231-240	Macro23
		241-255	Macro24
		000-255	Green3
	8	000-255	Program Speed
	9	000-255	Color Macros
	10	000-255	Red1
	11	000-255	Green1
	12	000-255	Blue1
	13	000-255	White1
	14	000-255	Red2
	15	000-255	Green2
	16	000-255	Blue2
	17	000-255	White2
	...	..	...
	146	000-255	Red1
	147	000-255	Green1
	148	000-255	Blue1
	149	000-255	White1
	150	000-255	Red2
	151	000-255	Green2
	152	000-255	Blue2
	153	000-255	White2

REMARK

The product has perfect performance and integrity packing. All users should be strictly comply with the warning and operating instructions as stated. Or we aren't in charge of any result by misusing. Any damage resulting by misuse is not within the Company's warranty. Any fault or problem caused by neglecting the manual is also not in the charge of dealers. Errors and omissions for every information given in this manual excepted. All information is subject to change without prior notice.