

PRECON PRECAST, LLC  
 6868 FM 730 SOUTH  
 AZLE, TX 76020


817-448-9718 OFFICE  
 817-448-9886 FAX  
 frank@preconprecast.com

1


**3500 SERIES**  
 1000 GALLON GREASE TRAP  
 SINGLE BAFFLE

General Notes: 1. Unit comes with interior piping installed.  
 2. Inflow section of unit must be filled with at least 14.5" of clear water prior to use.

Specifications: 1. Concrete has design strength of 5,000psi @ 28 days. 2. Steel reinforcement: ASTM A-615, grade 60 ASTM A-497 welded wire fabric. 3. Designed for H2O loading. 4. CI Casting: ASTM A-48, class 30/35.

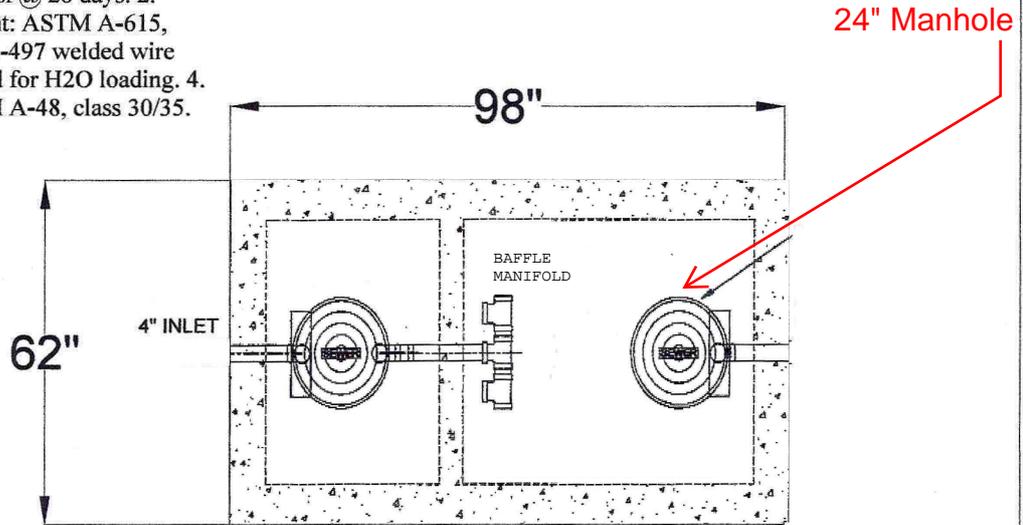

**TOP VIEW**

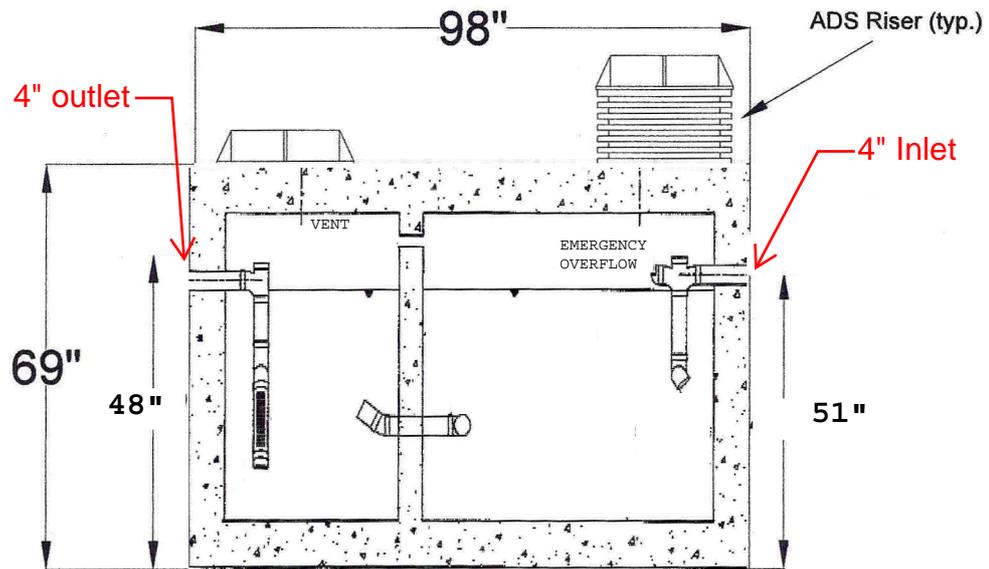

**SIDE VIEW**



1000galgtsb.dwg	APPROVED FOR PRODUCTION	AUTHORIZED BY
	DATE:	PRINT:
	FILE NAME:	SIGN:
	JOB TITLE:	

SUPPORT HANGER REQUIRED IF OUTLET TEE ASSEMBLY EXTENDS GREATER THAN 12" FROM THE INTERCEPTOR/SEPARATOR'S INTERIOR WALL

4" DIAMETER



DOUBLE Y FITTING

OUTLET DOUBLE Y TEE ASSEMBLY SHALL EXTEND DOWN 50% OF THE WETTED DEPTH OF THE INTERCEPTOR/SEPARATOR MEASURED FROM THE OUTLET PIPE INVERT TO THE BOTTOM OF END CAP (WHOLE)

2"X16" OPENING FACING UP

2"X16" OPENING FACING UP


END CAP (WHOLE)


END CAP HALF CUT WITH OPENING FACING DOWN

OUTLET SANITARY TEE FOR USE IN ALL GREASE INTERCEPTOR AND OIL/WATER SEPARATORS.

### OUTLET SANITARY TEE


NOT TO SCALE

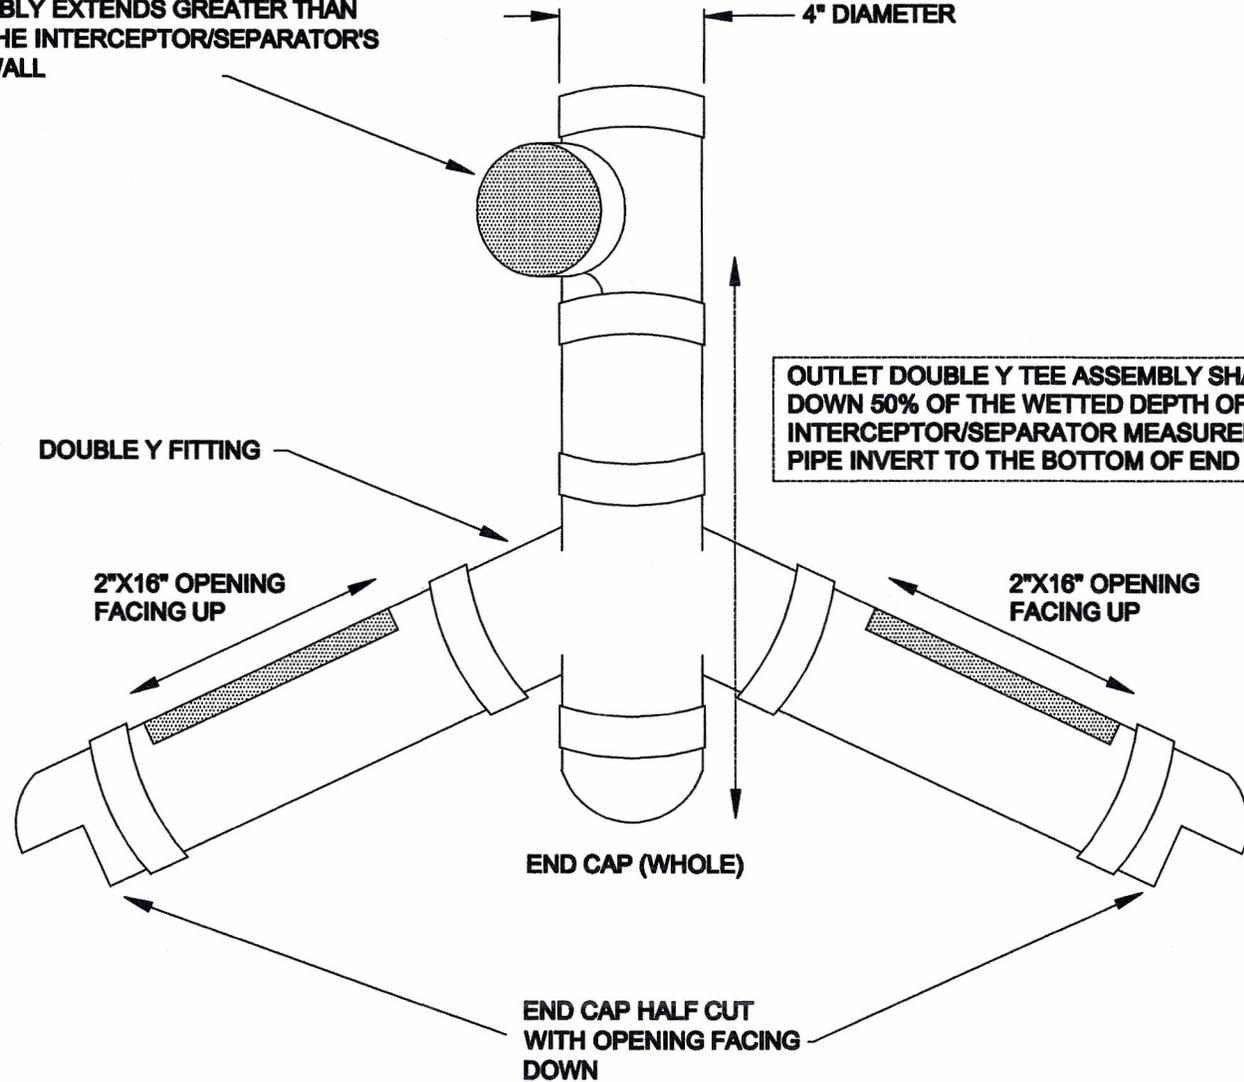

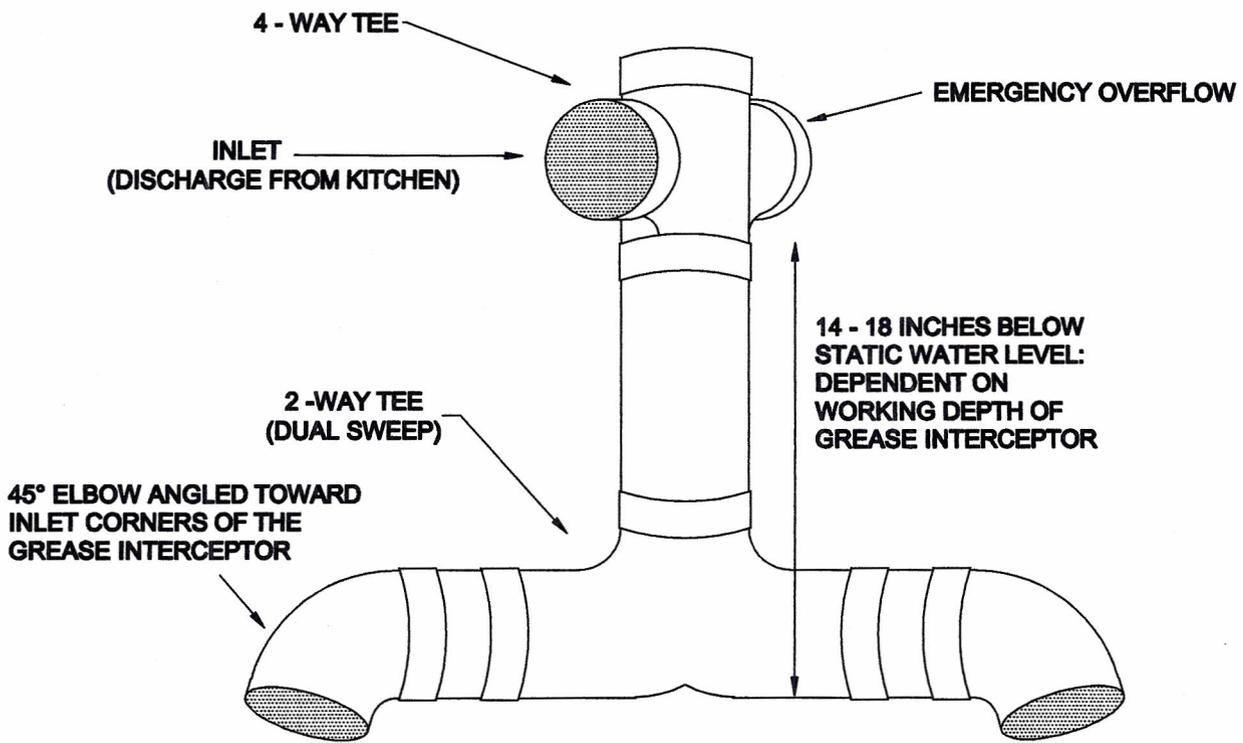

**INLET SANITARY TEE**

NOT TO SCALE

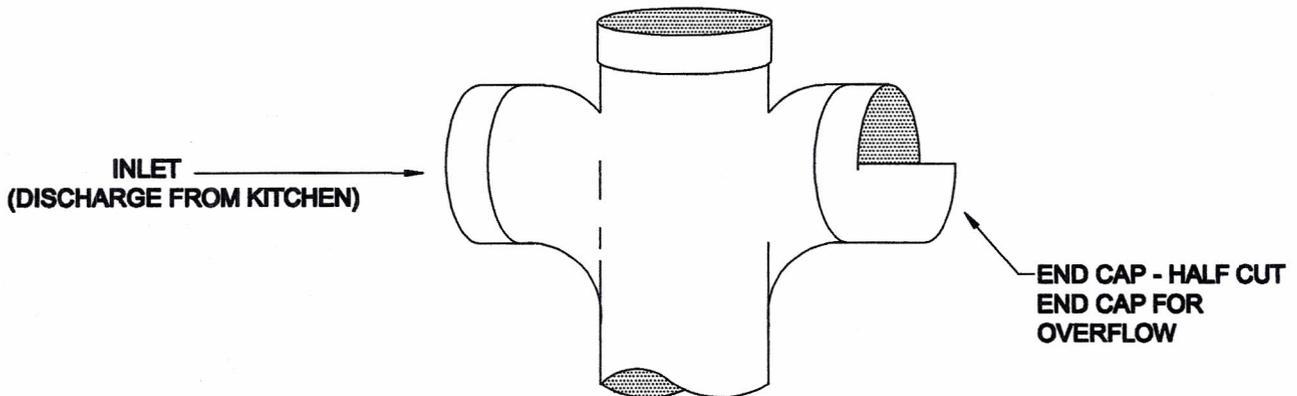

INLET FLOW DISTRIBUTION TEE FOR USE IN ALL GREASE INTERCEPTORS AND OIL/WATER SEPARATORS.

**EMERGENCY OVERFLOW CLOSE-UP**

NOT TO SCALE