

Installation

Lay out size for excavation 9' x 19'

Shell dimensions 8' x 18' outside edge to edge

Inside shell dimension waterline to waterline preliminary

Shell depth 54" with 4"-6" clean sand/or no.8 stone

Backfill around pool shell compacted clean sand/or no.8 stone

Installation based on concrete decking placed around pool per engineering plans

Approximate fill excavation from pool site preliminary

Pool Model: Ocho Rios

Average Depth: 54"

Average Weight: 712 lbs

Average Gallons: 2200

Perimeter: 32'

Note: all fittings are ABS not PVC the use of acetone or pipe cleaner will weaken the connection fittings. Maximum test pressure 40 lbs. Exceeding 40 lbs of test pressure may crack fittings.


Jack placement

Refer to Fig. 7 in the Installation Instruction Manual.



Ocho Rios 8 x 8

Installation Schematic & Jack Placement

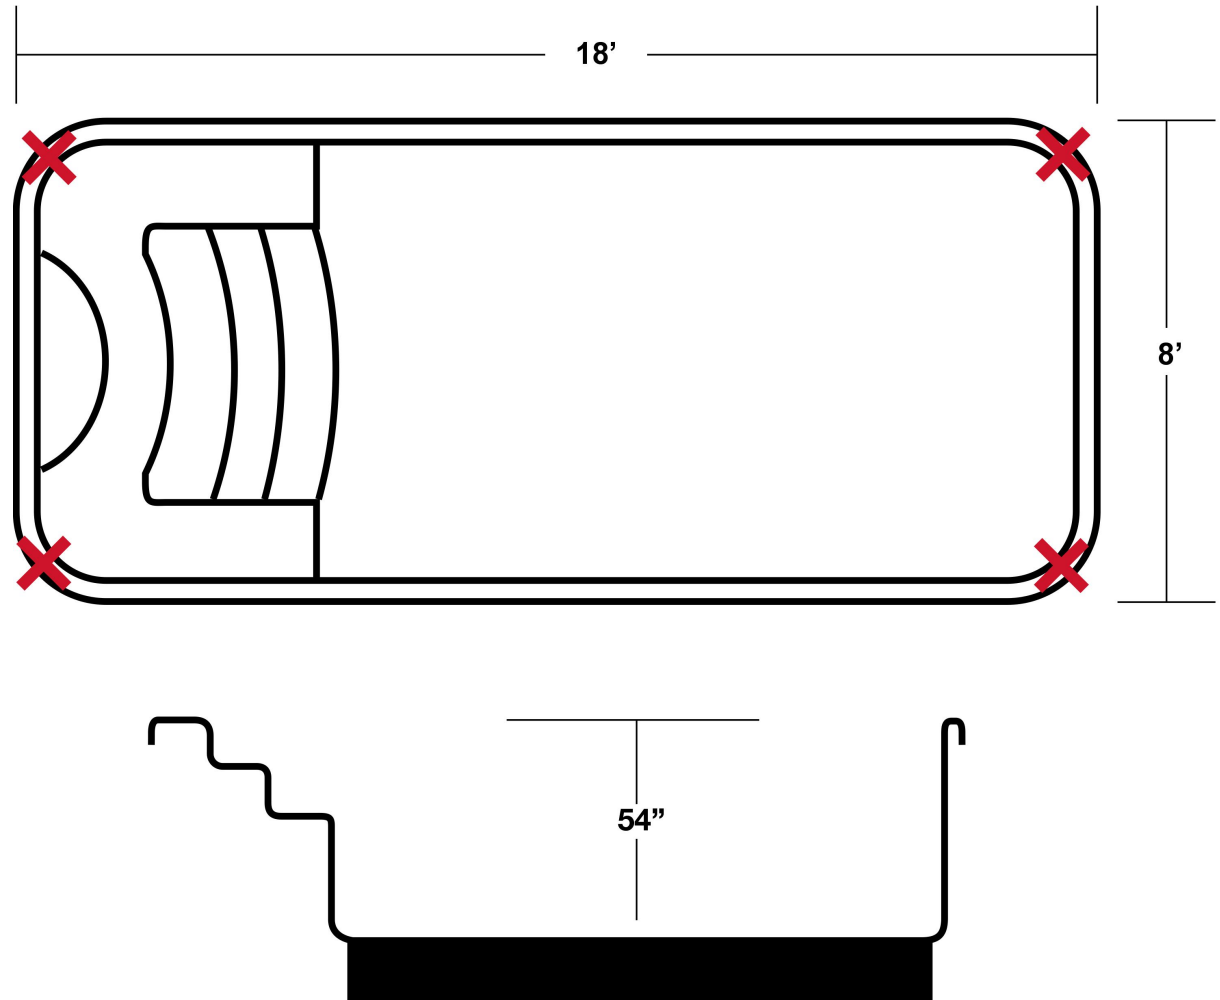

Notice: The dimensions for the pool shown are approximate, and are provided for general layout geometry. Fiberglass pools are sold "non-dimensionally" by model and design only, drawings are not to scale, all depth measurements are based on inches. Use field verified measurements to determine installation dimensions and quantities for ancillary appurtenances.



X = jack placement
Leveling Jack placed on timber.