

Installation

Lay out size for excavation 16' x 41'

Shell dimensions 15' x 40' outside edge to edge

Shell depth 38"-98" with 40 tons clean sand/
or no.8 stone

Backfill around pool water compacted clean sand/
or no.8 stone

Installation based on concrete decking placed
around pool per engineering plans

Approximate fill excavated from pool site 94-115
cubic yards

Pool Model: St. Croix

Average Depth 3'-8'2" - Top of coping to
bottom of shell

Average Weight: 3165 lbs.

Average Gallons: 19000

Perimeter: 102'

Note: All fittings are ABS not PVC the use of
acetone or pipe cleaner will weaken the
connection 3' fittings. Maximum test pressure
40 lbs. Exceeding 40 lbs of test pressure may
crack fittings.


Jack Placement

Refer to Fig. 7 in the Installation
Instruction Manual.



St. Croix – 15 x 40

Installation Schematic & Jack Placement

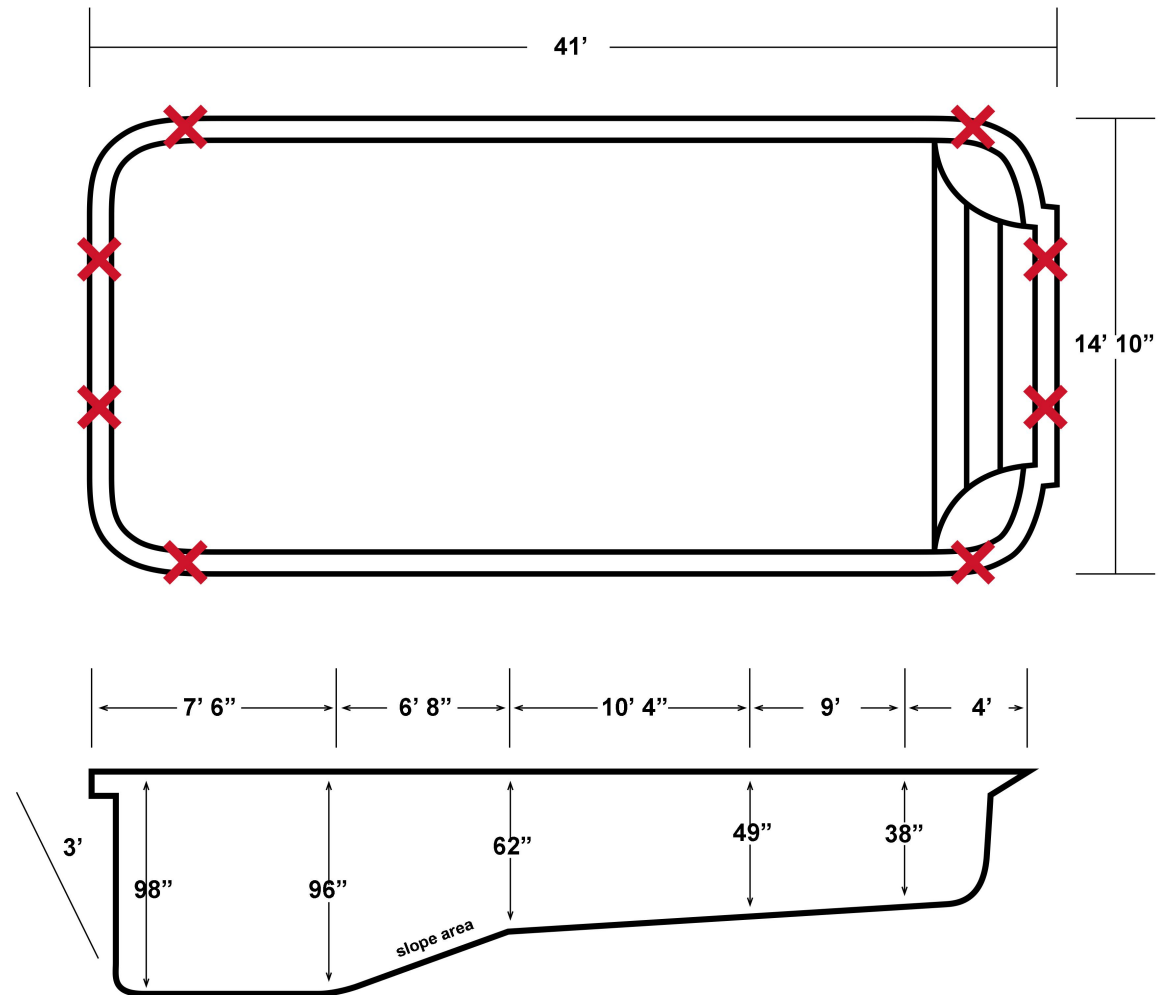

X = jack placement
Leveling Jack placed on timber.

Notice: The dimensions for the pool shown are approximate, and are provided for general layout geometry. Fiberglass pools are sold "non-dimensionally" by model and design only, drawings are not to scale, all depth measurements are based on inches. Use field verified measurements to determine installation dimensions and quantities for ancillary appurtenances.