

Installation

Lay out size for excavation 12' x 24'

Shell dimensions 11'3" x 23'0" outside edge to edge

Inside shell dimensions waterline to waterline 10'5" x 22'2"

Shell depth 43"-64" with 4'-6" clean sand/soft soil base

Backfill around pool water compacted clean sand/soft soil

Installation based on concrete decking placed around pool per engineering

Approximate fill excavated from pool site 25-30 yards

Pool Model: Sanibel

Average Depth: 3' – 5'

Average Weight: 1470 lbs

Average Gallons: 6000

Perimeter: 58'

Note: All fittings are ABS not PVC the use of acetone or pipe cleaner will weaken the connection fittings. Maximum test pressure 40 lbs. Exceeding 40 lbs of test pressure may crack fittings.


Jack Placement

Sanibel pool sits fine with dig plans

Refer to Fig. 7 in the Installation Instruction Manual.

Sanibel – 11 x 23

Installation schematic & Jack Placement

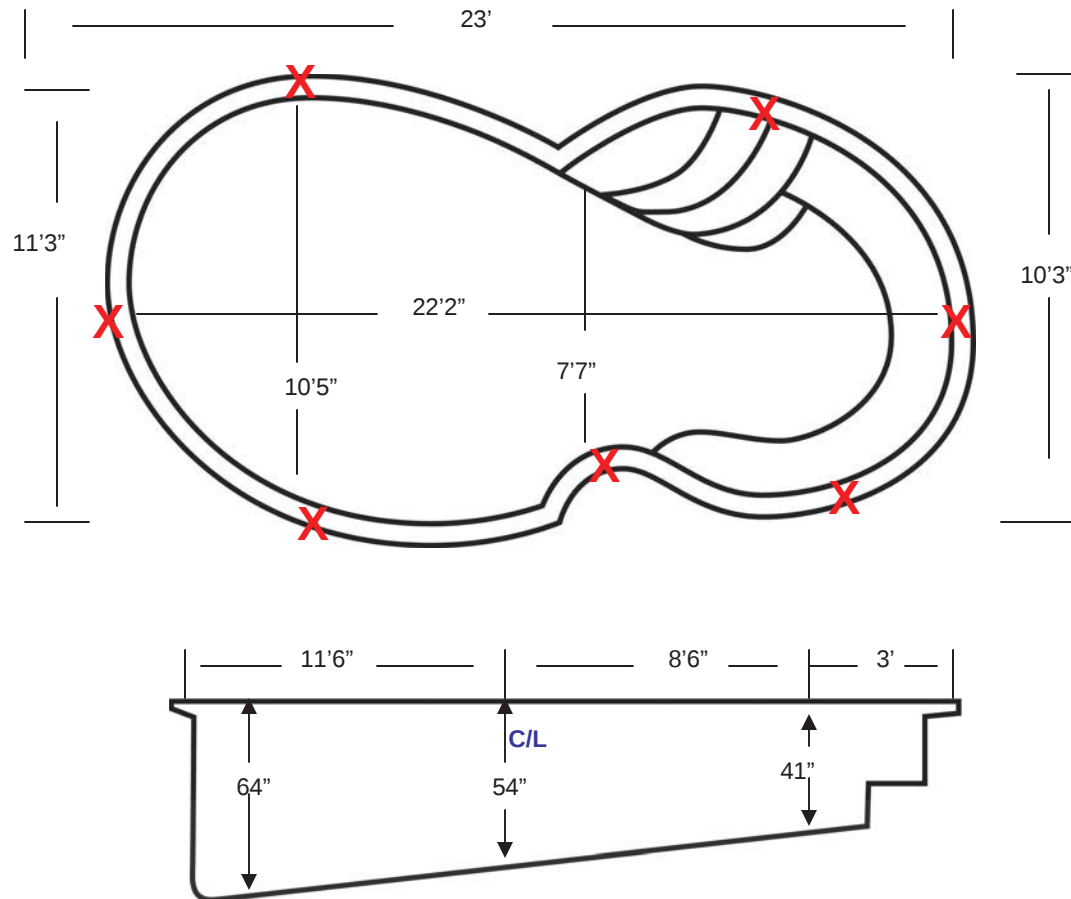

C/L = center line

Notice: The dimensions for the pool shown are approximate, and are provided for general layout geometry. Fiberglass pools are sold "non-dimensionally" by model and design only, drawings are not to scale, all depth measurements are based on inches. Use field verified measurements to determine installation dimensions and quantities for ancillary appurtenances.

X = Jack placement
Leveling jack placed on timber.
Refer to Installation Instruction Manual.

