


NO-DIG POROUS TARMAC ROAD CONSTRUCTION DETAIL

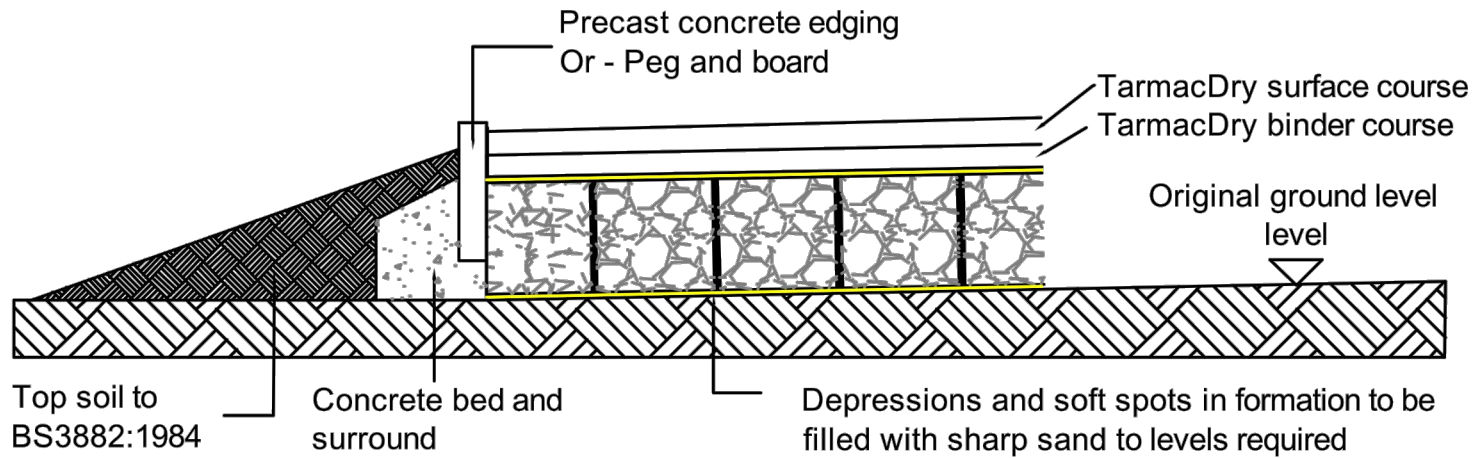

NO-DIG POROUS TARMAC ROAD CONSTRUCTION MATERIALS / THICKNESSES

Surface to be porous tarmac (TarmacDry or similar) to approved details and specifications.

Fibretext f4m non woven geotextile or similar approved laid over geocell

Geosynthetics cellweb or similar approved: 150mm-200mm thick. Cells to be filled with 20-40mm graded clean angular stone to manufacturers details and specifications.

Fibretext f4m non woven geotextile or similar approved laid over formation

All spec to be subject to engineering design