

Installation

Lay out size for excavation 15' x 29'

Shell dimensions 14' x 28' outside edge to edge

Shell depth 43" – 70" with 10 – 15 yards clean sand/or no.8 stone

Backfill around pool water compacted clean sand/or no.8 stone

Installation based on concrete decking placed around pool per engineering plan

Approximate fill excavated from pool site
20-35 yards

Pool Model: Jamaica

Average depth: 3'5" – 5'10" - Top of coping to bottom of shell

Average weight:: 1375 lbs

Average gallons:10,000

Perimeter: 70'

Surface Area: 303

Note: All fittings are ABS not PVC the use of acetone or pipe cleaner will weaken the connection fittings. Maximum test pressure 40 lbs. Exceeding 40 lbs of test pressure may crack fittings.

Jack Placement


Bottle jack 2 or 4 ton with 2 x 6 landscape timber 12" to 18" long

Refer to Fig. 7 in the Installation Instruction Manual.



Jamaica – 14 x 28

Installation Schematic & Jack Placement

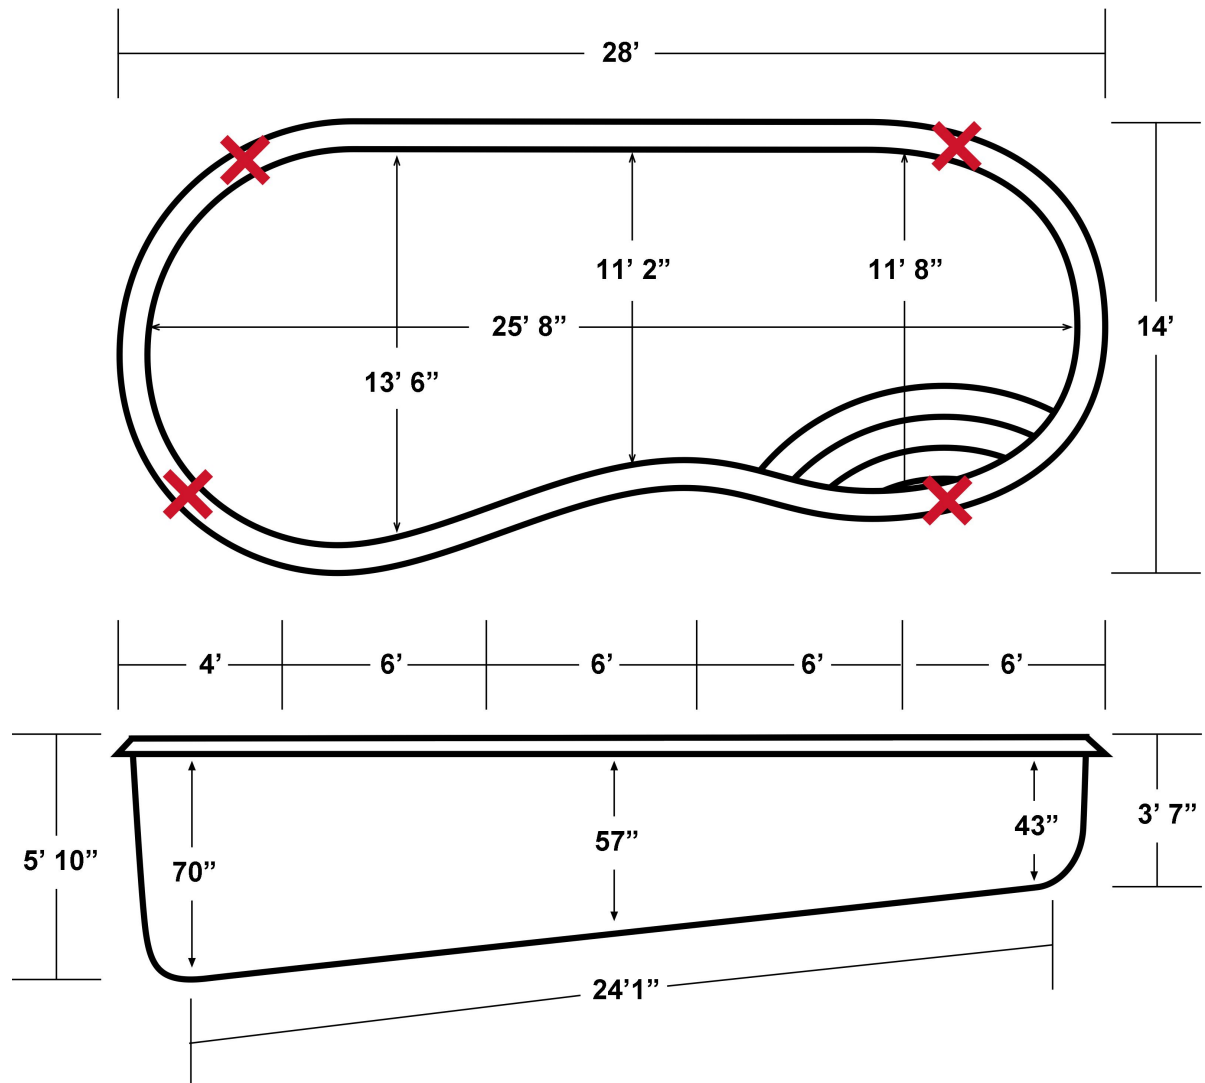

X = jack placement
Leveling Jack placed on timber.

Notice: The dimensions for the pool shown are approximate, and are provided for general layout geometry. Fiberglass pools are sold "non-dimensionally" by model and design only, drawings are not to scale, all depth measurements are based on inches. Use field verified measurements to determine installation dimensions and quantities for ancillary appurtenances.