

Installation

Lay out size for excavation 13' x 27'

Shell dimensions 10'3" x 25'6" outside edge to edge

Shell depth 3' – 5' with 4'-6' clean sand/
or no.8 stone

Installation based on concrete decking placed
around pool per engineering plans

Approximate fill excavated from pool site
25 -35 yards

Pool Model: Montego Bay

Average Depth: 3' – 5' - Top of coping to
bottom of shell

Average Weight: 1606 lbs

Average Gallons: 6000

Perimeter: 66'

Note: All fittings are ABS not PVC the use of
acetone or pipe cleaner will weaken the
connection fittings. Maximum test pressure 40
lbs. Exceeding 40 lbs of test pressure may
crack fittings.

Jack Placement

Fill to "A" before jacking back. Shoot pool at "AA":
for level. You can jack up "AAA" later on

Jack middle "B" of dip to level and jack steps. Jack
until "B" middle is level

Fill floor and jack front middle "C" up until
somewhere around 3/4 low then let water come
down about 3/8's the way up bench step


Bottle jack 2 or 4 ton with 2 x 6 landscape timber
12" to 18" long.

Refer to Fig. 7 in the Installation Instruction
Manual.



Montego Bay – 11 x 26

Installation Schematic & Jack Placement

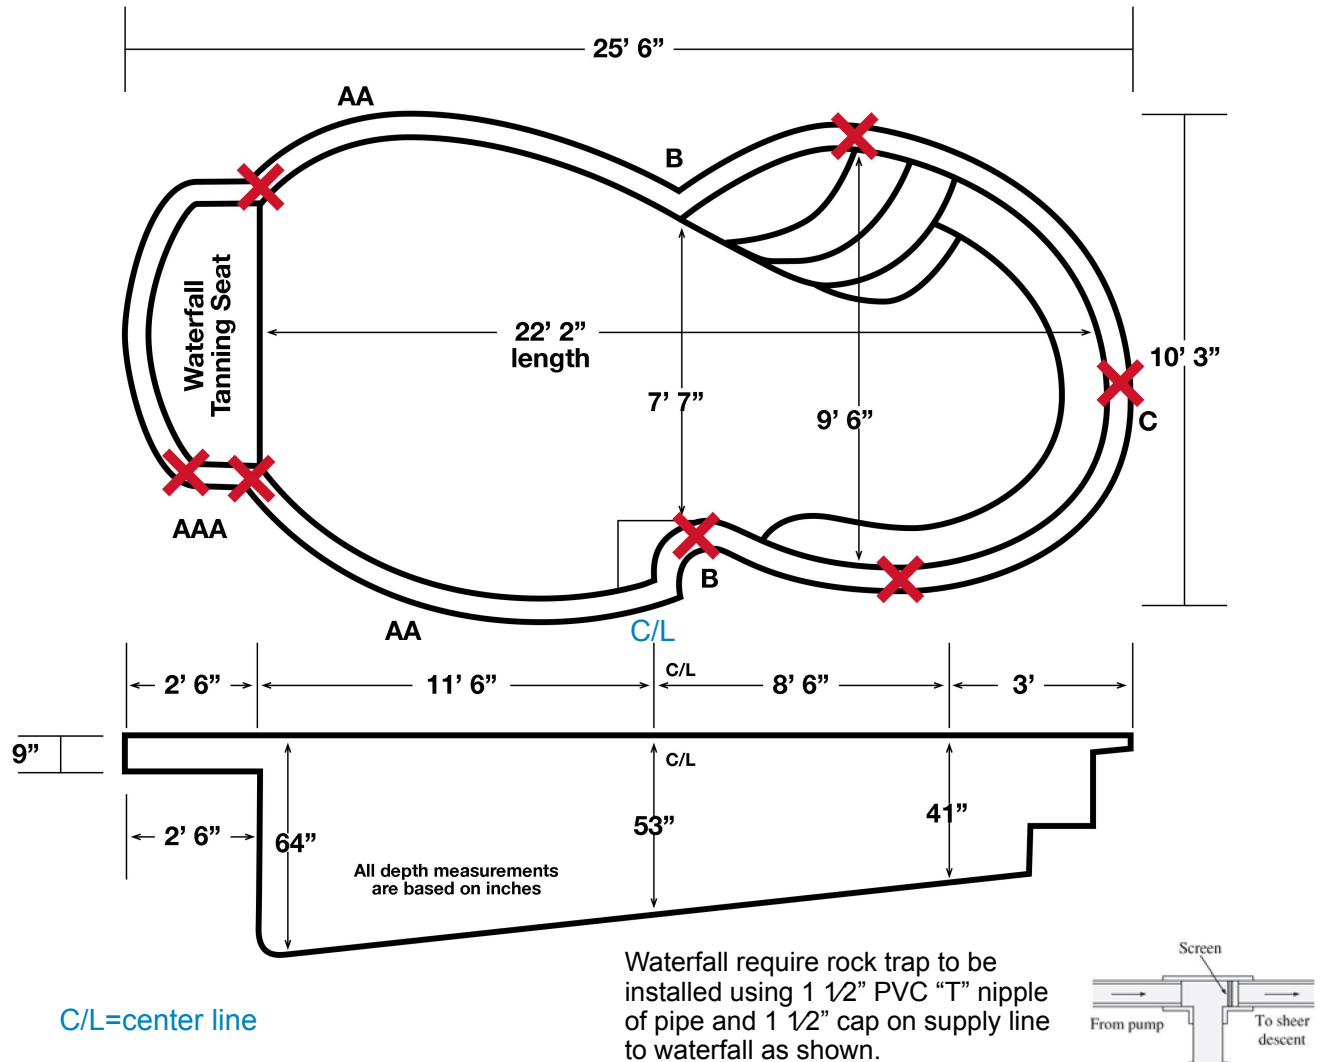

X = jack placement
Leveling Jack placed on timber.

Notice: The dimensions for the pool shown are approximate, and are provided for general layout geometry. Fiberglass pools are sold "non-dimensionally" by model and design only, drawings are not to scale, all depth measurements are based on inches. Use field verified measurements to determine installation dimensions and quantities for ancillary appurtenances.