

Installation

Lay out size for excavation 13' x 25'

Shell Dimensions 12'3" x 25'1" outside edge to edge

Shell depth 42"-6" with clean sand/
no.8 stone

Backfill around pool water compacted clean sand/
or no.8 stone

Installation based on concrete decking placed
around pool per engineering plans

Approximated fill excavated from pool site 25-30
yards

Pool Model: Nassau

Average Depth: 3' 5" - Top of coping to
bottom of shell

Average Weight: 1695 lbs.

Average Gallons: 6200

Perimeter: 65'

Note: All fittings are ABS not PVC the use of
acetone or pipe cleaner will weaken the
connection fittings. Maximum test pressure 40
lbs. Exceeding 40 lbs of test pressure may
crack fittings.

Jack Placement


Make adjusts with jacks when water comes up the
bottom steps.

Refer to Fig. 7 in the Installation
Instruction Manual.



Nassau – 12 x 25

Installation Schematic & Jack Placement

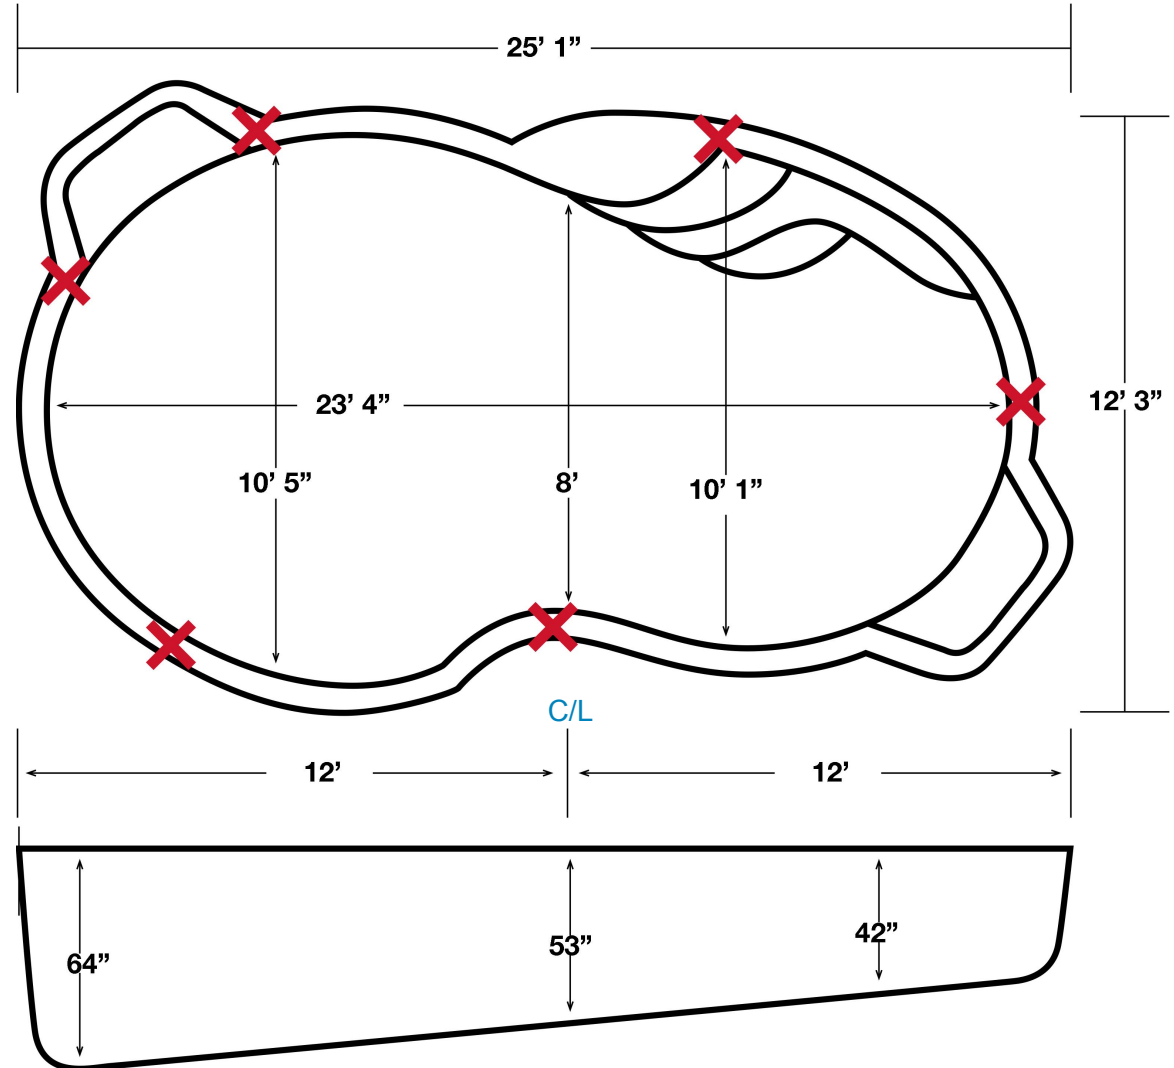

C/L=center line



X = jack placement
Leveling Jack placed on timber.

Notice: The dimensions for the pool shown are approximate, and are provided for general layout geometry. Fiberglass pools are sold "non-dimensionally" by model and design only, drawings are not to scale, all depth measurements are based on inches. Use field verified measurements to determine installation dimensions and quantities for ancillary appurtenances.