




Kingston – 11 x 20

Installation Schematic & Jack Placement

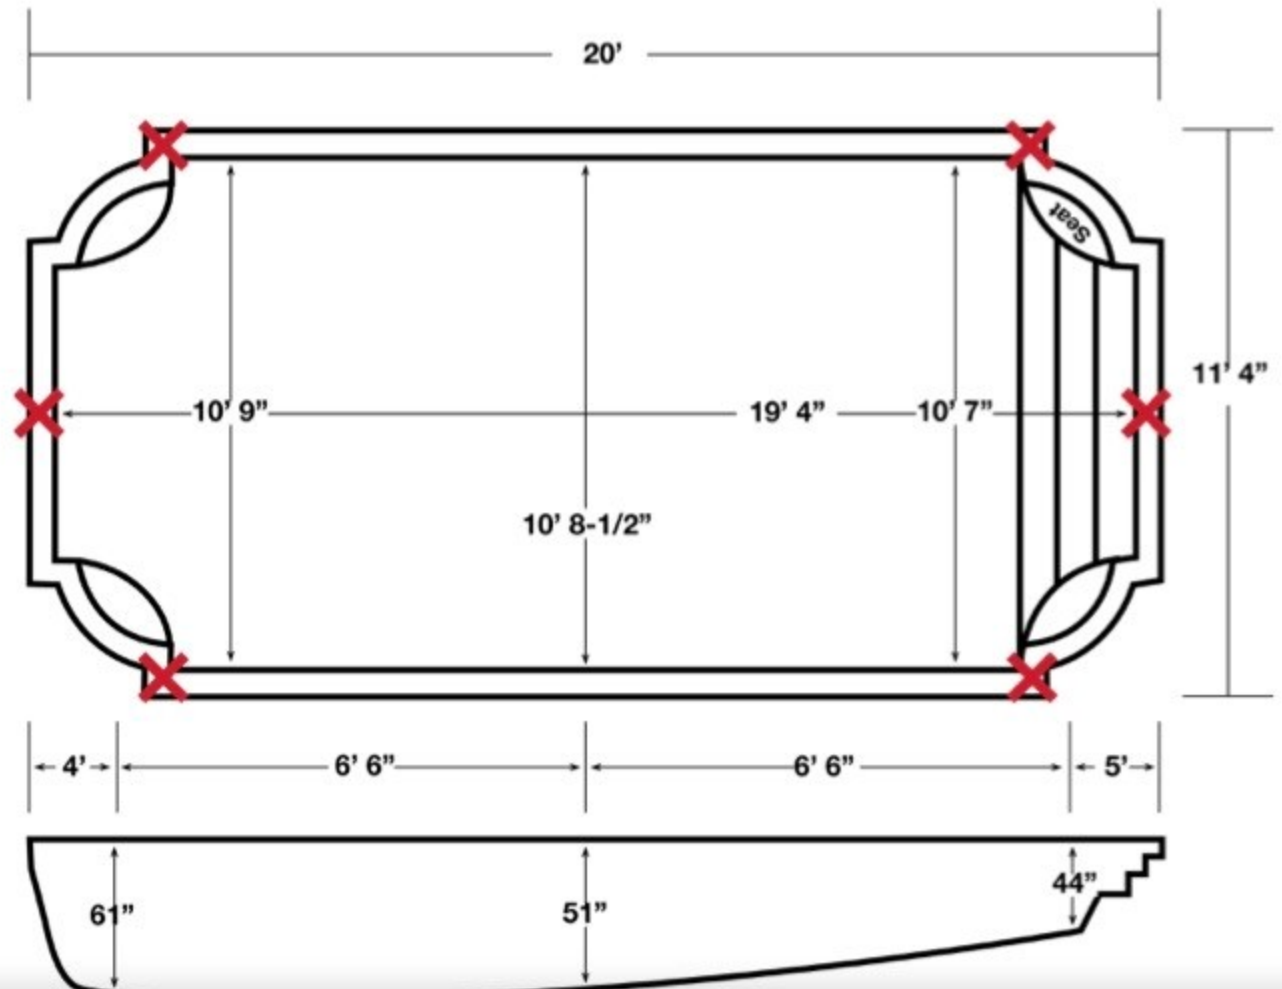

Installation

Lay out size for excavation 14'x22'

Shell dimensions 11'4"x20'0" outside edge to edge

Shell depth 41"-63" with 4"-6" clean sand/
or no.8 stone

Backfill around pool water compacted clean sand/
or no.8 stone

Installation based on concrete decking placed
around pool per engineering plans

Approximate fill excavated from pool site 25- 30
yards

Pool Model: Kingston

Average Depth: 3' to 5' - Top of coping to
bottom of shell

Average Weight: 1410 lbs

Average Gallons: 5200

Perimeter; 60'

**Note: All fittings are ABS not PVC the use of
acetone or pipe cleaner will weaken the
connection fittings. Maximum test pressure 40
lbs. Exceeding 40 lbs of test pressure may
crack fittings.**

Jack Placement

Jack back corners

Fill to B or more to get middle of back up or else it
will move the corners

Fill floor – jack front corners

Wait until water is over bottom step and 1/4 way up
bench before jacking steps\

Bottle jack 2 or 4 ton with 2 x 6 landscape timber
12" or 18" long