

Installation

Lay out size for excavation 41' x 15'

Shell dimensions 14'x40' Outside edge to edge

Shell depth 36"-70"-36" with 4"-6" clean sand/
or no.8 stone

Installation based on concrete decking placed
around pool per engineering plans

Approximate fill excavated from pool site 45 – 50
yards

Pool Model: Cancun

Average Depth: 3' – 5' – 3' - Top of coping to
bottom of shell

Average Weight: 2650 lbs.

Average Gallons: 16000

Perimeter: 100'

Note: All fittings are ABS not PVC the use of
acetone or pipe cleaner will weaken the
connection fittings. Maximum test pressure 40
lbs. Exceeding 40 lbs of test pressure may
crack fittings.

Jack Placement

For water see pool. Water to cover floor before
jacking corners.

Water to over bottom step before jacking middle of
steps

Pool will be about 3/4 to 7/8 full before walls
straighten out. Just fill dirt about 1/2 way up side
until walls straighten out


Bottle jack 2 or 4 ton 2 x 6 landscape timber 12" to
18" long.

Refer to Fig. 7 in the Installation Instruction
Manual.



Cancun – 14 x 40

Installation Schematic & Jack Placement

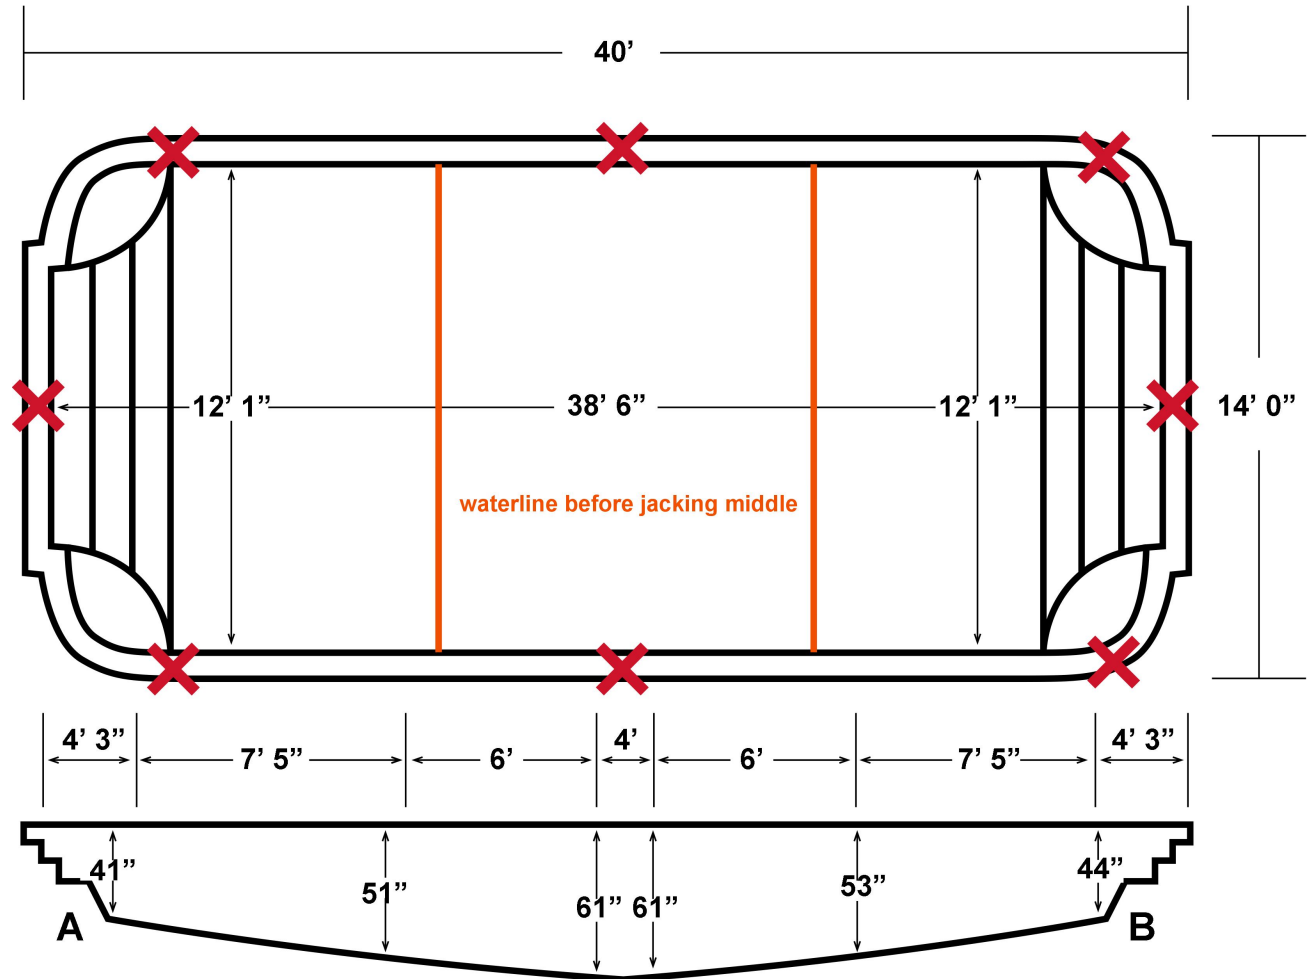

X = jack placement
Leveling Jack placed on timber.

Notice: The dimensions for the pool shown are approximate, and are provided for general layout geometry. Fiberglass pools are sold "non-dimensionally" by model and design only, drawings are not to scale, all depth measurements are based on inches. Use field verified measurements to determine installation dimensions and quantities for ancillary appurtenances.