

### Alarm Zone Controller (AZC)

### Technical Specifications

The Alarm Zone Controller (AZC) is an alarm monitoring field device that functions as interface between alarm input devices and the Unified Digital Controller (UDC) or the Single Board Controller (SBC). The AZC features 16 supervised inputs and 4 relay outputs. Application programs (firmware) and zone configurations are downloadable into FLASH memory eliminating the need to replace EPROMs for application changes and system upgrades.

In the event of communication loss to the UDC or SBC Board, the AZC continues to monitor alarms and store events in a high capacity buffer. When communication is restored, the buffered events are transmitted to the host. Industry standard RS-485 communication protocol is used between the AZC and UDC/SBC Board.

The system design is scalable, which provides for reduced installation costs. As customer needs change and grow, additions to the system become cost-effective by simply reconfiguring the system or adding only the required controllers. The AZC is configured with a diagnostics port which allows field service and other technical personnel to review activity, perform diagnostic analysis, and make some configuration changes. The AZC has mounting holes to allow upgrading of an existing Legacy RTU and can be mounted in any of the existing IDC Enclosures.

#### Primary Panel Features:

##### Electrical

Power	6-16 VDC
Current Draw	120mA maximum

##### Dimensions

Width	7.0 in. (178 mm)
Length	5.0 in. (127 mm)
Height	1.0 in. (26 mm)

##### Environment


Temperature	32°F-120°F, (0°C-50°C)
Humidity	10%-95% (non-condensing)

##### Memory

Read Only	64 Kbytes Flash Memory
Random	128 Kbytes SDRAM
Event Storage	2000 on loss of communications

##### Communications

Protocol	RS-485
Distance	4,000 feet
Media Type	Twisted Pair (Belden 9841 cable)
Diagnostics Port	RS-232

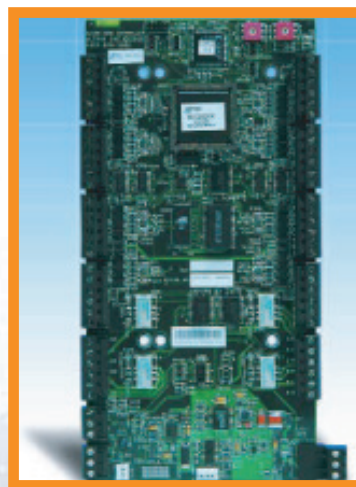

##### Outputs

Relay Outputs	4 Form-C
Max Current	1Amp @30VDC (resistive load)
LED Display	16 indicating relay status

##### Inputs

Tamper Switch	1 un-supervised
---------------	-----------------

Design and specifications subject to change without notice.

#### Features:

- 16 supervised inputs are provided for alarm devices
- An additional input provided for tamper
- 4 Form-C output relays are provided for local annunciation or other purposes
- Downloadable FLASH memory eliminates need to change EPROMs for application programming and system upgrades
- SDRAM memory stores 2000 events during any communications disruptions and forwards data upon communications restoration
- RS-485 communication allows local installation or remote installation up to 4000' (1300m) from UDC/SBC
- The AZC accepts a 6.0-16.0 VDC power source



**MONITOR  
DYNAMICS**



AZC0925