




Tri-Cutter for Tubing and Casing Thru-Tubing | Intervention

Features / Benefits

- Available in sizes 1-11/16" to 3-1/2"
- Self-centering three blade design
- Pressure operated
- Field redressable blades and orifice
- Can be run with CT motors, standard rotary, or power swivels
- Recommended running method is to use a motor and a Hailey Anchor

The Hailey Tri-Cutter has a proven record of success since its release in both onshore and offshore applications. No centralizer is necessary due to its design. Each tool is completely disassembled and reinspected after every rental. The use of an anchor is recommended to maintain initial cutting location.

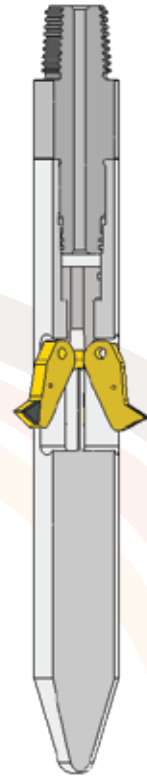

Tool OD (in.)	1.70	2.125		2.50	2.875		3.50
Tool Weight (lbs)	10	18		26	40		55
Tool Joint Connections	1" MT	1-1/2" MT		1-1/2" MT	2 3/8" PAC		2-3/8" Reg
Overall Length (in.)	20	19		24	26.50		26
Max ΔP (PSI)	1,500	2,250		2,250	2,250		3,550
Tensile Yield strength (lbf)	53,000	83,000		83,000	100,000		200,000
Torsional Yield Strength (ft-lbf)	750	750		750	3,000		3,500
Max Torque (lbf)	1,250	1,770		1,770	2,250		2,250
Minimum Makeup Torque (ft-lbf)	550	825		825	1,750		1,750
Max Cut Tubing OD (in.)	3.40	4.25		5.00	5.75		7.00
Min Cut Tubing ID (in.)	2.20	2.625		3.00	3.375		4.00
Max Cut Wall Thickness (in.)	3/8	3/8		5/8	5/8		5/8

*NOTE: All yield figures are estimated.

IF WE DON'T HAVE IT,
...WE CAN MAKE IT!