

# A1M



## Type of Work Undertaken: Sub-base preparation

Client: K-Rouse Civils, Balfour Beatty


Value: £15,000

Contract: Small Works

Duration: 2 Weeks

## Project Overview:

Alwoodley Civils yet again reach a new milestone by embarking on a motorway scheme for the first time. In July 2025, we did a trail run for Balfour Beatty on the A1m central reservation works. Working alongside K-Rouse Civils, we utilized our 3D machine control system on our Bobcat T76 Tracked Loader with its grader blade attachment to grade and prepare for tarmac and central reservation barriers. During our time on site, Alwoodley Civils were able to boast a 3km subbase levelled and complete within a 2 week timeframe proving the benefits and capabilities of such a compact yet valued piece of equipment. Our work on the A1m left our clients happy, got us an honorable mention on the Balfour Beatty newsletter and ultimately broadened our horizons and allowed us to step into a new phase of construction.

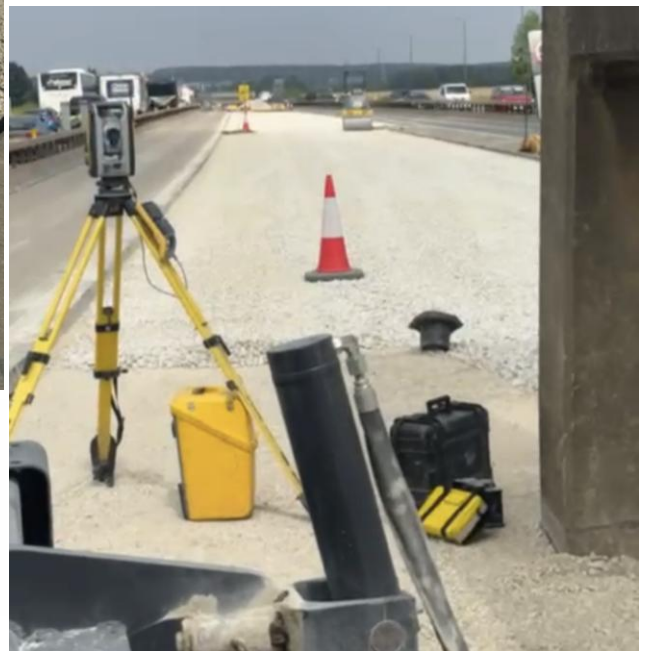

**ALWOODLEY**  
CIVILS LTD