




SPECIFICATION SHEET

12VAC MAGNETIC DIMMABLE TRANSFORMERS

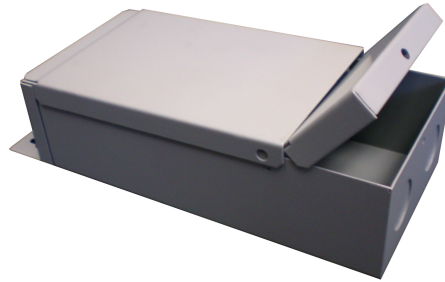

FEATURES

- 3 YEAR FREE REPLACEMENT WARRANTY
- FULLY DIMMABLE, WITH LOW-VOLTAGE MAGNETIC DIMMER
- 1/8" STEEL, POWDER COATED NEMA 3R CASE
- STANDARD WITH MANDATORY SECONDARY PROTECTION
- MEETS CLASS 2 OUTPUT LIMITS
- 12 VOLT "AC" RATED OUTPUT
- MEETS OR EXCEEDS ALL UL, CUL, ANSI/UL, CSA REQUIREMENTS.

REQUIREMENTS

- MEETS THE REQUIREMENTS FOR UL STANDARDS 2108 AND 1838
- MANDATORY SECONDARY PROTECTION, AS STATED IN THE NATIONAL ELECTRIC CODE ARTICLE 411, (1993, 1996, 1999, 2002, 2005 AND 2008)
- MAY BE USED WITH INDIVIDUAL "LISTED" COMPONENTS TO MEET "SYSTEM" REQUIREMENTS, AS LONG AS ALL PARTS LISTED TO SAME ANSI/UL STANDARD

	20 WATT	40 WATT	60 WATT	96 WATT
PART NUMBER	SEB12AC-20W-3R-277	SEB12AC-40W-3R-277	SEB12AC-60W-3R-277	SEB12AC-96W-3R-277
PRIMARY VOLTAGE	277VAC-1A MAX	277VAC-1A MAX	277VAC-1A MAX	277VAC-1A MAX
OUTPUT VOLTAGE	12VAC-2A MAX	12VAC-3,3A	12VAC-5A MAX	12VAC-8A MAX
BREAKERS	1x2A	1x4A	1x5A	2x4A (DUAL OUTPUT)
FREQUENCY	60 Hz	60 Hz	60 Hz	60 Hz
DIMENSIONS	8.5" x 3.5" x 3"	8.5" x 3.5" x 3"	8.5" x 3.5" x 3"	8.5" x 3.5" x 3"
WEIGHT	3 LBS.	3.5 LBS.	5 LBS.	5 LBS.