




SPECIFICATION SHEET

24VDC MAGNETIC DIMMABLE LED POWER SUPPLIES

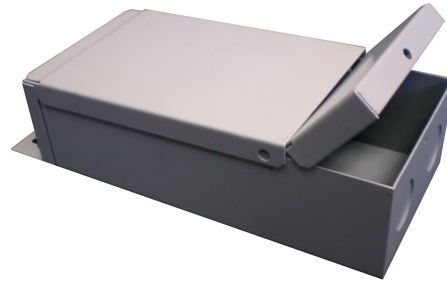

FEATURES

- 3 YEAR FREE REPLACEMENT WARRANTY
- FULLY DIMMABLE, WITH LOW-VOLTAGE MAGNETIC DIMMER
- 1/8" STEEL, POWDER COATED NEMA 3R CASE
- STANDARD WITH MANDATORY SECONDARY PROTECTION
- MEETS CLASS 2 OUTPUT LIMITS
- 24 VOLT "DC" RATED OUTPUT
- MEETS OR EXCEEDS ALL UL, CUL, ANSI/UL, CSA REQUIREMENTS.

REQUIREMENTS

- MEETS THE REQUIREMENTS FOR UL STANDARDS 2108 AND 1838
- MANDATORY SECONDARY PROTECTION, AS STATED IN THE NATIONAL ELECTRIC CODE ARTICLE 411, (1993, 1996, 1999, 2002, 2005 AND 2008)
- MAY BE USED WITH INDIVIDUAL "LISTED" COMPONENTS TO MEET "SYSTEM" REQUIREMENTS, AS LONG AS ALL PARTS LISTED TO SAME ANSI/UL STANDARD

PART NUMBER  
 PRIMARY VOLTAGE  
 OUTPUT VOLTAGE  
 BREAKERS  
 FREQUENCY  
 DIMENSIONS  
 WEIGHT

**192 WATT (277VAC)**  
 SEB24DC-192W-3R-277  
 277VAC-1.2A MAX  
 24VDC-8A MAX  
 2x4A  
 60 Hz  
 14" x 8" x 5"  
 15 LBS.

**288 WATT (277VAC)**  
 SEB24DC-288W-3R-277  
 277VAC-1.2A MAX  
 24VDC-12A  
 3x4A  
 60 Hz  
 14" x 8" x 5"  
 15 LBS.