

Supports High Number of Lamps per Circuit

GENERAL INFORMATION

LED Driver Type	AC LED (Class 2)
Maximum Wattage	60 Watts
Input Voltage	120 VAC ± 10%
Input Frequency	50/60Hz

PRODUCT FEATURES

- Supports High Number of Lamps per Circuit
- Short circuit protection
- Suitable for dry and damp locations
- Withstanding voltage: I/P – O/P 2kVAC
- Surge Rating: NEMA SSL1-2010 Non-roadway 2.5kV
- Operating temperature range: -20°C to 90°C (measured at Tcase)
- 2W Minimum Load
- Wide Dimming Range
- Recommended ELV Dimming
- Suitable for AC LED or Halogen Loads


ELECTRICAL SPECIFICATIONS

Specifications subject to change without notice


Watts	Input Voltage	Input Current	Output Voltage	Max Output Current	Case Style	Power Factor	Efficiency	Hatch Part No.
15W	120 VAC	0.15A	12 VAC	1.3A	M	>0.9	90%	RL12-15M-LED
					BF	>0.9	90%	RL12-15BF-LED
30W	120 VAC	0.30A	12 VAC	2.5A	M	>0.9	90%	RL12-30M-LED
					BF	>0.9	90%	RL12-30BF-LED
60W	120 VAC	0.60A	12 VAC	5.0A	M	>0.9	90%	RL12-60M-LED
					BF	>0.9	90%	RL12-60BF-LED

MECHANICAL SPECIFICATIONS

CASE STYLE M (SIDE LEAD)

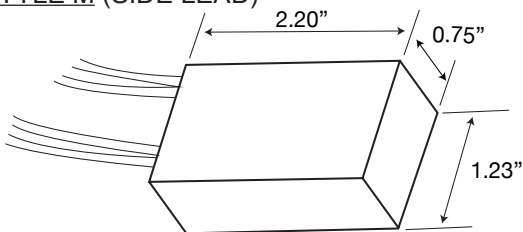

CASE STYLE BF (BOTTOM FEED)

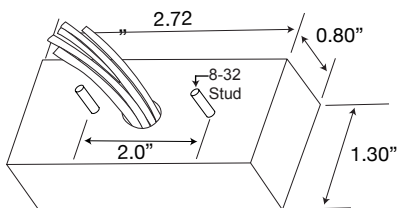

CASE: ALUMINIUM



CASE STYLE: M



CASE STYLE: BF


APPROVALS

- UL 8750 Recognized Component
- RoHS Compliant



WIRING INFORMATION

Input: 6", Black (L), White (N) 300V 105°C #18AWG
Output: 6", Red (+), Red (-) 300v 105°C #18AWG

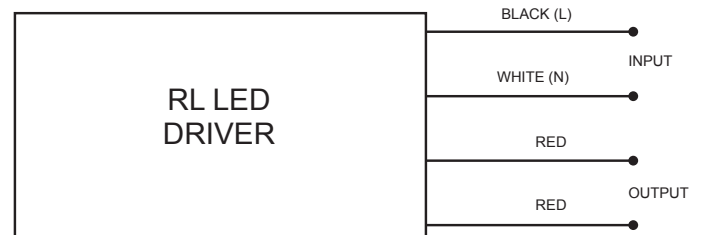

PACKAGING INFORMATION

Unit Weight:	2.8 oz
Quantity:	100pc/carton
Carton Weight:	17lbs 8 oz

Please refer to LED product manufacturer data sheets for compatibility with the RL LED products. Hatch does not perform compatibility and/or dimmer compatibility testing with other manufacturers LED lamp products. See lamp manufacturers listings of approval of their products with our drivers.