



L.T.F

Low Voltage Electronic Power Supply

**60W DC, 120V AC Input
TA60WD12LEDS & TA60WD24LEDS**



| | |
|------------------|----------------------|
| Efficiency | > 85% |
| Power Factor | > 98% |
| Case TC | 90°C Max. |
| Protection | Input / Output |
| Storage | -30°C / +90°C |
| Humidity | 95% RH Max. |
| IP Rating | IP 65 |
| Class | Class 2 Power Supply |
| Standard Dimming | ELV |



RoHS



FEATURES


- No load technology, works with both Halogen & LED DC loads**
- Isolated output power per NEC and UL safety requirements
- UL recognized / listed Class 2 power supply, meets UL2108 requirements
- FCC Part 15 Class B compliant
- Auto-reset; short circuit, overload and thermal protection
- Soft Start
- Dimmable with ELV type dimmers
- Low profile, small compact design to fit in most enclosures

ELECTRICAL SPECIFICATIONS

| Model # | Input | Output Voltage | Load Type | Form Factor | Dimming |
|--------------|-----------------------|----------------|---|-------------|---------|
| TA60WD12LEDS | 120V AC 0.5A, 50/60Hz | 12V DC | LED Strips, LED Bulbs, Incandescent & Halogen Bulbs | B5 | ELV |
| TA60WD24LEDS | 120V AC 0.5A, 50/60Hz | 24V DC | LED Strips, LED Bulbs, Incandescent & Halogen Bulbs | B5 | ELV |

MECHANICAL SPECS

| Available Form Factors | Dimensions |
|------------------------|------------------|
| "B5" | 67.5 x 33 x 21mm |

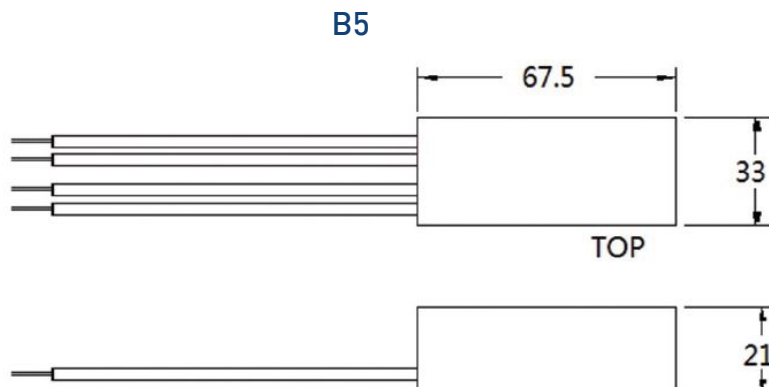

Low Voltage Electronic Transformer