

# TRACK BUSWAY PRODUCT SELECTION GUIDE



**Starline**<sup>®</sup>  
A brand of **legrand**

| 100-225T3 US SYSTEMS

## SPECS & INTRODUCTION

### Specs

This specification covers the electrical characteristics and general requirements for a track busway system, hereafter referred to as (Track Busway or busway). The system shall be designed primarily for overhead distribution of electrical power; supporting designated work areas and equipment. Once installed the Busway will provide a simple, versatile, fast and economic means of distributing power. Loads fed from a variety of plug-in units can be easily added or removed without shutting power down to the busway.

The Track Busway shall be designed and manufactured to the following standards:

1. Underwriters Laboratories Standard, UL 857 – The common UL, CSA, and ANCE Standard for Busways that is derived from the fifth edition of CSA Standard C22.2 No. 27, the twelfth edition of UL 857, and the second edition of NMX-J-148-1998-ANCE.

2. Low Voltage Switchgear and Controlgear Assemblies, Part 1: Type Tested and partially type tested Assemblies, IEC 61439-1 & IEC 61439-6.

\*All standards and certifications available upon request

### Introduction

Starline is the leader in electrical power distribution in the mission critical, commercial and light industrial industries with Starline Track Busway. This system was designed to meet the rugged specification of the UL857, Busway and Associated Fittings, with the flexible features of track lighting - and is available in systems with 100 or 225 amps with isolated ground.

Track Busway is the simple, versatile, fast and economical solution for supplying power to electrical loads and is unique because the busway can be instantly tapped at any location, with a variety of plug-in units.

The Product Selection Guide was developed to help the design engineer understand and consider all of the options available with Starline Track Busway when designing a system.

This guide is all-inclusive; however, Starline excels at collaborating with design engineers to provide solutions for any application. If you have a need that is not found in this guide, please contact us at **1-800-245-6378**. We will be happy to answer your questions over the telephone or schedule a visit with one of our local representatives.

Also, if viewing this guide in print, please keep in mind that this is a working document. Starline reserves the right to change information and descriptions of listed services and products. The latest version of this guide is available for download at [downloads.starlinepower.com/starline/busway/](https://downloads.starlinepower.com/starline/busway/).

## TABLE OF CONTENTS

### T3 SERIES

SPECS & INTRODUCTION.....	3
TABLE OF CONTENTS.....	3.1
SYSTEM LAYOUT DRAWING.....	3.3
GROUND OPTIONS.....	3.4
POLARITY TIPS.....	3.5
SYSTEM LAYOUT TIPS.....	3.6
COMPONENT RELATIONSHIP TIPS.....	3.7

### 100T3 SYSTEMS

STRAIGHT SECTIONS.....	3.8
Straight Sections: Product Numbers .....	3.9
ELBOW SECTIONS.....	3.10
Elbow Sections: Product Numbers.....	3.11
TEE SECTIONS.....	3.12
Tee Sections: Product Numbers.....	3.13
END FEED UNITS .....	3.14
End Feed Units: Metering .....	3.15
End Feed Units: Accessories.....	3.16
End Feed Units: Product Numbers.....	3.17
End Feed Metering: Product Numbers .....	3.18
ABOVE FEED UNITS .....	3.19
Above Feed Units: Product Numbers.....	3.20

### 225T3 SYSTEMS

STRAIGHT SECTIONS.....	3.21
Straight Sections: Product Numbers .....	3.22
ELBOW SECTIONS.....	3.23
Elbow Sections: Product Numbers .....	3.24
TEE SECTIONS.....	3.25
Tee Sections: Product Numbers.....	3.26
END FEED UNITS .....	3.27
End Feed Units: Metering .....	3.28
End Feed Units: Accessories.....	3.29
End Feed Units: Product Numbers .....	3.30
End Feed Metering: Product Numbers .....	3.31
ABOVE FEED UNITS .....	3.32
Above Feed Units: Product Numbers .....	3.33

### T3 ACCESSORIES


RAL COLORS.....	3.34
ACCESSORIES: SUPPORT HARDWARE .....	3.35
ACCESSORIES: CONNECTION HARDWARE.....	3.38
ACCESSORIES: INSTALLATION TOOL .....	3.39
SERVICES.....	3.40

## TABLE OF CONTENTS

### T3 PLUG-IN UNITS

T3 PLUG-IN UNITS .....	3.42
SYSTEM & BUILD GUIDE.....	3.43
METER PLUGS: PRODUCT NUMBERS .....	3.44
METER BOXES: PRODUCT NUMBERS.....	3.45
TERMINAL BLOCK UNITS: PRODUCT NUMBERS .....	3.46
CIRCUIT BREAKER/FUSED DISCONNECT: PRODUCT NUMBERS.....	3.47
CIRCUIT BREAKER/FUSED DISCONNECT: GROUND .....	3.48
CIRCUIT BREAKER/FUSED DISCONNECT: BOX.....	3.49
CIRCUIT BREAKER/FUSED DISCONNECT: INTERRUPT RATING.....	3.50
CIRCUIT BREAKER/FUSED DISCONNECT: DEVICE .....	3.51
CIRCUIT BREAKER/FUSED DISCONNECT: DEVICE: INDUSTRIAL SPECIFIC .....	3.52
CIRCUIT BREAKER/FUSED DISCONNECT: MOUNT LOCATION.....	3.53
CIRCUIT BREAKER/FUSED DISCONNECT: ACCESSORIES .....	3.54
CIRCUIT BREAKER/FUSED DISCONNECT: (AC ONLY) METER RELEASE.....	3.55
CIRCUIT BREAKER/FUSED DISCONNECT: (DC ONLY) METER RELEASE .....	3.56
RETROFIT METER (FACTORY REWORK).....	3.57
CORDED METERS.....	3.58
WIRING DEVICE/CORD SET OPTIONS .....	3.59
BOX SIZES & STYLES.....	3.60
50 SERIES ENCLOSURE CUT SHEET .....	3.63
90 SERIES ENCLOSURE CUT SHEET .....	3.64
US DEVICE CODE TABLE.....	3.65

## SYSTEM LAYOUT DRAWING

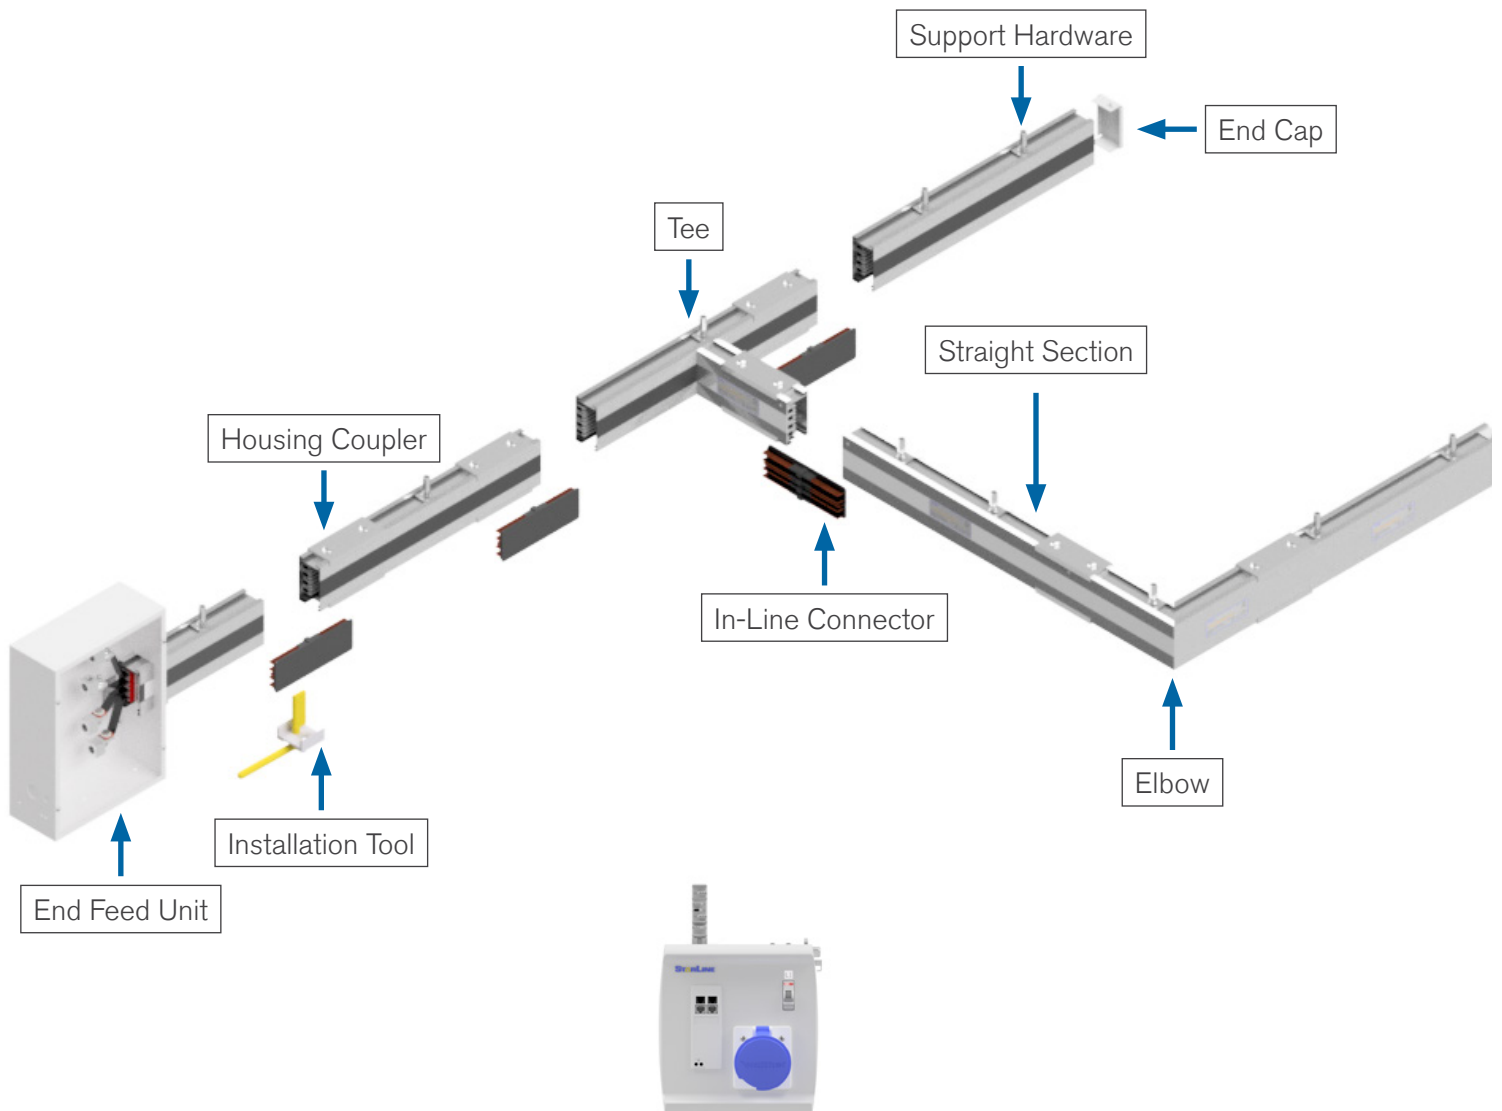



### Plug-In Units

For further information on applicable T3 plug-in unit options, please visit the **Plug-In Units** section.

## GROUND OPTIONS



### 100 & 225 Options Case Ground/Chassis Earth

Uses aluminum housing and no extra copper bar.

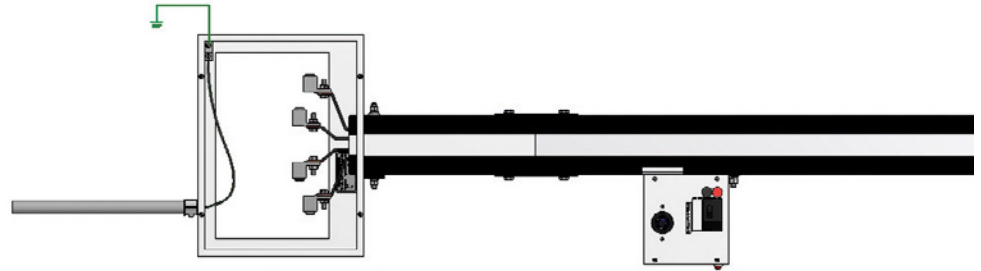



### 100 Option Only Dedicated Ground/Earth

Extra bar in busway for ground. Everything tied together inside plugs. Bar and housing at same potential.

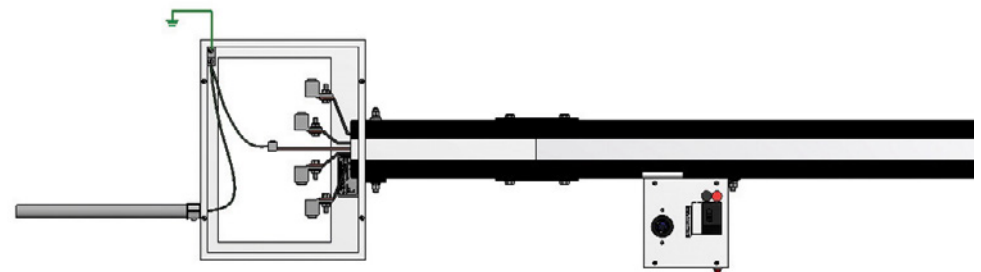

### 100 Option Only Isolated Ground/Earth

Orange receptacles in plugs. Case ground isolated from copper ground bar. Isolated ground carried back to panel by others.

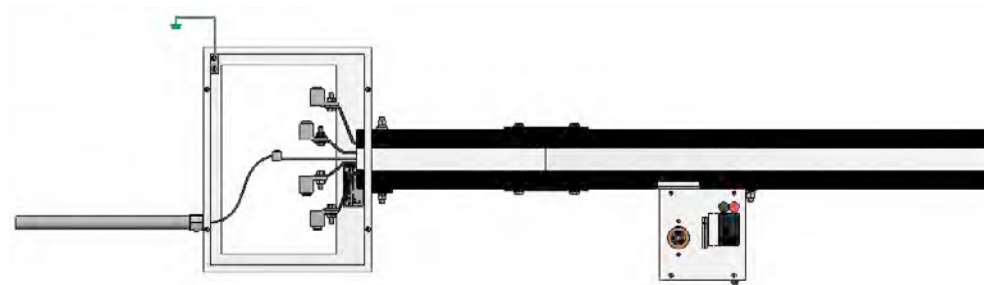


\*For further details about Dedicated Ground vs. Isolated Ground, please reference our "Isolated Ground vs. Dedicated Ground" tech brief on [downloads.starlinepower.com/starline](https://downloads.starlinepower.com/starline)

## POLARITY TIPS


Starline utilizes a unique polarizing method to prevent mismatched components from being inadvertently connected to each other. The system is designed to prevent cross phasing during installation.

**It is particularly important to understand this design concept prior to ordering and/or installing some components.**

For example, if the face direction of a Starline plug-in unit is important in your installation consider that they will always face the conductor side. Certain plug-in units are 'reversible', designated by 'R', to face devices away from the conductor side.

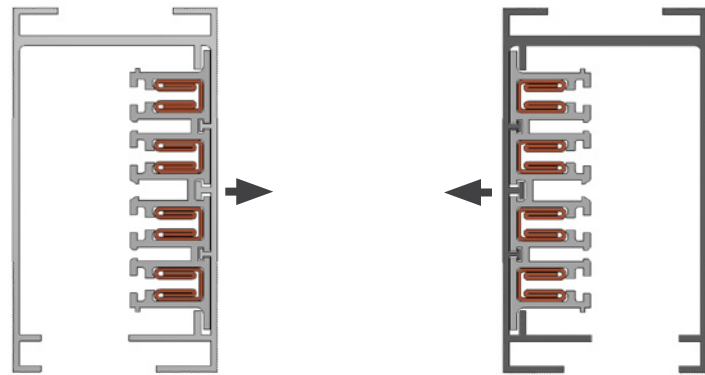

*All standard outlet boxes face the conductor side unless reversed plugs are specified*

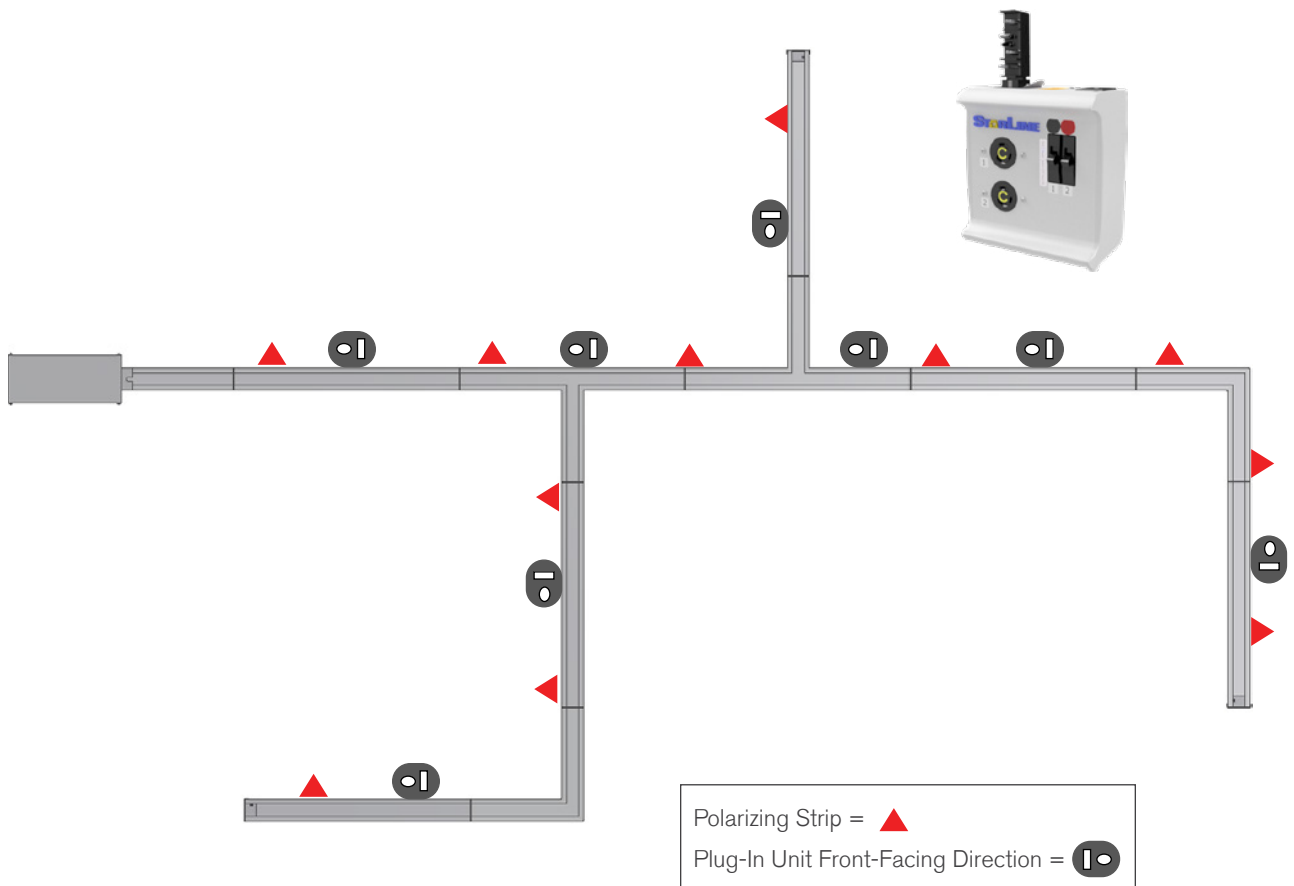

## SYSTEM LAYOUT TIPS

### Power Feeds

Determine location of power feeds based on relation to power source, existing feeders and voltage drop concerns for longer runs.

### Support Hardware

Support hardware is spaced no more than 10 feet apart. Refer to **page 3.35** for support hardware details. Contact your local Starline applications engineer for any questions.

### Installation

Printed installation drawings are supplied with each system shipment and they are also available for download online at [downloads.starlinepower.com/starline/busway/](https://downloads.starlinepower.com/starline/busway/). CAD files of these drawings are also available by contacting your local Starline applications engineer.

### Busway Housing Sections

Standard busway lengths are available in 5, 10 and 20 foot increments. Although the factory can cut individual Starline Track Busway sections to any length under 20 feet, it is highly recommended to keep all layout runs in increments of 5 feet to simplify layout and installation. Custom lengths can be made but can increase lead time and make layout and installation a bit more complex.

### Busway Tees and Elbows Sections

Try to keep all runs as straight as possible as tees and elbows are added cost. Pay close attention to polarity on the elbows. The polarity will need to match the adjacent busway section(s) to be compatible.

<b>Length of Busway for a One Volt Drop in Line to Line Voltage:</b>			
SYSTEM DESIGNATION	DISTRIBUTED LOAD	VOLTAGE DROP @ 0.8 PF Single Phase	VOLTAGE DROP @ 0.8 PF Three Phase
100T3 (standard)	100 amps	42 ft	72 ft
225T3 (standard)	225 amps	28 ft	48 ft



## COMPONENT RELATIONSHIP TIPS

When ordering material, it is important to understand the relationship between various components.

### Examples

- Each piece of housing (straights and elbows) requires a joint kit (containing two housing couplers and one bus connector). Determine the total number of housing sections (regardless of length) as this becomes the number of joint kits that will be needed. Add one extra joint kit for each tee section
- If this is your first installation for 100T3 or 225T3 systems, you will need to order an Installation Tool (ST3IT).
- General support hardware rule to follow:



10 feet maximum spacing between supports and we recommend 10% more than the required quantity to cover potential layout changes.

- Total Power Feeds and End Caps can be determined by counting the total number of unconnected runs.
- Before specifying or ordering Elbow or Tee connectors, it is important to understand polarity and the relationship to direction of outlets. Please refer to **page 3.5** Polarity Tips for more detail.

## STRAIGHT SECTIONS

### Product Description

Track Busway straight section consists of an extruded aluminum shell with channel type solid copper busbars contained in a full length insulator mounted on one side of the interior wall. Each straight has an open access slot over its entire length for the insertion of turn-n-lock plug-in units. Housing configuration is 4 pole, 600 Volt. Busway joint connections are made using a joint kit, which includes a housing coupler and bus connector. An installation tool is used to insert the bus connector in between the busbar channels of the two sections for a solid spring-tempered electrical connection. A housing coupler is then used to make a solid mechanical connection.

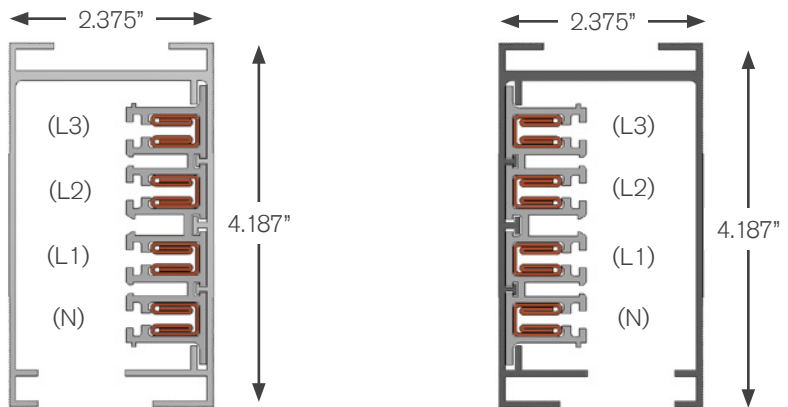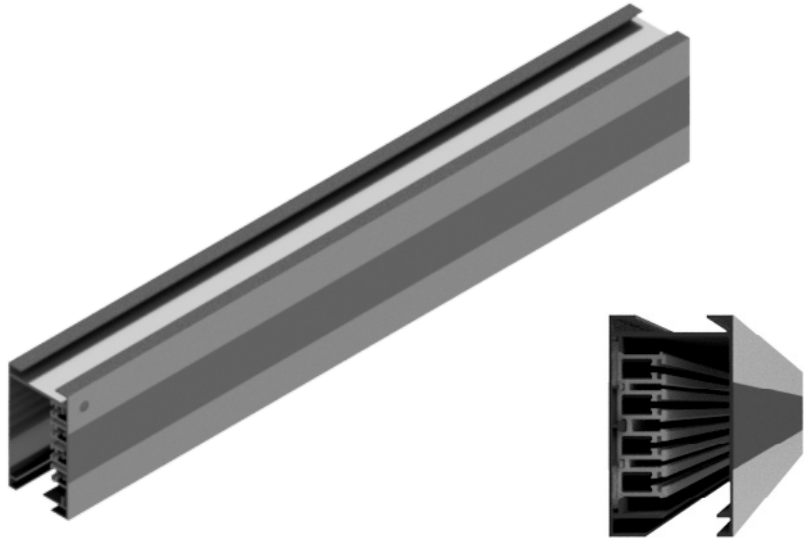

### Material

Extruded Aluminum

### Ratings

100% Ground Path

US: 100 Amp, 600 Volt

Metric: 160 Amp, 415 Volt

### Length

5 ft, 10 ft, 20 ft; or custom lengths between 2 - 20 ft

### Voltage Drop

Distributed load

Single Phase 1V per 54 ft (.8PF)

Three Phase 1V per 62 ft (.8PF)











### Weight


10 ft 4 pole: 26 lbs

10 ft 4 pole w/ ground: 30 lbs


10 ft 4 pole w/ 200% N: 33 lbs

10 ft 4 pole w/ ground & 200% N: 34 lbs

US			Metric		
L1 or Phase A		black	L1 or Phase A		brown
L2 or Phase B		red	L2 or Phase B		black
L3 or Phase C		blue	L3 or Phase C		gray
Neutral Ground		white	L3 or Phase C		blue
		green/ black	Neutral Ground		green/ yellow

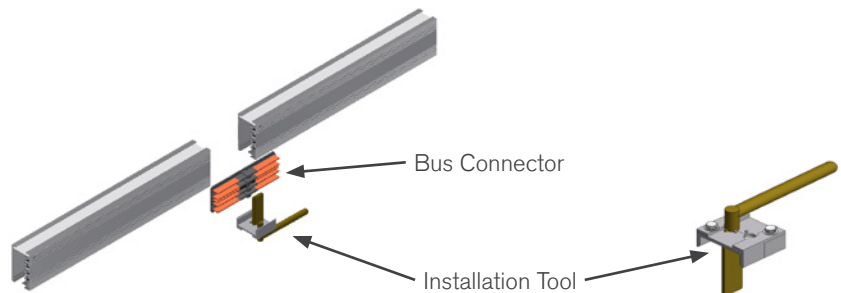

## STRAIGHT SECTIONS: PRODUCT NUMBERS

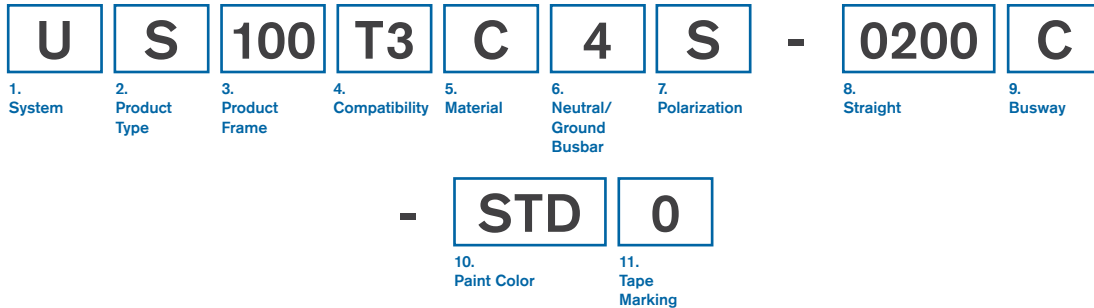

### 1. System (standard of measure)

**U** US

### 2. Product Type (section component)

**S** Straight Section

### 3. Product Frame (maximum amperage)

**100** 100 amps

### 4. Compatibility (frame compatibility)

**T3** T3 System

### 5. Material (busbar material)

**C** Copper

### 6. Neutral/Ground Busbar (size of neutral busbar and/or ground)

<b>4</b>	3 Phase plus Neutral	<b>G</b>	3 Phase plus Neutral plus Internal Ground Conductor
<b>N</b>	3 Phase plus 200% Neutral	<b>F</b>	3 Phase plus 200% Neutral plus Internal Ground Conductor

### 7. Polarization (orientation of section for mating purposes)

**S** Standard

### 8. Straight Length (length of section)

**XXYY** XX=feet, YY=inches

### 9. Busway Access (how plugs access the busway)

**C** Continuous

### 10. Paint Color (allows painting of the busway housing)

<b>STD</b>	Factory Mill Finish	<b>RED</b>	Paint Factory Red
<b>BLK</b>	Paint Factory Black	<b>BLU</b>	Paint Factory Blue
<b>WHT</b>	Paint Factory White	<b>**RAL (please see page 3.34)</b>	

### 11. Tape Marking (colored tape on both sides of busway housing)

<b>0</b>	No Tape Marking	<b>7</b>	Tape Factory Blue
<b>3</b>	Tape Factory Black	<b>8</b>	Tape Factory Green
<b>4</b>	Tape Factory White	<b>9</b>	Tape Factory Yellow
<b>6</b>	Tape Factory Red		

### EXAMPLES

**US100T3C4S-0206C-STD0** = US System, Straight Section, 100 amps, T3 System, Copper Conductor, 3 Phase plus Neutral, Standard Polarization, 2 foot 6 inch Straight Length, Continuous Access, Factory Mill Finish, No Tape Marking

**US100T3CNS-0500C-P013** = US System, Straight Section, 100 amps, T3 System, Copper Conductor, 3 Phase plus 200% Neutral, Standard Polarization, 5 foot Straight Length, Continuous Access, Painted RAL 1001, Factory Black Tape






## ELBOW SECTIONS

### Product Description

Elbows are used for making a 90 degree in a busway run. Horizontal elbows are available. Specify external or internal elbow according to the orientation of the busbars in the busway sections to be connected. Elbow sections are connected to adjacent busway sections using an installation tool and joint kit that includes a housing coupler and bus connector (ordered separately). This handles both the mechanical and electrical connection between a straight section and elbow section of busway.


### Weight

5.6 lbs

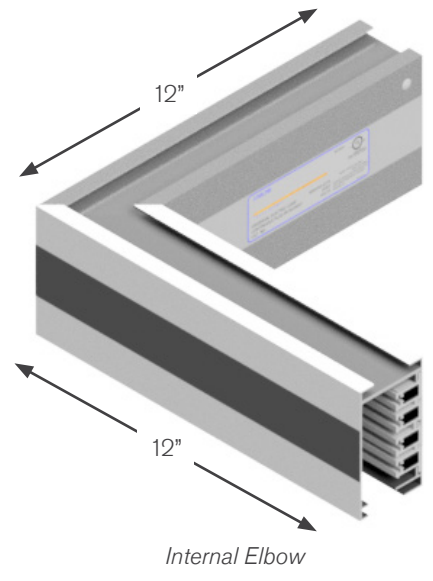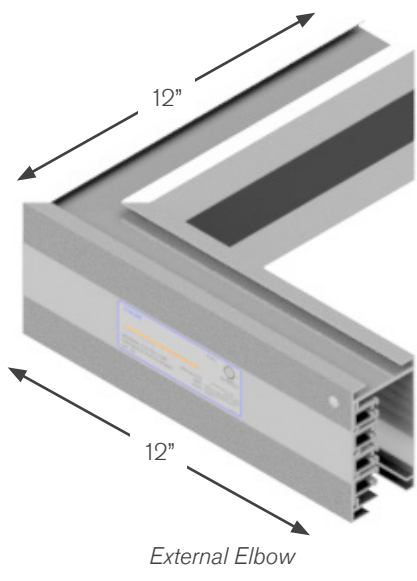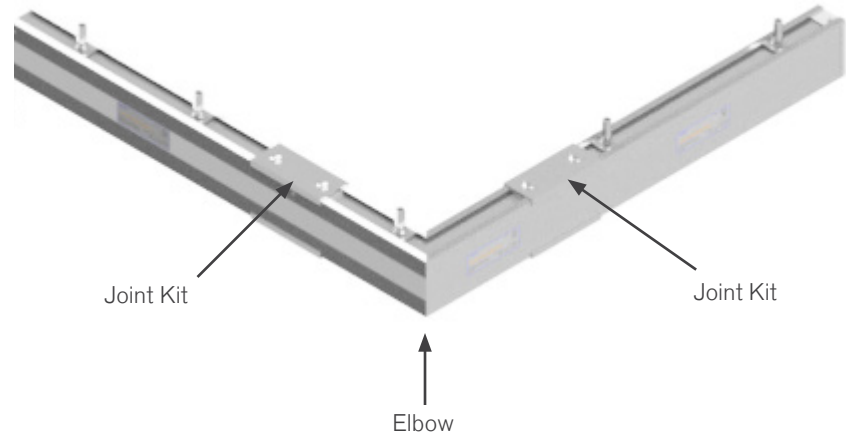

▲ = Polarizing Strip

## ELBOW SECTIONS: PRODUCT NUMBERS

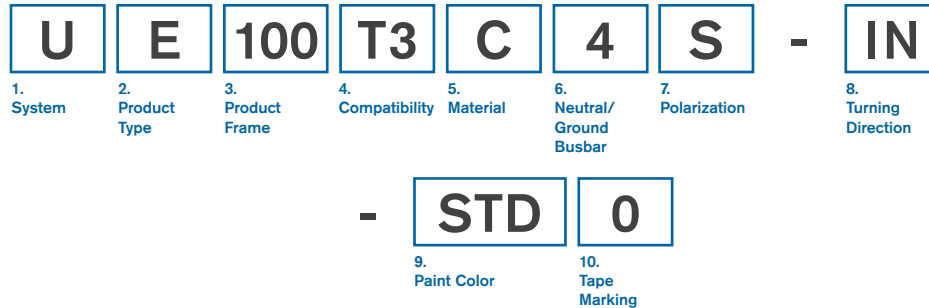

<b>1. System</b> <i>(standard of measure)</i>			
<b>U</b>	US		
<b>2. Product Type</b> <i>(section component)</i>			
<b>E</b>	Elbow Section		
<b>3. Product Frame</b> <i>(maximum amperage)</i>			
<b>100</b>	100 amps		
<b>4. Compatibility</b> <i>(frame compatibility)</i>			
<b>T3</b>	T3 System		
<b>5. Material</b> <i>(busbar material)</i>			
<b>C</b>	Copper		
<b>6. Neutral/Ground Busbar</b> <i>(size of neutral busbar and/or ground)</i>			
<b>4</b>	3 Phase plus Neutral	<b>G</b>	3 Phase plus Neutral plus Internal Ground Conductor
<b>N</b>	3 Phase plus 200% Neutral	<b>F</b>	3 Phase plus 200% Neutral plus Internal Ground Conductor
<b>7. Polarization</b> <i>(orientation of section for mating purposes)</i>			
<b>S</b>	Standard		

<b>8. Turning Direction</b> <i>(direction of section polarizing stripe)</i>			
<b>IN</b>	Internal	<b>EX</b>	External
<b>HN</b>	Seismic Internal	<b>GX</b>	Seismic External

<b>9. Paint Color</b> <i>(allows painting of the busway housing)</i>			
<b>STD</b>	Factory Mill Finish	<b>RED</b>	Paint Factory Red
<b>BLK</b>	Paint Factory Black	<b>BLU</b>	Paint Factory Blue
<b>WHT</b>	Paint Factory White	<b>**RAL (please see page 3.34)</b>	

<b>10. Tape Marking</b> <i>(colored tape on both sides of busway housing)</i>			
<b>0</b>	No Tape Marking	<b>7</b>	Tape Factory Blue
<b>3</b>	Tape Factory Black	<b>8</b>	Tape Factory Green
<b>4</b>	Tape Factory White	<b>9</b>	Tape Factory Yellow
<b>6</b>	Tape Factory Red		

### EXAMPLES

**UE100T3C4S-IN-BLK4** = US System, Elbow Section, 100 amps, T3 System, Copper Conductor, 3 Phase plus Neutral, Standard Polarization, Internal Turning Direction, Painted Factory Black, Factory White Tape

**UE100T3CNS-EX-STD0** = US System, Elbow Section, 100 amps, T3 System, Copper Conductor, 3 Phase plus 200% Neutral, Standard Polarization, External Turning Direction, Factory Mill Finish, No Tape Marking





## TEE SECTIONS

### Product Description

Tee sections are used for creating a 90 degree branch leg in a busway run. When laying out a system, specify the correct busbar orientation of the tee. Indicate right or left, external or internal busbars. External tees are preferred. Tee sections are connected to adjacent busway sections using an installation tool and joint kit that includes a housing coupler and bus connector (ordered separately). This handles both the mechanical and electrical connection between a straight section and tee section of busway.


### Weight

8 lbs

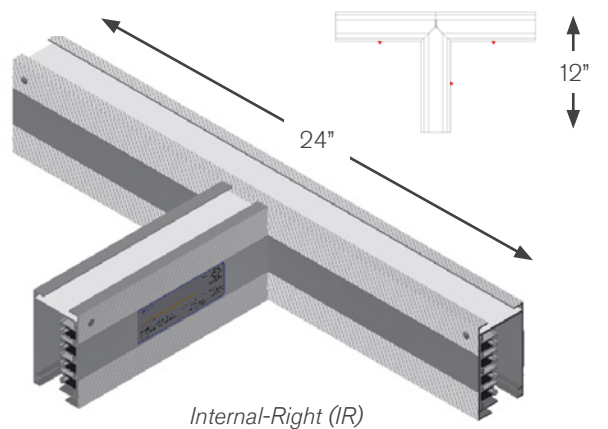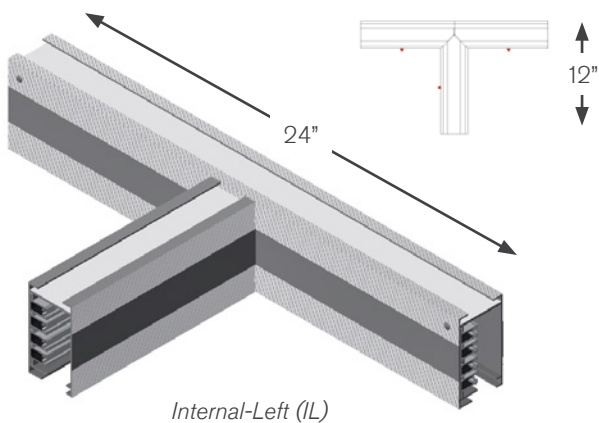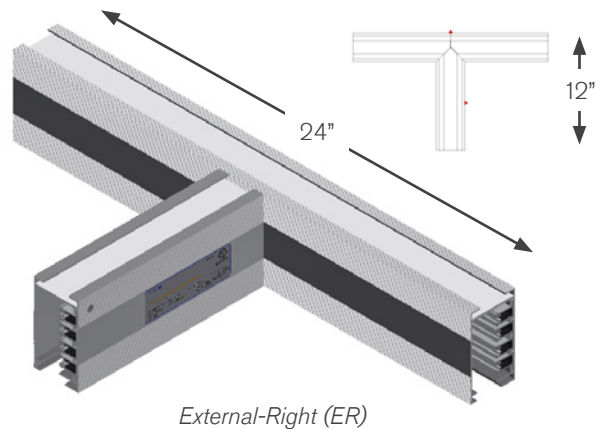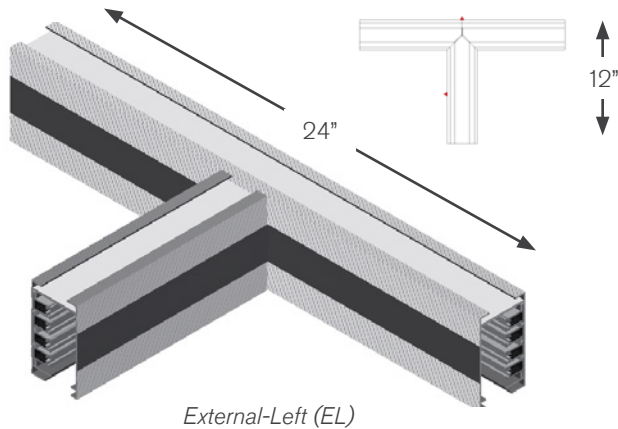

▲ = Polarizing Strip

## TEE SECTIONS: PRODUCT NUMBERS

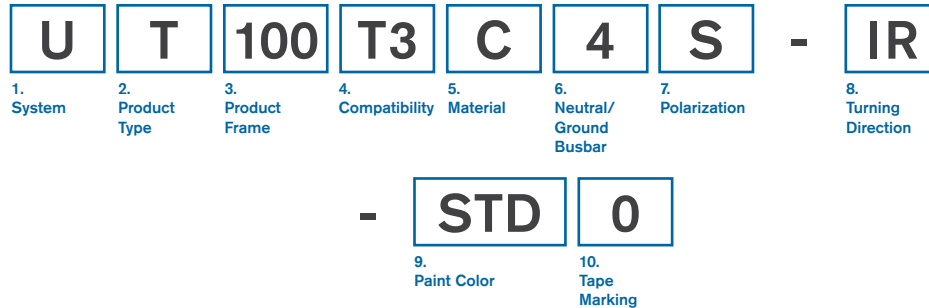

### 1. System (standard of measure)

**U** US

### 2. Product Type (section component)

**T** Tee Section

### 3. Product Frame (maximum amperage)

**100** 100 amps

### 4. Compatibility (frame compatibility)

**T3** T3 System

### 5. Material (busbar material)

**C** Copper

### 6. Neutral/Ground Busbar (size of neutral busbar and/or ground)

<b>4</b>	3 Phase plus Neutral	<b>G</b>	3 Phase plus Neutral plus Internal Ground Conductor
<b>N</b>	3 Phase plus 200% Neutral	<b>F</b>	3 Phase plus 200% Neutral plus Internal Ground Conductor

### 7. Polarization (orientation of section for mating purposes)

**S** Standard

### 8. Turning Direction (direction of section polarizing stripe)

<b>IL</b>	Internal-Left	<b>EL</b>	External-Left
<b>IR</b>	Internal-Right	<b>ER</b>	External-Right
<b>HL</b>	Seismic Internal-Left	<b>GL</b>	Seismic External-Left
<b>HR</b>	Seismic Internal-Right	<b>GR</b>	Seismic External-Right

### 9. Paint Color (allows painting of the busway housing)

<b>STD</b>	Factory Mill Finish	<b>RED</b>	Paint Factory Red
<b>BLK</b>	Paint Factory Black	<b>BLU</b>	Paint Factory Blue
<b>WHT</b>	Paint Factory White	<b>**RAL (please see page 3.34)</b>	

### 10. Tape Marking (colored tape on both sides of busway housing)

<b>0</b>	No Tape Marking	<b>7</b>	Tape Factory Blue
<b>3</b>	Tape Factory Black	<b>8</b>	Tape Factory Green
<b>4</b>	Tape Factory White	<b>9</b>	Tape Factory Yellow
<b>6</b>	Tape Factory Red		

### EXAMPLES

**UT100T3C4S-IR-REDO** = US System, Tee Section, 100 amps, T3 System, Copper Conductor, 3 Phase plus Neutral, Standard Polarization, Internal-Right Turning Direction, Painted Factory Red, No Tape Marking

**UT100T3CGS-EL-STD0** = US System, Tee Section, 100 amps, T3 System, Copper Conductor, 3 Phase plus Neutral plus Internal Ground Conductor, Standard Polarization, External-Left Turning Direction, Factory Mill Finish, No Tape Marking


## END FEED UNITS

### Product Description

End power feed units connect to the end of the busway. A large size, factory assembled unit consists of a steel junction box, with removable sides, connected to a 12 inch section of busway. The assembly includes connection lugs, a ground lug and shrink tubing for wires up to 300 MCM.

End power feed units are connected to adjacent busway sections using an installation tool and housing coupler set (ordered separately).

Special need power feed units for confined spaces as found in mission critical data centers can also be designed and fabricated requiring minimum quantities.

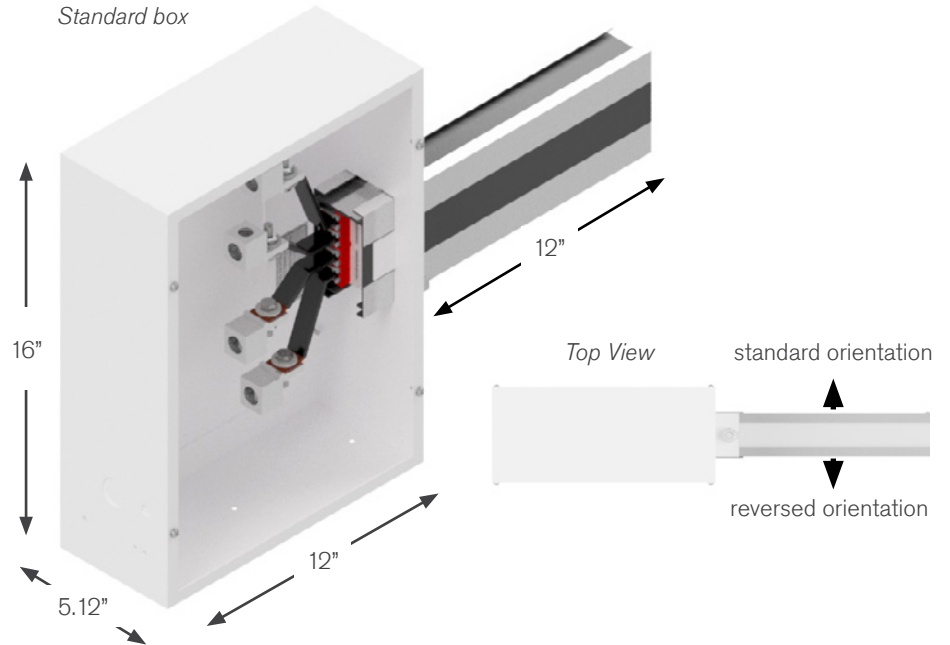

	Boxes		
Lugs	Standard	Large	Fused
Standard	S	L	
Double	D	A	
Bolt			


Box size and Lug options:

Refer to option 8. Lug/Box Options on **page 3.17 End Feed Units: Product Numbers**

\*Isolated or dedicated ground is determined at the feed during installation. For further details about Dedicated Ground vs. Isolated Ground, please reference our tech brief on [downloads. starlinepower.com/starline/](https://www.starlinepower.com/downloads/starline/)

Infrared (IR) Window options:

Refer to option 10. Accessories Package on **page 3.17 End Feed Units: Product Numbers**

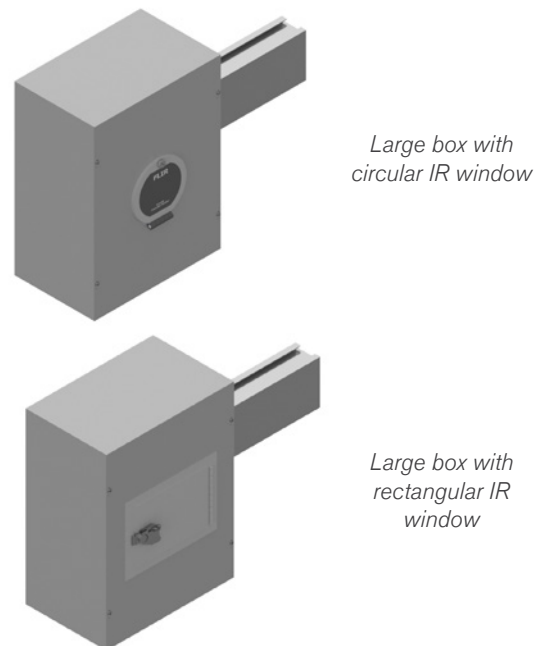




## END FEED UNITS: METERING

### Product Description


Standard end power feed units connect to the end of the busway. A factory assembled unit consists of a steel junction box, with removable sides, connected to a 12 inch section of busway. The assembly includes connection lugs, a ground lug, and shrink tubing for wires up to 300 MCM.

Integral CPM installed in the end feed provides power monitoring and alarm capabilities. The M40 models are for AC busway, while the M60 models are for DC busway. Nuisance tripping may be avoided using the current information to protect against overloading phases. The monitors also assist in the continuous challenge to balance the three phase loads. An automated email will be sent at 80% of full load as a warning to the user. This level may be changed in the field using the integrated webpage.

*M41D CPM with 4.3 inch display and Wi-Fi on a 30° angled display*

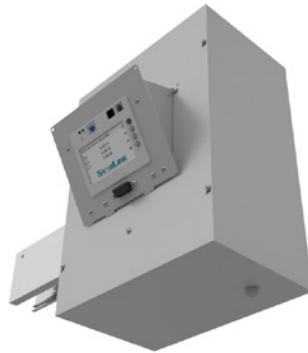

*M41D CPM with 4.3 inch display and Wi-Fi*

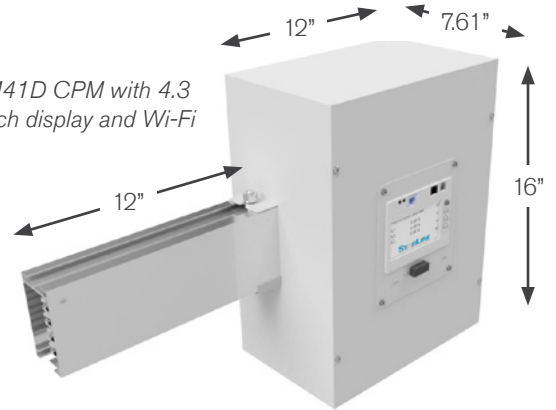

### AC End Feed Meter Options:

- M41** WiFi,  $\leq 415V$  Y,  $\leq 240V$   $\Delta$
  - M43** No WiFi,  $\leq 415V$  Y,  $\leq 240V$   $\Delta$
  - M45** WiFi, 600V Y, 347V  $\Delta$
  - M47** No WiFi, 600V Y, 347V  $\Delta$
- Y = wye,  $\Delta$  = delta


### DC End Feed Meter Options:

- M61** Single Eth./WiFi, single phase, 120VDC - 300VDC or split phase 120VDC (+/-60VDC) to 380V(+/-190VDC) OR 48VDC
- M63** Single Eth./No WiFi, single phase, 120VDC - 300VDC or split phase 120VDC (+/-60VDC) to 380V(+/-190VDC) OR 48VDC
- M67** Dual Eth., single phase, 120VDC - 300VDC or split phase 120VDC (+/-60VDC) to 380V(+/-190VDC) OR 48VDC
- M69** Dual Eth./Dual Modbus, single phase, 120VDC - 300VDC or split phase 120VDC (+/-60VDC) to 380V(+/-190VDC) OR 48VDC

Box/Lugs Option	1 Meter or Accessory	1 Meter & 1 Accessory (opposite lids)
(S) Standard Box, Standard Lugs		
(L) Large Box, Standard Lugs	X	X
(D) Standard Box, Double Lugs		
(A) Large Box, Double Lugs	X	X

\*Large box with one meter or accessory is 7.62" deep, and large box with one meter and accessory (on opposite lids) extends the depth to 10.12".

A meter and accessory can not be on the same lid.

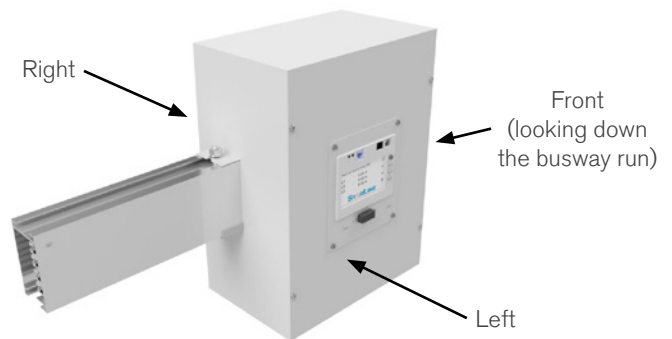


\*The above arrows show how to determine your meter location on an end feed (Refer to option 9. Meter Location on **page 3.17** End Feed Units: Product Numbers)


## END FEED UNITS: ACCESSORIES

### Temperature Monitor


Temperature sensor technology is now available with the Starline Critical Monitor (CPM) for End Feeds. This innovative technology is a first of its kind; making the monitoring and viewing of temperature data instantaneous.



Wired nodes are installed in the busway end feed, which measure the temperature of each mechanical or compression lug.



Each node communicates the temperature back to the Starline CPM. Both power and temperature information will now display on the meter's LCD screen.




Temperature data also automatically transfer to the CPM's integral webpage—placing timely data at the end users fingertips.

(Refer to option 17. M40 Options on **page 3.18**  
End Feed Units: Product Numbers)

### Angled Meter Lid

The angled meter End Feed lid is an accessory that delivers the flexibility to change the viewing angle for Display Meters in an End Feed.

This enclosure allows for the meter to be mounted flush to the End Feed lid or presented in an extended position at 30° from vertical. This presents a more comfortable and easier viewing angle when looking up at an End Feed unit to read the LCD screen.


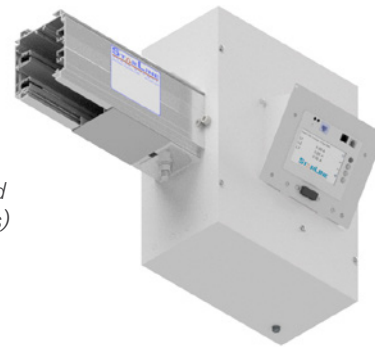


(Refer to option 10.  
Accessories Package on **page 3.17** End Feed  
Units: Product Numbers)

### IR Windows


IR windows added to End Feeds offer:

- Enhanced electrical safety
- Increased compliance to NFPA 70E / CSA Z462
- Reduced PPE
- Closed-door infrared inspections
- Stable and consistent transmission over product life
- Largest field of view of any IR window
- Supports visual and infrared imaging for any IR camera

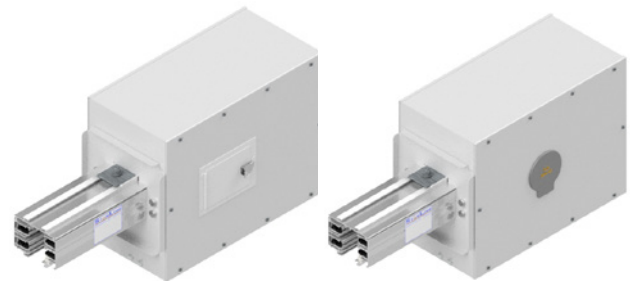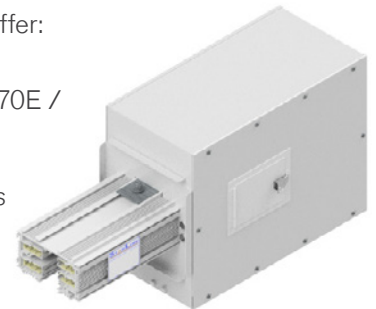

(Refer to option 10. Accessories Package on **page 3.17** End  
Feed Units: Product Numbers)

## END FEED UNITS: PRODUCT NUMBERS

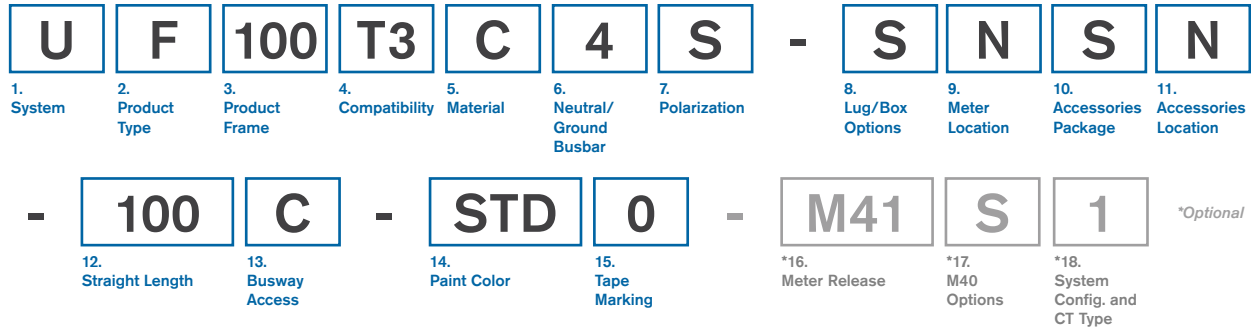

**1. System** (*standard of measure*)  
**U** US

**2. Product Type** (*section component*)  
**F** End Feed

**3. Product Frame** (*maximum amperage*)  
**100** 100 amps

**4. Compatibility** (*frame compatibility*)  
**T3** T3 System

**5. Material** (*busbar material*)  
**C** Copper

**6. Neutral/Ground Busbar** (*size of neutral busbar and/or ground*)

<b>4</b>	3 Phase plus Neutral	<b>G</b>	3 Phase plus Neutral plus Internal Ground Conductor
<b>N</b>	3 Phase plus 200% Neutral	<b>F</b>	3 Phase plus 200% Neutral plus Internal Ground Conductor

**7. Polarization** (*orientation of section for mating purposes*)

<b>S</b> Standard	<b>R</b> Reversed
-------------------	-------------------

**8. Lug/Box Options** (*standard/double/bolt lugs and box size*)

<b>S</b> Standard lugs, Standard box	<b>D</b> Double lugs, Standard box
<b>L</b> Standard lugs, Large box	<b>A</b> Double lugs, Large box

**9. Meter Location** (*from the terminal, side with removable lid*)

<b>R</b> Right	<b>L</b> Left
<b>N</b> None (N/A)	

**10. Accessories Package** (*optional accessories for feed units*)

<b>S</b> Standard	<b>R</b> IR Window - Rectangular
<b>C</b> IR Window - Circular	<b>A</b> Angled Meter Lid
<b>T</b> IR (rect.) + Angled Lid	<b>L</b> IR (circ.) + Angled Lid
<b>O</b> Seismic Mounting Holes	<b>D</b> Seismic with IR Window Circular
<b>Q</b> Seismic with IR Window Rectangular	

**11. Accessories Location** (*from the terminal, side with accessory*)

<b>N</b> None (N/A)	<b>R</b> Right
<b>L</b> Left	<b>F</b> Front ( <i>consult the factory</i> )

**12. Straight Length** (*length of section*)  
**0100** 1 foot *(For other lengths, consult the factory)*

**13. Busway Access**  
**C** Continuous

**14. Paint Color** (*allows painting of the busway housing*)


<b>STD</b> Factory Mill Finish	<b>RED</b> Paint Factory Red
<b>BLK</b> Paint Factory Black	<b>BLU</b> Paint Factory Blue
<b>WHT</b> Paint Factory White	<b>**RAL (please see page 3.34)</b>

**15. Tape Marking** (*colored tape on both sides of busway housing*)

<b>0</b> No Tape Marking	<b>7</b> Tape Factory Blue
<b>3</b> Tape Factory Black	<b>8</b> Tape Factory Green
<b>4</b> Tape Factory White	<b>9</b> Tape Factory Yellow
<b>6</b> Tape Factory Red	

**EXAMPLE**  
**UF100T3C4R-LNSN-0100C-STD0** = US System, End Feed, 100 amps, T3 System, Copper Conductor, 3 Phase plus Neutral, Reversed Polarization, Standard Lugs, Large Box, No Meter Location, Standard Accessory Package, No Accessory Location- 1 foot Straight Length, Continuous Busway Access- Factory Mill Finish, No Tape Marking

## END FEED METERING: PRODUCT NUMBERS

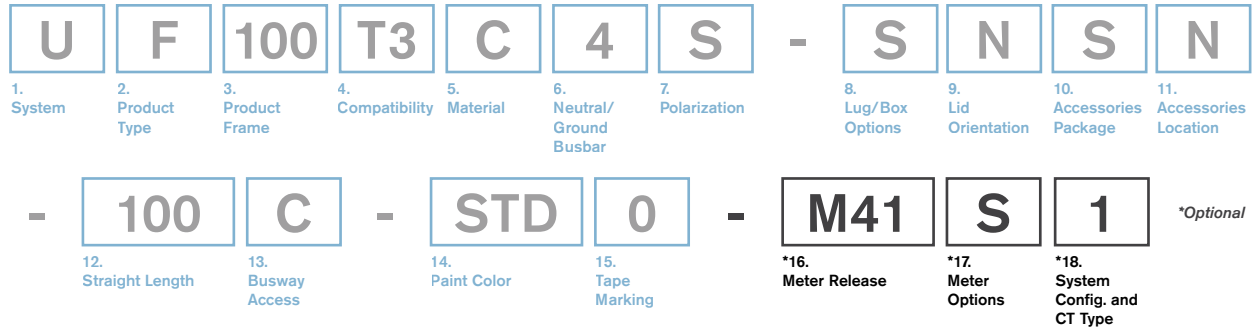

<b>*16. Meter Release (M40 AC)</b>			
<b>M41</b>	WiFi, ≤415V Y, ≤240V Δ		
<b>M43</b>	No WiFi, ≤415V Y, ≤240V Δ		
<b>M45</b>	WiFi, 600V Y, 347V Δ		
<b>M47</b>	No WiFi, 600V Y, 347V Δ		
<b>*16. Meter Release (M60 DC)</b>			
<b>M61</b>	Single Eth./WiFi, single phase, VDC		
<b>M63</b>	Single Eth./No WiFi, single phase, VDC		
<b>M67</b>	Dual Eth., single phase, VDC		
<b>M69</b>	Dual Eth./Dual Modbus, single phase, VDC		
<b>*17. Meter Options (M40 AC)</b>			
<b>S</b>	Standard (M60s also)	<b>F</b>	Featured (D+A)
<b>D</b>	Display (M60s also)	<b>E</b>	Enhanced (N+A)
<b>N</b>	(Measured) Neutral	<b>P</b>	Professional (D+N)
<b>A</b>	Audible Alarm	<b>U</b>	Ultimate (D+N+A)
<b>B</b>	Temperature Monitor	<b>W</b>	(B+D+N)
<b>V</b>	(B+N)	<b>1</b>	(B+D+A)
<b>C</b>	(B+D)	<b>2</b>	(B+N+A)
<b>M</b>	(B+A)	<b>3</b>	(B+D+N+A)

<b>*17. Meter Options (M60 DC)</b>			
<b>S</b>	Standard (High Voltage)	<b>P</b>	Standard (48 VDC)
<b>D</b>	Display (High Voltage)	<b>Q</b>	Display (48 VDC)
<i>M60 Meters support: High Voltage: 120 to 300VDC/Split Phase 120VDC (+/-60) to 380VDC (+/-180) OR Low Voltage: 48VDC</i>			

<b>*18. System Configuration and CT Type (M40 AC)</b>			
<b>1</b>	LLD - Standard, Milivolt	<b>K</b>	LLD - SC, 5A
<b>2</b>	LLY - Standard, Milivolt	<b>L</b>	LLY - SC, 5A
<b>3</b>	LNY - Standard, Milivolt	<b>M</b>	LNY - SC, 5A
<i>line-line or line-neutral and wye or delta systems</i>			

<b>*18. System Configuration and CT Type (M60 DC)</b>	
<b>1</b>	Circuit 1 Only, Solid Core
<b>2</b>	Circuit 2 Only, Solid Core
<b>3</b>	Both Circuits, Solid Core

**EXAMPLE**  
**UF100T3C4R-LNSN-0100C-STD0-M41D1** = US System, End Feed, 100 amps, T3 System, Copper Conductor, 3 Phase plus Neutral, Reversed Polarization, Standard Lugs, Large Box, No Meter Location, Standard Accessory Package, No Accessory Location, 1 foot Straight Length, Continuous Busway Access, Factory Mill Finish, No Tape Marking, M41 Meter, with Display, LLD - Standard, Milivolt

## ABOVE FEED UNITS


### Product Description

The above feed power unit comes as a completely pre-wired steel box to the top of a 30 inch section of busway. A connection lug is located inside the box for field termination of supply power cable up to 1/0. This unit is then connected to the end of an adjoining busway section using an installation tool and set of housing couplers (ordered separately).


### Weight

16.5 lbs

\*Isolated or dedicated ground is determined at the feed during installation. For further details about Dedicated Ground vs. Isolated Ground, please reference our tech brief on [downloads](#). [starlinepower.com/starline/](http://starlinepower.com/starline/)

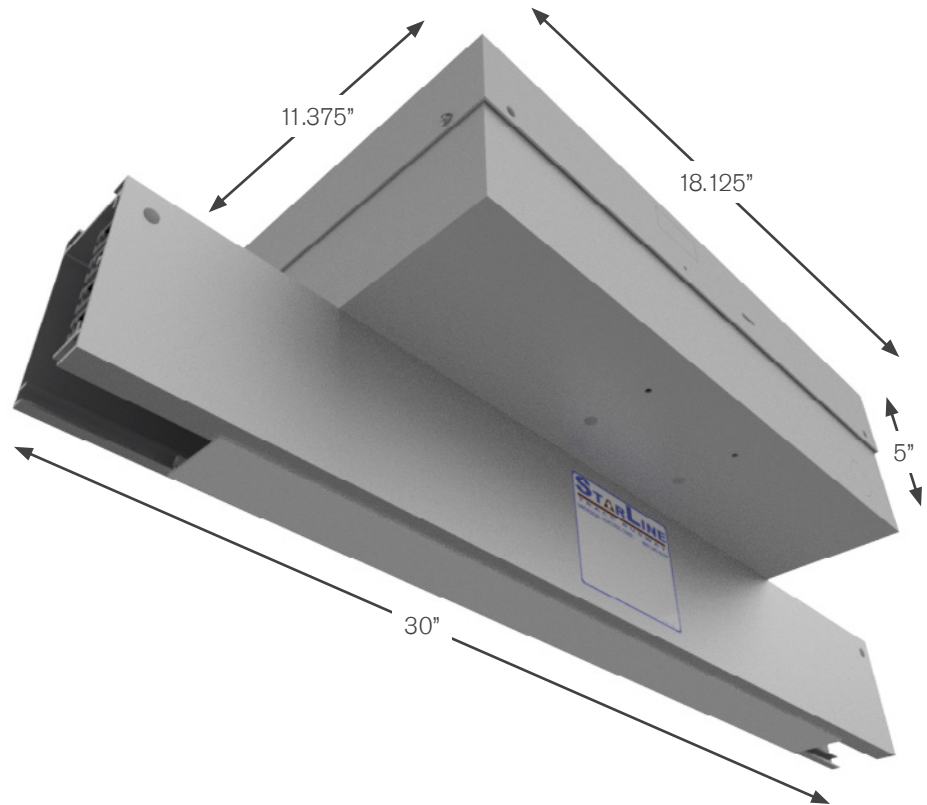

## ABOVE FEED UNITS: PRODUCT NUMBERS

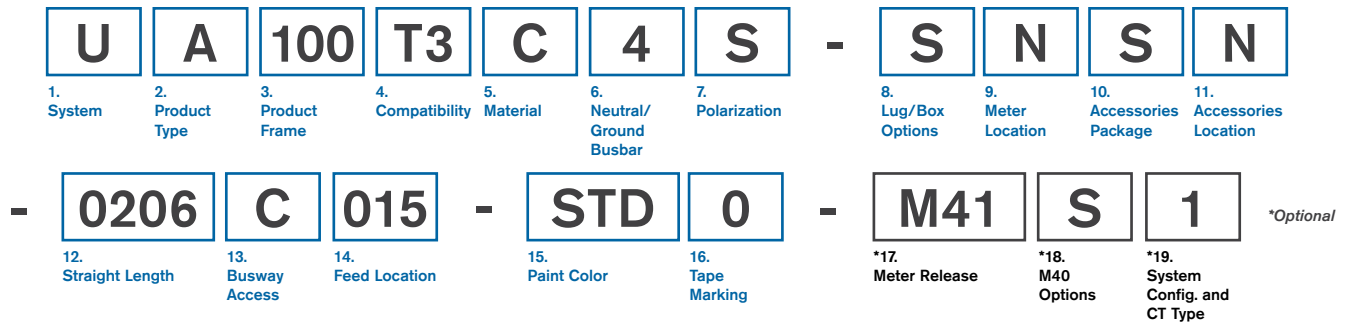

<b>1. System</b> ( <i>standard of measure</i> )	<b>U</b> US				
<b>2. Product Type</b> ( <i>section component</i> )	<b>A</b> Above Feed				
<b>3. Product Frame</b> ( <i>maximum amperage</i> )	<b>100</b> 100 amps				
<b>4. Compatibility</b> ( <i>frame compatibility</i> )	<b>T3</b> T3 System				
<b>5. Material</b> ( <i>busbar material</i> )	<b>C</b> Copper				
<b>6. Neutral/Ground Busbar</b> ( <i>size of neutral busbar and/or ground</i> )	<table border="0"> <tr> <td><b>4</b> 3 Phase plus Neutral</td> <td><b>G</b> 3 Phase plus Neutral plus Internal Ground Conductor</td> </tr> <tr> <td><b>N</b> 3 Phase plus 200% Neutral</td> <td><b>F</b> 3 Phase plus 200% Neutral plus Internal Ground Conductor</td> </tr> </table>	<b>4</b> 3 Phase plus Neutral	<b>G</b> 3 Phase plus Neutral plus Internal Ground Conductor	<b>N</b> 3 Phase plus 200% Neutral	<b>F</b> 3 Phase plus 200% Neutral plus Internal Ground Conductor
<b>4</b> 3 Phase plus Neutral	<b>G</b> 3 Phase plus Neutral plus Internal Ground Conductor				
<b>N</b> 3 Phase plus 200% Neutral	<b>F</b> 3 Phase plus 200% Neutral plus Internal Ground Conductor				
<b>7. Polarization</b> ( <i>orientation of section for mating purposes</i> )	<b>S</b> Standard <b>R</b> Reversed				
<b>8. Lug/Box Options</b> ( <i>standard/double/bolt lugs and box size</i> )	<b>S</b> Standard lugs, Standard box <b>L</b> Standard lugs, Large box				
<b>9. Meter Location</b> ( <i>from the terminal, side with removable lid</i> )	<b>R</b> Right <b>L</b> Left <b>N</b> None (N/A)				
<b>10. Accessories Package</b> ( <i>optional accessories for feed units</i> )	<b>S</b> Standard				
<b>11. Accessories Location</b> ( <i>from the terminal, side with removable lid</i> )	<b>N</b> None (N/A)				
<b>12. Straight Length</b> ( <i>length of section</i> )	<b>0206</b> 2 feet, 6 inches				



<b>13. Busway Access</b> ( <i>how plugs access the busway</i> )	<b>C</b> Continuous								
<b>14. Feed Location</b> ( <i>location of the center of the top feed</i> )	<b>015</b> 15 inches <i>(For other lengths, consult the factory)</i>								
<b>15. Paint Color</b> ( <i>allows painting of the busway housing</i> )	<table border="0"> <tr> <td><b>STD</b> Factory Mill Finish</td> <td><b>RED</b> Paint Factory Red</td> </tr> <tr> <td><b>BLK</b> Paint Factory Black</td> <td><b>BLU</b> Paint Factory Blue</td> </tr> <tr> <td><b>WHT</b> Paint Factory White</td> <td><b>**RAL (please see page 3.34)</b></td> </tr> </table>	<b>STD</b> Factory Mill Finish	<b>RED</b> Paint Factory Red	<b>BLK</b> Paint Factory Black	<b>BLU</b> Paint Factory Blue	<b>WHT</b> Paint Factory White	<b>**RAL (please see page 3.34)</b>		
<b>STD</b> Factory Mill Finish	<b>RED</b> Paint Factory Red								
<b>BLK</b> Paint Factory Black	<b>BLU</b> Paint Factory Blue								
<b>WHT</b> Paint Factory White	<b>**RAL (please see page 3.34)</b>								
<b>16. Tape Marking</b> ( <i>colored tape on both sides of busway housing</i> )	<table border="0"> <tr> <td><b>0</b> No Tape Marking</td> <td><b>7</b> Tape Factory Blue</td> </tr> <tr> <td><b>3</b> Tape Factory Black</td> <td><b>8</b> Tape Factory Green</td> </tr> <tr> <td><b>4</b> Tape Factory White</td> <td><b>9</b> Tape Factory Yellow</td> </tr> <tr> <td><b>6</b> Tape Factory Red</td> <td></td> </tr> </table>	<b>0</b> No Tape Marking	<b>7</b> Tape Factory Blue	<b>3</b> Tape Factory Black	<b>8</b> Tape Factory Green	<b>4</b> Tape Factory White	<b>9</b> Tape Factory Yellow	<b>6</b> Tape Factory Red	
<b>0</b> No Tape Marking	<b>7</b> Tape Factory Blue								
<b>3</b> Tape Factory Black	<b>8</b> Tape Factory Green								
<b>4</b> Tape Factory White	<b>9</b> Tape Factory Yellow								
<b>6</b> Tape Factory Red									
<b>*17. Meter Release</b> ( <i>M40 Series Meters</i> )	<table border="0"> <tr> <td><b>M41</b> WiFi, ≤415V Y, ≤240V Δ</td> </tr> <tr> <td><b>M43</b> No WiFi, ≤415V Y, ≤240V Δ</td> </tr> <tr> <td><b>M45</b> WiFi, 600V Y, 347V Δ</td> </tr> <tr> <td><b>M47</b> No WiFi, 600V Y, 347V Δ</td> </tr> </table>	<b>M41</b> WiFi, ≤415V Y, ≤240V Δ	<b>M43</b> No WiFi, ≤415V Y, ≤240V Δ	<b>M45</b> WiFi, 600V Y, 347V Δ	<b>M47</b> No WiFi, 600V Y, 347V Δ				
<b>M41</b> WiFi, ≤415V Y, ≤240V Δ									
<b>M43</b> No WiFi, ≤415V Y, ≤240V Δ									
<b>M45</b> WiFi, 600V Y, 347V Δ									
<b>M47</b> No WiFi, 600V Y, 347V Δ									
<b>*18. M40 Options</b> ( <i>choose from a 4.1" display, measured neutral, audible alarm and/or a temperature monitor</i> )	<table border="0"> <tr> <td><b>S</b> Standard (M60s also)</td> <td><b>F</b> Featured (D+A)</td> </tr> <tr> <td><b>D</b> Display (M60s also)</td> <td><b>E</b> Enhanced (N+A)</td> </tr> <tr> <td><b>N</b> (Measured) Neutral</td> <td><b>P</b> Professional (D+N)</td> </tr> <tr> <td><b>A</b> Audible Alarm</td> <td><b>U</b> Ultimate (D+N+A)</td> </tr> </table>	<b>S</b> Standard (M60s also)	<b>F</b> Featured (D+A)	<b>D</b> Display (M60s also)	<b>E</b> Enhanced (N+A)	<b>N</b> (Measured) Neutral	<b>P</b> Professional (D+N)	<b>A</b> Audible Alarm	<b>U</b> Ultimate (D+N+A)
<b>S</b> Standard (M60s also)	<b>F</b> Featured (D+A)								
<b>D</b> Display (M60s also)	<b>E</b> Enhanced (N+A)								
<b>N</b> (Measured) Neutral	<b>P</b> Professional (D+N)								
<b>A</b> Audible Alarm	<b>U</b> Ultimate (D+N+A)								
<b>*19. System Configuration and CT Type</b> ( <i>line-line or line-neutral and wye or delta systems</i> )	<table border="0"> <tr> <td><b>1</b> LLD - Standard, Milivolt</td> <td><b>K</b> LLD - SC, 5A</td> </tr> <tr> <td><b>2</b> LLY - Standard, Milivolt</td> <td><b>L</b> LLY - SC, 5A</td> </tr> <tr> <td><b>3</b> LNY - Standard, Milivolt</td> <td><b>M</b> LNY - SC, 5A</td> </tr> </table>	<b>1</b> LLD - Standard, Milivolt	<b>K</b> LLD - SC, 5A	<b>2</b> LLY - Standard, Milivolt	<b>L</b> LLY - SC, 5A	<b>3</b> LNY - Standard, Milivolt	<b>M</b> LNY - SC, 5A		
<b>1</b> LLD - Standard, Milivolt	<b>K</b> LLD - SC, 5A								
<b>2</b> LLY - Standard, Milivolt	<b>L</b> LLY - SC, 5A								
<b>3</b> LNY - Standard, Milivolt	<b>M</b> LNY - SC, 5A								

**EXAMPLE**  
**UA100T3CFS-LNSN-0206C015-STD0** = US System, Above Feed, 100 amps, T3 System, Copper Conductor, 3 Phase plus 200% Neutral plus Internal Ground Conductor, Standard Polarization, Standard Lugs, Large Box, No Lid Orientation, Standard Accessory Package, No Accessory Location- 2 foot 6 inch Straight Length, Continuous Busway Access, 15 inch Feed Location, Factory Mill Finish, No Tape Marking

## STRAIGHT SECTIONS

### Product Description

Track Busway straight section consists of an extruded aluminum shell with channel type solid copper busbars contained in a full length insulator mounted on one side of the interior wall. Each straight has an open access slot over its entire length for the insertion of turn-n-lock plug-in units. Housing configuration is 4 pole, 600 Volt. Busway joint connections are made using a joint kit, which includes a housing coupler and bus connector. An installation tool is used to insert the bus connector in between the busbar channels of the two sections for a solid spring-tempered electrical connection. A housing coupler is then used to make a solid mechanical connection.

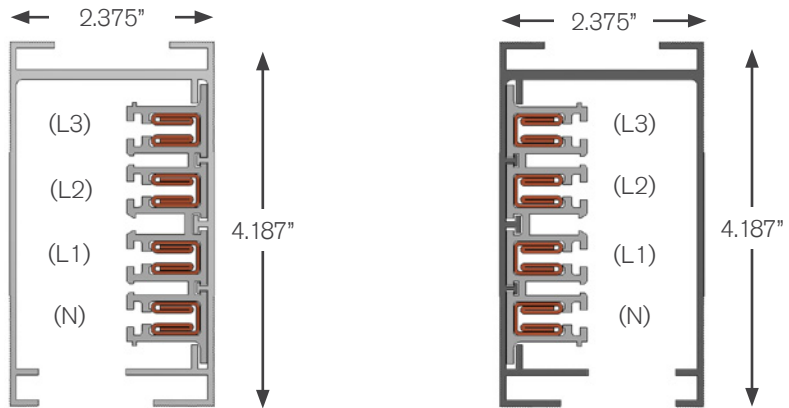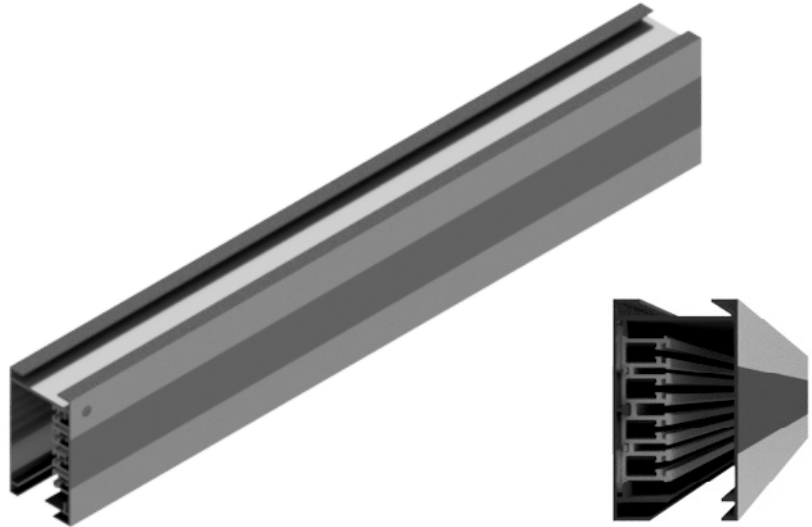

### Material

Extruded Aluminum

### Ratings

100% Ground Path  
225 Amp, 600 Volt

### Length











5 ft, 10 ft, 20 ft; or custom lengths between 2 - 20 ft


### Voltage Drop

Distributed load  
Single Phase 1V per 28 ft (.8PF)  
Three Phase 1V per 48 ft (.8PF)


### Weight

10 ft 4 pole: 33 lbs

	US		Metric	
L1 or Phase A		black		brown
L2 or Phase B		red		black
L3 or Phase C		blue		gray
L3 or Phase C		white		blue
Neutral Ground		green/ black		green/ yellow

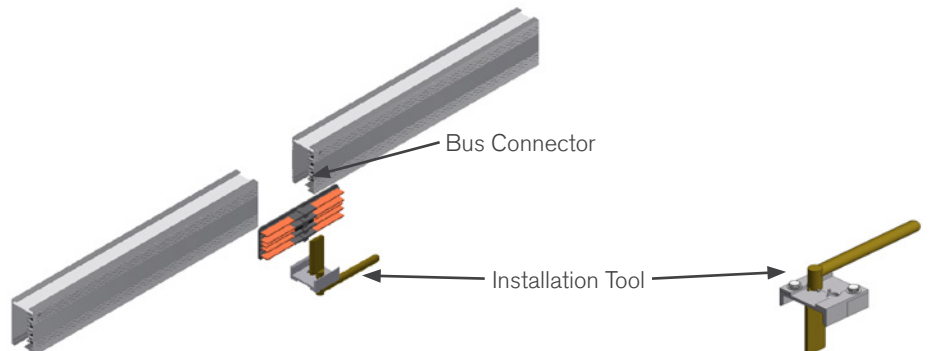

## STRAIGHT SECTIONS: PRODUCT NUMBERS

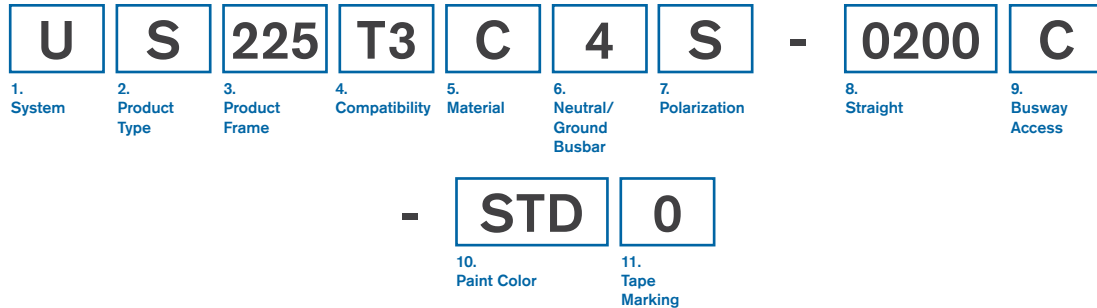

### 1. System (standard of measure)

**U** US

### 2. Product Type (section component)

**S** Straight Section

### 3. Product Frame (maximum amperage)

**225** 225 amps

### 4. Compatibility (frame compatibility)

**T3** T3 System

### 5. Material (busbar material)

**C** Copper

### 6. Neutral/Ground Busbar (size of neutral busbar and/or ground)

**4** 3 Phase plus Neutral

### 7. Polarization (orientation of section for mating purposes)

**S** Standard

### 8. Straight Length (length of section)

**XXYY** XX=feet, YY=inches

### 9. Busway Access (how plugs access the busway)

**C** Continuous

### 10. Paint Color (allows painting of the busway housing)

**STD** Factory Mill Finish

**RED** Paint Factory Red

**BLK** Paint Factory Black

**BLU** Paint Factory Blue

**WHT** Paint Factory White

**\*\*RAL (please see page 3.34)**

### 11. Tape Marking (colored tape on both sides of busway housing)

**0** No Tape Marking

**7** Tape Factory Blue

**3** Tape Factory Black

**8** Tape Factory Green

**4** Tape Factory White

**9** Tape Factory Yellow

**6** Tape Factory Red

### EXAMPLES

**US225T3C4S-0206C-STD6** = US System, Straight Section, 225 amps, T3 System, Copper Conductor, 3 Phase plus Neutral, Standard Polarization, 2 foot 6 inch Straight Length, Continuous Busway Access, Factory Mill Finish, Factory Red Tape

**US225T3C4S-1000C-P013** = US System, Straight Section, 225 amps, T3 System, Copper Conductor, 3 Phase plus Neutral, Standard Polarization, 10 foot Straight Length, Continuous Busway Access, Painted RAL 1001, Factory Black Tape







## ELBOW SECTIONS

### Product Description

Elbows are used for making a 90 degree in a busway run. Horizontal elbows are available. Specify external or internal elbow according to the orientation of the busbars in the busway sections to be connected. Elbow sections are connected to adjacent busway sections using an installation tool and joint kit that includes a housing coupler and bus connector (ordered separately). This handles both the mechanical and electrical connection between a straight section and elbow section of busway.


### Weight

5.5 lbs

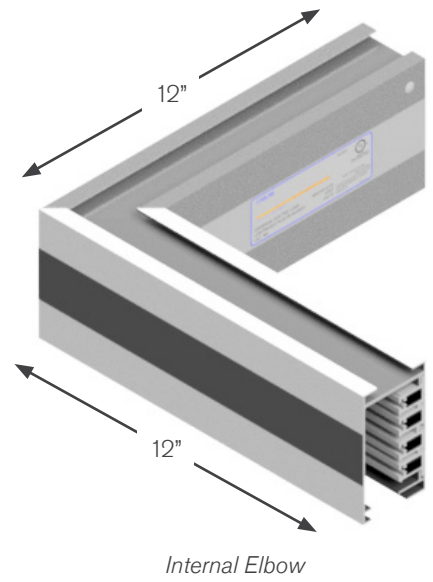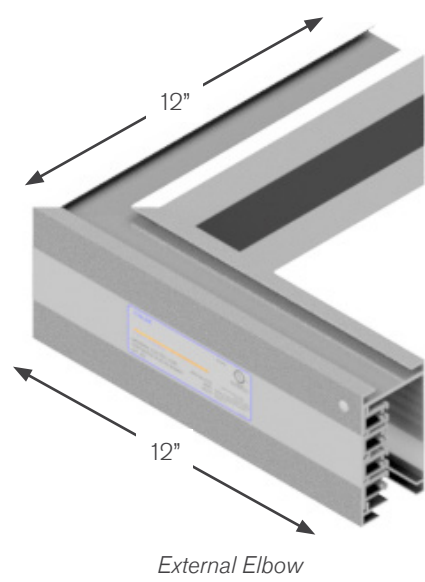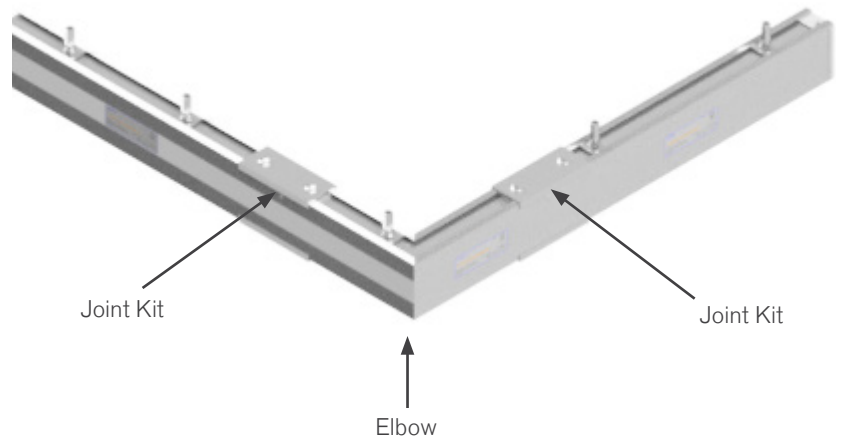

▲ = Polarizing Strip

## ELBOW SECTIONS: PRODUCT NUMBERS

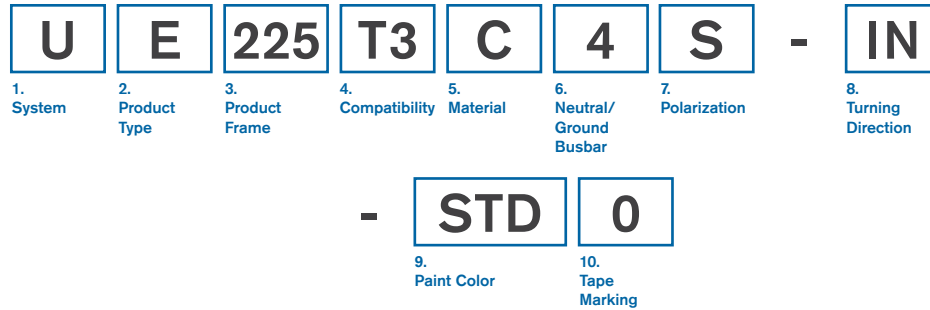

### 1. System (standard of measure)

**U** US

### 2. Product Type (section component)

**E** Elbow Section

### 3. Product Frame (maximum amperage)

**225** 225 amps

### 4. Compatibility (frame compatibility)

**T3** T3 System

### 5. Material (busbar material)

**C** Copper

### 6. Neutral/Ground Busbar (size of neutral busbar and/or ground)

**4** 3 Phase plus Neutral

### 7. Polarization (orientation of section for mating purposes)

**S** Standard

### 8. Turning Direction (direction of section polarizing stripe)

<b>IN</b> Internal	<b>EX</b> External
<b>HN</b> Seismic Internal	<b>GX</b> Seismic External

### 9. Paint Color (allows painting of the busway housing)

<b>STD</b> Factory Mill Finish	<b>RED</b> Paint Factory Red
<b>BLK</b> Paint Factory Black	<b>BLU</b> Paint Factory Blue
<b>WHT</b> Paint Factory White	<b>**RAL (please see page 3.34)</b>

### 10. Tape Marking (colored tape on both sides of busway housing)

<b>0</b> No Tape Marking	<b>7</b> Tape Factory Blue
<b>3</b> Tape Factory Black	<b>8</b> Tape Factory Green
<b>4</b> Tape Factory White	<b>9</b> Tape Factory Yellow
<b>6</b> Tape Factory Red	

### EXAMPLES

**UE225T3C4S-EX-WHT0** = US System, Elbow Section, 225 amps, T3 System, Copper Conductor, 3 Phase plus Neutral, Standard Polarization, External Turning Direction, Painted Factory White, No Tape Marking

**UE225T3C4S-IN-PH40** = US System, Elbow Section, 225 amps, T3 System, Copper Conductor, 3 Phase plus Neutral, Standard Polarization, Internal Turning Direction, Painted RAL 5014, No Tape Marking





## TEE SECTIONS

### Product Description

Tee sections are used for creating a 90 degree branch leg in a busway run. When laying out a system, specify the correct busbar orientation of the tee. Indicate right or left, external or internal busbars. External tees are preferred. Tee sections are connected to adjacent busway sections using an installation tool and joint kit that includes a housing coupler and bus connector (ordered separately). This handles both the mechanical and electrical connection between a housing section and tee section of busway.


### Weight

9.2 lbs

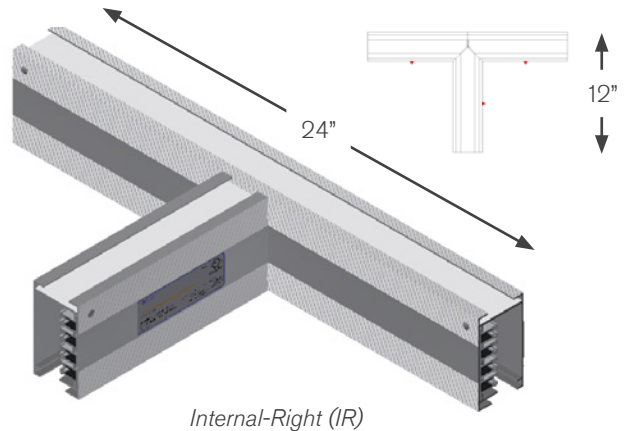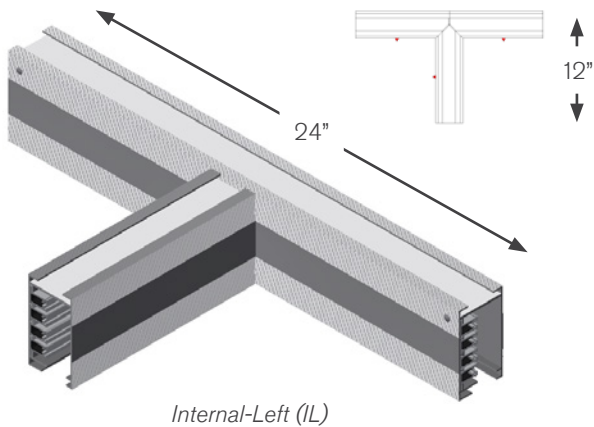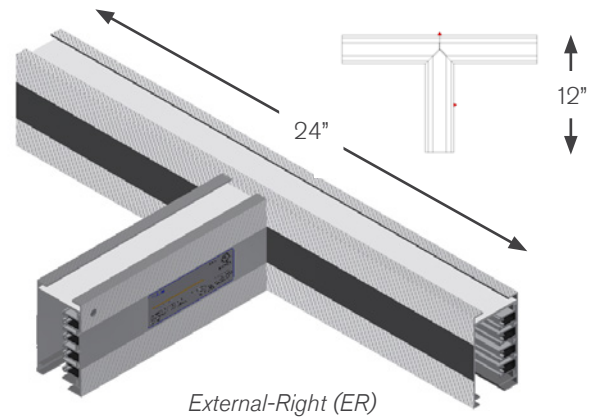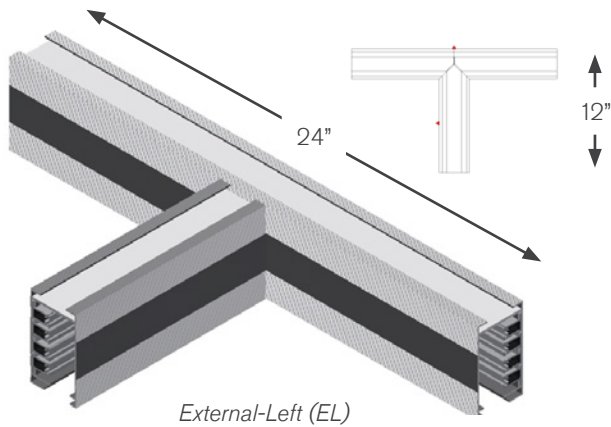

▲ = Polarizing Stripe

## TEE SECTIONS: PRODUCT NUMBERS

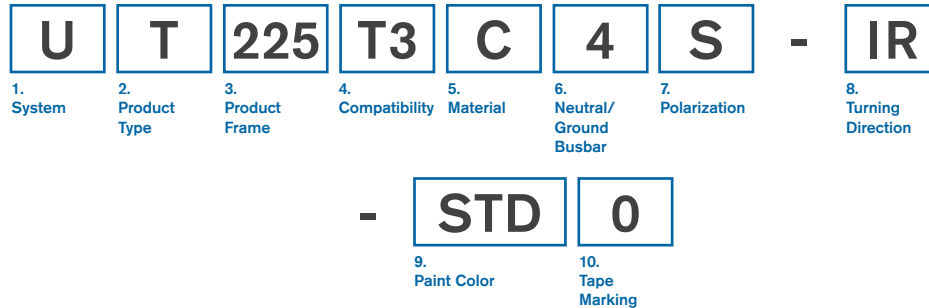

### 1. System (standard of measure)

**U** US

### 2. Product Type (section component)

**T** Tee Section

### 3. Product Frame (maximum amperage)

**225** 225 amps

### 4. Compatibility (frame compatibility)

**T3** T3 System

### 5. Material (busbar material)

**C** Copper

### 6. Neutral/Ground Busbar (size of neutral busbar and/or ground)

**4** 3 Phase plus Neutral

### 7. Polarization (orientation of section for mating purposes)

**S** Standard

### 8. Turning Direction (direction of section polarizing stripe)

<b>IL</b> Internal-Left	<b>EL</b> External-Left
<b>IR</b> Internal-Right	<b>ER</b> External-Right
<b>HL</b> Seismic Internal-Left	<b>GL</b> Seismic External-Left
<b>HR</b> Seismic Internal-Right	<b>GR</b> Seismic External-Right

### 9. Paint Color (allows painting of the busway housing)

<b>STD</b> Factory Mill Finish	<b>RED</b> Paint Factory Red
<b>BLK</b> Paint Factory Black	<b>BLU</b> Paint Factory Blue
<b>WHT</b> Paint Factory White	<b>**RAL (please see page 3.34)</b>

### 10. Tape Marking (colored tape on both sides of busway housing)

<b>0</b> No Tape Marking	<b>7</b> Tape Factory Blue
<b>3</b> Tape Factory Black	<b>8</b> Tape Factory Green
<b>4</b> Tape Factory White	<b>9</b> Tape Factory Yellow
<b>6</b> Tape Factory Red	

### EXAMPLES

**UT225T3C4S-IR-BLU0** = US System, Tee Section, 225 amps, T3 System, Copper Conductor, 3 Phase plus Neutral, Standard Polarization, Internal-Right Turning Direction, Painted Factory Blue, No Tape Marking

**UT225T3C4S-EL-STD0** = US System, Tee Section, 225 amps, T3 System, Copper Conductor, 3 Phase plus Neutral, Standard Polarization, External-Left Turning Direction, Factory Mill Finish, No Tape Marking


## END FEED UNITS

### Product Description

Standard end power feed units connect to the end of the busway. Factory assembled unit consists of a steel junction box, with removable side, connected to a 12 inch section of busway. The assembly includes connection lugs, a ground lug and shrink tubing for wires up to 300 MCM.

End power feed units are connected to adjacent busway sections using an installation tool and joint kit (ordered separately).

Special need power feed units for confined spaces as found in mission critical data centers can also be designed and fabricated requiring minimum quantities.

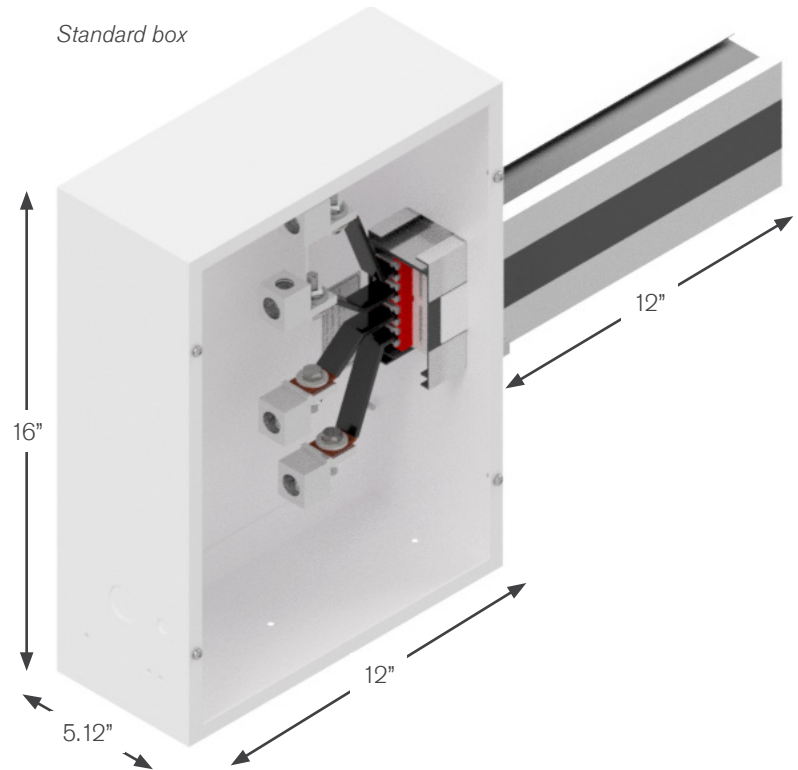


	Boxes		
Lugs	Standard	Large	Fused
Standard	S	L	
Double	D	A	
Bolt			

Box size and Lug options:


Refer to option 8. Lug/Box Options on **page 3.30** End Feed Units: Product Numbers

Top View

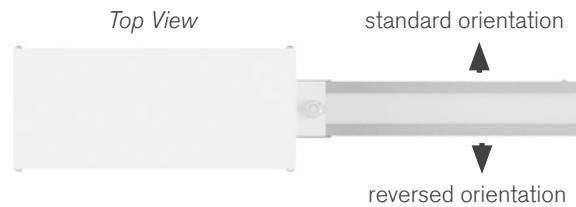


Infrared (IR) Window options

Refer to option 10. Accessories Package on **page 3.30** End Feed Units: Product Numbers

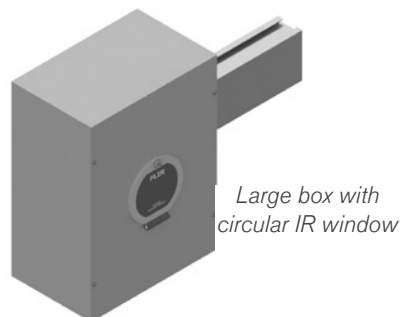

Large box with circular IR window

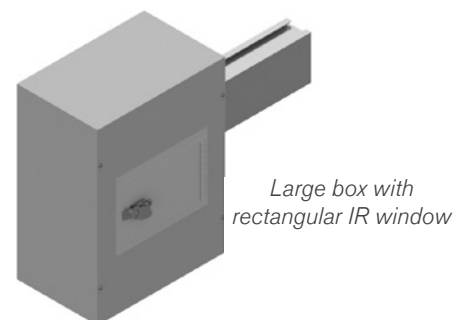

Large box with rectangular IR window


## END FEED UNITS: METERING

### Product Description


Standard end power feed units connect to the end of the busway. A factory assembled unit consists of a steel junction box, with removable sides, connected to a 12 inch section of busway. The assembly includes connection lugs, a ground lug, and shrink tubing for wires up to 300 MCM.

Integral CPM installed in the end feed provides power monitoring and alarm capabilities. The M40 models are for AC busway, while the M60 models are for DC busway. Nuisance tripping may be avoided using the current information to protect against overloading phases. The monitors also assist in the continuous challenge to balance the three phase loads. An automated email will be sent at 80% of full load as a warning to the user. This level may be changed in the field using the integrated webpage.

M41D CPM with 4.3 inch display and Wi-Fi on a 30° angled display

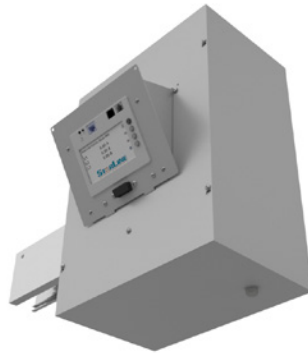

M41D CPM with 4.3 inch display and Wi-Fi

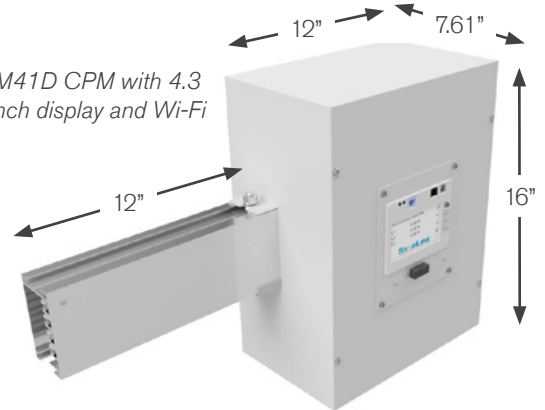

### AC End Feed Meter Options:

- M41** WiFi,  $\leq 415V$  Y,  $\leq 240V$   $\Delta$
  - M43** No WiFi,  $\leq 415V$  Y,  $\leq 240V$   $\Delta$
  - M45** WiFi, 600V Y, 347V  $\Delta$
  - M47** No WiFi, 600V Y, 347V  $\Delta$
- Y = wye,  $\Delta$  = delta


### DC End Feed Meter Options:

- M61** Single Eth./WiFi, single phase, 120VDC - 300VDC or split phase 120VDC (+/-60VDC) to 380V(+/-190VDC) OR 48VDC
- M63** Single Eth./No WiFi, single phase, 120VDC - 300VDC or split phase 120VDC (+/-60VDC) to 380V(+/-190VDC) OR 48VDC
- M67** Dual Eth., single phase, 120VDC - 300VDC or split phase 120VDC (+/-60VDC) to 380V(+/-190VDC) OR 48VDC
- M69** Dual Eth./Dual Modbus, single phase, 120VDC - 300VDC or split phase 120VDC (+/-60VDC) to 380V(+/-190VDC) OR 48VDC

Box/Lugs Option	1 Meter or Accessory	1 Meter & 1 Accessory (opposite lids)
(S) Standard Box, Standard Lugs		
(L) Large Box, Standard Lugs	X	X
(D) Standard Box, Double Lugs		
(A) Large Box, Double Lugs	X	X

\*Large box with one meter or accessory is 7.62" deep, and large box with one meter and accessory (on opposite lids) extends the depth to 10.12".

A meter and accessory can not be on the same lid.

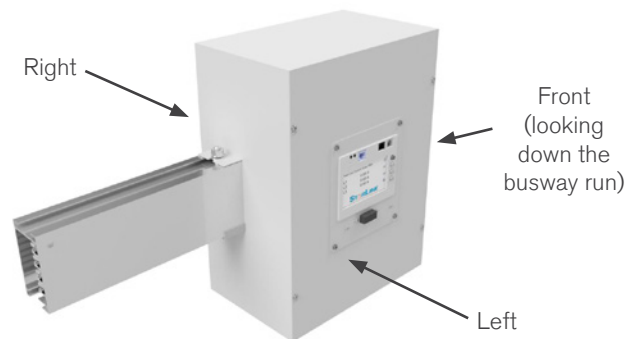


\*The above arrows show how to determine your meter location on an end feed (Refer to option 9. Meter Location on [page 3.30](#) End Feed Units: Product Numbers)


## END FEED UNITS: ACCESSORIES

### Temperature Monitor


Temperature sensor technology is now available with the Starline Critical Monitor (CPM) for End Feeds. This innovative technology is a first of its kind; making the monitoring and viewing of temperature data instantaneous.



Wired nodes are installed in the busway end feed, which measure the temperature of each mechanical or compression lug.



Each node communicates the temperature back to the Starline CPM. Both power and temperature information will now display on the meter's LCD screen.




Temperature data also automatically transfer to the CPM's integral webpage—placing timely data at the end users fingertips.

(Refer to option 17. M40 Options on **page 3.31**  
End Feed Units: Product Numbers)

### Angled Meter Lid

The angled meter End Feed lid is an accessory that delivers the flexibility to change the viewing angle for Display Meters in an End Feed.

This enclosure allows for the meter to be mounted flush to the End Feed lid or presented in an extended position at 30° from vertical. This presents a more comfortable and easier viewing angle when looking up at an End Feed unit to read the LCD screen.


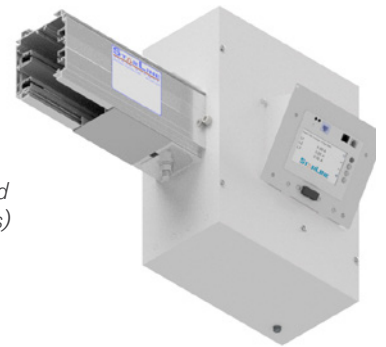


(Refer to option 10.  
Accessories Package on **page 3.30** End Feed  
Units: Product Numbers)

### IR Windows


IR windows added to End Feeds offer:

- Enhanced electrical safety
- Increased compliance to NFPA 70E / CSA Z462
- Reduced PPE
- Closed-door infrared inspections
- Stable and consistent transmission over product life
- Largest field of view of any IR window
- Supports visual and infrared imaging for any IR camera

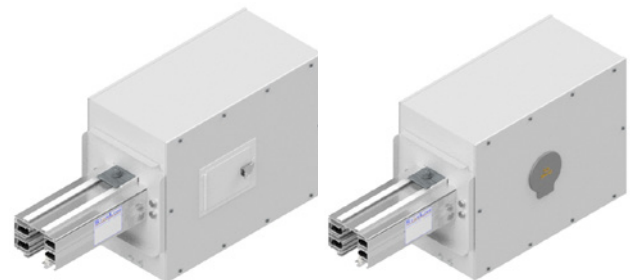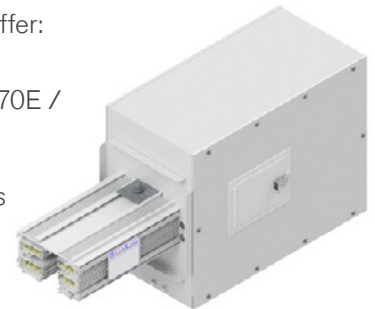

(Refer to option 10. Accessories Package on **page 3.30** End  
Feed Units: Product Numbers)

## END FEED UNITS: PRODUCT NUMBERS

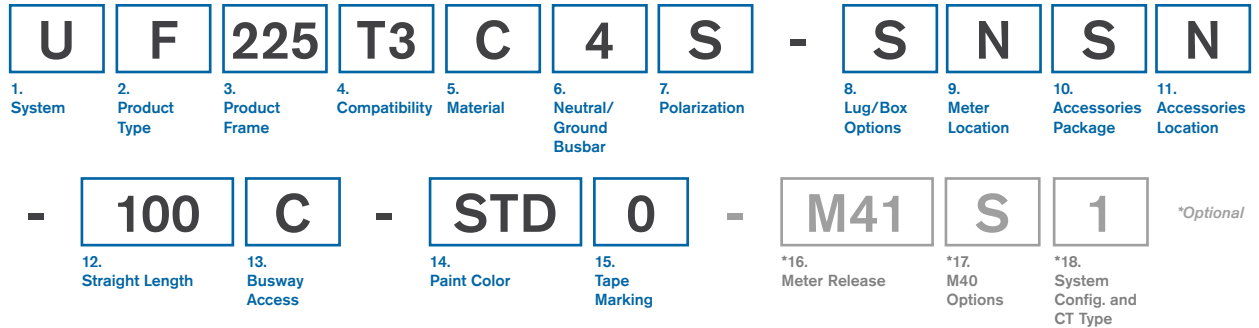

**1. System** (*standard of measure*)  
**U** US

**2. Product Type** (*section component*)  
**F** End Feed

**3. Product Frame** (*maximum amperage*)  
**225** 225 amps

**4. Compatibility** (*frame compatibility*)  
**T3** T3 System

**5. Material** (*busbar material*)  
**C** Copper

**6. Neutral/Ground Busbar** (*size of neutral busbar and/or ground*)  
**4** 3 Phase plus Neutral

**7. Polarization** (*orientation of section for mating purposes*)  
**S** Standard                      **R** Reversed

**8. Lug/Box Options** (*standard/double/bolt lugs and box size*)  
**S** Standard lugs, Standard box    **D** Double lugs, Standard box  
**L** Standard lugs, Large box        **A** Double lugs, Large box

**9. Meter Location** (*from the terminal, side with removable lid*)  
**R** Right                              **L** Left  
**N** None (N/A)

**10. Accessories Package** (*optional accessories for feed units*)

<b>S</b> Standard	<b>R</b> IR Window - Rectangular
<b>C</b> IR window - Circular	<b>A</b> Angled Meter Lid
<b>T</b> IR (rect.) + Angled Lid	<b>L</b> IR (circ.) + Angled Lid
<b>O</b> Seismic Mounting	<b>D</b> Seismic with IR Window - Circular
<b>Q</b> Seismic with IR Window - Rectangular	

**11. Accessories Location** (*from the terminal, side with accessory*)

<b>N</b> None (N/A)	<b>R</b> Right
<b>L</b> Left	<b>F</b> Front ( <i>consult the factory</i> )

**12. Straight Length** (*length of section*)  
**0100** 1 foot                              (*For other lengths, consult the factory*)

**13. Busway Access**  
**C** Continuous

**14. Paint Color** (*allows painting of the busway housing*)

<b>STD</b> Factory Mill Finish	<b>RED</b> Paint Factory Red
<b>BLK</b> Paint Factory Black	<b>BLU</b> Paint Factory Blue
<b>WHT</b> Paint Factory White	<b>**RAL (please see page 3.34)</b>


**15. Tape Marking** (*colored tape on both sides of busway housing*)

<b>0</b> No Tape Marking	<b>7</b> Tape Factory Blue
<b>3</b> Tape Factory Black	<b>8</b> Tape Factory Green
<b>4</b> Tape Factory White	<b>9</b> Tape Factory Yellow
<b>6</b> Tape Factory Red	

**EXAMPLE**  
**UF225T3C4R-DRSN-0100C-BLK0** = US System, End Feed, 225 amps, T3 System, Copper Conductor, 3 Phase plus Neutral, Reversed Polarization, Double Lugs, Standard Box, Right Meter Location, Standard Accessory Package, No Accessory Location, 1 foot Straight Length, Continuous Access, Painted Factory Black, No Tape Marking



## END FEED METERING: PRODUCT NUMBERS

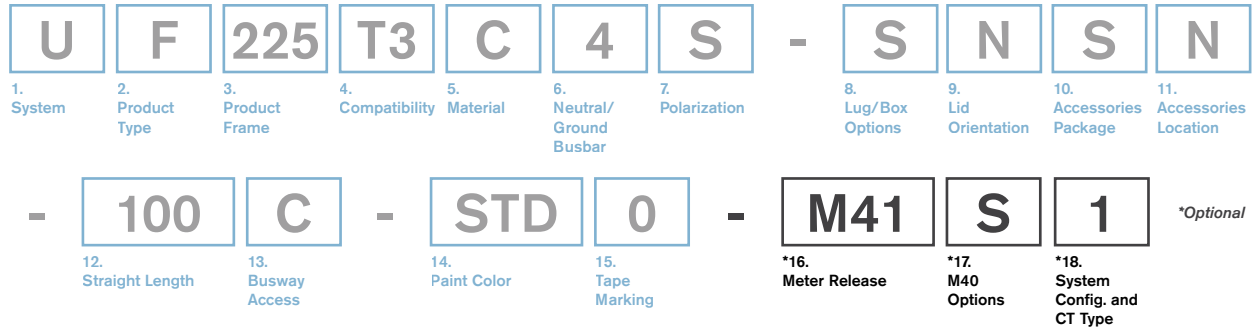

### \*16. Meter Release (M40 AC)

<b>M41</b>	WiFi, ≤415V Y, ≤240V Δ
<b>M43</b>	No WiFi, ≤415V Y, ≤240V Δ
<b>M45</b>	WiFi, 600V Y, 347V Δ
<b>M47</b>	No WiFi, 600V Y, 347V Δ

### \*16. Meter Release (M60 DC)

<b>M61</b>	Single Eth./WiFi, single phase, VDC
<b>M63</b>	Single Eth./No WiFi, single phase, VDC
<b>M67</b>	Dual Eth., single phase, VDC
<b>M69</b>	Dual Eth./Dual Modbus, single phase, VDC

### \*17. Meter Options (M40 AC)

<b>S</b>	Standard (M60s also)	<b>F</b>	Featured (D+A)
<b>D</b>	Display (M60s also)	<b>E</b>	Enhanced (N+A)
<b>N</b>	(Measured) Neutral	<b>P</b>	Professional (D+N)
<b>A</b>	Audible Alarm	<b>U</b>	Ultimate (D+N+A)
<b>B</b>	Temperature Monitor	<b>W</b>	(B+D+N)
<b>V</b>	(B+N)	<b>1</b>	(B+D+A)
<b>C</b>	(B+D)	<b>2</b>	(B+N+A)
<b>M</b>	(B+A)	<b>3</b>	(B+D+N+A)

### \*17. Meter Options (M60 DC)

<b>S</b>	Standard (High Voltage)	<b>P</b>	Standard (48 VDC)
<b>D</b>	Display (High Voltage)	<b>Q</b>	Display (48 VDC)

M60 Meters support: High Voltage: 120 to 300VDC/Split Phase 120VDC (+/-60) to 380VDC (+/-180) OR Low Voltage: 48VDC

### \*18. System Configuration and CT Type (M40 AC)

<b>1</b>	LLD - Standard, Milivolt	<b>K</b>	LLD - SC, 5A
<b>2</b>	LLY - Standard, Milivolt	<b>L</b>	LLY - SC, 5A
<b>3</b>	LNY - Standard, Milivolt	<b>M</b>	LNY - SC, 5A

line-line or line-neutral and wye or delta systems

### \*18. System Configuration and CT Type (M60 DC)

<b>1</b>	Circuit 1 Only, Solid Core
<b>2</b>	Circuit 2 Only, Solid Core
<b>3</b>	Both Circuits, Solid Core

### EXAMPLE

**UF225T3C4R-DRSN-0100C-BLK0-M45D1** = US System, End Feed, 225 amps, T3 System, Copper Conductor, 3 Phase plus Neutral, Reversed Polarization, Double Lugs, Standard Box, Right Meter Location, Standard Accessory Package, No Accessory Location, 1 foot Straight Length, Continuous Access, Painted Factory Black, No Tape Marking, M45 Meter, with Display, LLD - Standard, Milivolt


## ABOVE FEED UNITS

### Product Description

The above feed power unit comes as a completely pre-wired steel box to the top of a 30 inch section of busway. A connection lug is located inside the box for field termination of supply power cable up to 1/0. This unit is then connected to the end of an adjoining busway section using an installation tool and a joint kit (ordered separately).

### Weight

16.5 - 23 lbs

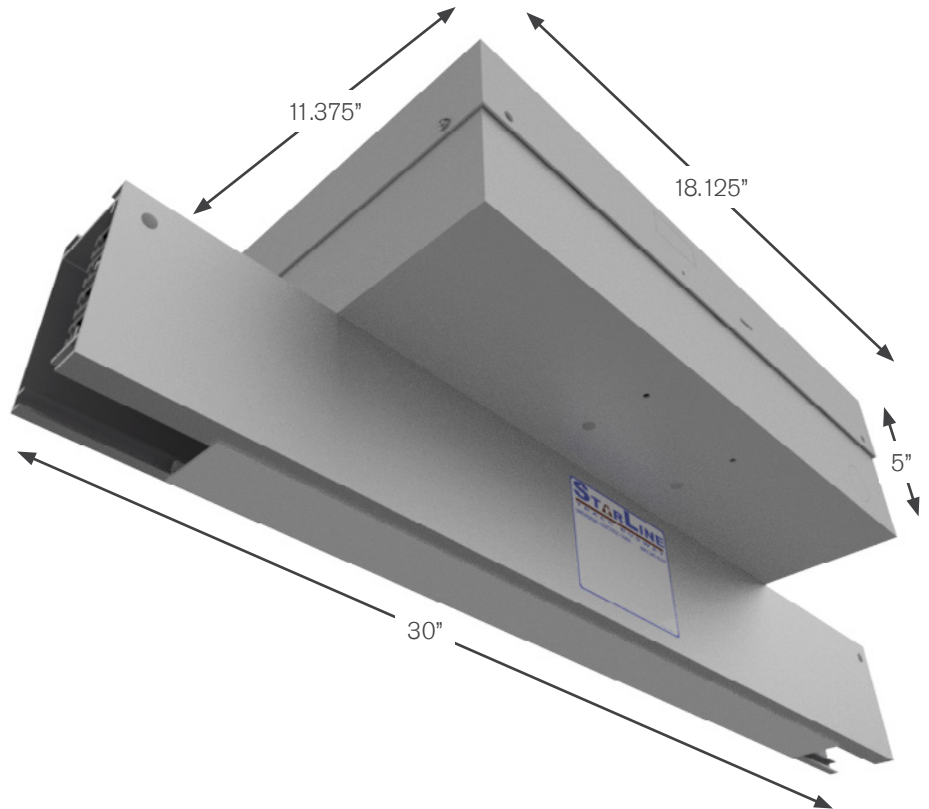

## ABOVE FEED UNITS: PRODUCT NUMBERS



<b>1. System</b> (standard of measure)	<b>U</b> US
<b>2. Product Type</b> (section component)	<b>A</b> Above Feed
<b>3. Product Frame</b> (maximum amperage)	<b>225</b> 225 amps
<b>4. Compatibility</b> (frame compatibility)	<b>T3</b> T3 System
<b>5. Material</b> (busbar material)	<b>C</b> Copper
<b>6. Neutral/Ground Busbar</b> (size of neutral busbar and/or ground)	<b>4</b> 3 Phase plus Neutral
<b>7. Polarization</b> (orientation of section for mating purposes)	<b>S</b> Standard <b>R</b> Reversed
<b>8. Lug/Box Options</b> (standard/double/bolt lugs and box size)	<b>S</b> Standard lugs, Standard box <b>L</b> Standard lugs, Large box
<b>9. Meter Location</b> (from the terminal, side with removable lid)	<b>R</b> Right <b>L</b> Left <b>N</b> None (N/A)
<b>10. Accessories Package</b> (optional accessories for feed units)	<b>S</b> Standard
<b>11. Accessories Location</b> (from the terminal, side with removable lid)	<b>N</b> None (N/A) <b>R</b> Right <b>A</b> Rear <b>L</b> Left <b>T</b> Top <b>F</b> Front
<b>12. Straight Length</b> (length of section)	<b>0206</b> 2 feet, 6 inches
<b>13. Busway Access</b> (how plugs access the busway)	<b>C</b> Continuous

<b>14. Feed Location</b> (location of the center of the top feed)	<b>015</b> 15 inches (For other lengths, consult the factory)
<b>15. Paint Color</b> (allows painting of the busway housing)	<b>STD</b> Factory Mill Finish <b>RED</b> Paint Factory Red <b>BLK</b> Paint Factory Black <b>BLU</b> Paint Factory Blue <b>WHT</b> Paint Factory White <b>**RAL</b> (please see page 3.34)
<b>16. Tape Marking</b> (colored tape on both sides of busway housing)	<b>0</b> No Tape Marking <b>7</b> Tape Factory Blue <b>3</b> Tape Factory Black <b>8</b> Tape Factory Green <b>4</b> Tape Factory White <b>9</b> Tape Factory Yellow <b>6</b> Tape Factory Red
<b>*17. Meter Release</b> (M40 Series Meters)	<b>M41</b> WiFi, ≤415V Y, ≤240V Δ <b>M43</b> No WiFi, ≤415V Y, ≤240V Δ <b>M45</b> WiFi, 600V Y, 347V Δ <b>M47</b> No WiFi, 600V Y, 347V Δ
<b>*18. M40 Options</b> (choose from a 4.1" display, measured neutral, audible alarm and/or a temperature monitor)	<b>S</b> Standard (M60s also) <b>F</b> Featured (D+A) <b>D</b> Display (M60s also) <b>E</b> Enhanced (N+A) <b>N</b> (Measured) Neutral <b>P</b> Professional (D+N) <b>A</b> Audible Alarm <b>U</b> Ultimate (D+N+A)
<b>*19. System Configuration and CT Type</b> (line-line or line-neutral and wye or delta systems)	<b>1</b> LLD - Standard, Milivolt <b>K</b> LLD - SC, 5A <b>2</b> LLY - Standard, Milivolt <b>L</b> LLY - SC, 5A <b>3</b> LNY - Standard, Milivolt <b>M</b> LNY - SC, 5A

### EXAMPLE

**UA225T3C4R-SNSN-0206C015-STD0** = US System, Above Feed, 225 amps, T3 System, Copper Conductor, 3 Phase plus Neutral, Reversed Polarization, Standard Lugs, Standard Box, No Meter Location, Standard Accessory Package, No Accessory Location, 2 foot 6 inch Straight Length, Continuous Access, 15 inch Feed Location, Factory Mill Finish, No Tape Marking

## RAL COLORS

### 1st Character

P	Paint
---	-------

### 2nd Character

0	100
1	101
2	102
3	103
4	200
5	201
A	300
B	301
C	302
D	303
E	400
F	401
G	500
H	501
J	502
K	600
L	601
M	602
N	603
P	700
Q	701
R	702
S	703
T	704
U	800
V	801
W	802
X	900
Y	901
Z	902

### 3rd Character

0	0
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9

### 4th Character

0	0
---	---

**Example:**


P B 2 0 = Paint RAL 3012

## ACCESSORIES: SUPPORT HARDWARE

### Threaded Rod

For mounting to 3/8" - 16 threaded rod. Can be inserted anywhere along the top full-access slot of busway. Hanger support is required every 10 feet maximum.


Part Number  
UBRH-1  
Available in plain zinc  
or black (-BLK)  
Weight  
.3 lb

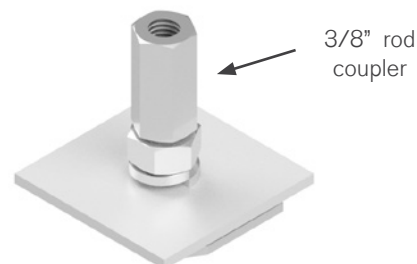

### Seismic Threaded Rod

For mounting to 3/8" - 16 threaded rod. Can be inserted anywhere along the top full-access slot of busway, and includes a seismic brace. Hangers are required every 5 feet maximum for seismic support.


Part Number  
UBRH-3  
Available in plain zinc  
or black (-BLK)  
Weight  
.3 lb



### Standard

For mounting to strut or other flat surfaces. Twist-in design allows inserting anywhere along the top full-access slot on the busway. Hanger support is required every 10 feet maximum.

Part Number  
UBH-1  
Available in plain zinc  
or black (-BLK)  
Weight  
.2 lb

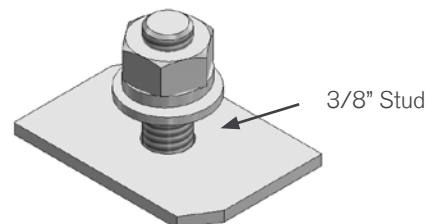

### Weight Hook

Can be used as a hanger to suspend the busway from chains or cables. Can also be used to hang loads up to 100 pounds under the busway, such as light fixtures, tools and balancers.

Part Number  
SWHRT3  
Available in plain zinc  
Weight  
.2 lb




### Recessed Suspended Ceilings

For hanging busway into a recessed ceiling.

*\*Hanger bolt must be ordered separately*

Part Number  
SRMT3-1  
Available in plain zinc

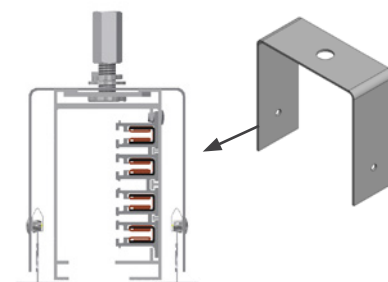

## ACCESSORIES: SUPPORT HARDWARE

### Raised Access Floor


For mounting the busway vertically (with access slot facing down) for under floor applications.

*Part Number*

URFBT3-1

\*UBH-1 comes included

*Available in plain zinc  
or black (-BLK)*

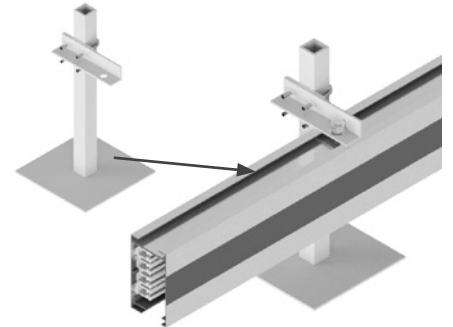

### Raised Mounting Bracket


For mounting the busway horizontally (with access slot facing to the side) for under floor applications. Pedestal not included.

*Part Number*

URFBT3-2

*Available in plain zinc  
or black (-BLK)*

*Weight*  
.2 lb

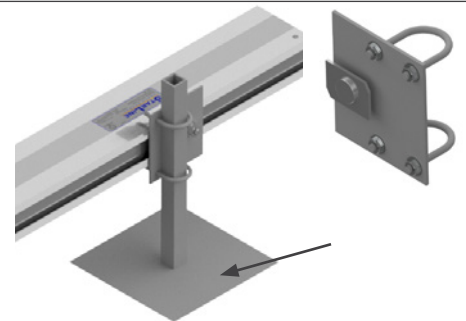

### Side Mount Brackets


Mounted to vertical supports. Vertical supports not included, only bracket.

*Part Number*

UBSS-1

*Available in plain zinc  
or black (-BLK)*

*Weight*  
.2 lb

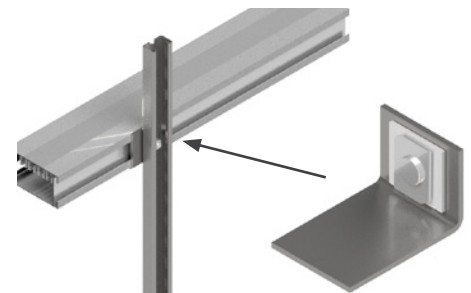


Mounted to overhead supports

*Part Number*

UBH-T3-SIDE

*Available in plain zinc  
or black (-BLK)*

*Weight*  
1.31 lb

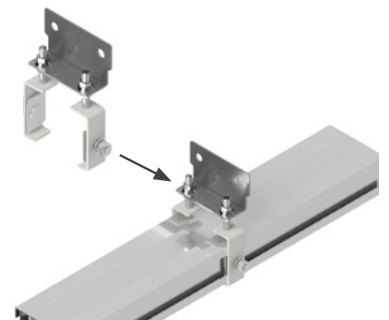

### Wall Mount Bracket

For mounting to walls, using standard hangers. Hanger support is required everything 3 meters maximum.

*Part Number*

WMBT5-9



## ACCESSORIES: SUPPORT HARDWARE

### Universal Server Cabinet Mounting Brackets

The Universal Server Cabinet Mounting Brackets are designed with generous 3/8 inch wide through slots to mount directly onto virtually any server cabinet. These accessories quickly and easily provide a flexible busway mounting solution on top of server cabinets, eliminating the need for threaded rod and strut support from the ceiling.

The brackets are adjustable in height, can be ordered in virtually any color, and can be positioned at any depth on the server cabinet. Moreover, they can accommodate up to (2) runs of busway. Hanger Bolt Included – UBH-1

### Material


Galvanneal Steel

### Height

17.68 in Min

23.75 in Max

Maximum Spacing: Every 10 ft per run

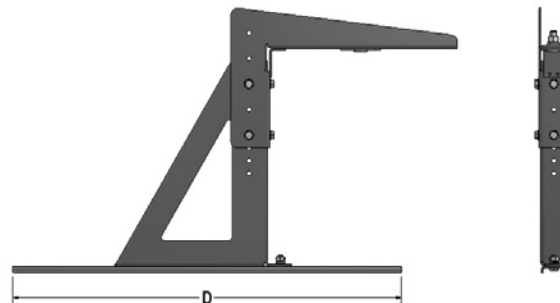

	<b>C: Color (1, 3, 4, 6, 7)</b>
1-	Anodized Silver
3-	Black
4-	White
6-	Red
7-	Blue

*\*consult factory for custom colors*

<i>Part Number</i>	
U.S: UUSCMB-(X)-(D)-(C)	
X = System (T3)	
D = Depth (30", 36", 42", 48" or custom length)	
C = Color (1, 3, 4, 6, 7)	
<b>EXAMPLES</b>	
<b><u>UUSCMB-T3-36-4</u></b> = US, Universal Server Cabinet Mounting Bracket, T3 System, 36 inch Depth, White	
<b><u>UUSCMB-T3-42-3</u></b> = US, Universal Server Cabinet Mounting Bracket, T3 System, 42 inch Depth, Black	

## ACCESSORIES: CONNECTION HARDWARE

### Joint Kit


For the connection of adjacent busway sections. One kit is required at each joint. Each kit is comprised of a housing coupler pair and bus connector set.

*Bus Connector:* copper blades secured to an insulating mounting plate. This makes the electrical connection between sections.

*Housing Couplers:* one pair that consists of a 2-bolt coupler for the top of busway, and a 4-bolt coupler for the bottom of busway.

*\*Installation tool is required (page 3.39)*


- Part Number*
- SJK100T3 (for 100 amp systems)
  - SJK100T3G (for 100 amp systems with ground)
  - SJK100T3N (for 100 amp systems with 200% neutral)
  - SJK100T3F (for 100 amp systems with ground and 200% neutral)
  - SJK225T3 (for 225 amp systems)
- Available in all standard and RAL colors*

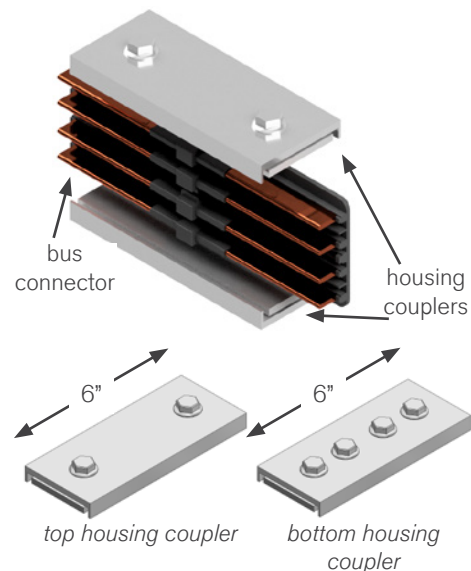

### End Cap

For covering the end of 100T3 or 225T3 busway.

- Part Number*
- SECT3
- Available in all standard and RAL colors*
- Weight: .2 lb*




### Optional Closure Strip

Snaps into bottom access slot of busway housing. The optional closure strip is normally shipped in 20 feet lengths and can be field cut to fit exact desired length.

The Closure Strip is offered in both non-conductive plastic material and aluminum.


- Part Number*
- SCST3-1
- Aluminum closure strip:*  
SCST3-1-AL
- Plastic Closure Strip available in black & white*
- Aluminum Closure Strip available in all standard colors*
- Maximum Cut Length: 20 ft*

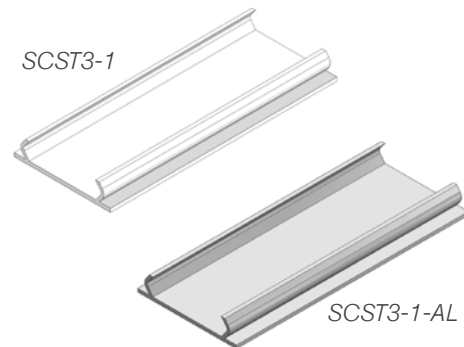

### End Feed Seismic Brace

For seismic applications, the End Feed Seismic Brace bolts on to the end feed, to be used with threaded rod for gravity hanger.

- Part Number*
- SEFB-SIL

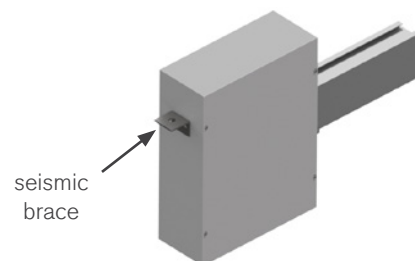



**ACCESSORIES: INSTALLATION TOOL****Installation Tool**

An installation tool is used to install the bus connector between two adjacent sections of busway. A joint kit, which is comprised of two housing couplers and a bus connector set, is required at every joint.

Busway sections are butted together and the top housing coupler is installed. The bus connector is inserted, centered and seated in the slot of the busway. The installation tool is inserted into the jointed intersection and rotated 90 degrees to form a spring-loaded, secure electrical connection. The housing coupler is then positioned over the bottom joint and tightened.



**Weight**

2.5 lb

**Part Number**

ST3IT

*No available colors*

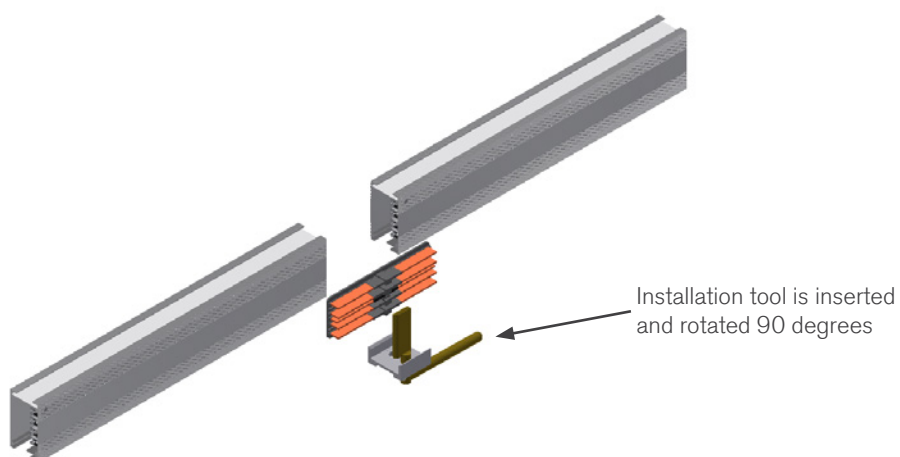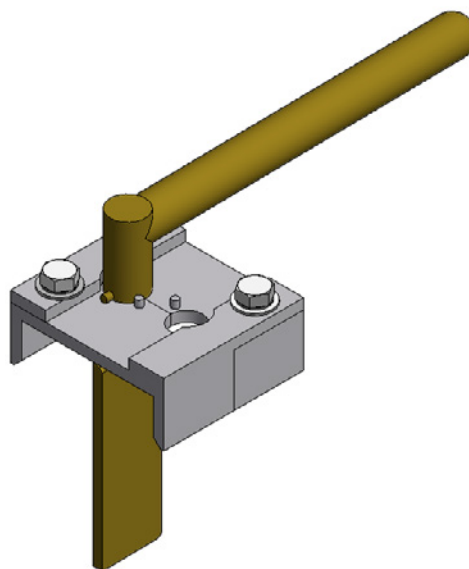

Starline Services offers a comprehensive suite of services from startup and system certification through on-going support contracts and extended warranty programs. To ensure that your Busway system is installed properly you can trust Starline's team of factory certified technicians to perform services throughout the long life of your Starline Track Busway system. Our complete line of services include:

- Load Bank Testing and Equipment Rentals
- Meter Services
- Startup and System Certification
- Engineering Studies
- On-Site Installation Support
- On-Site Product Training
- Extended Warranty and Enhanced Service Plans

Contact your Starline Representative today to add services to your Track Busway order, or download the detailed Statement of Work documents at [downloads.starlinepower.com/services](https://downloads.starlinepower.com/services).

With over 30 years of experience in the busway market, Starline has the knowledge and expertise to ensure that your Track Busway system is functioning at a best-in-class level. We are currently offering the following services:

#### **Load Bank Testing and Equipment Rentals**

Whether you are in need of rental equipment to test your power system or a team of technicians to test the system for you, Starline Services has you covered. Select testing equipment from our inventory of load banks and associated gear, or work with a Starline engineer to customize your own test plan to suit your individual needs.

#### **Meter Services**

Factory trained and certified technicians will provide comprehensive on-site meter commissioning that includes meter inspection, programming and detailed documentation. Our technicians will program CPM meters and offer optional integration services to your BMS or DCIM for any and all meters located within your facility.

#### **Startup and System Certification**

Certified technicians inspect and validate that the installation meets factory standards, ensuring ongoing reliability and compliance with facility safety requirements. Upon successful completion of system startup, Starline's standard one (1) year manufacturer's warranty will be automatically extended in duration.

- Double the length of the standard factory warranty
- Ensure all joint and feed connections are properly installed with continuity testing
- Ensure proper installation of all plug-in units
- Validate that system will perform to your specified requirements
- Full certification report delivered electronically at conclusion of service

#### **Engineering Studies (US Only)**

Understanding the dangers and implementing a safety program is imperative to maintaining a safe work environment. Our professional engineers will conduct comprehensive facility electrical studies and recommend corrective actions, confirming your systems reliability and compliance with government and safety requirements.

#### **Turnkey Installation Services (UK Only)**

Our trained and factory certified Busbar installers are looking forward to completing your next job. You can order your best-in-class power distribution system and leave the rest to us. Our technicians will complete your installation quickly and safely and will reduce your overall TCO by extending your product warranty.

## SERVICES

### On-Site Installation Support

On-site installation support begins by scheduling a site trip during your system installation. All work is performed by certified technicians- including review of installation best practices prior to the job, visual inspection of safe system installation, contractor installation oversight, and inspection and verification of functionality after rework.

### On-Site Product Training

Certified technicians will provide a comprehensive training course curriculum that meets our high factory system standards, ensuring ongoing reliability of the system while also emphasizing operational safety. This course curriculum takes place in both a classroom and on-site with equipment.

### Extended Warranty and Enhanced Service Plans

Ensure that your equipment investment is always covered. Select from an extended factory warranty or one of our many Enhanced Service Plans to meet your organizational requirements.

Contact your Starline Representative today to add services to your Track Busway order, or download detailed Statement of Work documents at [downloads.starlinepower.com/services](https://downloads.starlinepower.com/services).

Choice of Extended Warranty or Enhanced: Silver, Gold or Platinum Service Plans	Extended 1, 2, 3, 4 years	Silver 1, 2, 3, 4 years	Gold 1, 2, 3, 4 years	Platinum 2, 3, 4 years
Repair or replacement of defective parts throughout life of service agreement	X	X	X	X
24/7 technical support hotline	X	X	X	X
Visual inspection of meters		X	X	X
Visual inspection of all joints for visible gaps		X	X	X
Update firmware and verify all Starline CPMs		X	X	X
Includes travel and expenses		X	X	X
One (1) service site visit per year		X		
Two (2) service site visits per year			X	X
Thermal imaging of all plug-in units			X	X
Thermal imaging of all Busway joints			X	X
Thermal imaging of all end feed units			X	X
Detailed and fully executed thermography report			X	X
Online portal for test reports & documentation			X	X
Spare parts inventory management program				X

## T3 PLUG-IN UNITS

### Meter Plug/Meter Box Units

Any T3 compatible Starline Plug-In Unit that contains only a meter, or any lone box (without paddle head) that includes a meter.




### Terminal Block Units

Any T3 compatible Starline Plug-In Unit that's fully rated to the listed electrical ratings that can accept incoming connections from the end user.



### Receptacle Box/Drop Cord Units with Class CC Fuse

Any T3 compatible Starline Plug-In Unit that contains a receptacle box or drop cord that contains a class CC fuse.

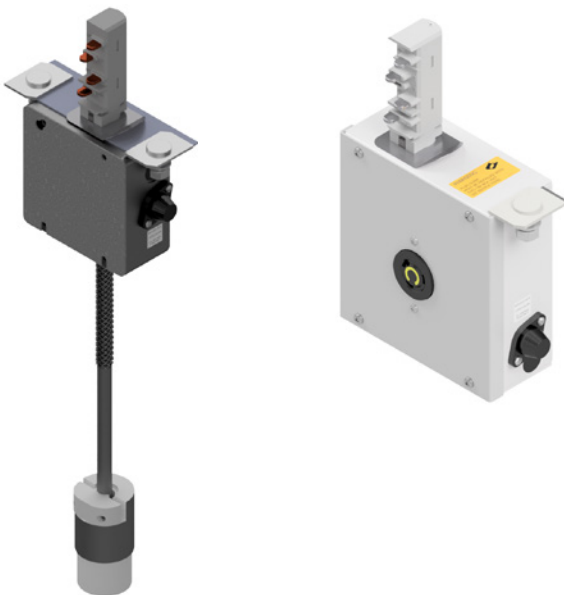

### Circuit Breaker/Fused Disconnect Units

Any T3 compatible Starline Plug-In Unit that contains a receptacle and/or drop cord along with circuit breaker(s) or fused disconnect.



## SYSTEM & BUILD GUIDE

The below is a suggested list of questions to determine answers to in order to properly build or assemble both Track Busway systems and plugs.


### **When building systems**

1. What is the amperage needed for the system? (100, 225, etc.)
2. Does the system need an internal ground?
3. Are there any limitations on the length of a run? (5ft max, 10ft max, 20ft max, etc...)

### **When determining desired plug configurations**

1. What type of system is this being used on? (T3)
2. Does the system have an internal ground? If so, does the plug need to be wired Isolated or Dedicated ground/earth?
3. What is the fault current needed for the breaker? (10Kaic, 22Kaic, etc...)
4. Does the plug need to have drop cords or receptacles?
5. What is the device configuration of the connector bodies or receptacles?
6. What is your desired MCB configuration?  
-phase, amperage, poles?
7. Do you require metering?
8. How many outlets are needed?
9. What is the trip curve needed?
10. What MCB brand is preferred?
11. What is the voltage required?

## METER PLUGS: PRODUCT NUMBERS

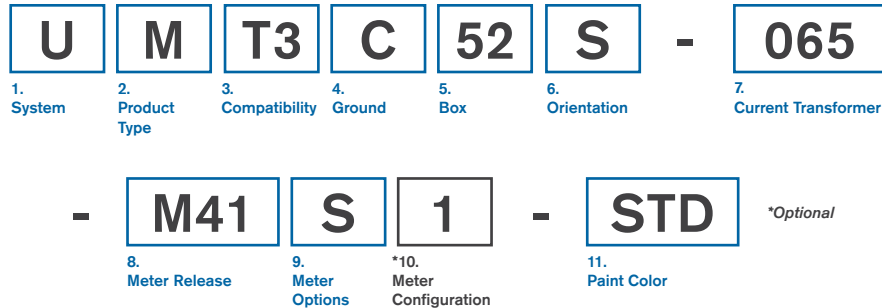

**1. System (standard of measure)**  
U US

**2. Product Type (section component)**  
M Meter Plug

**3. Compatibility (frame compatibility)**  
T3 T3 System

**4. Ground (ground type installed)**  
C Case (Housing) Ground

**5. Box (what size enclosure)**  
01, 02, ... 99 (refer to enclosure reference **page 3.60**)  
*\*12 and 28 boxes are currently not available*

**6. Orientation (what direction the paddle faces)**  
S Standard R Reversed

**7. Current Transformer (current rating)**

<b>065</b> 65 amps	<b>125</b> 125 amps
<b>225</b> 225 amps	<b>250</b> 250 amps
<b>400</b> 400 amps	<b>800</b> 800 amps
<b>1K0</b> 1000 amps	<b>1K2</b> 1200 amps

*\*\*M60 (DC) meters are only available with 125 and 800 amp current transducers*

**8. Meter Release (M40/M50 AC)**

<b>M51</b> Single Eth./WiFi, ≤480V Y, ≤277V Δ	<b>M53</b> Single Eth./No WiFi, ≤480V Y, ≤277V Δ
<b>M58</b> Dual Eth., ≤480V Y, ≤277V Δ	<b>M59</b> Dual Eth./Dual Modbus, ≤480V Y, ≤277V Δ
<b>M41</b> WiFi, ≤415V Y, ≤240V Δ	<b>M43</b> No WiFi, ≤415V Y, ≤240V Δ
<b>M45</b> WiFi, 600V Y, 347V Δ	<b>M47</b> No WiFi, 600V Y, 347V Δ

**8. Meter Release (M60 DC)**

<b>M61</b> Single Eth./WiFi, single phase, VDC
<b>M63</b> Single Eth./No WiFi, single phase, VDC
<b>M67</b> Dual Eth., single phase, VDC
<b>M69</b> Dual Eth./Dual Modbus, single phase, VDC

**9. Meter Options (M40/M50 AC)**

<b>S</b> Standard	<b>F</b> Featured (D+A)
<b>D</b> Display	<b>E</b> Enhanced (N+A)
<b>N</b> (Measured) Neutral	<b>P</b> Professional (D+N)
<b>A</b> Audible Alarm	<b>U</b> Ultimate (D+N+A)

**9. Meter Options (M60 DC)**

<b>S</b> Standard (High Voltage)	<b>P</b> Standard (48 VDC)
<b>D</b> Display (High Voltage)	<b>Q</b> Display (48 VDC)

*M60 Meters support: High Voltage: 120 to 300 VDC/Split Phase 120 VDC (+/-60) to 380 VDC (+/-180) OR Low Voltage: 48 VDC*

**\*10. Meter Configuration (M40/M50 AC)**

<b>1</b> LL power, Delta Solid Core, mV CT
<b>2</b> LL power, Wye Solid Core, mV CT
<b>3</b> LN power, Wye Solid Core, mV CT
<b>4</b> LL power, Delta Solid Core, 5A-secondary CT
<b>5</b> LL power, Wye Solid Core, 5A-secondary CT
<b>6</b> LN power, Wye Solid Core, 5A-secondary CT
<b>7</b> LL power, Delta Split Core, mV CT
<b>8</b> LL power, Wye Split Core, mV CT
<b>9</b> LN power, Wye Split Core, mV CT
<b>K</b> LL power, Delta Split Core, 5A-secondary CT
<b>L</b> LL power, Wye Split Core, 5A-secondary CT
<b>M</b> LN power, Wye Split Core, 5A-secondary CT

**\*10. Meter Configuration (M60 DC)**


<b>1</b> Circuit 1 Only, Solid Core	<b>2</b> Circuit 2 Only, Solid Core
<b>3</b> Both Circuits, Solid Core	

**11. Paint Color**

<b>STD</b> Paint Factory Silver	<b>RED</b> Paint Factory Red
<b>BLK</b> Paint Factory Black	<b>BLU</b> Paint Factory Blue
<b>WHT</b> Paint Factory White	<b>**RAL (please see page 3.34)</b>

**EXAMPLE**  
**UMT3C52S-065-M43S1-STD** = US System, Meter Plug, T3 System, Case Ground, 52 Box, Standard Orientation, 65 Current Rating, M43 Meter, Standard, LL Power, Delta Solid Core, mV CT, Painted Factory Silver

## METER BOXES: PRODUCT NUMBERS

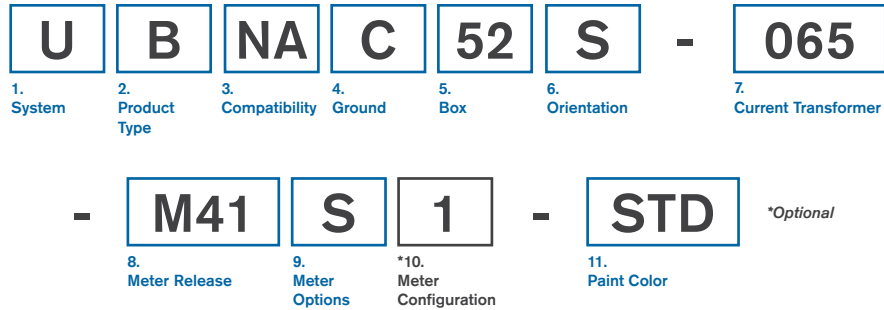

**1. System (standard of measure)**  
**U** US

**2. Product Type (section component)**  
**B** Meter Box

**3. Compatibility (frame compatibility)**  
**NA** Not Applicable

**4. Ground (ground type installed)**  
**C** Case (Housing) Ground

**5. Box (what size enclosure)**  
**01, 02, ... 99** (refer to enclosure reference **page 3.60**)  
*\*12 and 28 boxes are currently not available*

**6. Orientation (what direction the paddle faces)**  
**S** Standard

**7. Current Transformer (current rating)**

<b>065</b> 65 amps	<b>125</b> 125 amps
<b>225</b> 225 amps	<b>250</b> 250 amps
<b>400</b> 400 amps	<b>800</b> 800 amps
<b>1K0</b> 1000 amps	<b>1K2</b> 1200 amps

*\*\*M60 (DC) meters are only available with 125 and 800 amp current transducers*

**8. Meter Release (M40/M50 AC)**

<b>M51</b> Single Eth./WiFi, ≤480V Y, ≤277V Δ	<b>M53</b> Single Eth./No WiFi, ≤480V Y, ≤277V Δ
<b>M58</b> Dual Eth., ≤480V Y, ≤277V Δ	<b>M59</b> Dual Eth./Dual Modbus, ≤480V Y, ≤277V Δ
<b>M41</b> WiFi, ≤415V Y, ≤240V Δ	<b>M43</b> No WiFi, ≤415V Y, ≤240V Δ
<b>M45</b> WiFi, 600V Y, 347V Δ	<b>M47</b> No WiFi, 600V Y, 347V Δ

**8. Meter Release (M60 DC)**

<b>M61</b> Single Eth./WiFi, single phase, VDC	<b>M63</b> Single Eth./No WiFi, single phase, VDC
<b>M67</b> Dual Eth., single phase, VDC	<b>M69</b> Dual Eth./Dual Modbus, single phase, VDC

**9. Meter Options (M40/M50 AC)**

<b>S</b> Standard	<b>F</b> Featured (D+A)
<b>D</b> Display	<b>E</b> Enhanced (N+A)
<b>N</b> (Measured) Neutral	<b>P</b> Professional (D+N)
<b>A</b> Audible Alarm	<b>U</b> Ultimate (D+N+A)

**9. Meter Options (M60 DC)**

<b>S</b> Standard (High Voltage)	<b>P</b> Standard (48 VDC)
<b>D</b> Display (High Voltage)	<b>Q</b> Display (48 VDC)

*M60 Meters support: High Voltage: 120 to 300 VDC/Split Phase 120 VDC (+/-60) to 380 VDC (+/-180) OR Low Voltage: 48 VDC*

**\*10. Meter Configuration (M40/M50 AC)**

<b>1</b> LL power, Delta Solid Core, mV CT
<b>2</b> LL power, Wye Solid Core, mV CT
<b>3</b> LN power, Wye Solid Core, mV CT
<b>4</b> LL power, Delta Solid Core, 5A-secondary CT
<b>5</b> LL power, Wye Solid Core, 5A-secondary CT
<b>6</b> LN power, Wye Solid Core, 5A-secondary CT
<b>7</b> LL power, Delta Split Core, mV CT
<b>8</b> LL power, Wye Split Core, mV CT
<b>9</b> LN power, Wye Split Core, mV CT
<b>K</b> LL power, Delta Split Core, 5A-secondary CT
<b>L</b> LL power, Wye Split Core, 5A-secondary CT
<b>M</b> LN power, Wye Split Core, 5A-secondary CT

**\*10. Meter Configuration (M60 DC)**


<b>1</b> Circuit 1 Only, Solid Core	<b>2</b> Circuit 2 Only, Solid Core
<b>3</b> Both Circuits, Solid Core	

**11. Paint Color**

<b>STD</b> Paint Factory Silver	<b>RED</b> Paint Factory Red
<b>BLK</b> Paint Factory Black	<b>BLU</b> Paint Factory Blue
<b>WHT</b> Paint Factory White	<b>**RAL (please see page 3.34)</b>

**EXAMPLE**  
**UBNAC52S-065-M43S1-STD** = US System, Meter Box, Not Applicable, Case Ground, 52 Box, Standard Orientation, 65 Current Rating, M43 Meter, Standard, LL Power, Delta Solid Core, mV CT, Painted Factory Silver

## TERMINAL BLOCK UNITS: PRODUCT NUMBERS

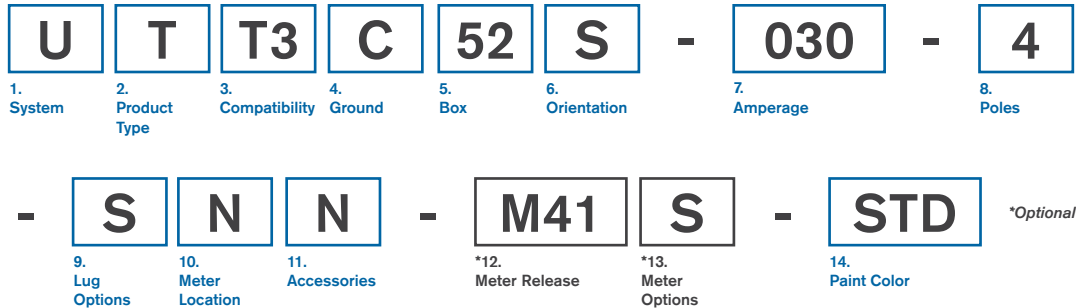

### 1. System (standard of measure)

**U** US

### 2. Product Type (section component)

**T** Terminal Block

### 3. Compatibility (frame compatibility)

**T3** T3 System

### 4. Ground (ground type installed)

**C** Case (Housing) Ground      **D** Dedicated Ground  
**G** Isolated (Separate) Ground

### 5. Box (what size enclosure)

**01, 02, ... 99** (refer to enclosure reference [page 3.63](#))

### 6. Orientation (what direction the paddle faces)

**S** Standard      **R** Reversed

### 7. Amperage (amperage of terminal block)

**030** 30 amps      **060** 60 amps  
**100** 100 amps      **225** 225 amps

### 8. Poles (number of poles in a circuit)

**4** 4 poles

### 9. Lug Options

**S** Standard      **D** Double Lug  
**N** Double Neutral      **2** 2 Bolt Lug  
**B** Double Neutral & 2 Bolt Lug

### 10. Meter Location (location of optional meter)

**N** N/A      **L** Left  
**R** Right      **B** Bottom (lid)

### 11. Accessories (optional accessories for plugs)

**N** N/A      **R** IR Window

### \*12. Meter Release (M40/M50 AC)

<b>M51</b> Single Eth./WiFi, ≤480V Y, ≤277V Δ	<b>M53</b> Single Eth./No WiFi, ≤480V Y, ≤277V Δ
<b>M58</b> Dual Eth., ≤480V Y, ≤277V Δ	<b>M59</b> Dual Eth./Dual Modbus, ≤480V Y, ≤277V Δ
<b>M41</b> WiFi, ≤415V Y, ≤240V Δ	<b>M43</b> No WiFi, ≤415V Y, ≤240V Δ
<b>M45</b> WiFi, 600V Y, 347V Δ	<b>M47</b> No WiFi, 600V Y, 347V Δ

### \*12. Meter Release (M60 DC)

**M61** Single Eth./WiFi, single phase, VDC  
**M63** Single Eth./No WiFi, single phase, VDC  
**M67** Dual Eth., single phase, VDC  
**M69** Dual Eth./Dual Modbus, single phase, VDC

### \*13. Meter Options (M40/M50 AC)

<b>S</b> Standard	<b>F</b> Featured (D+A)
<b>D</b> Display	<b>E</b> Enhanced (N+A)
<b>N</b> (Measured) Neutral	<b>P</b> Professional (D+N)
<b>A</b> Audible Alarm	<b>U</b> Ultimate (D+N+A)

### \*13. Meter Options (M60 DC)

<b>S</b> Standard (High Voltage)	<b>P</b> Standard (48 VDC)
<b>D</b> Display (High Voltage)	<b>Q</b> Display (48 VDC)

*M60 Meters support: High Voltage: 120 to 300 VDC/Split Phase 120 VDC (+/-60) to 380 VDC (+/-180) OR Low Voltage: 48 VDC*

### 14. Paint Color


<b>STD</b> Paint Factory Silver	<b>RED</b> Paint Factory Red
<b>BLK</b> Paint Factory Black	<b>BLU</b> Paint Factory Blue
<b>WHT</b> Paint Factory White	<b>**RAL (please see page 3.34)</b>

### EXAMPLE

**UTT3C27S-225-4-SBN-M47A-BLK** = US System, Terminal Block, T3 System, Case (Housing) Ground, 27 Box, Standard Orientation, 225 amps, 4 poles, Standard Lugs, Bottom-Located Meter, No Accessories, M47 Meter, Audible Alarm, Painted Factory Black



## CIRCUIT BREAKER/FUSED DISCONNECT: PRODUCT NUMBERS

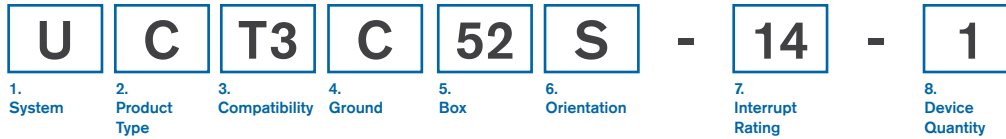


<b>1. System</b> ( <i>standard of measure</i> )	
<b>U</b>	US
<b>2. Product Type</b> ( <i>section component</i> )	
<b>C</b>	Circuit Breaker Unit
<b>F</b>	Fused Disconnect Unit
<b>3. Compatibility</b> ( <i>frame compatibility</i> )	
<b>T3</b>	T3 System
<b>4. Ground</b> ( <i>ground type installed</i> )	
<b>C</b>	Case (Housing) Ground
<b>D</b>	Dedicated Ground
<b>G</b>	Isolated (Separate) Ground
<b>5. Box</b> ( <i>what size enclosure</i> )	
<b>01, 02, ... 99</b> (refer to enclosure reference <a href="#">page 3.60</a> )	
<b>6. Orientation</b> ( <i>what direction the paddle faces</i> )	
<b>S</b>	Standard
<b>R</b>	Reversed
<b>7. Interrupt Rating</b> ( <i>interrupt rating of the breakers in K</i> )	
<b>10, 14, 22, 25, 30, 35, 50, 65, CC</b> (CC = 200,000) ( <i>for U.S.</i> )	
<b>8. Device Quantity</b> ( <i>quantity of device 1</i> )	
<b>1, 2, 3, 4, 5, 6, 7, 8, 9</b> ( <i>for more than 1 device type, reference <a href="#">page 3.51</a></i> )	
<b>9. Device</b> ( <i>standard name for device 1</i> )	
<b>AA, AB, ...ZZ</b> (refer to device codes <a href="#">page 3.65</a> )	
<b>*10. Mount Location</b> ( <i>with respect to busway polarizing stripe</i> )	
<b>F</b>	Front
<b>A</b>	Back
<b>T</b>	Top
<b>B</b>	Bottom
<b>L</b>	Left
<b>R</b>	Right
<b>*11. Drop Cord Length</b>	
<i>XXY: XX = feet, Y = Inches (010 = 1 foot, 0 inches)</i>	
<i>(only can be chosen in 6" increments)</i>	
<i>***For any device configuration chosen over 70 amps, the max. drop cord length is 10 feet (100)</i>	
<b>12. Accessories</b> ( <i>optional accessories for plugs</i> )	
<b>N</b>	N/A
<b>F</b>	Finger Shroud
<b>C</b>	Circuit Breaker Interlock
<b>P</b>	Padlock Adapter for Circuit Breaker
<b>S</b>	Seismic Hanger
<b>R</b>	IR Window

<b>*13. Meter Release</b> ( <i>M40/M50 AC</i> )		
<b>M51</b>	Single Eth./WiFi, ≤480V Y, ≤277V Δ	<b>M53</b> Single Eth./No WiFi, ≤480V Y, ≤277V Δ
<b>M58</b>	Dual Eth., ≤480V Y, ≤277V Δ	<b>M59</b> Dual Eth./Dual Modbus, ≤480V Y, ≤277V Δ
<b>M41</b>	WiFi, ≤415V Y, ≤240V Δ	<b>M43</b> No WiFi, ≤415V Y, ≤240V Δ
<b>M45</b>	WiFi, 600V Y, 347V Δ	<b>M47</b> No WiFi, 600V Y, 347V Δ
<b>M56</b>	Dual Eth./Dual Modbus, ≤480V Y, ≤277V Δ, Breaker Monitoring	<b>M57</b> Dual Eth, Breaker Monitoring ≤480V Y, ≤277V Δ
<b>*13. Meter Release</b> ( <i>M60 DC</i> )		
<b>M61</b>	Single Eth./WiFi, single phase, VDC	
<b>M63</b>	Single Eth./No WiFi, single phase, VDC	
<b>M67</b>	Dual Eth., single phase, VDC	
<b>M69</b>	Dual Eth./Dual Modbus, single phase, VDC	
<b>*14. Meter Options</b> ( <i>M40/M50 AC</i> )		
<b>S</b>	Standard	<b>F</b> Featured (D+A)
<b>D</b>	Display	<b>E</b> Enhanced (N+A)
<b>N</b>	(Measured) Neutral	<b>P</b> Professional (D+N)
<b>A</b>	Audible Alarm	<b>U</b> Ultimate (D+N+A)
<b>*14. Meter Options</b> ( <i>M60 DC</i> )		
<b>S</b>	Standard (High Voltage)	<b>P</b> Standard (48 VDC)
<b>D</b>	Display (High Voltage)	<b>Q</b> Display (48 VDC)
<i>M60 Meters support: High Voltage: 120 to 300 VDC/Split Phase 120 VDC (+/-60) to 380 VDC (+/-180) OR Low Voltage: 48 VDC</i>		
<b>15. Paint Color</b>		
<b>STD</b>	Paint Factory Silver	<b>RED</b> Paint Factory Red
<b>BLK</b>	Paint Factory Black	<b>BLU</b> Paint Factory Blue
<b>WHT</b>	Paint Factory White	<b>**RAL</b> (please see <a href="#">page 3.34</a> )

**EXAMPLE**  
**UCT3D28S-50-2BCB010N-M53D-STD** = US System, Circuit Breaker Unit, T3 System, Dedicated Ground, 28 Box, Standard Orientation, 50 kA Interrupt Rating-2 Devices, 6-20C, Bottom Located, 12 inch Long Drop Cord, No Accessories-M53 Meter, with Display, Painted Factory Silver

## CIRCUIT BREAKER/FUSED DISCONNECT: GROUND

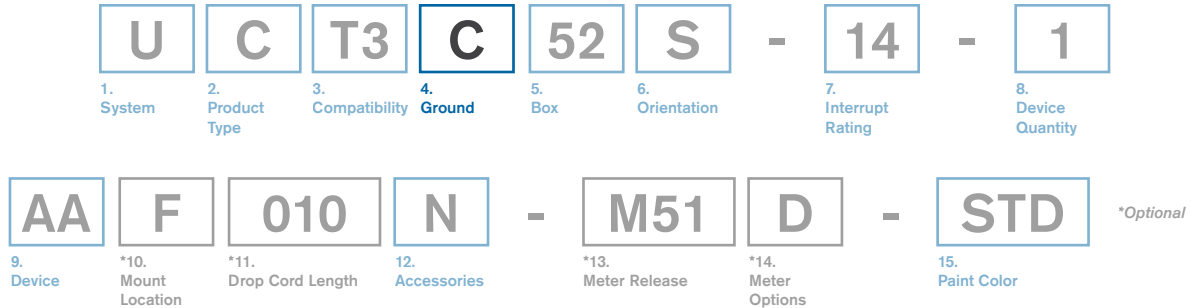

### 4. Ground (ground type installed)

<b>C</b> Case (Housing) Ground	<b>D</b> Dedicated Ground
<b>G</b> Isolated (Separate) Ground	

In option 4, you are asked to specify what type of ground you would like: case, dedicated or isolated.

Parts affected by grounding are the plug paddle (ground paddles have a fifth stab).

#### Case Ground/Chassis Earth


Uses aluminum housing and no extra copper bar.

#### Isolated Ground/Earth

Orange receptacles in plugs. Case ground isolated from copper ground bar. Isolated ground carried back to panel by others.


#### Dedicated Ground/Earth

Extra bar in busway for ground. Everything tied together inside plugs. Bar and housing at same potential.

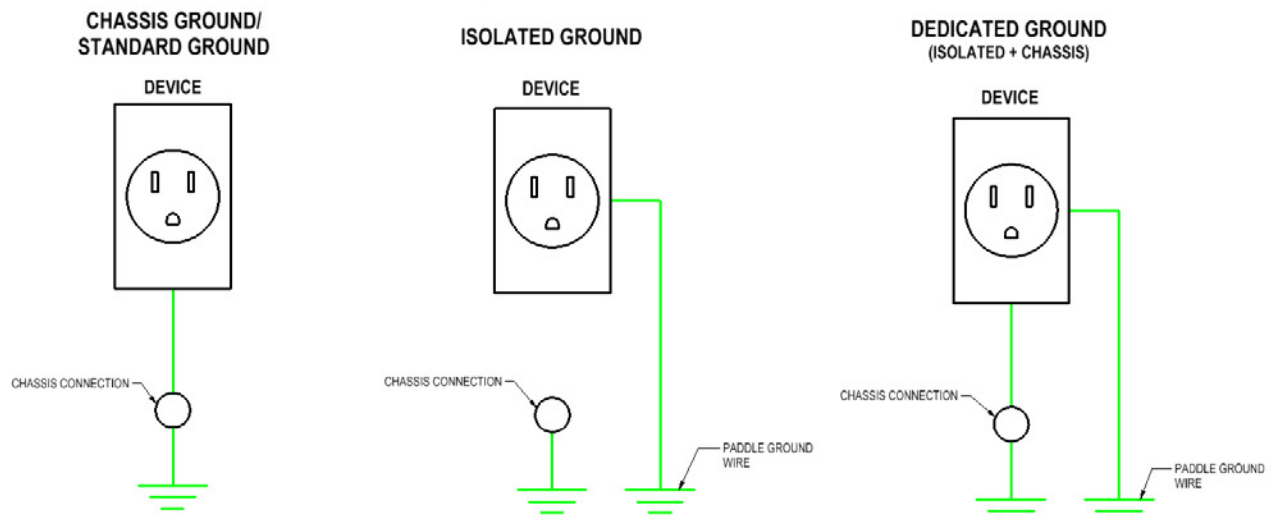

\*For further details about Dedicated Ground vs. Isolated Ground, please reference our "Isolated Ground vs. Dedicated Ground" tech brief on [downloads.starlinepower.com/starline/](https://downloads.starlinepower.com/starline/)

## CIRCUIT BREAKER/FUSED DISCONNECT: BOX

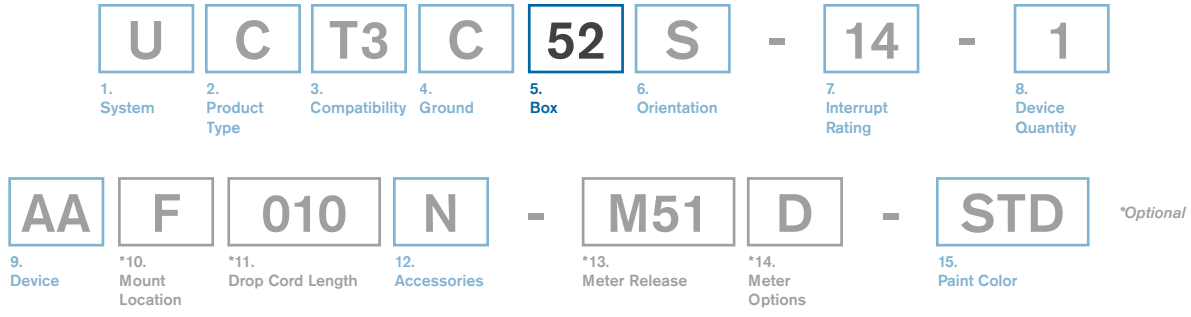

**5. Box** (*what size enclosure*)  
**01, 02, ... 99** (refer to enclosure reference **page 3.60**)

In option 5, you are asked to specify what size and style enclosure that you would like. A few common enclosure sizes for T3 busway systems are shown below:

### 50 Series

**Box Lengths**

51: 6.00"

52: 8.00"

53: 10.00"

54: 12.00"

55: 13.00"

56: 15.00"

57: 18.00"

### 90 Series

**Box Lengths**

91: 6.00"

92: 8.00"

93: 10.00"

94: 12.00"

95: 13.00"

96: 15.00"

97: 18.00"

\*For all box sizes and styles, please refer to **page 3.60**

# T3 Plug-In Units

## CIRCUIT BREAKER/FUSED DISCONNECT: INTERRUPT RATING




### 7. Interrupt Rating *(interrupt rating of the breakers in K)*

10, 14, 22, 25, 30, 35, 50, 65, CC (CC = 200,000)

In option 7, you are asked to specify what the interrupt rating of your protection will be. The breaker used is dependent on voltage, amperage and short-circuit ratings. Different or particular brands may be available upon request. Images of example breakers can be found below.



## CIRCUIT BREAKER/FUSED DISCONNECT: DEVICE

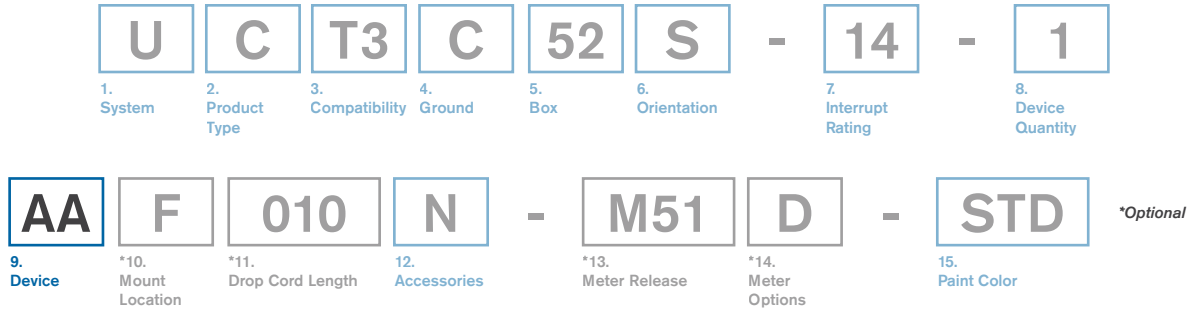

**9. Device** (standard name for device 1)  
**AA, AB, ...ZZ** (refer to device codes **page 3.65**)

In option 9, you are asked to specify what device(s) you would like in your plug. All devices will need to be coded. The catalog number can accommodate up to 3 different types of devices- anything more than that will be handled in the G0 code. If you require more than one type of device, see the example catalog number below:

UCT3C57S-22-2AD-3AB-1ACFN-M51D-STD

If you require a drop cord(s), only one device type can be accommodated in the main catalog number. In addition, drop cord length is only specified if it's the same for all devices. Any additional device types or varying lengths will be handled in the G0 code.



# T3 Plug-In Units

CIRCUIT BREAKER/FUSED DISCONNECT: DEVICE: INDUSTRIAL SPECIFIC

For your convenience, the below display includes a variety of plug-in units that are popularly used in industrial-specific applications. However, these plug configurations are not limited to use in industrial environments.



*UCT3C12S-14-1FGB060N-STD*  
5-20 Receptacle Quad Box  
6' Drop Cord



*UCT3C53S-14-3ABFN-STD*  
(3) 5-20 Duplex Receptacles



*UCT3C92S-14-1MAB060N-STD -G001*  
MA = Custom Device  
Gxxx = Specific Metric Brand Industrial Connector

\*For the full list of all device codes, please refer to **page 3.65**


## CIRCUIT BREAKER/FUSED DISCONNECT: MOUNT LOCATION




<b>*10. Mount Location</b> <i>(location with respect to polarizing stripe)</i>			
<b>F</b>	Front	<b>A</b>	Back
<b>T</b>	Top	<b>B</b>	Bottom
<b>L</b>	Left	<b>R</b>	Right

**In option 10.** if you are required to specify the devices desired location on the plug. Please see the image below to guide you in selecting your specified mounting location.

\*Mount location is only specified if it's the same for all chosen devices. If it is not the same, then it is omitted.

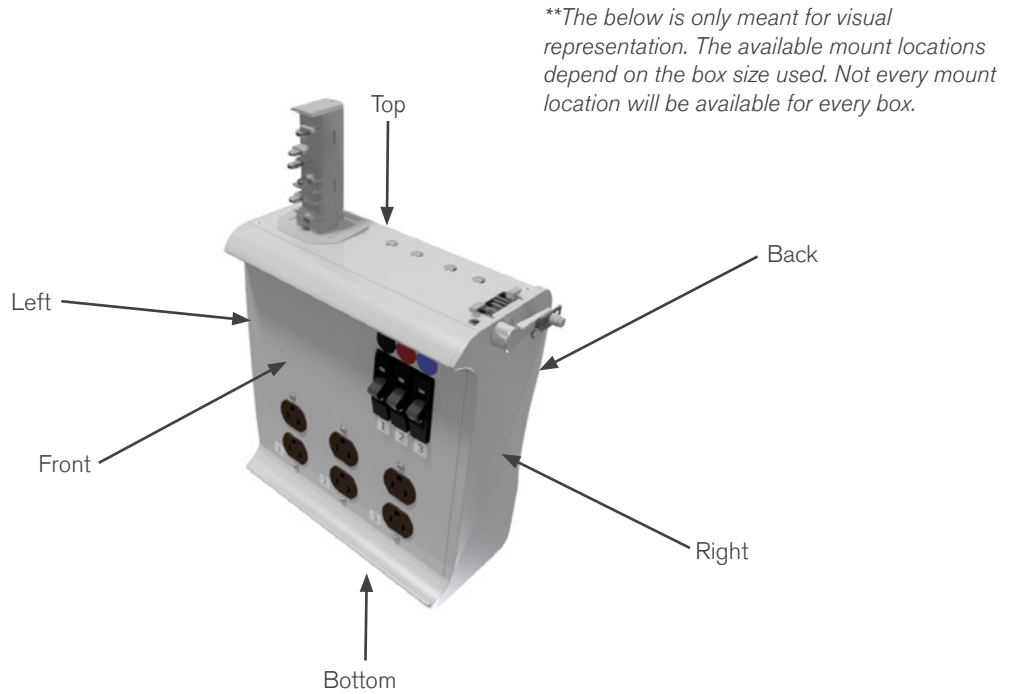


## CIRCUIT BREAKER/FUSED DISCONNECT: ACCESSORIES

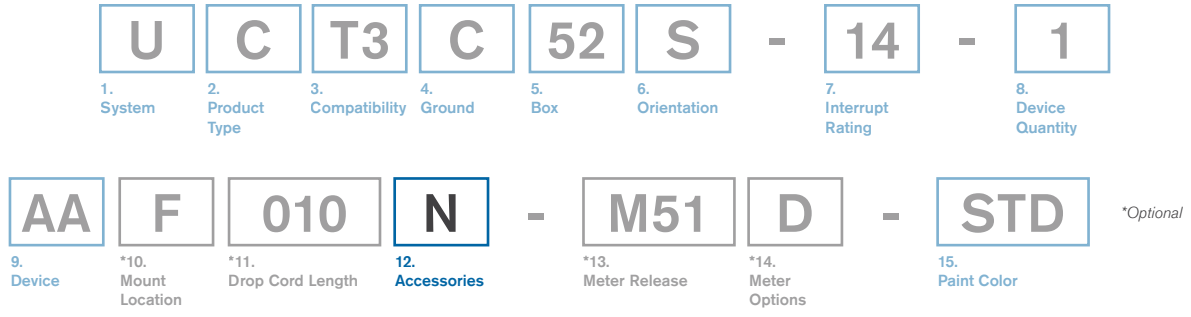

<b>12. Accessories</b> (optional accessories for plugs)			
<b>N</b>	N/A	<b>F</b>	Finger Shroud
<b>C</b>	Circuit Breaker Interlock	<b>P</b>	Padlock Adapter for Circuit Breaker
<b>S</b>	Seismic Hanger	<b>R</b>	IR Window


**In option 12.** you have the option to choose an accessory. Please see examples below. The Circuit Breaker Interlock is a device that prevents disengaging the plug from the busway. The Finger Shroud goes over top of your breakers, preventing accidental on or off motions. The Padlock Adapter for Circuit Breaker is optional breaker protection offered by ABB.

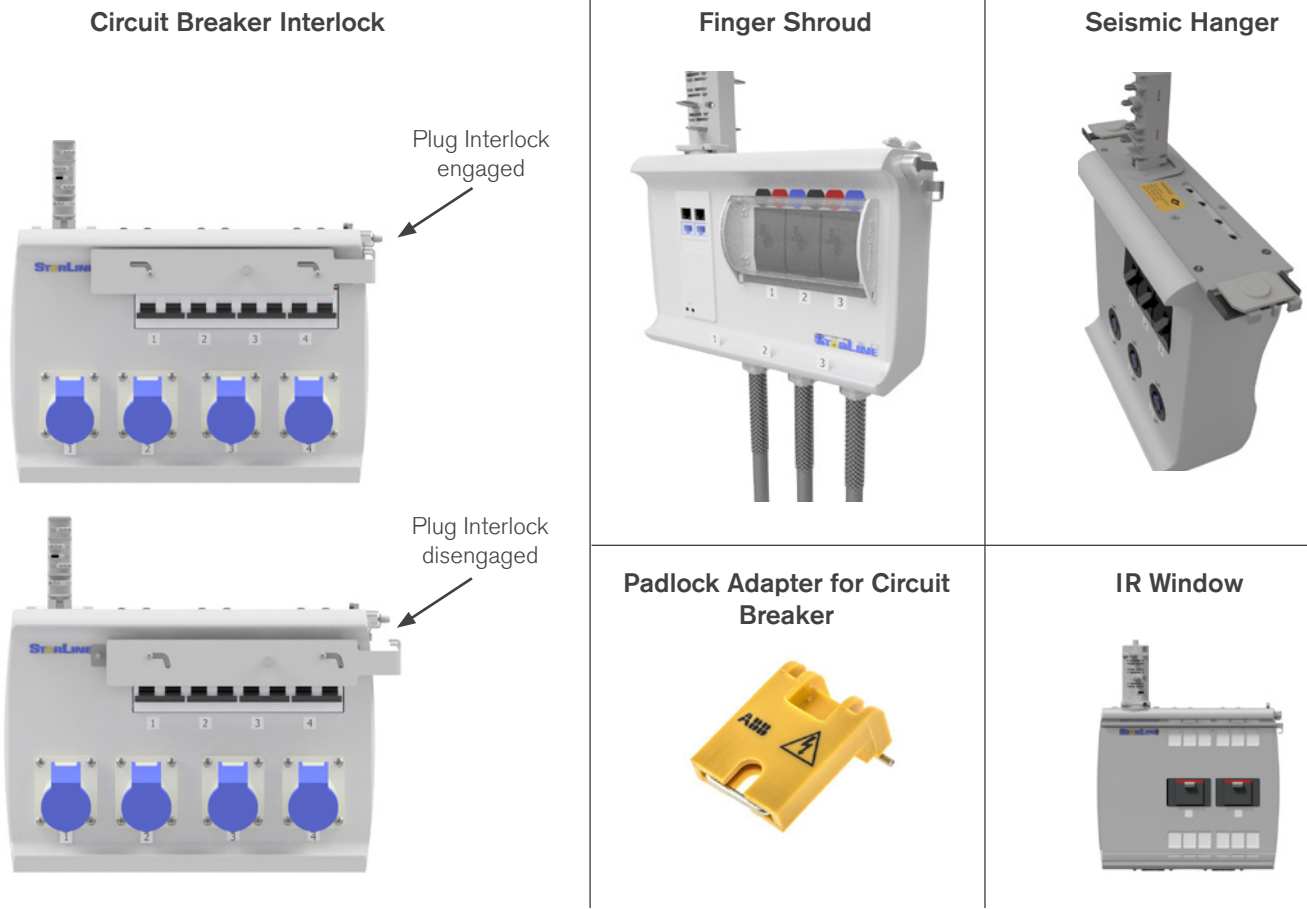



# T3 Plug-In Units

## CIRCUIT BREAKER/FUSED DISCONNECT: (AC ONLY) METER RELEASE

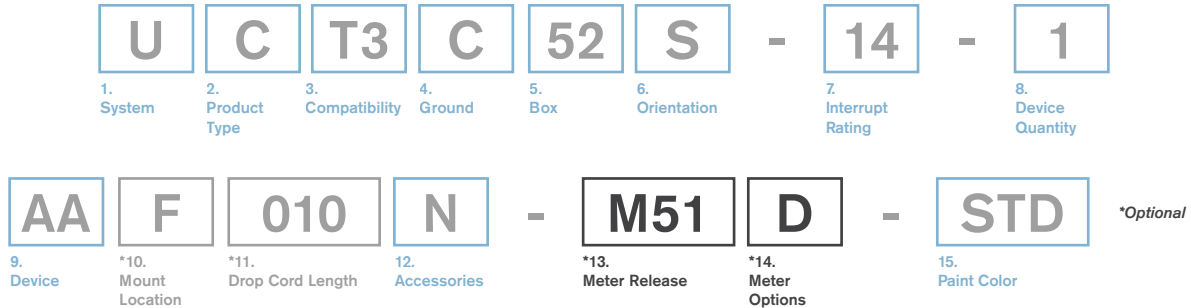

### \*13. Meter Release (M40/M50 AC Series Meters)

<b>M51</b> Single Eth./WiFi, ≤480V Y, ≤277V Δ	<b>M53</b> Single Eth./No WiFi, ≤480V Y, ≤277V Δ
<b>M58</b> Dual Eth., ≤480V Y, ≤277V Δ	<b>M59</b> Dual Eth./Dual Modbus, ≤480V Y, ≤277V Δ
<b>V51</b> Single Eth./WiFi, ≤480V Y, ≤277V Δ	<b>V53</b> Single Eth./No WiFi, ≤480V Y, ≤277V Δ
<b>V58</b> Dual Eth., ≤480V Y, ≤277V Δ	<b>V59</b> Dual Eth./Dual Modbus, ≤480V Y, ≤277V Δ
<b>M41</b> WiFi, ≤415V Y, ≤240V Δ	<b>M43</b> No WiFi, ≤415V Y, ≤240V Δ
<b>M45</b> WiFi, 600V Y, 347V Δ	<b>M47</b> No WiFi, 600V Y, 347V Δ
<b>M56</b> Dual Eth./Dual Modbus, ≤480V Y, ≤277V Δ, Breaker Monitoring	<b>V56</b> Dual Eth./Dual Modbus, ≤480V Y, ≤277V Δ, Breaker Monitoring
<b>M57</b> Dual Eth, Breaker Monitoring ≤480V Y, ≤277V Δ	<b>V57</b> Dual Eth, Breaker Monitoring ≤480V Y, ≤277V Δ

### \*14. Meter Options (M40/M50 AC)

<b>S</b> Standard	<b>D</b> Display
-------------------	------------------

In option 13, you are able to select metering for your plug-in unit. M50 and V50 series meters are the best options for plug-in units.

The communication options include:

- Single Ethernet + WiFi
- Single Ethernet
- Dual Ethernet
- Dual Modbus + Dual Ethernet

The difference between 'M' and 'V' is that M50 series meters are capable of monitoring the current of the entire unit, and V50 series meters are capable of monitoring up to 6 individual devices limited to 6 solid core Current Transformers (CTs).

Each unit is calibrated for accuracy and is within 0.5% to meet ANSI Revenue Grade Standards.

M/V56 and M/V57 meters also have the capability to sense circuit breaker position (on/off) for up to two outlets.

Critical Power Monitor (No Display)



Critical Power Monitor with Optional Display




Single Ethernet w/ Wi-Fi  
**M/V51**

Single Ethernet  
**M/V53**

Dual Ethernet  
**M/V58**

Dual Modbus  
Dual Ethernet  
**M/V59**

**CIRCUIT BREAKER/FUSED DISCONNECT: (DC ONLY) METER RELEASE**

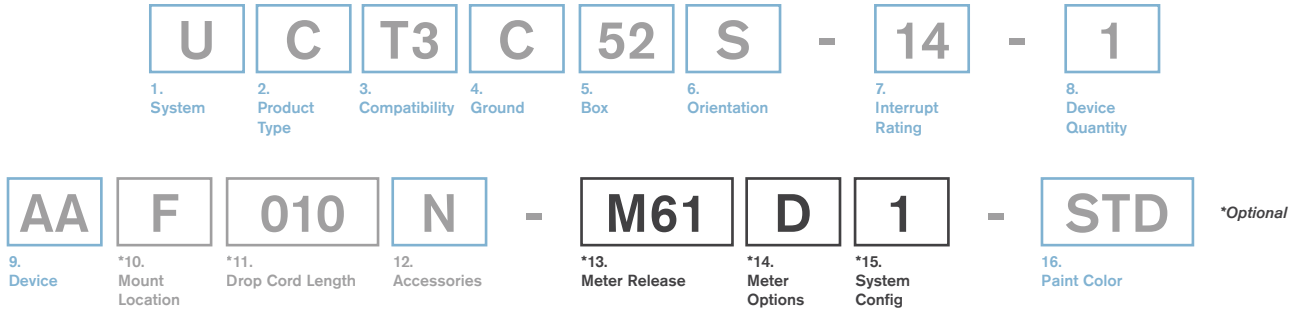

**\*13. Meter Release (M60 DC Series Meters)**  
**M61/V61** Single Eth./WiFi, single phase, VDC  
**M63/V63** Single Eth./No WiFi, single phase, VDC  
**M67/V67** Dual Eth., single phase, VDC  
**M69/V69** Dual Eth./Dual Modbus, single phase, VDC

**\*14. Meter Options (M60 DC)**

<b>S</b> Standard (High Voltage)	<b>D</b> Display (High Voltage)
<b>P</b> Standard (48 VDC)	<b>Q</b> Display (48 VDC)

**\*15. System Configuration (voltage)**



<b>1</b> Circuit 1 only	<b>2</b> Circuit 2 only
<b>3</b> Both circuits (1 & 2)	

If you've chosen to use direct current (DC) for your Track Busway system, then the DC M60 series meters are a perfect fit. For M60 meters there is a special addition to the catalog number (reference 15. System Configuration). It is important to select your circuit(s) when ordering.

The M60 device utilizes the M50 bezel (shown on previous page) and is capable of measuring up to 4 outlets (circuit 1 or circuit 2). The difference between 'M' and 'V' is that M60 series meters are capable of monitoring the current of the entire unit, and V60 series meters are capable of monitoring up to 4 individual devices.

M60 devices support the following voltages:  
 High Voltage: 120-300VDC or split phase 120VDC (+/- 60VDC) to 380VDC (+/- 190VDC)  
 Low Voltage: 48 VDC

Each unit is calibrated for accuracy within 1% of energy.

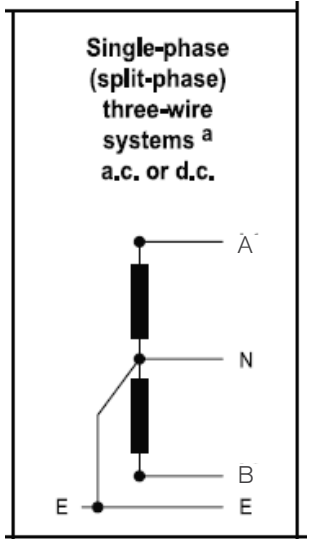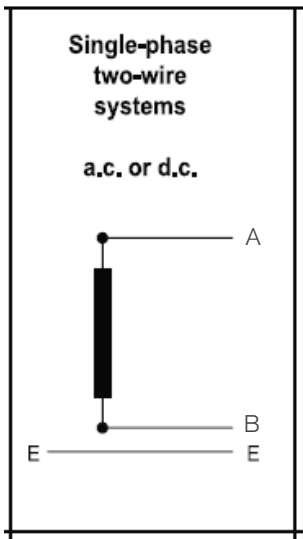


M60 meters are capable of supporting single phase, 120VDC - 300VDC or split phase 120VDC (+/-60VDC) to 380VDC(+/-190VDC).

*\*12VDC & 24VDC applications are not supported at this time.*

*\*\*Meter is capable of reporting A to B voltages (as shown above). A to N + B to N voltages will not be reported.*

# T3 Plug-In Units

## CIRCUIT BREAKER UNITS, NO DEVICES: PRODUCT NUMBERS

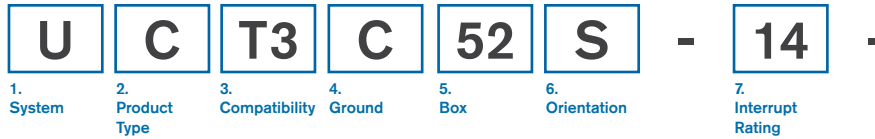

### 1. System (standard of measure)

**U** US

### 2. Product Type (section component)

**C** Circuit Breaker Unit      **F** Fused Disconnect Unit

### 3. Compatibility (frame compatibility)

**T3** T3 System      **K5** T3 System (Limiting Strip)  
**R5** T3 System (Rotating Paddle)      **Z5** K5 + R5

### 4. Ground (ground type installed)

**C** Case (Housing) Ground      **D** Dedicated Ground  
**G** Isolated (Separate) Ground

### 5. Box (what size enclosure)

**01, 02, ... 99** (refer to enclosure reference [page 3.60](#))

### 6. Orientation (what direction the paddle faces)

**S** Standard      **R** Reversed

### 7. Interrupt Rating (interrupt rating of the breakers in K)

**10, 14, 22, 25, 30, 35, 50, 65, CC (CC = 200,000)** (for US)

### 8. Circuit Protection Quantity

**1, 2, 3, 4, 5, 6**

### 9. Amperage

**015, 020, 030, 600**

### 10. Poles (number of poles in circuit)

**1, 2, 3, 4, 5**

### 11. Voltage

**120, 240, 277, 300, 415, 480, 600**

### \*12. Drop Cord Length (length of drop cord)

**010** 1 foot      **XXY** XX=feet, Y=inches

(only can be chosen in 6" increments) For any device configuration chosen over 70 amps, the max. drop cord length is 10 feet (100)

### \*13. Number of Wires (in drop cord)

**2, 3, 4, 5**

### 14. Accessories (optional accessories for plugs)

<b>N</b> N/A	<b>F</b> Finger Shroud
<b>C</b> Circuit Breaker Interlock	<b>P</b> Padlock Adapter for Circuit Breaker
<b>S</b> Seismic Hanger	<b>R</b> IR Window

### 15. Meter

<b>M51</b> Single Eth./WiFi, ≤480V Y, ≤277V Δ	<b>M53</b> Single Eth./No WiFi, ≤480V Y, ≤277V Δ
<b>M58</b> Dual Eth, ≤480V Y, ≤277V Δ	<b>M59</b> Dual Eth/Dual Modbus, ≤480V Y, ≤277V Δ
<b>M41</b> WiFi, ≤415V Y, ≤240V Δ	<b>M43</b> No WiFi, ≤415V Y, ≤240V Δ
<b>M45</b> WiFi, 600V Y, 347V Δ	<b>M47</b> No WiFi, 600V Y, 347V Δ
<b>M56</b> Dual Eth/Dual Modbus, ≤480V Y, ≤277V Δ, Breaker Monitoring	<b>M57</b> Dual Eth, Breaker Monitoring ≤480V Y, ≤277V Δ

### 16. Meter Options (M40/M50 AC)

<b>S</b> Standard	<b>F</b> Featured (D+A)
<b>D</b> Display	<b>E</b> Enhanced (N+A)
<b>N</b> (Measured) Neutral	<b>P</b> Professional (D+N)
<b>A</b> Audible Alarm	<b>U</b> Ultimate (D+N+A)

### \*16. Meter Options (M60 DC)

<b>S</b> Standard (High Voltage)	<b>P</b> Standard (48 VDC)
<b>D</b> Display (High Voltage)	<b>Q</b> Display (48 VDC)

M60 Meters support: High Voltage: 120 to 300 VDC/Split Phase 120 VDC (+/-60) to 380 VDC (+/-180) OR Low Voltage: 48 VDC


### 17. Paint Color

<b>STD</b> Paint Factory Silver	<b>RED</b> Paint Factory Red
<b>BLK</b> Paint Factory Black	<b>BLU</b> Paint Factory Blue
<b>WHT</b> Paint Factory White	<b>**RAL (please see page 3.34)</b>

### EXAMPLE

**UCT5D57S-25-203034800505N-M59D-STD** = US System, Circuit Breaker Only Unit, T3 system, Dedicated Ground, 57 box, Standard orientation, 25kA interrupt rating, 2 circuits, 30 amps, 3 poles, 480v, 5 ft drop cord, 5 wires, no accessories, M53 meter, painted factory silver

## CORDED METERS

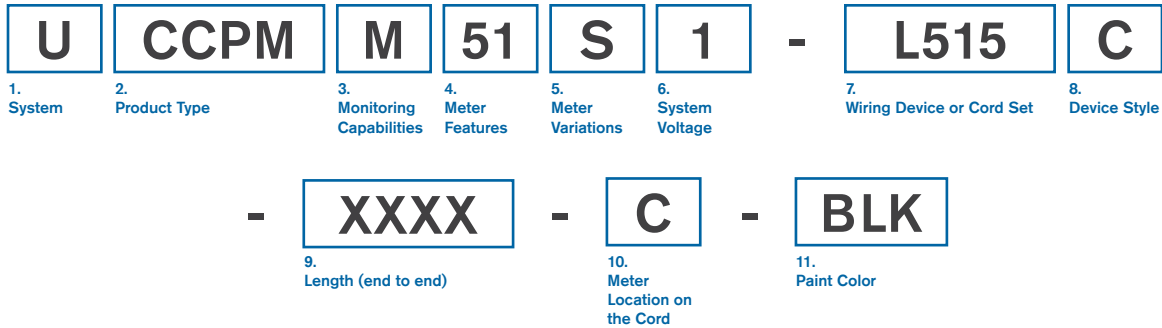

<b>1. System</b> ( <i>standard of measure</i> )			
U	US		
<b>2. Product Type</b> ( <i>section component</i> )			
CCPM	Corded CPM		
<b>3. Monitoring Compatibilities</b>			
M	Paddle/Feed Monitoring		
<b>4. Meter Features</b>			
51	Single Ethernet WiFi	53	Single Ethernet
58	Dual Ethernet	59	Dual Ethernet, Modbus
<b>5. Meter Variations</b>			
S	Standard Unit	D	Display
<b>6. System Voltage</b>			
1	Line-Line	3	Line-Neutral

<b>7. Wiring Device or Cord Set</b>
Options listed on page 3.59

<b>8. Device Style</b>			
C	Connector Body	R	Receptacle
D	Duplex	Q	Quad Receptacle

<b>9. Length</b> ( <i>end to end</i> )
XXXX Length will be selected when ordering. There will always be four X's for these characters. (lengths range from 4 to 25 feet in increments of 1 foot)

<b>10. Meter Location on the Cord</b>			
C	Center	T	Top
B	Bottom		

<b>11. Paint Color</b>			
STD	Paint Factory Silver	RED	Paint Factory Red
BLK	Paint Factory Black	BLU	Paint Factory Blue
WHT	Paint Factory White	**RAL	(please see page 3.34)

**Monitoring:** The Corded CPM has a plug on one end and a connector body or receptacle on the other end; making it ideal for field power monitoring on-the-fly. It is capable of monitoring the energy of any device. The Corded CPM is also available without connectors. All M50 meter features, communication options and accessories are available except for measured neutral.

**Box Size:** There are two different Corded CPM box sizes. The smaller is designed for single phase (2 pole/3 wire, 1 pole+N/3W) wiring devices rated from 0-32A & 0-480V. The color is black unless specified. The larger enclosure is designed for all other configurations. These include single phase (2 pole/3 wire) rated at 32A-63A & 0-480V, three phase delta (3 pole/4 wire) rated at 0-63A & 0-480V and three phase wye (4 pole/5 wire) rated at 0-63A & 0-480V.

**Meter Location:** The meter can be placed in the center or offset from the top or bottom of the cord. Top or Bottom meters will always be 1'8" from the end of the connector.




## WIRING DEVICE/CORD SET OPTIONS

AC NEMA/IEC Name	Voltage	Current
CS6360C	125V	50
CS6364C	125/250V	50
CS8264C	250V	50
CS8364C	250V	50
CS8164C	480V	50
CS8464C	480V	50
515D	125V	15
515	125V	15
520D	125V	20
520	125V	20
530	125V	30
615D	250V	15
615	250V	15
620D	250V	20
620	250V	20
630	250V	30
L1420	125/250V	20
L1430	125/250V	30
L1520	250V	20
L1530	250V	30
L1620	480V	20
L1630	480V	30
L2120	120/208V	20
L2130	120/208V	30
L2220	277/480V	20
L2230	277/480V	30
L2320	347/600V	20
L2330	347/600V	30
L515	125V	15
L520	125V	20
L530	125V	30
L615	250V	15
L620	250V	20
L630	250V	30
L715	277V	15
L720	277V	20
L730	277V	30
L820	480V	20
L830	480V	30
316C4S	110V	16
332C4S	110V	32
363C4S	110V	63
320C4S	125V	20
330C4S	125V	30
360C4S	125V	60
520C9W	120/208V	20
530C9W	120/208V	30
560C9W	120/208V	60
316C6S	230V	16
332C6S	230V	32
363C6S	230V	63


420C12W	125/250V	20
430C12W	125/250V	30
460C12W	125/250V	60
320C6W	250V	20
330C6W	250V	30
360C6W	250V	60
320C5W	277V	20
330C5W	277V	30
360C5W	277V	60
416C4S	110V	16
432C4S	110V	32
463C4S	110V	63
416C9S	230V	16
432C9S	230V	32
463C9S	230V	63
420C9S	250V	20
430C9S	250V	30
460C9S	250V	60
416C6S	415V	16
432C6S	415V	32
463C6S	415V	63
420C7S	480V	20
430C7S	480V	30
460C7S	480V	60
516C6S	230/400V	16
532C6S	230/400V	32
563C6S	230/400V	63
316C9S	415V	16
332C9S	415V	32
363C9S	415V	63
520C7S	277/480V	20
530C7S	277/480V	30
560C7S	277/480V	60
320C7W	480V	20
330C7W	480V	30
360C7W	480V	60
15A-300V	300V	15
16A-300V	300V	16
20A-300V	300V	20
30A-300V	300V	30
32A-300V	300V	32
50A-300V	300V	50
60A-300V	300V	60
63A-300V	300V	63
15A-480V	480V	15
16A-480V	480V	16
20A-480V	480V	20
30A-480V	480V	30
32A-480V	480V	32
50A-480V	480V	50
60A-480V	480V	60
63A-480V	480V	63

## BOX SIZES & STYLES


12

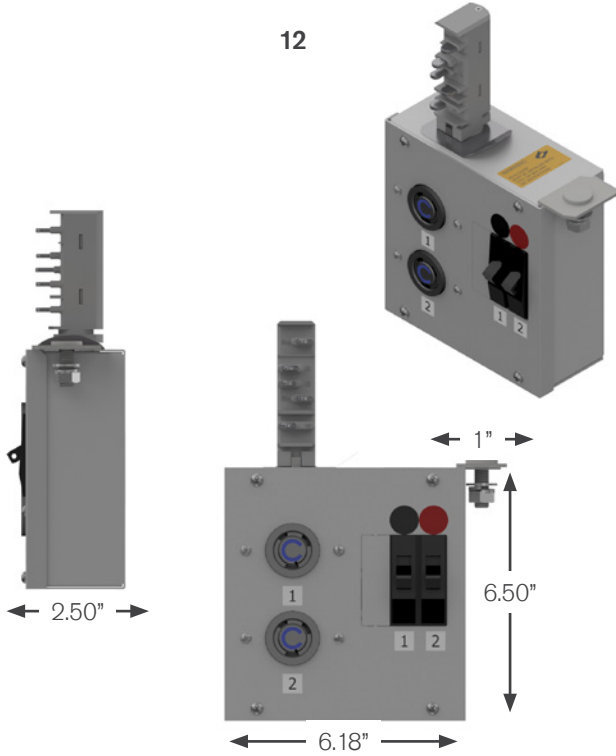


25

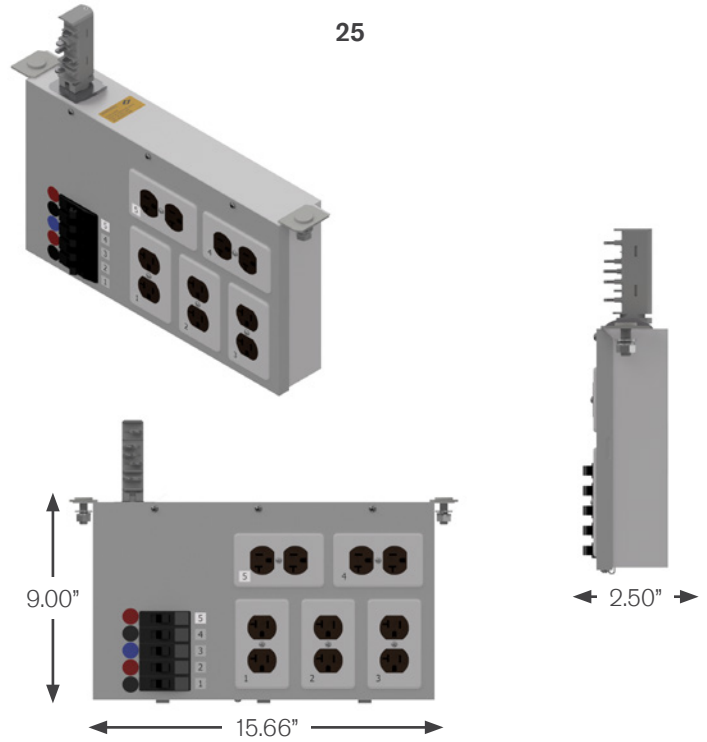

28

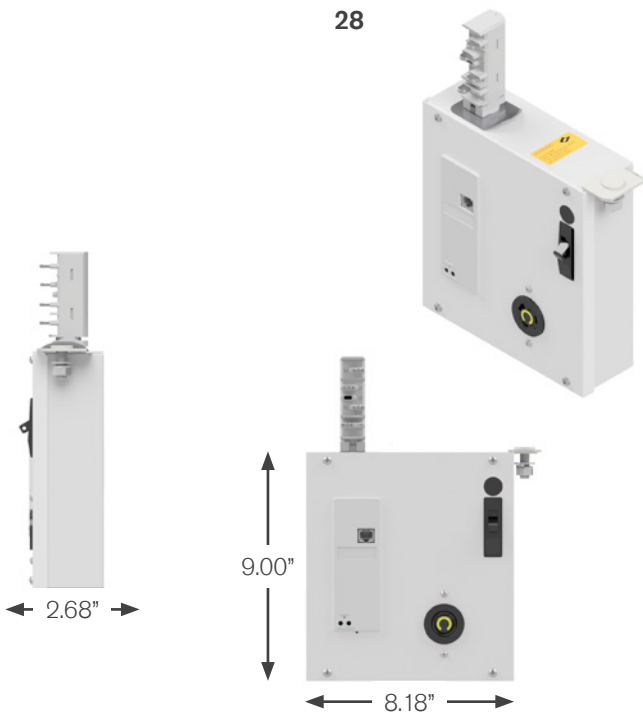


30

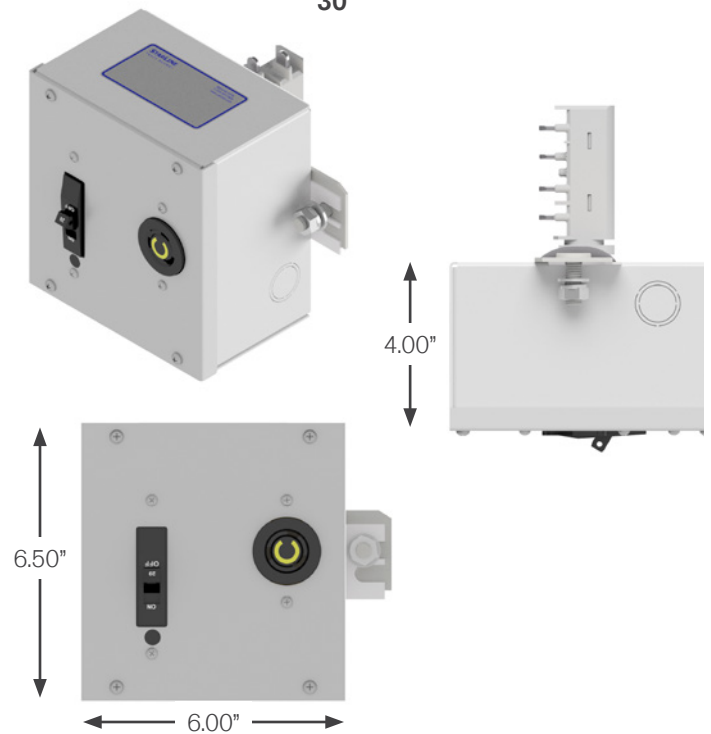


## BOX SIZES & STYLES


37

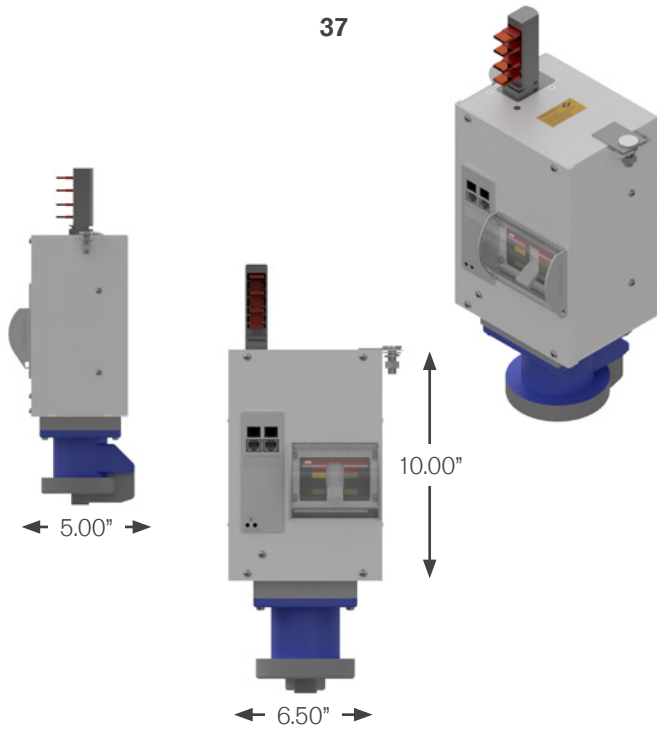


50

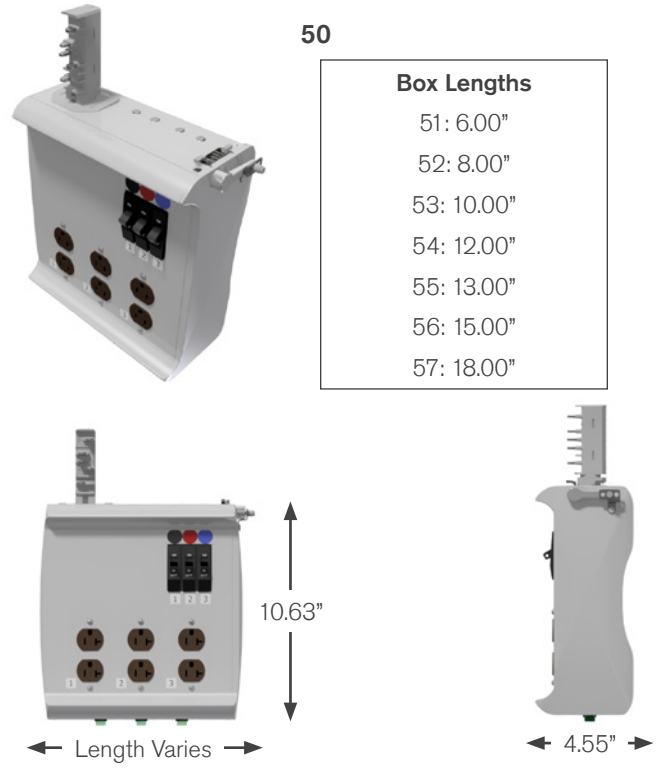

70

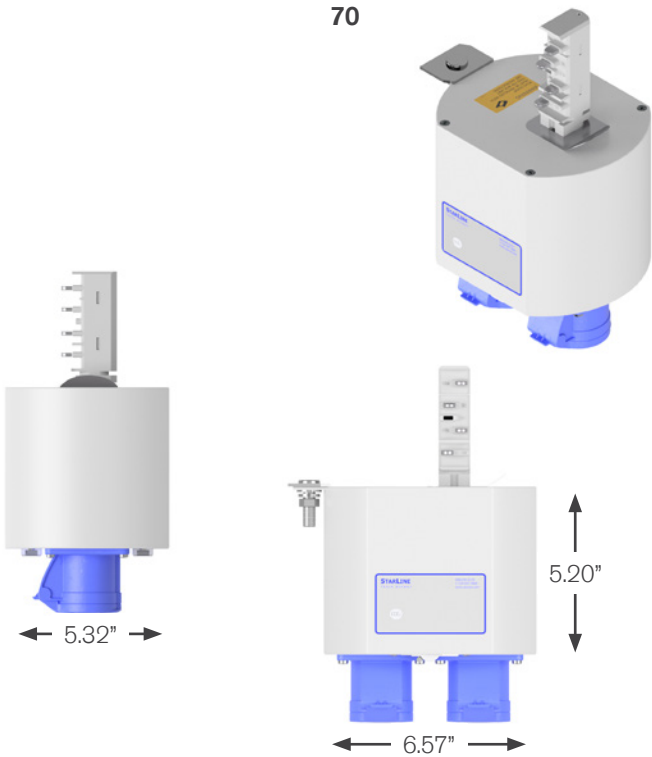


90

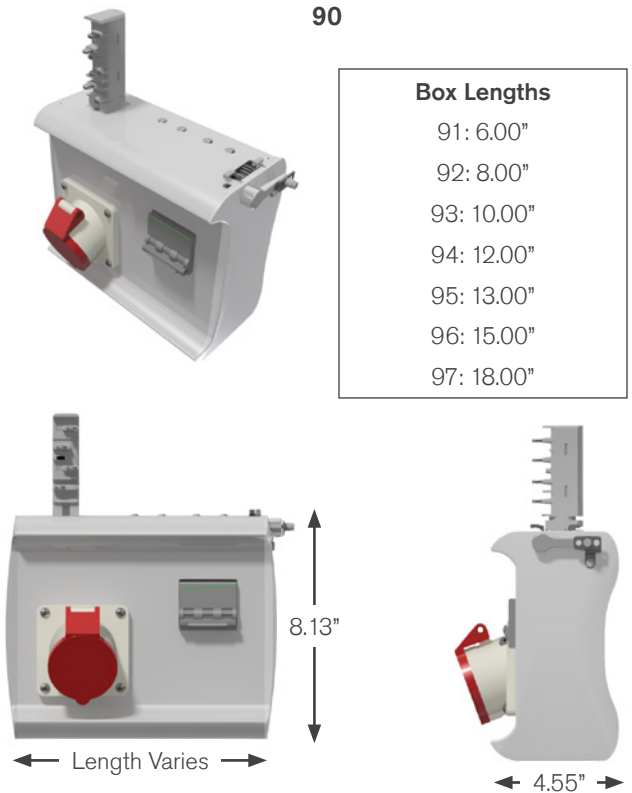

## BOX SIZES & STYLES

T3 Paddle

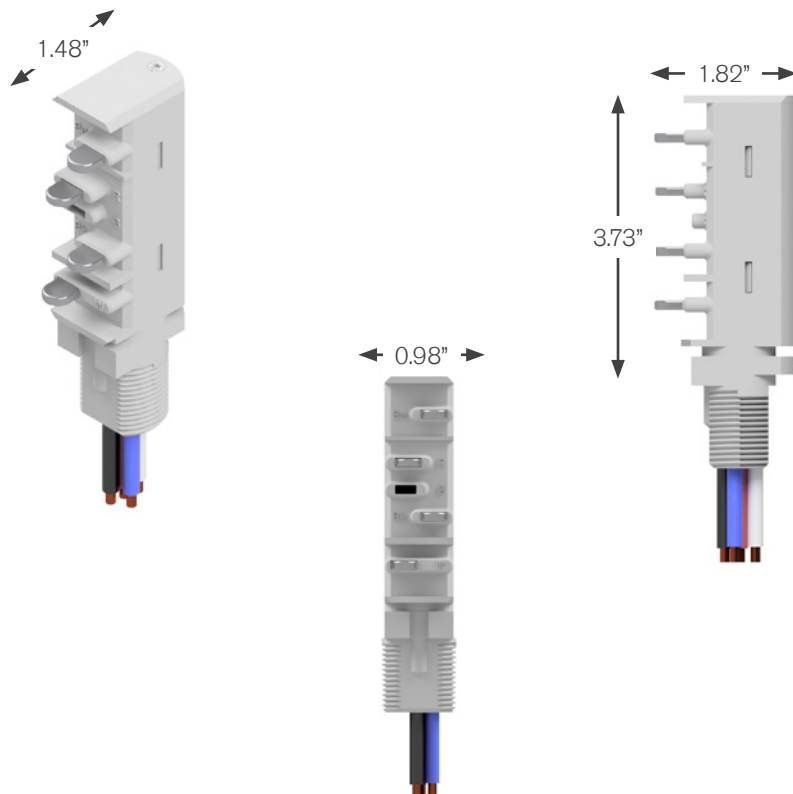




## 50 SERIES ENCLOSURE CUT SHEET

Next-generation, custom engineered enclosure that features a stylish exterior combined with a spacious interior and customizable body length to accommodate a wide variety of applications. The 50 Series enclosure is designed to tap off power from the busway. The option is available to have a reverse paddle such that the enclosure faces in the opposite direction when in the busway.

- Configurable unit length for multiple circuit breaker pole positions.
- Consult factory for possible combinations\*

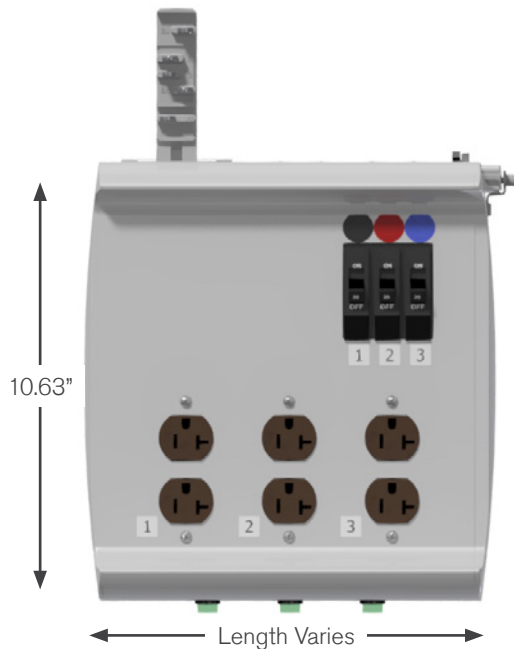

### Box Lengths

51:	6.00"
52:	8.00"
53:	10.00"
54:	12.00"
55:	13.00"
56:	15.00"
57:	18.00"

### EXAMPLES


**UCT3C54S-22-2ACFN-STD** = US System, Circuit Breaker Plug, T3 System, Case (Housing) Ground, 54 Box, Standard Orientation, 22 Interrupt Rating, 2 Devices, L21-30, Front Located, No Accessories, PPG Anodized Silver

**UCT3G53S-10-2EMFN-STD** = US System, Circuit Breaker Plug, T3 System, Isolated (Separate) Ground, 53 Box, Standard Orientation, 10 Interrupt Rating, 2 Devices, IGL15-30, Front Located, No Accessories, PPG Anodized Silver

## 90 SERIES ENCLOSURE CUT SHEET

Next-generation, custom engineered enclosure that features a stylish exterior combined with a spacious interior and customizable body length to accommodate a wide variety of applications. The 90 Series enclosure is designed to tap off power from the busway. The option is available to have a reverse paddle such that the enclosure faces in the opposite direction when in the busway.

- Configurable unit length for multiple circuit breaker pole positions.
- Consult factory for possible combinations\*

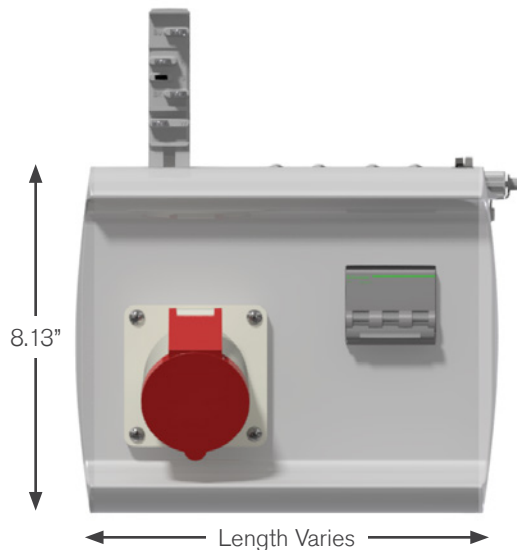

### Box Lengths

91:	6.00"
92:	8.00"
93:	10.00"
94:	12.00"
95:	13.00"
96:	15.00"
97:	18.00"

### EXAMPLES

**UCT3C93S-50-1AKFN-STD** = US System, Circuit Breaker Plug, T3 System, Case (Housing) Ground, 93 Box, Standard Orientation, 50 Interrupt Rating, 1 Device, CS8369, Front Located, No Accessories, PPG Anodized Silver

**UCT3C94S-10-2BGB050F-STD** = US System, Circuit Breaker Plug, T3 System, Case (Housing) Ground, 94 Box, Standard Orientation, 10 Interrupt Rating, 2 Devices, I6-30, Bottom Located, 5 foot Drop Cord, Finger Shroud, PPG Anodized Silver

## US DEVICE CODE TABLE

Device Code	Device Designation	Type	Voltage	Wiring Configuration
<b>NEMA Connectors</b>				
<b>BS</b>	5-15C	Connector	120	1PNG
<b>FF</b>	5-15Q-X	Connector	120	1PNG
<b>BD</b>	5-20C	Connector	120	1PNG
<b>FG</b>	5-20-Q-X	Connector	120	1PNG
<b>BB</b>	6-15C	Connector	240	2PG
<b>FH</b>	6-15Q-X	Connector	240	2PG
<b>BC</b>	6-20C	Connector	240	2PG
<b>FI</b>	6-20Q-X	Connector	240	2PG
<b>CO</b>	L14-20C	Connector	120/208	2PNG
<b>CN</b>	L14-30C	Connector	120/208	2PNG
<b>CM</b>	L15-20C	Connector	240	3PG
<b>CL</b>	L15-30C	Connector	240	3PG
<b>CE</b>	L16-20C	Connector	480	3PG
<b>CD</b>	L16-30C	Connector	480	3PG
<b>CS</b>	L21-20C	Connector	120/208	3PNG
<b>CT</b>	L21-30C	Connector	120/208	3PNG
<b>FA</b>	L22-20C	Connector	277/480	3PNG
<b>EZ</b>	L22-30C	Connector	277/480	3PNG
<b>BR</b>	L5-15C	Connector	120	1PNG
<b>BE</b>	L5-20C	Connector	120	1PNG
<b>BF</b>	L5-30C	Connector	120	1PNG
<b>BA</b>	L6-15C	Connector	240	2PG
<b>BH</b>	L6-20C	Connector	240	2PG
<b>BG</b>	L6-30C	Connector	240	2PG
<b>CK</b>	L7-15C	Connector	277	1PNG
<b>CJ</b>	L7-20C	Connector	277	1PNG
<b>CF</b>	L7-30C	Connector	277	1PNG
<b>Pin &amp; Sleeve Connectors</b>				
<b>BJ</b>	360C6W	Connector	240	2PG
<b>BQ</b>	420C6W	Connector	240	2PNG
<b>BW</b>	430C7W	Connector	480	3PG
<b>BP</b>	430C9W	Connector	240	3PG
<b>BX</b>	460C7W	Connector	480	3PG
<b>EJ</b>	460C9S	Connector	240	3PG
<b>EI</b>	460C9W	Connector	240	3PG
<b>BZ</b>	520C6S	Connector	240/415	3PNG
<b>CC</b>	530C6S	Connector	240/415	3PNG
<b>EX</b>	530C6W	Connector	240/415	3PNG

### Wiring Configuration Reference Table

1 = Number of poles

P = Poles

N = Neutral

G = Ground

## US DEVICE CODE TABLE

Device Code	Device Designation	Type	Voltage	Wiring Configuration
<b>Pin &amp; Sleeve Connectors (Continued)</b>				
CH	530C7S	Connector	480	3PNG
BI	530C9W	Connector	240/415	3PNG
CB	560C6S	Connector	240/415	3PNG
CI	560C7S	Connector	480	3PNG
EH	560C9W	Connector	120/208	3PNG
BV	320C6S	Connector	240	2PG
BU	330C6S	Connector	240	2PG
BT	360C6S	Connector	240	2PG
BO	560C9S	Connector	120/208	3PNG
<b>NEMA Receptacles</b>				
DD	14-20R	Receptacle	120/208	2PNG
DC	14-30R	Receptacle	120/208	2PNG
CW	14-50R	Receptacle	120/208	2PNG
CV	14-60R	Receptacle	120/208	2PNG
CU	15-20R	Receptacle	240	3PG
CY	15-30R	Receptacle	240	3PG
DI	15-50R	Receptacle	240	3PG
DH	15-60R	Receptacle	240	3PG
AW	5-15D	Receptacle	120	1PNG
FB	5-15Q	Receptacle	120	1PNG
DN	5-15R	Receptacle	120	1PNG
AB	5-20D	Receptacle	120	1PNG
DL	5-20D-GFI	Receptacle	120	1PNG
FC	5-20Q	Receptacle	120	1PNG
DM	5-20R	Receptacle	120	1PNG
DV	5-30R	Receptacle	120	1PNG
GB	6-15D	Receptacle	240	2PG
FD	6-15Q	Receptacle	240	2PG
DU	6-15R	Receptacle	240	2PG
GC	6-20D	Receptacle	240	2PG
FE	6-20Q	Receptacle	240	2PG
DO	6-20R	Receptacle	240	2PG
DR	6-30R	Receptacle	240	2PG
DA	6-50R	Receptacle	240	2PG
CZ	L14-20R	Receptacle	120/208	2PNG
DB	L14-30R	Receptacle	120/208	2PNG
CX	L15-20R	Receptacle	240	3PG
AH	L15-30R	Receptacle	240	3PG
EO	L16-20R	Receptacle	480	3PG

### Wiring Configuration Reference Table

1 = Number of poles

P = Poles

N = Neutral

G = Ground

## US DEVICE CODE TABLE

Device Code	Device Designation	Type	Voltage	Wiring Configuration
<b>NEMA Receptacles (Continued)</b>				
EQ	L16-30R	Receptacle	480	3PG
AT	L21-20R	Receptacle	120/208	3PNG
AC	L21-30R	Receptacle	120/208	3PNG
AA	L22-20R	Receptacle	277/480	3PNG
AF	L22-30R	Receptacle	277/480	3PNG
AS	L5-15D	Receptacle	120	1PNG
AP	L5-15R	Receptacle	120	1PNG
AG	L5-20R	Receptacle	120	1PNG
AO	L5-30R	Receptacle	120	1PNG
DP	L6-15D	Receptacle	240	2PG
DQ	L6-15R	Receptacle	240	2PG
AI	L6-20R	Receptacle	240	2PG
AD	L6-30R	Receptacle	240	2PG
ES	L7-15D	Receptacle	277	1PNG
ER	L7-15R	Receptacle	277	1PNG
AQ	L7-20R	Receptacle	277	1PNG
EP	L7-30R	Receptacle	277	1PNG
<b>Pin &amp; Sleeve Receptacles</b>				
FJ	316A6S	Receptacle	240/415	2PG
FK	316A6W	Receptacle	240/415	2PG
FL	316R6S	Receptacle	240/415	2PG
FM	320A6S	Receptacle	240/415	2PG
FN	320A6W	Receptacle	240/415	2PG
FO	332A6S	Receptacle	240/415	2PG
FP	332A6W	Receptacle	240/415	2PG
FQ	332A9S	Receptacle	240/415	2PG
FR	332R6S	Receptacle	240/415	2PG
DG	360R6W	Receptacle	240	2PG
FS	363R6S	Receptacle	240/415	2PG
DF	430R9W	Receptacle	240	3PG
AU	460R9S	Receptacle	240	3PG
AN	460R9W	Receptacle	240	3PG
FT	5125R6S	Receptacle	240/415	3PNG
FU	516A6S	Receptacle	240/415	3PNG
FV	516A6W	Receptacle	240/415	3PNG
FW	516R6S	Receptacle	240/415	3PNG
FX	520A6W	Receptacle	240/415	3PNG
FY	520R6S	Receptacle	240/415	3PNG
AR	530R6S	Receptacle	240/415	3PNG
FZ	532A6S	Receptacle	240/415	3PNG
GA	532A6W	Receptacle	240/415	3PNG

### Wiring Configuration Reference Table

1 = Number of poles

P = Poles

N = Neutral

G = Ground

## US DEVICE CODE TABLE

Device Code	Device Designation	Type	Voltage	Wiring Configuration
<b>Pin &amp; Sleeve Receptacles (Continued)</b>				
<b>BY</b>	560R6S	Receptacle	240/415	3PNG
<b>DS</b>	360C4W	Receptacle	120	1PNG
<b>Isolated Ground Receptacles</b>				
<b>EN</b>	IG14-30R	Receptacle	120/208	2PNG
<b>AX</b>	IG5-20D	Receptacle	120	1PNG
<b>EA</b>	IG5-20R	Receptacle	120	1PNG
<b>DY</b>	IG6-20D	Receptacle	240	2PG
<b>DZ</b>	IG6-20R	Receptacle	240	2PG
<b>EK</b>	IGL14-20R	Receptacle	120/208	2PNG
<b>ET</b>	IGL15-20R	Receptacle	240	3PG
<b>EM</b>	IGL15-30R	Receptacle	240	3PG
<b>EL</b>	IGL21-20R	Receptacle	120/208	3PNG
<b>EG</b>	IGL21-30R	Receptacle	120/208	3PNG
<b>EU</b>	IGL22-20R	Receptacle	277/480	3PNG
<b>EV</b>	IGL22-30R	Receptacle	277/480	3PNG
<b>EB</b>	IGL5-15R	Receptacle	120	1PNG
<b>AY</b>	IGL5-20R	Receptacle	120	1PNG
<b>ED</b>	IGL5-30R	Receptacle	120	1PNG
<b>DW</b>	IGL6-15D	Receptacle	240	2PG
<b>DX</b>	IGL6-15R	Receptacle	240	2PG
<b>AM</b>	IGL6-20R	Receptacle	240	2PG
<b>AZ</b>	IGL6-30R	Receptacle	240	2PG
<b>California Connectors</b>				
<b>CP</b>	CS6360C	Connector	120	1PNG
<b>CG</b>	CS8164C	Connector	480	3PG
<b>CR</b>	CS8264C	Connector	240	2PG
<b>CQ</b>	CS8364C	Connector	240	3PG
<b>California Receptacles</b>				
<b>DK</b>	CS6369	Receptacle	120/208	2PNG
<b>DE</b>	CS8269	Receptacle	240	2PG
<b>AK</b>	CS8369	Receptacle	240	3PG
<b>Other</b>				
<b>XX</b>	Custom Device (ex: colored receptacle, etc.)			

### Wiring Configuration Reference Table

1 = Number of poles

P = Poles

N = Neutral

G = Ground

Starline, a brand of Legrand, has been a leader in power distribution since 1924. The company's founders led the way for many new technologies in the power distribution equipment industry. Today, Starline continues to pave the way for safer, more innovative and more reliable electrical power distribution systems. Visit [StarlinePower.com](http://StarlinePower.com) to learn more about our flexible power solutions.

**Starline**<sup>®</sup>  
A brand of  **legrand**<sup>®</sup>

**North American Headquarters**

168 Georgetown Road | Canonsburg, PA 15317 | USA | +1 800-245-6378

**UK & Northern Europe**

Unit C Island Road | Reading RG2 0RP | UK | +44 (0) 1183-043180

**Asia Pacific Region**

16D Tuas Avenue 1 | #04-60/62 | JTC Space @ Tuas | Singapore 639536 | +65 6950-1247

**StarlinePower.com**

+1 724-597-7800 | +1 800-245-6378

06/20 F0000009-US-T3

