




Composition : Calcium carbide : 52% (+ 2%)
Carbonaceous Mass : 4-6%
Slag modifier : 2 -3%
Fluidized Lime : Balance

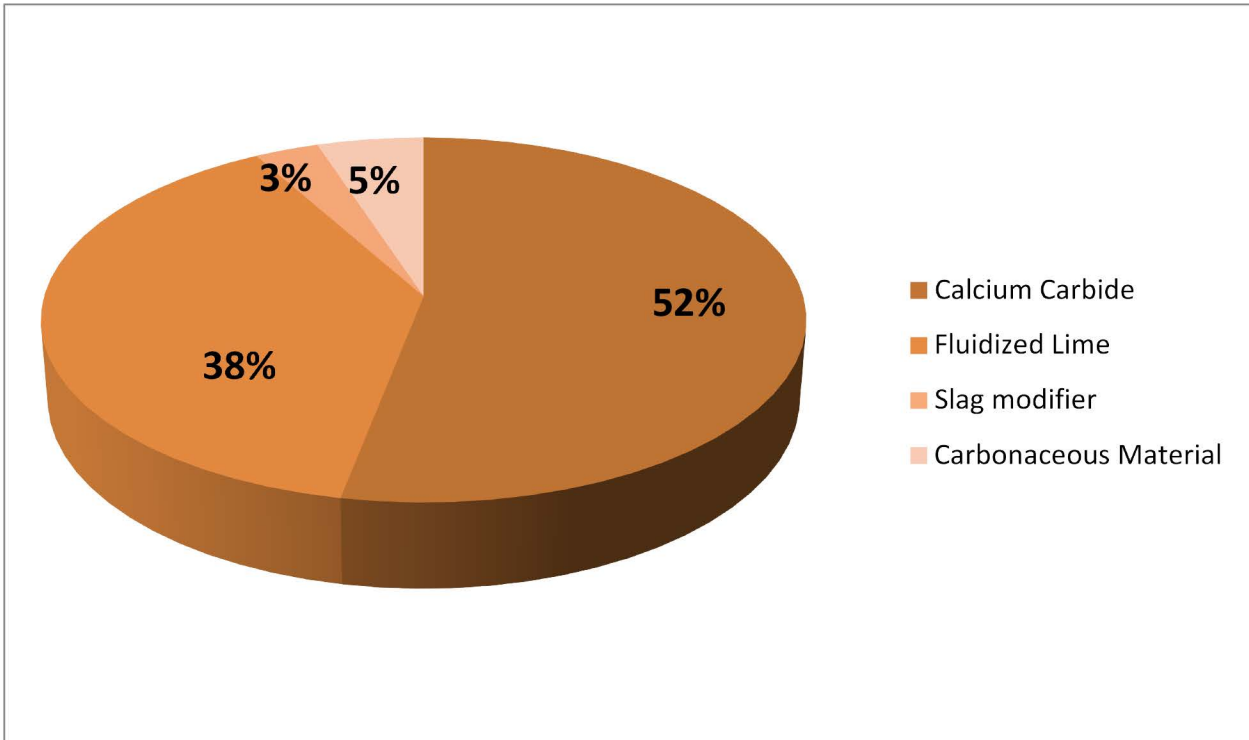

Grain Size Distribution : < 63 micron – 80% min.
< 90 micron – 95% min.
< 100 micron – 100%

Density : 1000 Kg/m³

Packing : In Silo tanker under dry N₂ cover

Application : Hot Metal DeSulphurisation by injecting into the ladle through pneumatic conveying system.

