




Composition : Magnesium Metal : 97% min.
Lime for passivation : 3% max.

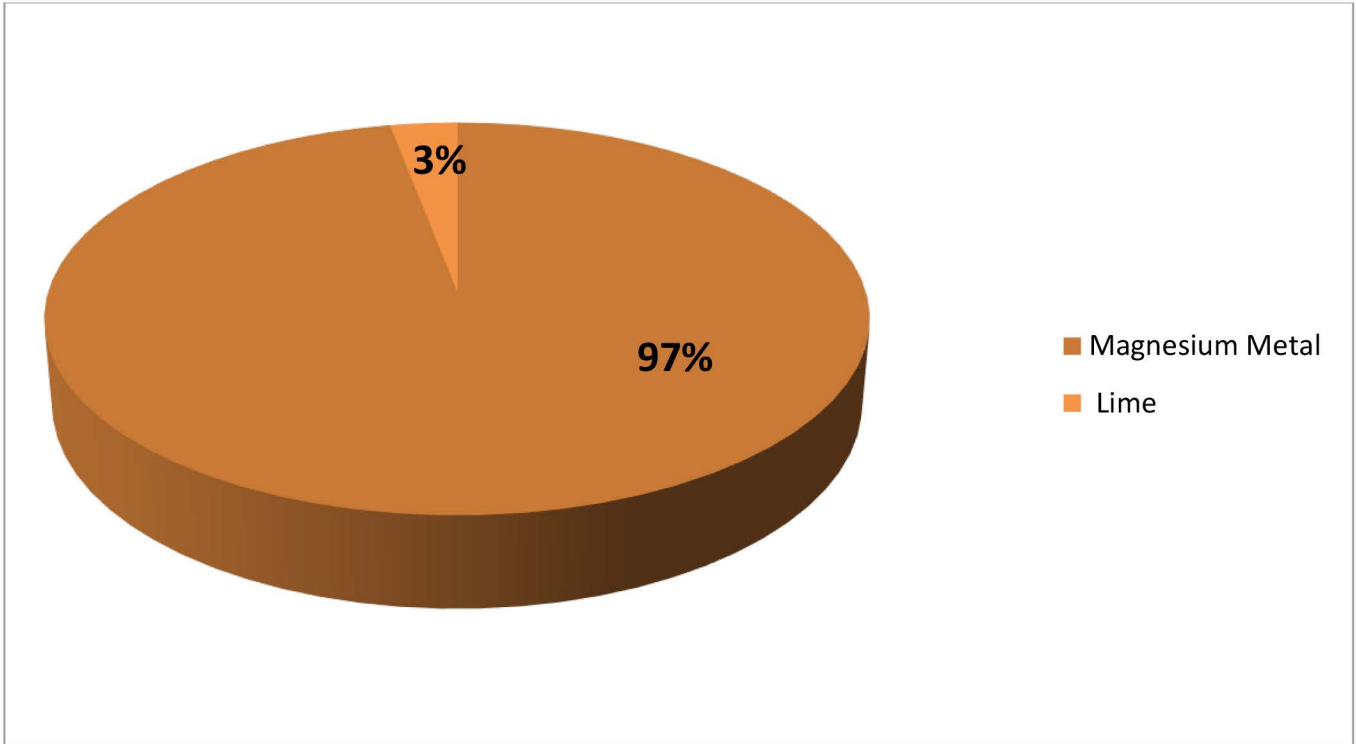

Grain Size Distribution : < 0.2mm – 5% max.
0.2-0.5mm – 40 -60 %
0.5-0.8mm – 30-50%
>0.8mm – 5% max.

Density : 800 Kg/m3

Packing : In Silo tanker under dry N2 cover

Application : Hot Metal DeSulphurisation by injecting in the ladle through pneumatic conveying system.

