




Composition : CaO : 40-45%
Al₂O₃ : 30-33%
Free Al : 8-10%
SiO₂+MgO : 4-6%
R₂O₃+ others : 7-10%

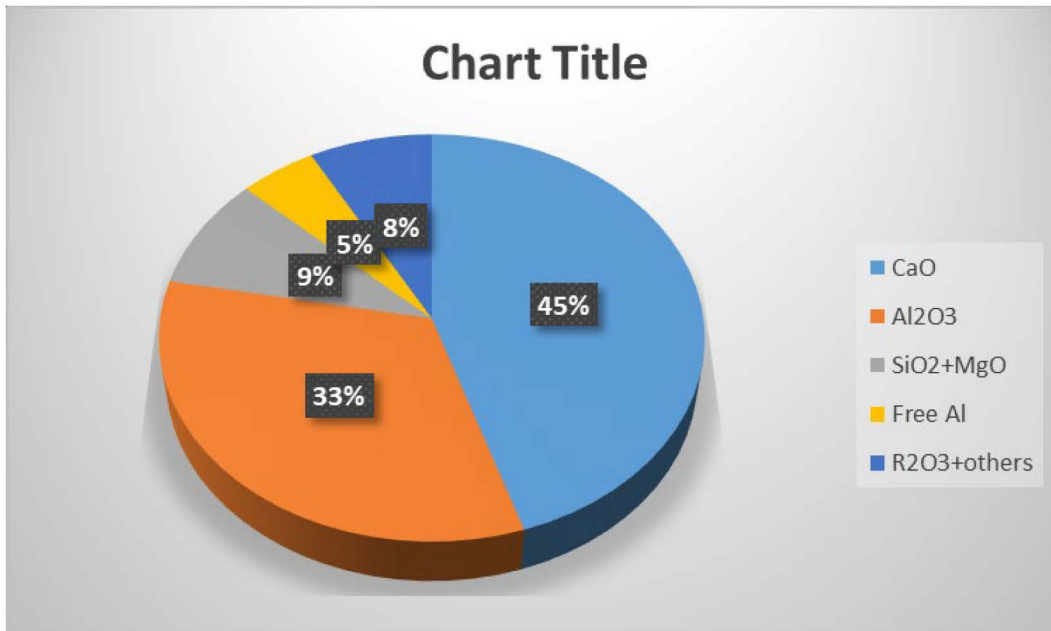

Grain Size Distribution : 10-50 mm
Bulk Density : 980 Kg/m³
Melting point : 1380 °C

Packing : HDPE bags 20 kg each. Such small bags are packed in 1 T jumbo bag

Application : To be used in LRF during convertor tapping with stream of liquid steel.

