

## Miragrid® 22XT

Miragrid® 22XT geogrid is composed of high molecular weight, high tenacity polyester multifilament yarns woven in tension and finished with a PVC coating. Miragrid® 22XT geogrid is inert to biological degradation and resistant to naturally encountered chemicals, alkalis, and acids.

Miragrid 22XT geogrid is used as soil reinforcement in MSE structures such as segmental retaining walls, precast modular block walls, wire faced walls, geosynthetic wrapped faced walls and steepened slopes. Miragrid 22XT is also used in MSE stabilized platforms for voids bridging, embankments on soft soils, landfill veneer stability, reducing differential settlement and for foundation seismic stability.

TenCate Geosynthetics Americas is accredited by Geosynthetic Accreditation Institute – Laboratory Accreditation Program ([GAI-LAP](#)).

MECHANICAL PROPERTIES	TEST METHOD	UNIT	MINIMUM AVERAGE ROLL VALUE
			MD
Tensile Strength @ Ultimate	ASTM D6637 (Method B)	lbs/ft (kN/m)	20559 (300.0)
Tensile Strength @ 5% strain	ASTM D6637 (Method B)	lbs/ft (kN/m)	6700 (97.8)
Mass/Unit Area <sup>1</sup>	(ASTM D5261)	oz/yd <sup>2</sup> (g/m <sup>2</sup> )	28.2 (956)
MINIMUM ROLL VALUE			
Creep Rupture Strength <sup>2</sup>	ASTM D5262/D6992	lbs/ft (kN/m)	14277 (208.3)
Long Term Design Strength <sup>3</sup>		lbs/ft (kN/m)	12361 (180.4)
PHYSICAL PROPERTIES		UNIT	ROLL CHARACTERISTIC
Roll Dimensions <sup>4</sup> (width x length)		ft (m)	12 x 200 (3.6 x 61)
Roll Area		yd <sup>2</sup> (m <sup>2</sup> )	267 (220)
Estimated Roll Weight		lbs (kg)	470 (213)
Label Roll Color			WHITE

<sup>1</sup> Typical Value

<sup>2</sup> 75-year design life based on NTPEP Report [REGEO-2016-01-069](#).

<sup>3</sup> Long Term Design Strength for sand, silt, clay. RF<sub>CR</sub> = 1.44; RF<sub>ID</sub> = 1.05; RF<sub>D</sub> = 1.1 (Installation damage reduction factor for other soils available upon request).

<sup>4</sup> Special order roll lengths are available upon request

Disclaimer: TenCate assumes no liability for the accuracy or completeness of this information or for the ultimate use by the purchaser. TenCate disclaims any and all express, implied, or statutory standards, warranties or guarantees, including without limitation any implied warranty as to merchantability or fitness for a particular purpose or arising from a course of dealing or usage of trade as to any equipment, materials, or information furnished herewith. This document should not be construed as engineering advice. Mirafi® is a registered trademark of Nicolon Corporation. Copyright © 2021 Nicolon Corporation. All Rights Reserved  
FGS000105  
ETQR19





**MYERS<sup>®</sup>**  
**MODEL SRM4**  
**4/10 HORSEPOWER**  
**RESIDENTIAL SEWAGE PUMP**



[WWW.FEMYERS.COM](http://WWW.FEMYERS.COM)

# MYERS® MODEL SRM4

## Residential Sewage Pump

### The Right Choice


The SRM4 solids handling pump is the most reliable 4/10 horsepower residential sewage pump available today. The SRM4 is a plumbers/contractors dream! Its recessed impeller design allows 2" solids to pass freely through the volute without the chance of jamming the impeller. The SRM4 series pump has a national field-proven record of reliability. Look to your Myers distributor for the answer to your residential sewage handling needs ... and across the counter will be the Myers mini solids handling, the SRM4. It works for you! For more information, call your Myers distributor today, or the Myers Ohio sales office at 419-289-6898.



Product Capabilities		
Capacities To	95 gpm	360 lpm
Heads To	18 ft.	5.5 m
	19 ft. shutoff	5.8 m
Pump Down Range Float Switch	7 to 14 in.	178 to 356 mm
Solids Handling Capacity	2 in.	50.8 mm
Liquids Handling	raw sewage, effluent, drain water	
Intermittent Liquid Temp.	up to 140°F	up to 60°C
Motor Electrical Data	4/10 HP shaded pole 1650 RPM	
Electrical	115V, 12A or 230V, 6A, 1Ø, 60 Hz.	
Acceptable pH Range	6 – 9	
Discharge, NPT	2 in.	50.8 mm
Min. Sump Diameter	18 in.	457 mm
	30 in.	762 mm

Note: Consult factory for applications outside these recommendations.

# Pump Features and Applications

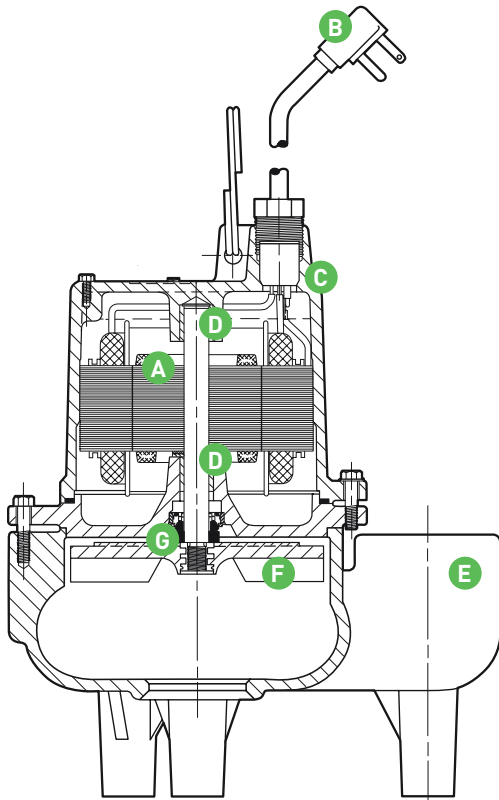

## A. 4/10 HP Motor

Pressed in place and oil-filled for best alignment and heat transfer. Built-in overload protection.

## B. Power Cord

Quick-disconnect watertight fitting.

## C. Motor Housing

Heavy cast iron for efficient heat transfer.

## D. Dual Thrust Washers, Sleeve Bearings

Oil lubricated, enhance smooth operation and extend pump life..

## E. Cast Iron Volute

Passes 2" diameter solids.

## F. Recessed Impeller

Operates out of volute passage, allowing maximum flow of liquids and solids.

## G. Mechanical Shaft Seal

Carbon and ceramic faces, body is stationary, prevents string or trash from winding on seal..

## Mechanical Float Switch

Mercury-free, 90° angle operation. (Piggyback models only).

## Durable Motor Will Deliver Many Years Of Reliable Service.

- Oil-filled motor for maximum heat dissipation and continuous bearing lubrication.
- Overload protected shaded pole motor eliminates starting switches.
- Recessed vortex impeller provides minimal radial loading for long bearing life.




## The SRM4P Is Engineered For Many Years Of Maintenance-Free Operation.

- Wide-angle piggy-back float switch for maximum draw down. (Automatic models.)
- Pump can be operated manually by unplugging piggy-back switch and plugging pump directly into outlet (Automatic models).
- Recessed vortex impeller operates completely out of volute and provides free flow through passage for solids and liquids.

# Performance Data and Dimensions

[Dimensions in mm]

1650 RPM

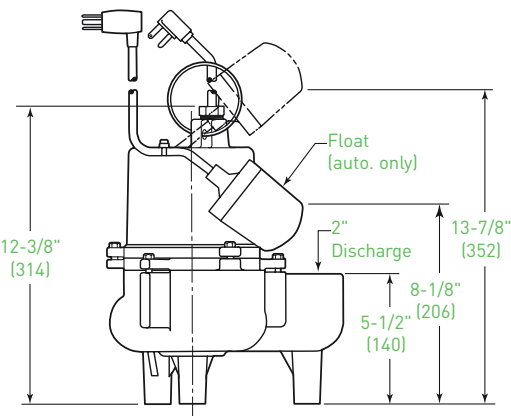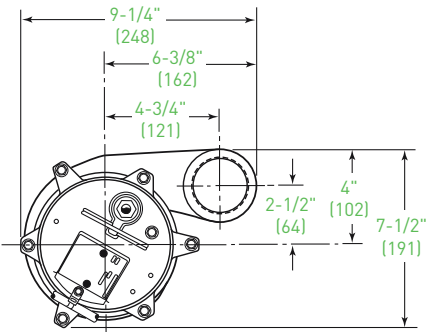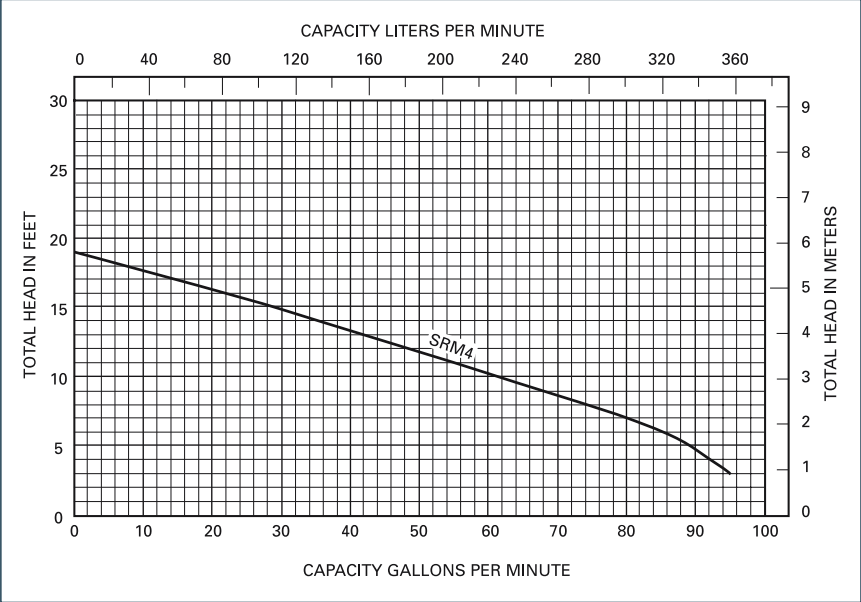

740 EAST 9TH STREET,  
ASHLAND, OHIO 44805  
WWW.FEMYERS.COM

269 TRILLIUM DRIVE, KITCHENER,  
ONTARIO, CANADA N2G 4W5  
WWW.FEMYERS.COM

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.  
K3305 1/2/13 © 2013 Pentair Ltd. All Rights Reserved.



January 13, 2023

David T. Bray, PLS  
President  
Caputo & Wick LTD  
1150 Pawtucket Ave.  
Rumford, RI 02916-1897  
Phone: (401) 434-8880

**RE: Burlingame State Park and Camp Ground, Charlestown, RI**

Dear Mr. Bray:

This letter will confirm that you have been trained and certified to design GST™ Leaching Systems by Geomatrix Systems, LLC ("Geomatrix") in the State of Rhode Island.

This letter also confirms that Geomatrix has reviewed the design of the GST Leaching System proposed for installation at Burlingame State Park and Camp Ground, Charlestown, RI and found the site and design to be suitable and in compliance with the approved design manuals for the aforementioned product.

If you have any questions, please contact me.

Sincerely,  
GEOMATRIX SYSTEMS, LLC


A handwritten signature in black ink, appearing to read "David Jewett". The signature is fluid and cursive, with a long horizontal stroke extending from the end.

David Jewett

Geomatrix Systems, LLC  
114 Mill Rock Road East - Old Saybrook, CT 06475  
Phone: 860-510-0730 – Fax: 860-510-0735



# GST Schematics

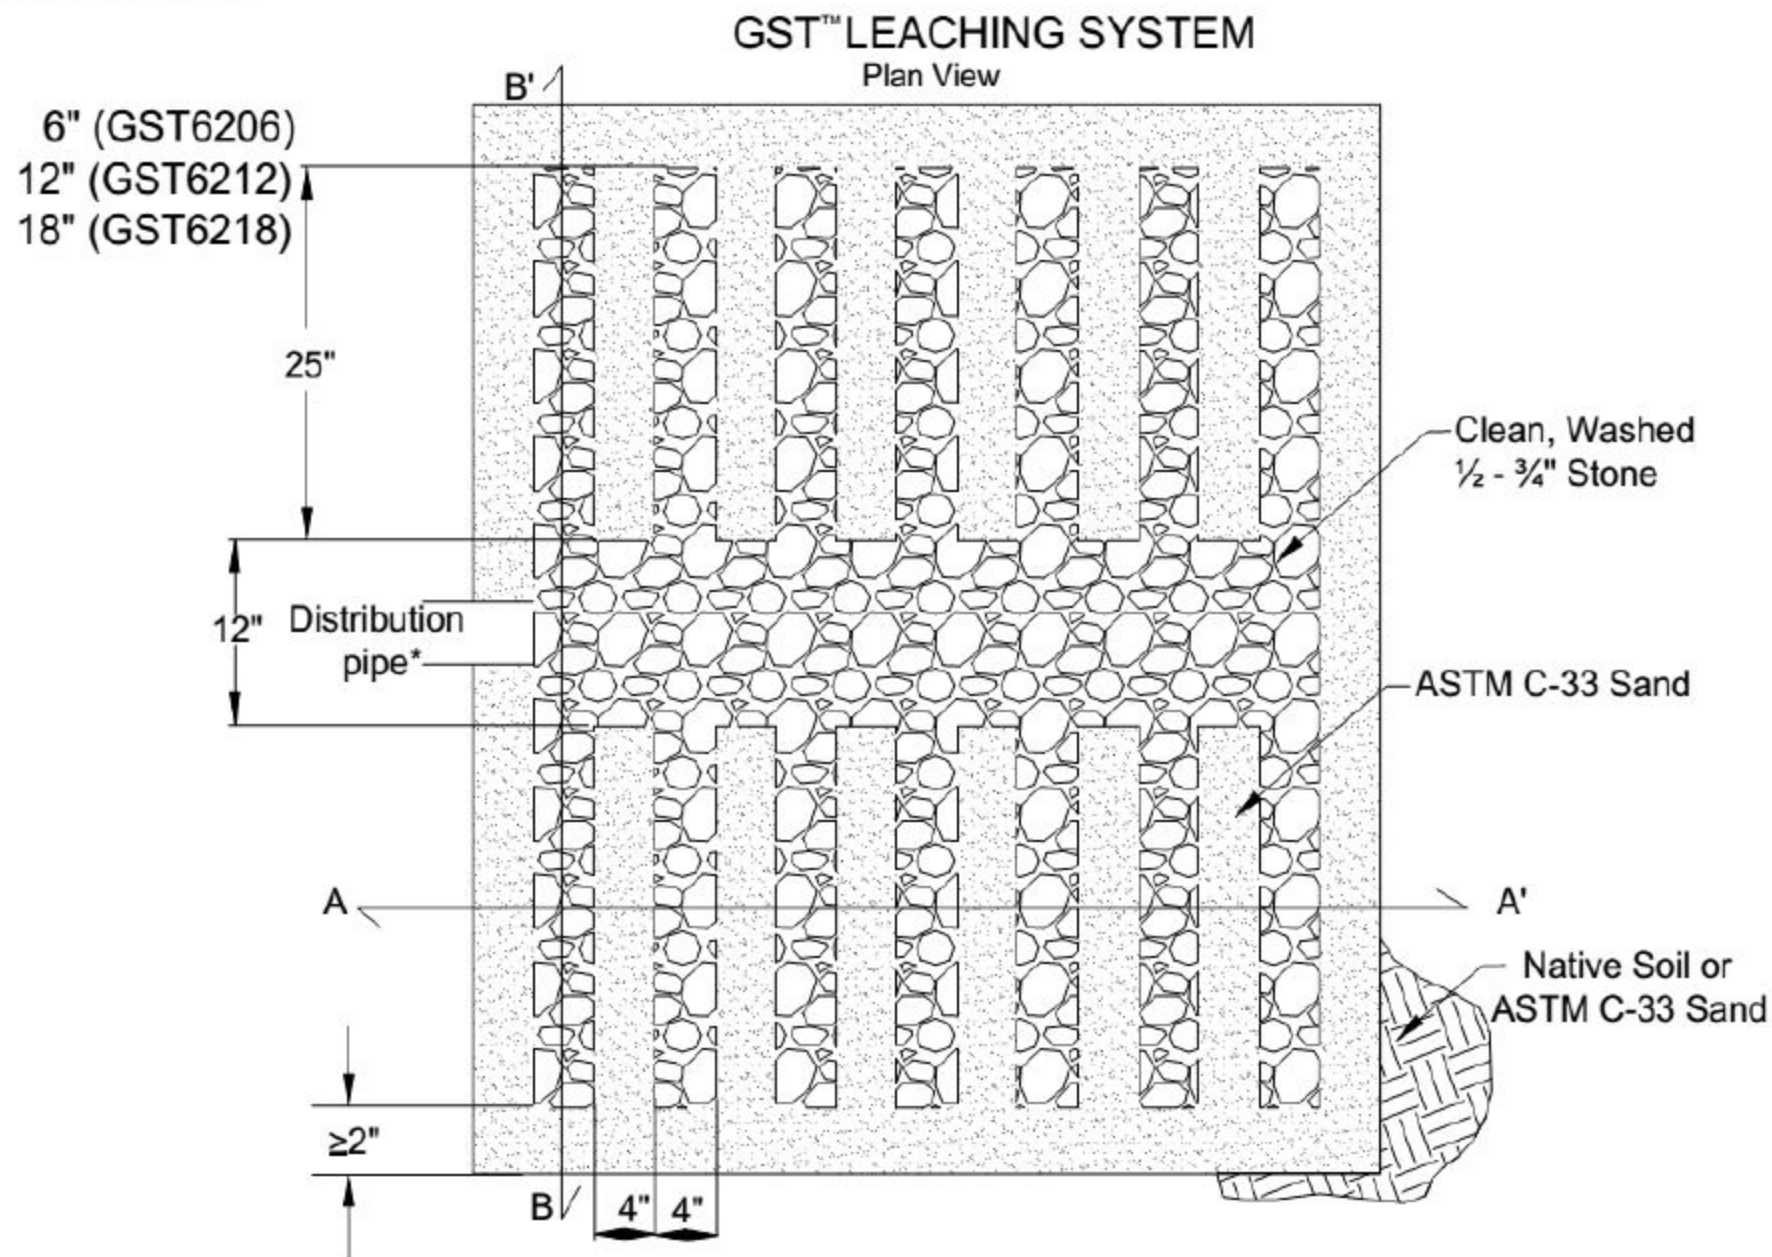


\* Distribution pipe for gravity systems shall comply with RIDEM OWTS Rule 6.34C  
Distribution pipe for pressure applications shall comply with RIDEM Guidelines for the Design, Use and Maintenance of Pressurized Drainfields.

# GEOMATRIX GST™ LEACHING SYSTEM

## A-A' CROSS SECTION

Finished Grade shall be pitched to sheet flow  
stormwater away from system

Cover material depth shall be 6-30" and  
shall be uniform over distribution pipe

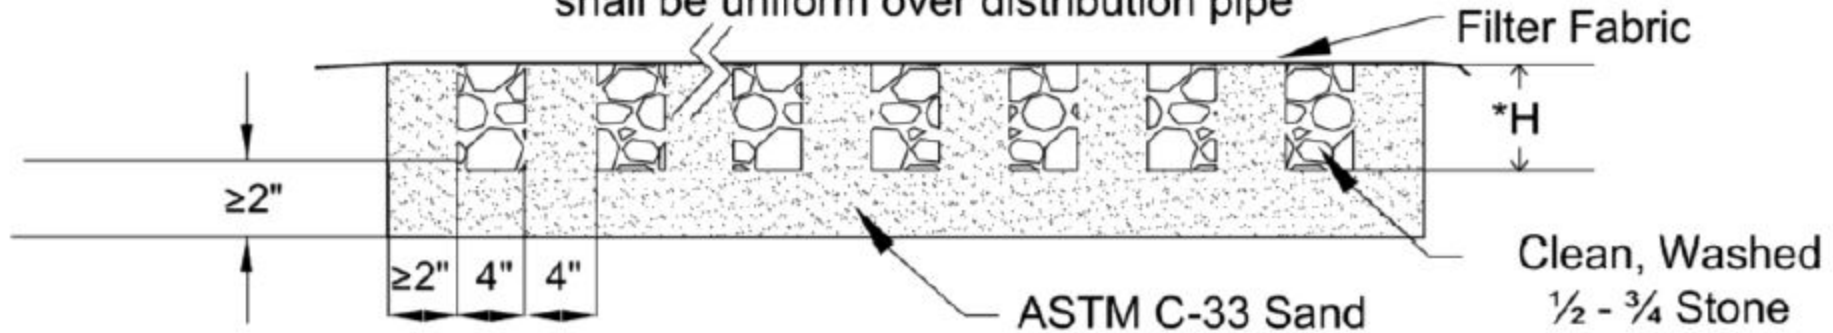


\*H= 6" (GST6206)  
12" (GST6212)  
18" (GST6218)

# GST™ LEACHING SYSTEM

## B-B' CROSS SECTION

Finished Grade shall be pitched to sheet flow  
stormwater away from system

Cover material depth shall be 6-30" and  
shall be uniform over distribution pipe

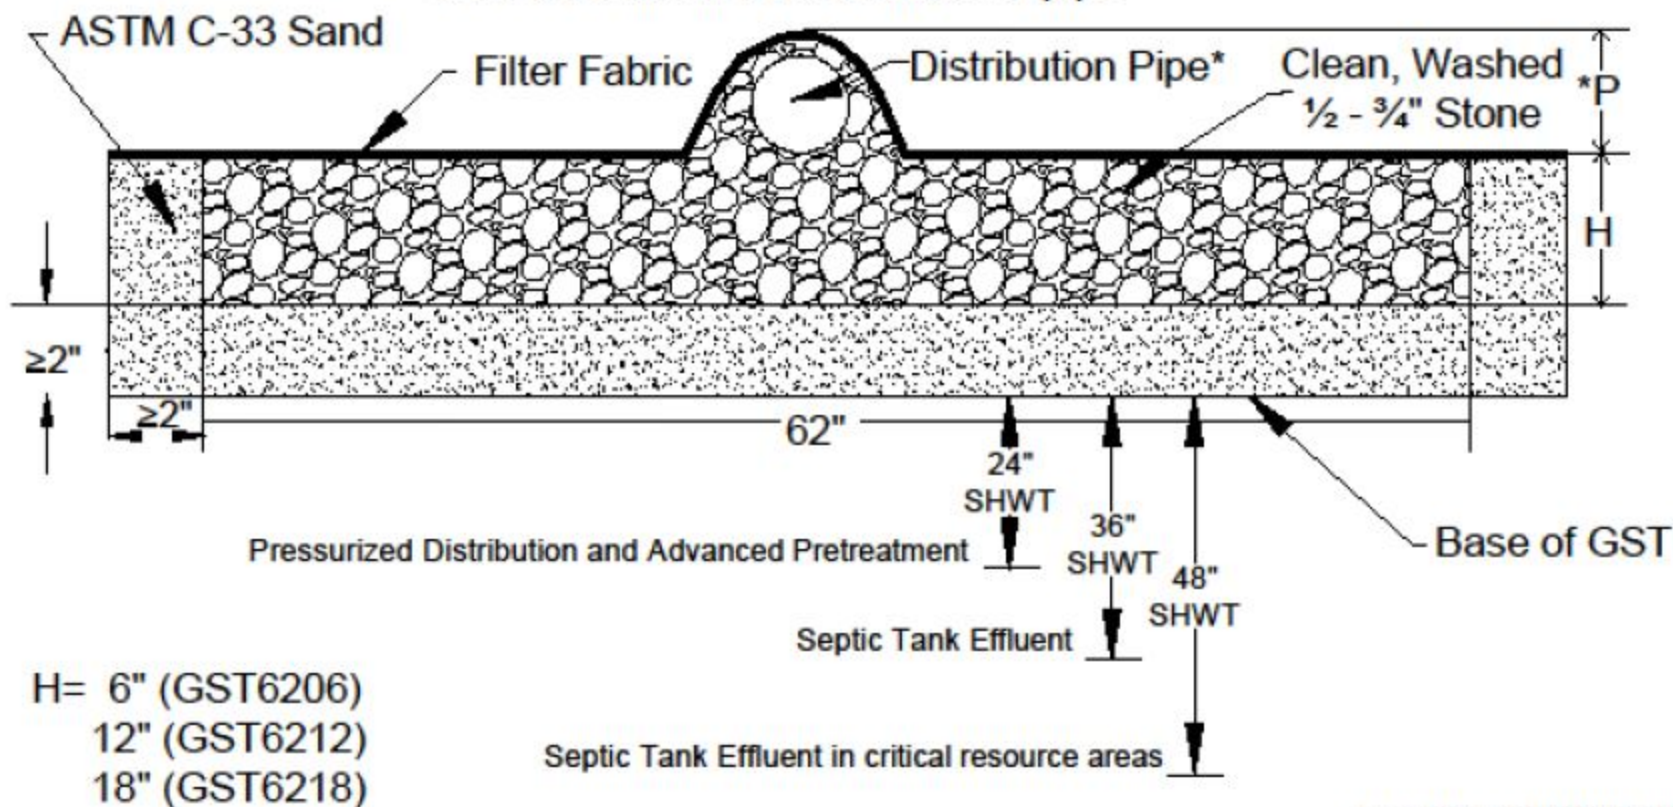

\* Distribution pipe for gravity applications shall comply with RIDEM OWTS Rule 6.34C  
Distribution pipe for pressure applications shall comply with RIDEM Guidelines for the  
Design, Use and Maintenance of Pressurized Drainfields

Copyright 2022 GEOMATRIX SYSTEMS, LLC  
patents: www.geomatrixsystems.com


GST LEACHING SYSTEM

B-B' Cross Section

Geomatrix Systems, LLC., Old Saybrook, CT  
860-510-0730


SCALE	None	REV.	0
DATE	9-4-2018	ACAD No.	040 GLS B-B'.DWG
DRAWN BY:	ERP	SHEET	3 OF 3

# GEOMATRIX GST™ LEACHING SYSTEM INSPECTION PORT DETAIL

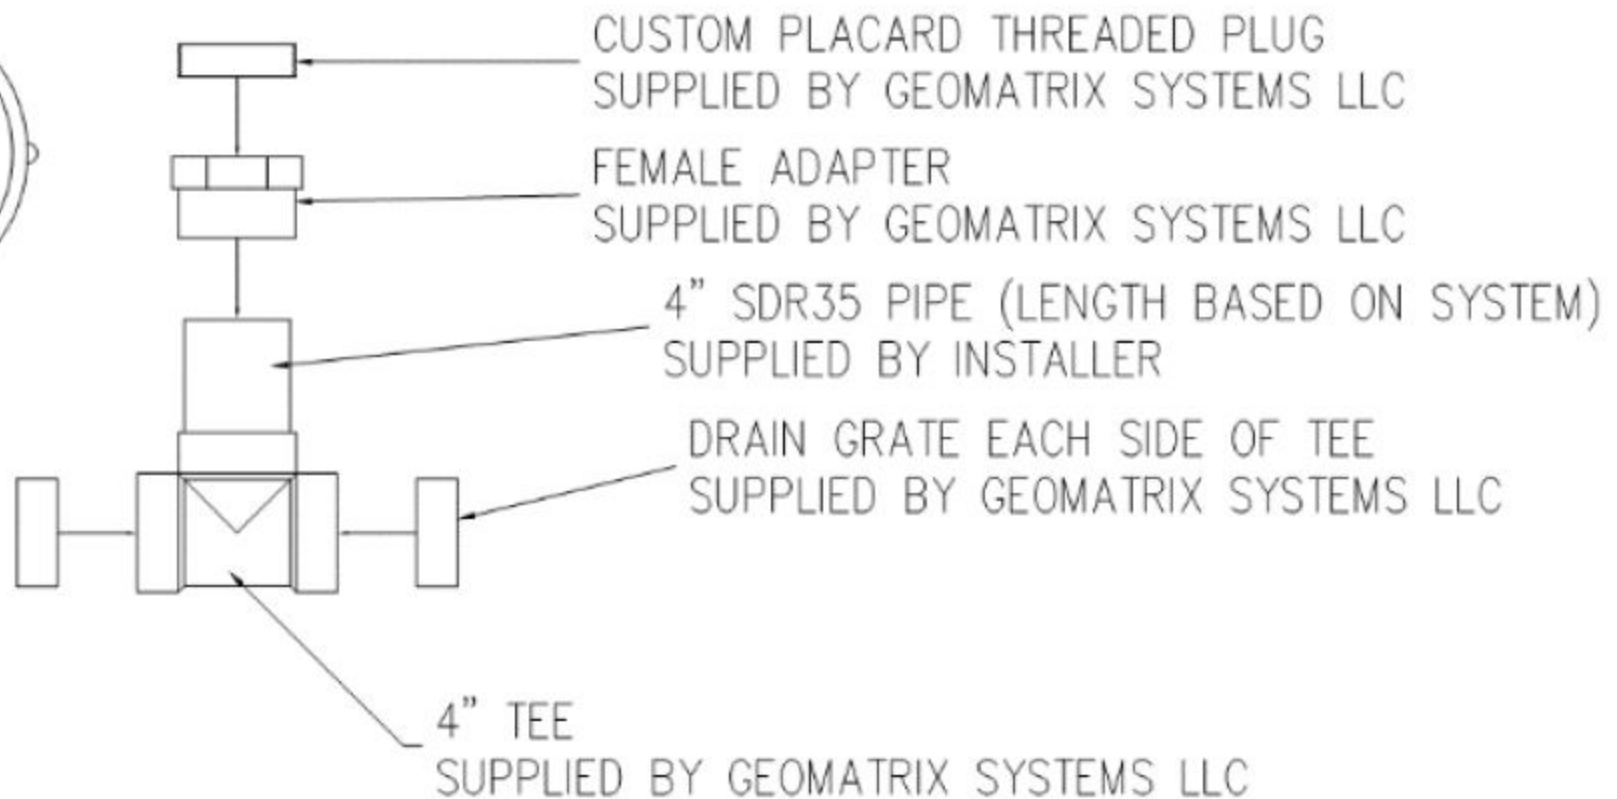


GST LEACHING SYSTEM Inspection Port Detail Geomatrix Systems, LLC., Old Saybrook, CT 860-510-0730			
SCALE	None	REV.	A
DATE	6/2/2015	ACAD No.	GSTIP.DWG
DRAWN BY:	ERP	SHEET	I OF I

# RIDEM GIS MAP

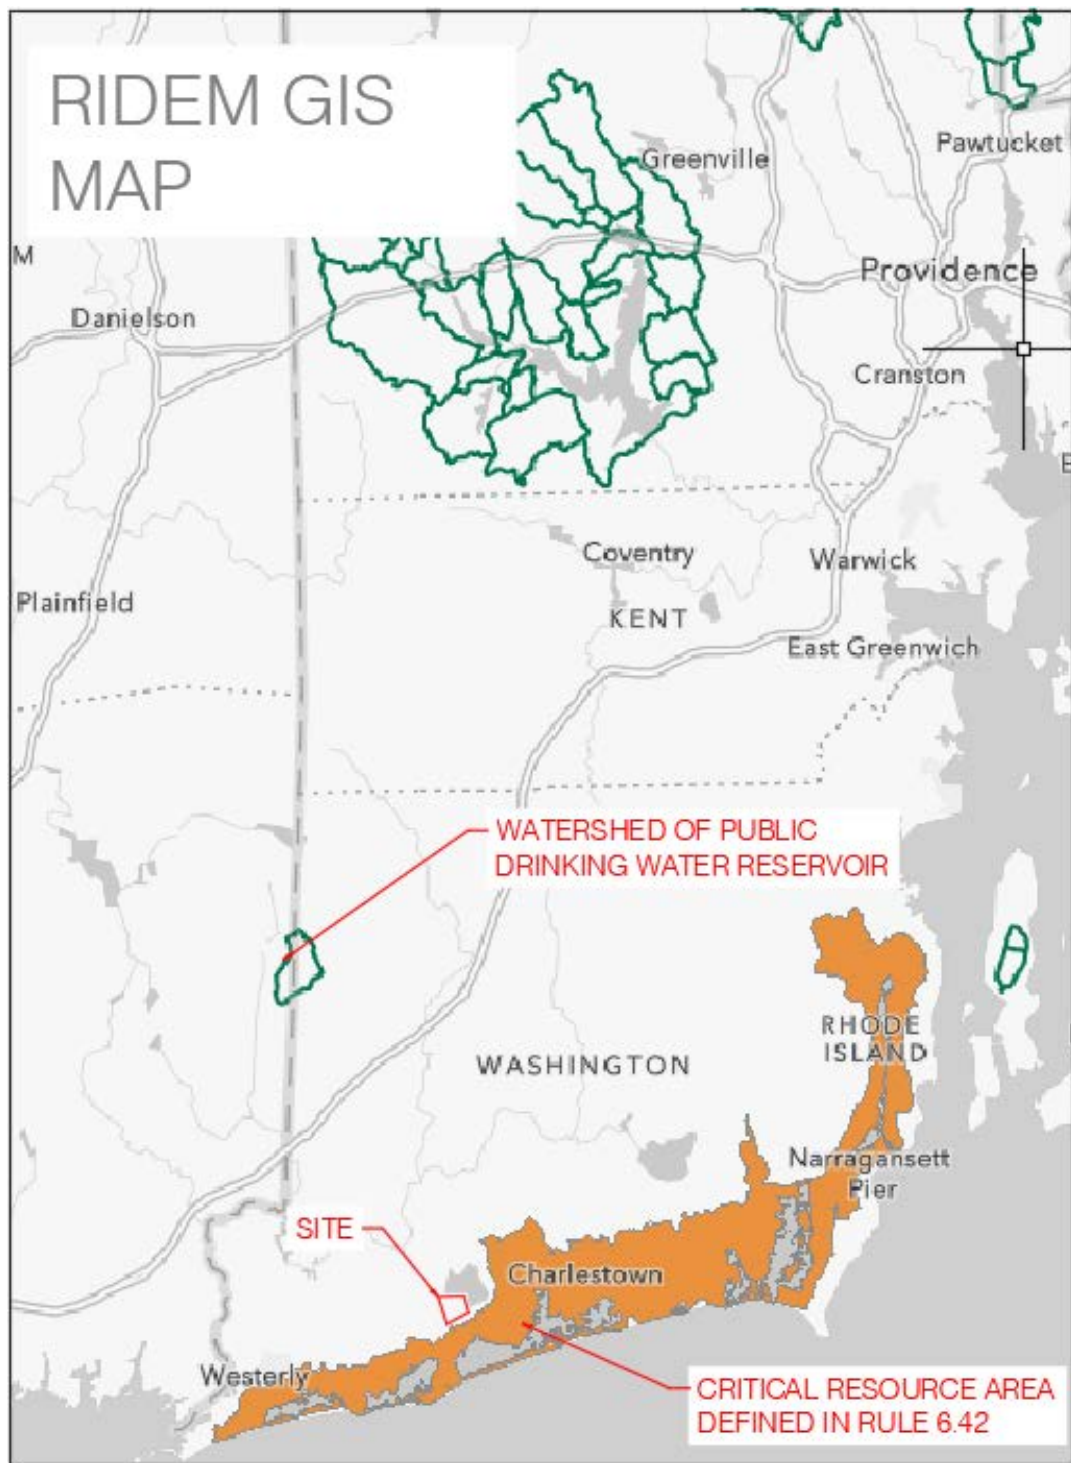




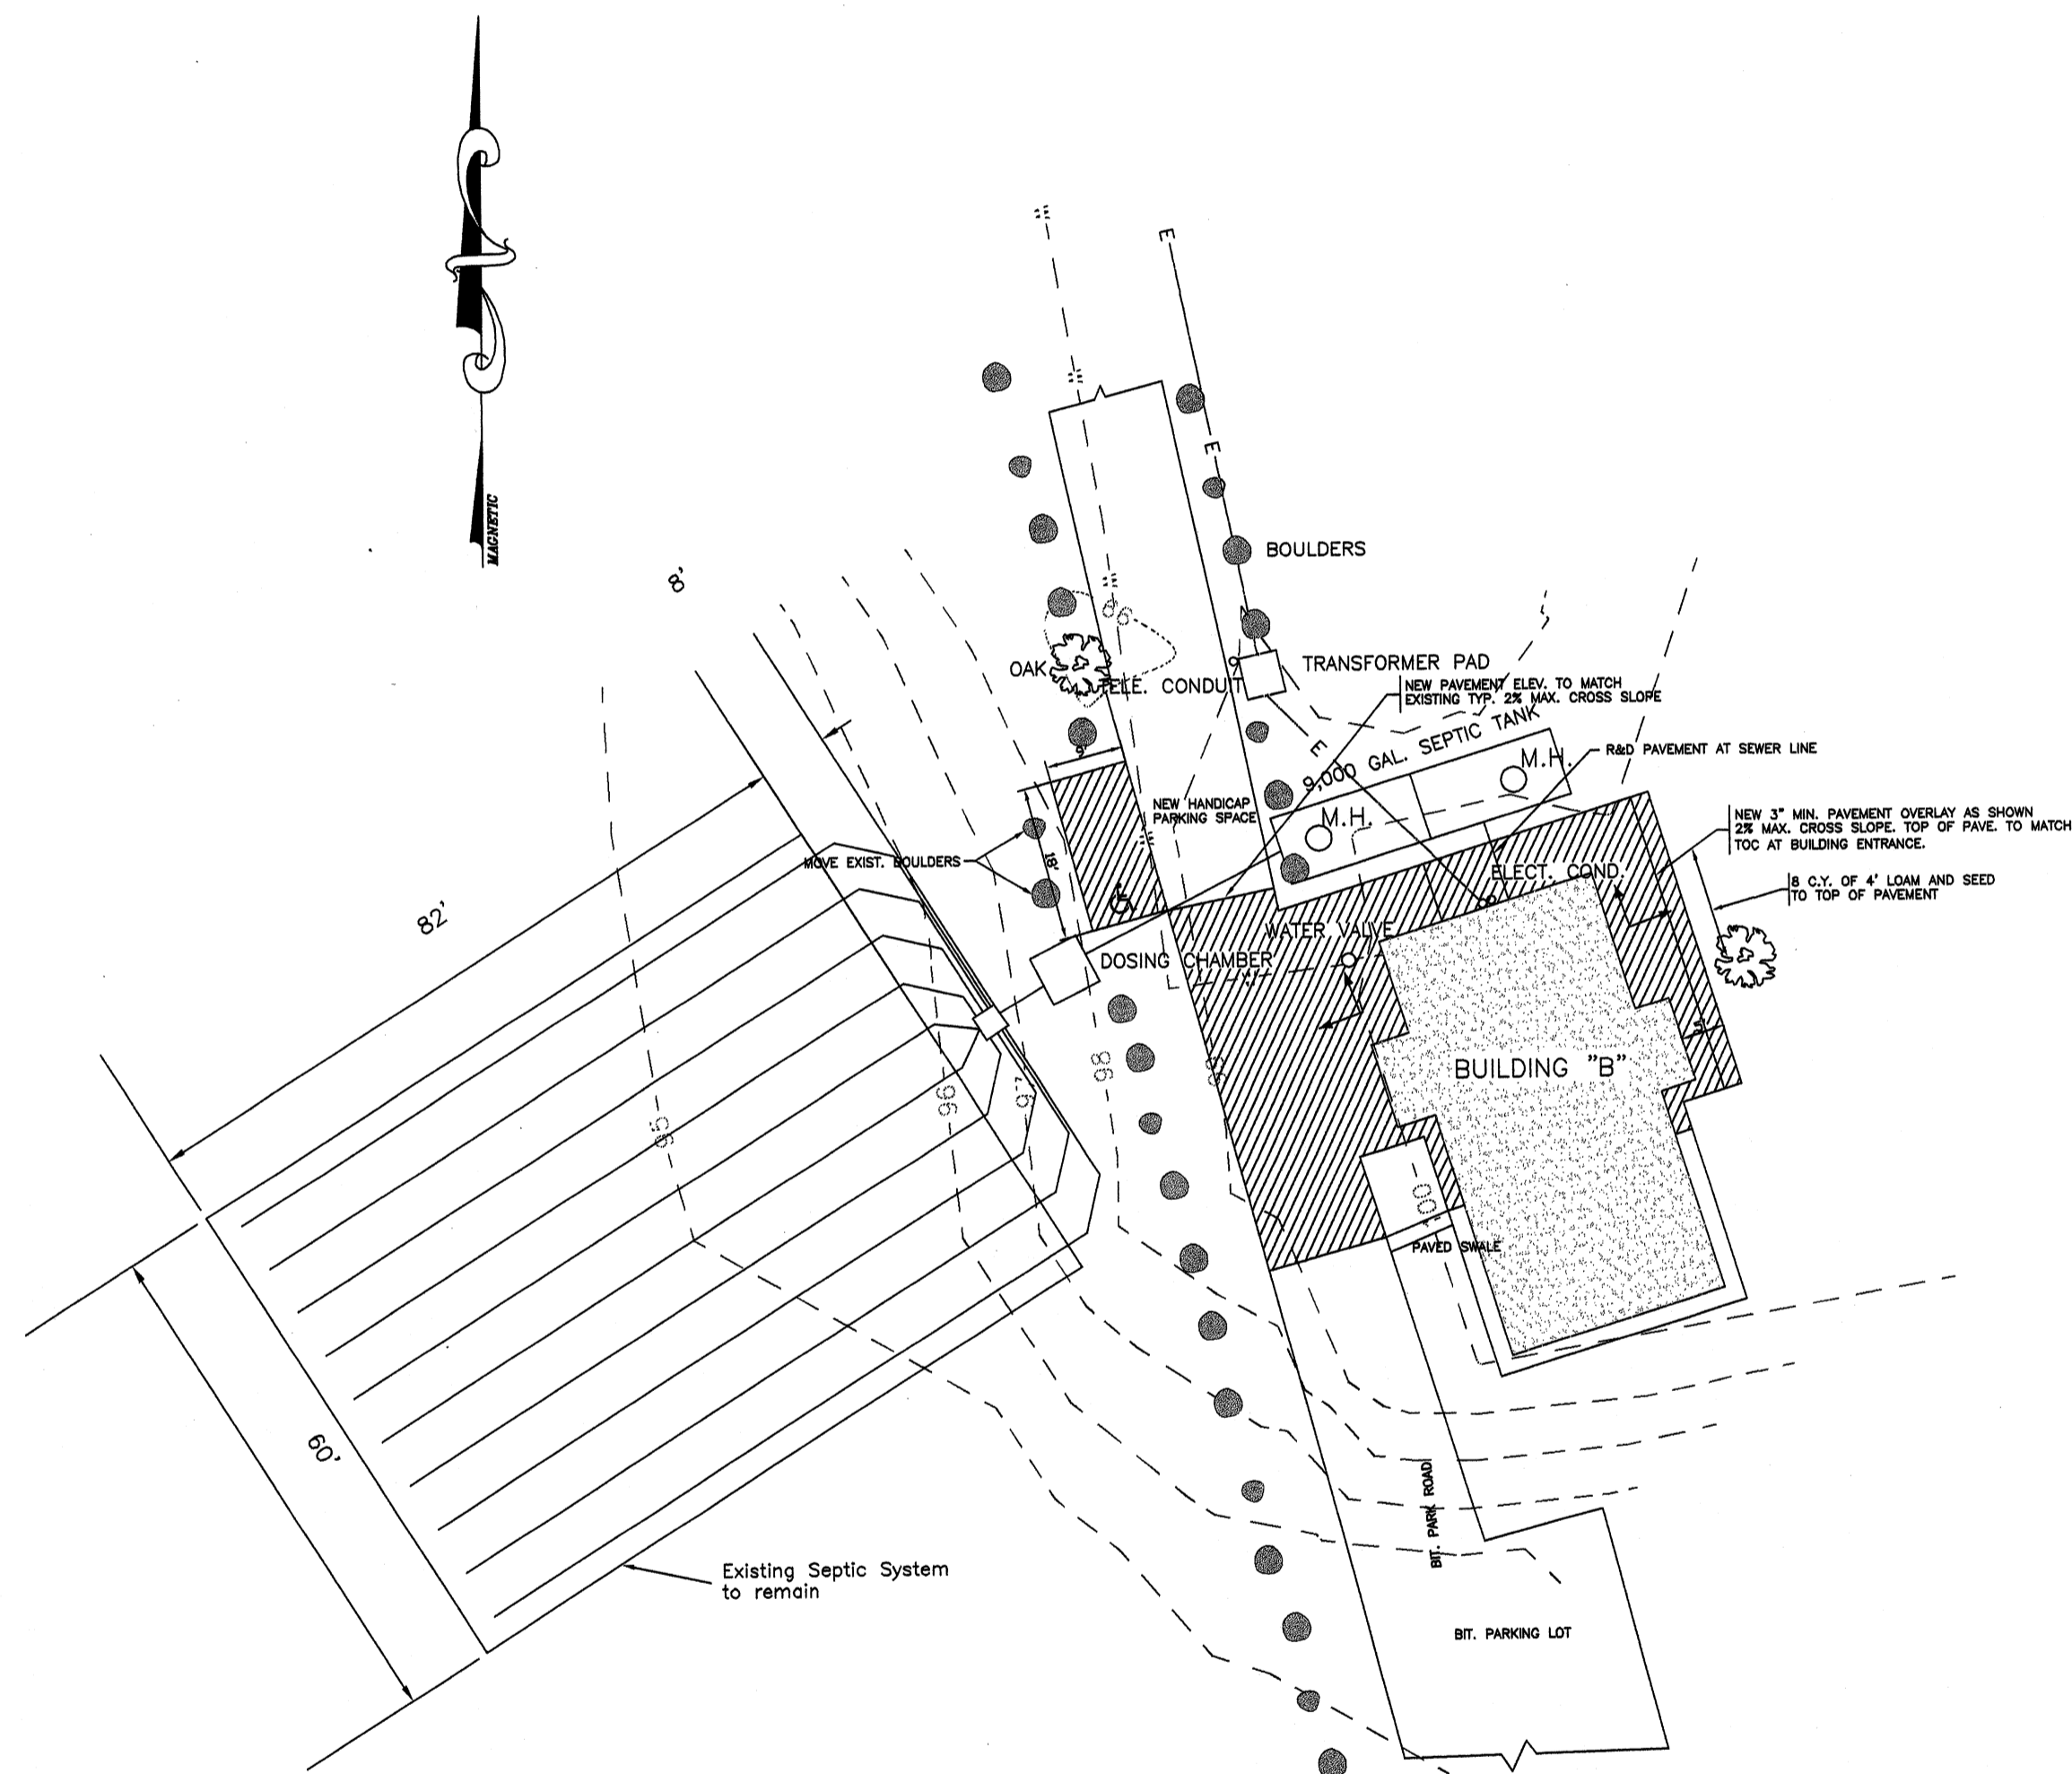

Site Plan Building "B"  
Scale: 1" = 20'

### Notes:

1. All features shown are existing unless noted otherwise.
2. Locations of all utilities shown are approximate, Contractor to verify exact locations of all utilities in the field, both overhead and underground, with DIGSAFE. Any damage to utilities shall be the Contractor's responsibility.
3. Construction work area is 20' outside of building, walkway to parking area, and parking area.
4. Contractor must restore the site to it's original condition at the completion of all work. Any grassed areas to be loamed and seeded with 4" min. loam. Any pavement areas to be repaved per the specifications.
5. Each utility company is to be notified at least 24 hrs. before any work impacting their utilities begins.
6. adjust valve covers and M.H. covers to new grade as required.

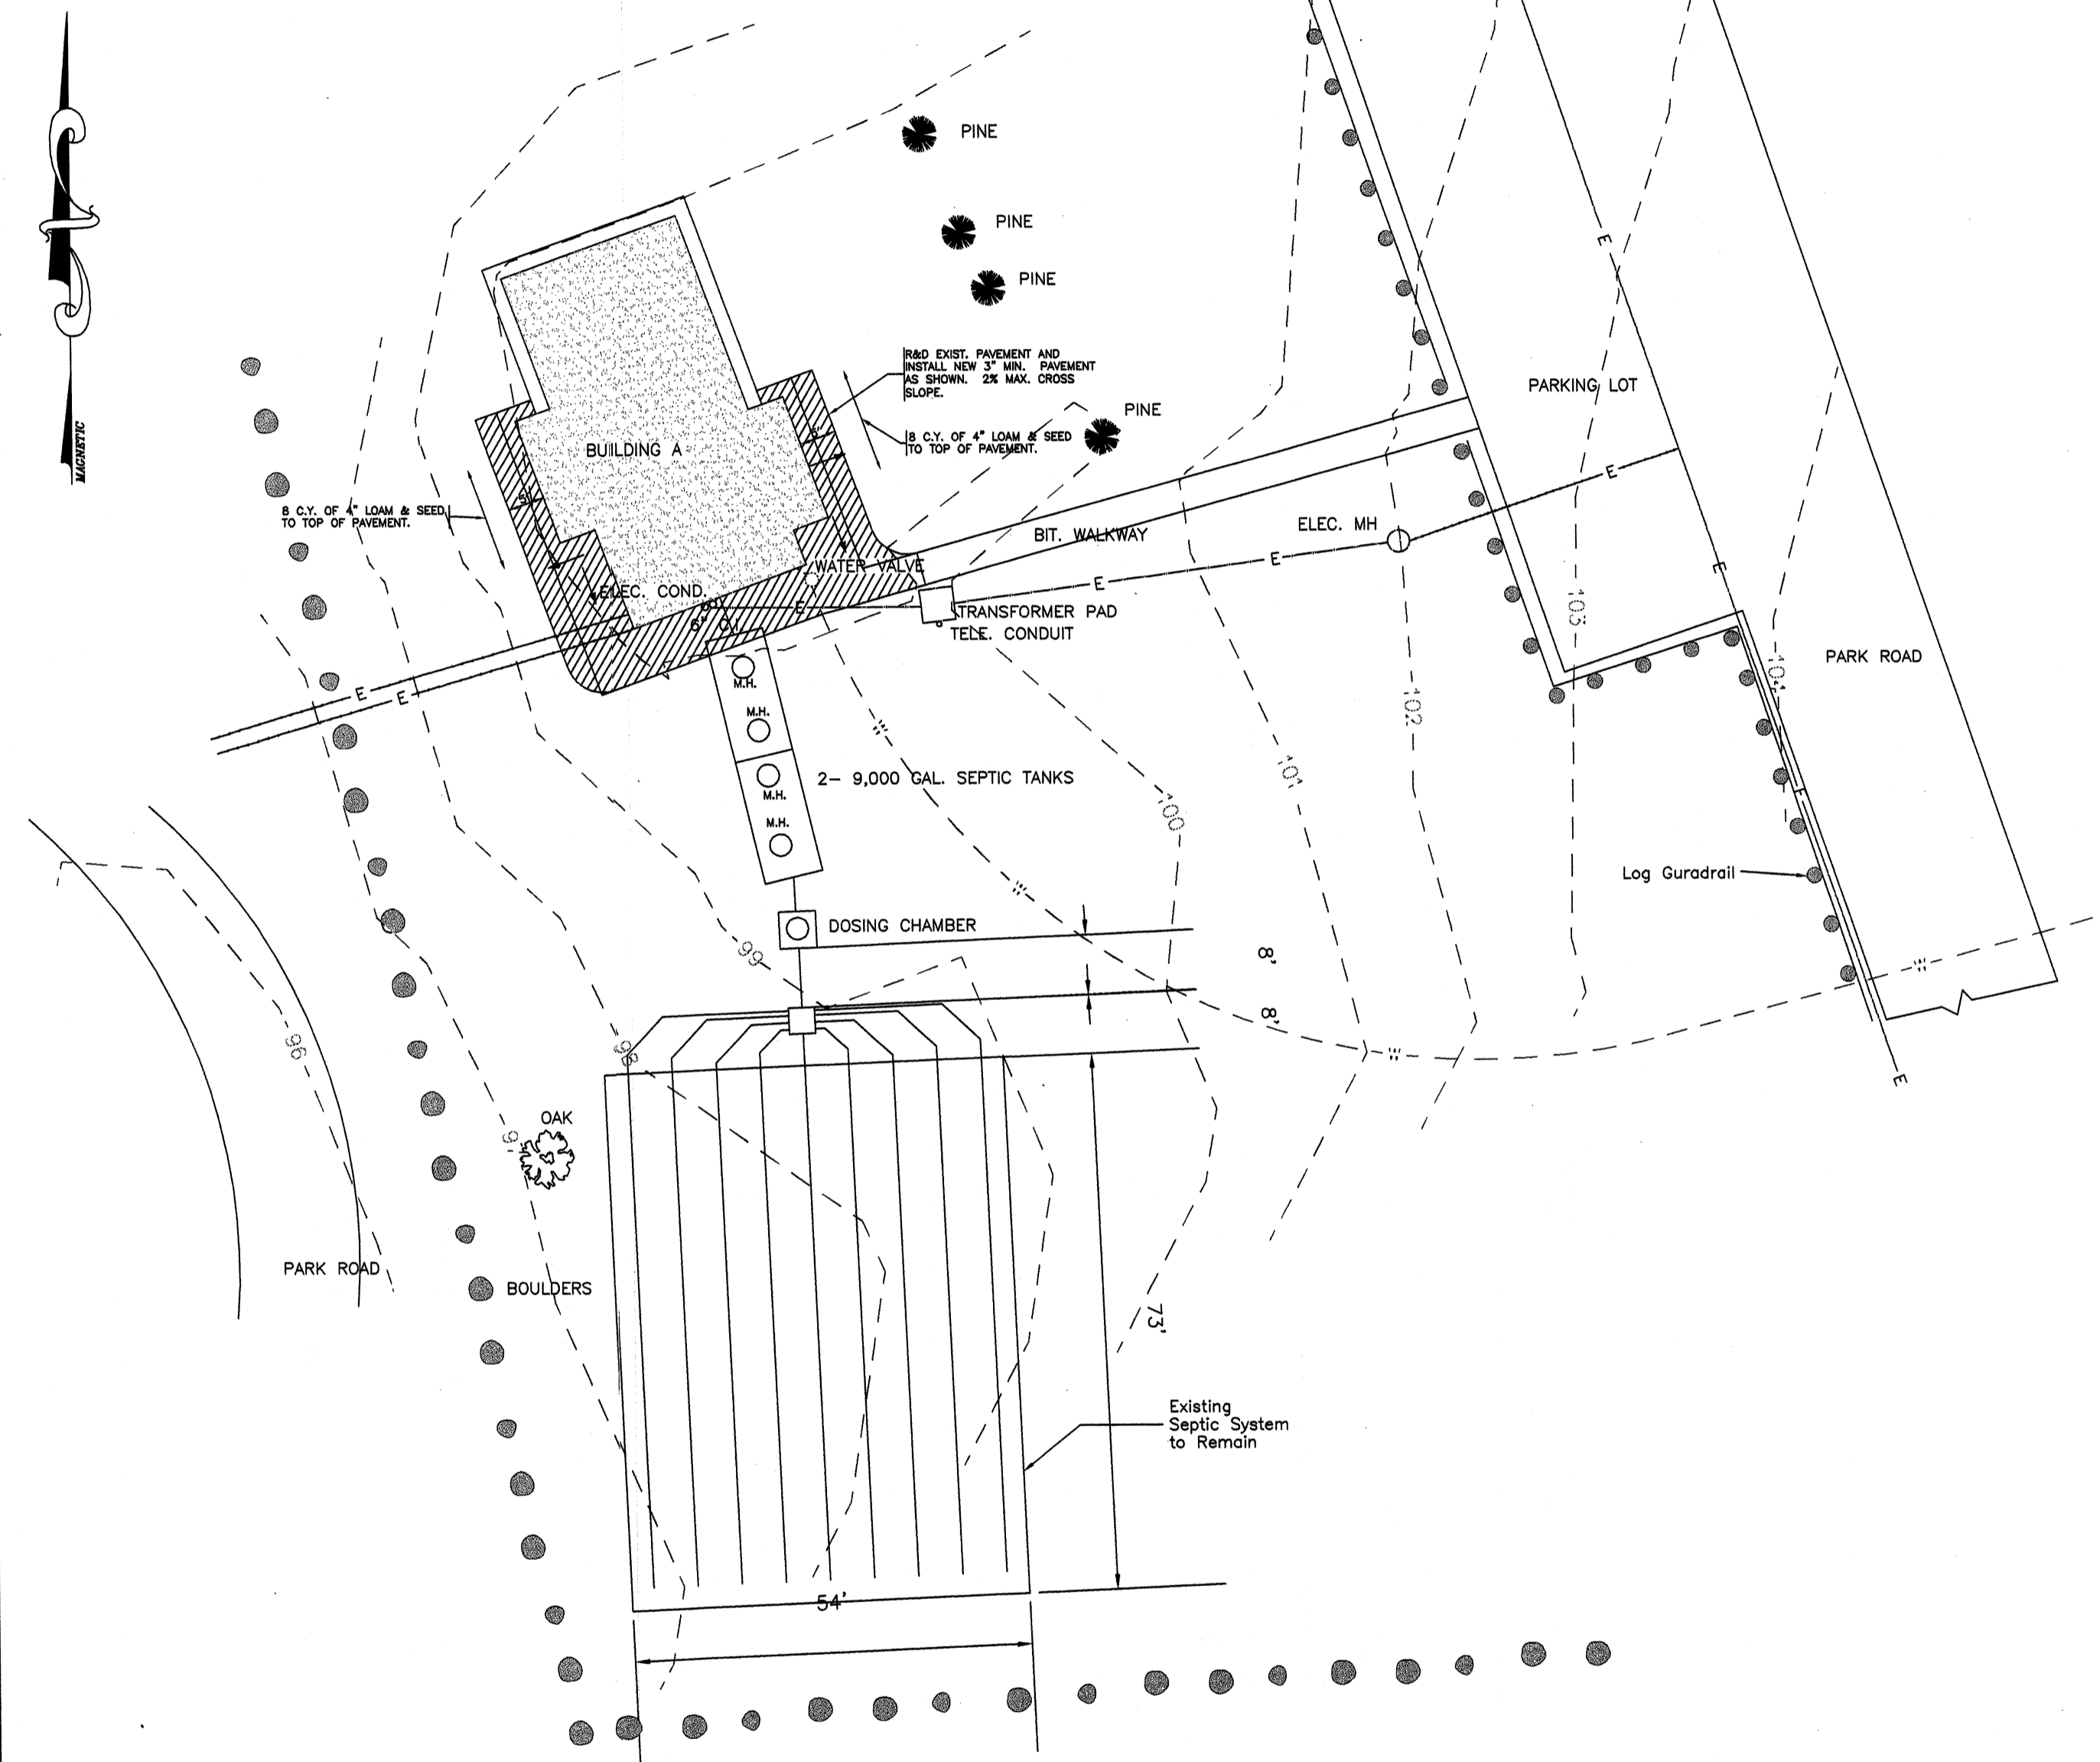

Site Plan Building "A"  
Scale: 1" = 20'

No.	Description	Date


REVISIONS:



STATE OF RHODE ISLAND  
DEPARTMENT OF ENVIRONMENTAL MANAGEMENT  
DIVISION OF PLANNING AND DEVELOPMENT

RENOVATIONS TO A&B TOLIETS  
BURLINGAME STATE PARK  
CHARLESTOWN, RI

Design by: LL  
Drawn by: CVP  
Checked by: LL  
Date: JUNE 2002  
Scale: 1"=20'  
Project No.:

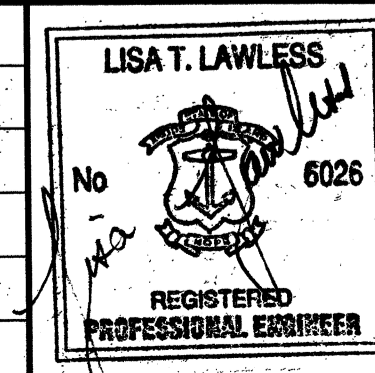

SITE PLANS  
BUILDINGS A & B

C2  
SHEET OF

CNA 5594 OR 76





# “Fish Camp Bathhouse and Onsite Wastewater Treatment System Replacement”

For

Rhode Island Department of Environmental Management  
Burlingame State Park and Campground

Burlingame Park Road  
Charlestown, Rhode Island

Assessors Map 15 – Lot 10  
Area: 847 Acres±

July 2022  
Rev.: March 2023

Prepared by

Caputo & Wick Ltd.  
1150 Pawtucket Avenue  
Rumford, Rhode Island 02916-1897  
401-434-8880





# RHODE ISLAND DEPARTMENT OF ENVIRONMENTAL MANAGEMENT ONSITE WASTEWATER TREATMENT SYSTEM CONSTRUCTION PERMIT

www.dem.ri.gov/septic

Environmental Management



MAR - 8 2023

## FOR RIDEM USE ONLY

APPLICATION No. 2205-1141 DATE RECEIVED 03/29/22 AMOUNT RECEIVED \$ Unpaid CHECK # 024 NOTE 024

Office of Water Resources

### TYPE OF APPLICATION (CHECK ALL THAT APPLY)

- ☒ NEW BUILDING CONSTRUCTION  
☐ ALTERATION  
☐ REPAIR  
☐ TRANSFER
- ☒ A/E TECHNOLOGY TYPE 2205-1141  
☐ VARIANCE  
☐ REDESIGN  
☐ JOINT OWTS / WETLANDS PD

### CERTIFICATION

I, Kevin Horro (print), the undersigned licensed OWTS designer, certify that I prepared this application and accompanying forms, submittals, plans and sketches in accordance with the RULES of the RIDEM pertaining to OWTS and that all the information provided on this application and accompanying forms, submittals, plans and sketches is true and accurate.

### SITE INFORMATION

BURCHIGAME STATE PARK AND CAMP GROUND  
1100 BURCHIGAME PARK ROAD CHARGE TOWN

NO. STREET CITY/TOWN POLE #

PLAT NUMBER 15 LOT NUMBER 10 SUBDIVISION LOT NUMBER N.A.

LOT SIZE 847 SF/ACRES

SUBDIVISION NAME N.A.

SUBDIVISION SITE SUITABILITY CERTIFICATION # N.A.

Designer's Signature Kevin Horro License # 023155

Designer's Email Kevin.Horro@DEM.RI.GOV Phone # 401-222-4700

Business/Company Name CHARGE TOWN

I certify that a) I am the owner of the property indicated under the site information on this application, b) I will hire a licensed OWTS installer to install the system proposed herein, c) the system will be installed in strict accordance with this application, d) I will hire and retain the licensed OWTS designer of record to witness and inspect the installation of the system, e) I assume all responsibility for the truth and accuracy of this application and all liability and responsibility for any improper installations of the system on this site and agree to hold the RIDEM harmless from any and all claims relating whatsoever to the system. In the case of a transfer application, I acknowledge that the permit application and plans previously approved and accompanying this application are the operative documents subject to certification.

### OWNER INFORMATION

STATE OF R.I. DEM

LAST NAME FIRST NAME M.I.

225 PROMENADE ST. PROVIDENCE 02109

NO. STREET CITY/TOWN ZIP CODE

Owner's Phone Number (401) 222-4700 ext. 2774307

Owner's Email MEGAN.DIFFETE@DEM.RI.GOV

Owner(s) Signature MDH

### PERMIT APPROVAL SECTION: DO NOT WRITE BELOW THIS LINE

Based upon the representations of the owner and the owner's agents, including the representations of the owner's OWTS designer, and the truth and accuracy of all information submitted, this application for an OWTS is hereby approved. The RIDEM assumes no responsibility or liability for the future safe operation or maintenance of the aforesaid system, of the fitness or suitability of this system to this site, nor does it assume any responsibility for the accuracy and truth of the owner's, or the owner's agent's representations. This approval is subject to future suspension or revocation in the event that subsequent examination reveals any data indicated on any application, form, submittal, plan or sketch to be incorrect, or not in compliance with the RULES or any conditions at the site are such that the approved design is not in accordance with the RULES, or in the event that the system discharges inadequately treated wastewater to waters of the State or fails to operate satisfactorily in any other manner.

### IMPORTANT: Additional terms of approval as circled.

- Bottom of leaching area excavation must be inspected by the RIDEM prior to placement of any gravel or stone.
- System installation must be inspected by RIDEM prior to covering any component of the system with backfill.
- Applicant shall comply with all requirements, conditions and stipulations of variance(s) approved on \_\_\_\_\_.
- Joint Permit: Designer of record must contact RIDEM prior to start of any site construction.
- A/E Technology: additional installation, operation or maintenance requirements may apply (see A/E Technology Certification.)
- Copy of this form and Operation/Maintenance contract must be filed in land evidence records prior to conformance.
- Proposed construction falls within "Coastal Zone". Contact Rhode Island Coastal Resources Management Council.
- Proper erosion and sedimentation controls must be installed prior to start of construction.
- Transfer: See original permit for all applicable conditions.
- Other

### RIDEM APPLICATION HISTORY

PREVIOUS SITE TESTING ☒ YES ☐ NO APPLICATION # 2205-1141

DEPTH TO APPROVED WATER TABLE 125" HOW DETERMINED SOIL EVALUATION

TEST HOLE # 26 DATE EXCAVATED 11/17/21 WETLANDS within 200' OF OWTS ☐ YES ☒ NO

WETLAND DETERMINATION ☐ YES ☒ NO RIDEM FILE # \_\_\_\_\_ DATE 1/1/22

LARGE SYSTEM ☒ YES ☐ NO OCI FILE # IF APPLICABLE \_\_\_\_\_

### DESIGN INFORMATION

BUILDING USE: ☐ Residential ☐ Commercial ☒ Other BATHHOUSE

WATER SUPPLY: ☐ public water ☒ public well ☐ private well

# OF DESIGN UNITS 15

UNIT DESIGN FLOW 50 gallons per (unit) TOTAL DAILY FLOW 7,500 gallons

TANK SIZE 15,000 gallons DESIGN LOADING RATE 3.5 gpd/sf

MINIMUM REQUIRED LEACHFIELD AREA 2,143 square feet

LEACHFIELD TYPE GRAVEL SAND TREATMENT (G.S.T.)

TOTAL AREA OF LEACHFIELD PROVIDED 5,040 square feet

Signature of RIDEM Official \_\_\_\_\_ Date of Approval \_\_\_\_\_ Date of Expiration \_\_\_\_\_

DESIGNER





RHODE ISLAND DEPARTMENT OF ENVIRONMENTAL MANAGEMENT  
ONSITE WASTEWATER TREATMENT SYSTEM CONSTRUCTION PERMIT

www.dem.ri.gov/septic



FOR RIDEM USE ONLY

APPLICATION No. \_\_\_\_\_ DATE RECEIVED \_\_\_\_/\_\_\_\_/\_\_\_\_ AMOUNT RECEIVED \$ \_\_\_\_\_ CHECK # \_\_\_\_\_ NOTE \_\_\_\_\_

TYPE OF APPLICATION (CHECK ALL THAT APPLY)

☒ NEW BUILDING CONSTRUCTION

☐ ALTERATION

☐ REPAIR

☐ TRANSFER

☒ A/E TECHNOLOGY TYPE ORENCO AX100/GST

☐ VARIANCE

☐ REDESIGN

☐ JOINT OWTS / WETLANDS PD

SITE INFORMATION

BURLINGAME STATE PARK AND CAMPGROUND (FISHCAMP)

1-100 BURLINGAME PARK ROAD CHARLESTOWN

NO. STREET CITY/TOWN POLE #

PLAT NUMBER 15 LOT NUMBER 10 SUBDIVISION LOT NUMBER N.A.

LOT SIZE 847 SF/ACRES

SUBDIVISION NAME N.A.

SUBDIVISION SITE SUITABILITY CERTIFICATION # N.A.

OWNER INFORMATION

STATE OF R.I. DEM

LAST NAME

FIRST NAME

M.I.

235 PROMENADE ST. PROVIDENCE

02908

NO. STREET

CITY/TOWN

ZIP CODE

RIDEM APPLICATION HISTORY

PREVIOUS SITE TESTING ☒ YES ☐ NO APPLICATION # 2205-1141

DEPTH TO APPROVED WATER TABLE 120" HOW DETERMINED SOIL EVALUATION

TEST HOLE # 28 DATE EXCAVATED 8/17/21 WETLANDS within 200' OF OWTS ☐ YES ☒ NO

WETLAND DETERMINATION ☐ YES ☒ NO RIDEM FILE # \_\_\_\_\_ DATE \_\_\_\_/\_\_\_\_/\_\_\_\_

LARGE SYSTEM ☒ YES ☐ NO OCI FILE # IF APPLICABLE \_\_\_\_\_

DESIGN INFORMATION

BUILDING USE: ☐ Residential ☐ Commercial \_\_\_\_\_

☒ Other BATHHOUSE

WATER SUPPLY: ☐ public water ☒ public well ☐ private well

# OF DESIGN UNITS 150

UNIT DESIGN FLOW 50 gallons per SITE (unit) TOTAL DAILY FLOW 7,500 gallons

TANK SIZE 15,000 gallons DESIGN LOADING RATE 3.5 gpd/sf

MINIMUM REQUIRED LEACHFIELD AREA 2,143 square feet

LEACHFIELD TYPE GRAVEL SAND TREATMENT (GST)

TOTAL AREA OF LEACHFIELD PROVIDED 5,040 square feet

CERTIFICATION

I, KEVIN HARROP (print), the undersigned licensed OWTS designer, certify that I prepared this application and accompanying forms, submittals, plans and sketches in accordance with the RULES of the RIDEM pertaining to OWTS and that all the information provided on this application and accompanying forms, submittals, plans and sketches is true and accurate.

Designer's Signature Kevin Harrop License # D 3155

Designer's Email kharpop@cw1st.net Phone # 401-434-8880

Business/Company Name CAPUTO and WICK LTD.

I certify that a) I am the owner of the property indicated under the site information on this application, b) I will hire a licensed OWTS installer to install the system proposed herein, c) the system will be installed in strict accordance with this application, d) I will hire and retain the licensed OWTS designer of record to witness and inspect the installation of the system, e) I assume all responsibility for the truth and accuracy of this application and all liability and responsibility for any improper installations of the system on this site and agree to hold the RIDEM harmless from any and all claims relating whatsoever to the system. In the case of a transfer application, I acknowledge that the permit application and plans previously approved and accompanying this application are the operative documents subject to certification.

Owner's Phone Number (401) 222-4700 ext 2774307

Owner's Email MEGAN.DIPRETE@DEM.RI.GOV

Owner(s) Signature \_\_\_\_\_

PERMIT APPROVAL SECTION: DO NOT WRITE BELOW THIS LINE

Based upon the representations of the owner and the owner's agents, including the representations of the owner's OWTS designer, and the truth and accuracy of all information submitted, this application for an OWTS is hereby approved. The RIDEM assumes no responsibility or liability for the future safe operation or maintenance of the aforesaid system, of the fitness or suitability of this system to this site, nor does it assume any responsibility for the accuracy and truth of the owner's, or the owner's agent's representations. This approval is subject to future suspension or revocation in the event that subsequent examination reveals any data indicated on any application, form, submittal, plan or sketch to be incorrect, or not in compliance with the RULES or any conditions at the site are such that the approved design is not in accordance with the RULES, or in the event that the system discharges inadequately treated wastewater to waters of the State or fails to operate satisfactorily in any other manner.

IMPORTANT: Additional terms of approval as circled.

- A. Bottom of leaching area excavation must be inspected by the RIDEM prior to placement of any gravel or stone.
- B. System installation must be inspected by RIDEM prior to covering any component of the system with backfill.
- C. Applicant shall comply with all requirements, conditions and stipulations of variance(s) approved on \_\_\_\_\_.
- D. Joint Permit: Designer of record must contact RIDEM prior to start of any site construction.
- E. A/E Technology: additional installation, operation or maintenance requirements may apply (see A/E Technology Certification.)
- F. Copy of this form and Operation/Maintenance contract must be filed in land evidence records prior to conformance.
- G. Proposed construction falls within "Coastal Zone". Contact Rhode Island Coastal Resources Management Council.
- H. Proper erosion and sedimentation controls must be installed prior to start of construction.
- I. Transfer: See original permit for all applicable conditions.
- J. Other

Signature of RIDEM Official

Date of Approval

Date of Expiration





## RHODE ISLAND

### DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

OFFICE OF WATER RESOURCES

235 Promenade Street, Providence, Rhode Island 02908

March 15, 2023

State of Rhode Island

Rhode Island Department of Environmental Management Division of Planning and Development

235 Promenade Street

Providence, RI 02908

**RE: Fish Camp Bathhouse  
Burlingame State Park and Campground  
Charlestown, RI  
OWTS Application No. 2205-1141**

Dear Applicant:

Attached herewith are revised monitoring and reporting requirements applicable to the above listed permit. As you are aware the above listed Onsite Wastewater Treatment System (OWTS) permit is granted based on a maximum daily design flow of **7,500** gallons per day and includes 1 - 15,000 gallon septic tank, 1 - 7,500 gallon anoxic tank, 1 - 6,000 gallon recirculation tank, 2 - Advantex AX 100 filter pods followed by a 6 x 6 pump chamber to a Gravel Sand Treatment (GST) type of leaching system.

Advanced treatment systems are utilized to mitigate against possible adverse impacts of residual onsite wastewater pollutants on groundwater quality and surface water quality. Owners of advanced OWTSs with design flows  $\geq 2,000$  gallons per day are subject to regular monitoring and reporting. The following stipulations now apply to your permit:

1. The following discharge limits as measured at the 6 x 6 pump chamber shall apply:

Orengo Systems, Inc. AdvanTex AX-100 – Mode 1

Biochemical Oxygen Demand (5 Day)  $\leq 20$  mg/L

Total Suspended Solids  $\leq 20$  mg/L

Oil & Grease  $\leq 5$  mg/L

2. Wastewater flow shall not exceed a maximum daily flow of **7,500** gallons per day. Wastewater flow shall be monitored and recorded to ensure compliance with this stipulation.
3. Sampling and testing shall be conducted quarterly at the compliance point specified in Item 1 above. Sampling and measurements shall be representative of the monitored activity. The Permittee shall sample and test the wastewater in each system as follows:

Dissolved Oxygen (mg/L) – *Field Test*

Effluent Temperature (°F) – *Field Test*

pH (s.u.) – *Field Test*

Biochemical Oxygen Demand (5-Day) (mg/L)

Total Suspended Solids (mg/L)

Oil and Grease (mg/L)

Alkalinity (mg/L)


4. Corrective Action – Corrective action must be taken as soon as practicable following receipt of monitoring results which indicate that system modifications or maintenance is required. The system must be resampled no sooner than seven (7) days after any adjustment is made to the system and within thirty (30) days of the routine quarterly sample date. Samples must be analyzed for each of the parameters listed in Item 3 for any post corrective action sampling events.
5. Annual Report – All monitoring results including wastewater flow data shall be submitted to the DEM in the form of an annual report. The annual report is due **February 15<sup>th</sup>** of each year. The annual report must summarize all monitoring results and corrective actions implemented during the previous calendar year. A clear determination regarding the compliance status of the OWTS must be made as part of the annual report. The annual report must include a copy of the most recent Operation and Maintenance Contract as proof of compliance with this requirement.
6. The Permittee shall properly operate and maintain all facilities and equipment associated with the OWTS in accordance with the most recent operation and maintenance (O&M) plan. The O&M plan specifies procedures for operation, process control, record keeping, monitoring, weekly maintenance checks, other routine and periodic maintenance, safety and security. Also, the O&M plan includes a contingency plan to address emergency actions and procedures in the event of equipment failure and power loss.
7. Your permit approval is for the discharge of sanitary waste only. No toxic, hazardous or industrial processing waste may be discharged into the system.
8. All septage, sludges, screenings or other pollutants removed from the system shall be disposed in accordance with all applicable state and federal laws.
9. The permit may be automatically transferred by the Permittee to a new owner provided:
  - a. The current Permittee notifies the DEM by certified mail at least thirty (30) days in advance of the proposed transfer date;
  - b. The notice includes the name and address of the new Permittee and a written agreement between the existing and new Permittee containing a specific date for the transfer of permit responsibility, surety and liability between them and;
  - c. The DEM does not notify the existing Permittee and the proposed new Permittee of its intent to modify or reissue the permit.
10. The operator or person in responsible charge of the OWTS shall have at a minimum a Rhode Island Class 1 Wastewater Treatment Plant Operator Certification or an equivalent certification from another jurisdiction acceptable to the DEM. If the operator is not employed directly by the Permittee, a service agreement with the operator shall be entered into and continuously maintained, and a copy of the active service agreement shall be submitted to the DEM as part of the annual report.
11. The permit may be modified, suspended, or revoked for cause. The DEM reserves the right to revise the permit to ensure compliance with applicable state and federal regulations. Failure to comply with the conditions of this permit approval letter may result in an enforcement action.

12. The Permittee shall allow the DEM or their authorized representative to access the OWTS and work areas to inspect equipment, practices, records pertinent to this permit and stipulated compliance requirements, and to sample and monitor the wastewater for the purposes of determining compliance.
13. In the event of treatment interruption, bypass or sewage overflow, the Permittee shall notify the DEM verbally within twenty-four (24) hours. Such incident shall be reported in writing within five (5) days after it becomes known to the Permittee, the report shall include the date and time(s) of the incident, the duration of the incident, and actions taken to correct the problem and prevent a reoccurrence.
14. For purposes of notification, monitoring, compliance or inquiries pursuant to this permit, all correspondence, telephone calls and other contacts must reference the OWTS permit number and shall be directed to:

The Rhode Island Department of Environmental Management  
Onsite Wastewater Treatment Systems Program  
235 Promenade Street  
Providence, RI 02908  
Telephone: (401) 222-3961  
[www.dem.ri.gov/septic](http://www.dem.ri.gov/septic)

Should you have any questions concerning these permit requirements, please contact Tom Angelone by email at [tom.angelone@dem.ri.gov](mailto:tom.angelone@dem.ri.gov) or by phone at 401-222-3961, extension 2777607.

Very truly yours,



Mohamed J. Freij, P.E., PLS  
Supervising Sanitary Engineer

KF

Enclosure(s)

cc: Joseph L. Warner Jr., Charlestown Building Official



J:\Rhode Island\Charlestown\RIDDM - Burlingame\009 - 025 and S-6 Site Design 2023.03.06.dwg

TH-2A - GROUND ELEV. 58.0 - AUGUST 17, 2021									
HORIZON	DEPTH	DIST	TOPO	MATRIX	RE-DOX	Ab. S. CONTR.	TEXTURE	STRUCTURE	CONSISTENCE
Ap	0 - 5"	C	S	2.5YR 6/3			La	2gld	Wf
Bw	5" - 29"	C	S	10YR 5/6			La	2gld	Ff
C1	29" - 120"	C	S	2.5YR 7/3			La	2gld	Ff





SOIL CLASS: B OBSERVED STANDING GROUNDWATER - NA  
ESTIMATED SEASONAL HIGH WATER TABLE - 120" (ELEV. 48.0)

OBSERVED WEEPING GROUNDWATER - NA  
PERFORMED BY: KAMAL HINDORARY

TH-2B - GROUND ELEV. 62.0 - AUGUST 17, 2021									
HORIZON	DEPTH	DIST	TOPO	MATRIX	RE-DOX	Ab. S. CONTR.	TEXTURE	STRUCTURE	CONSISTENCE
Ap	0 - 8"	C	S	2.5YR 6/3			La	2gld	Wf
Bw	8" - 28"	C	S	10YR 5/6			La	2gld	Ff
C1	28" - 120"	C	S	2.5YR 7/3			La	2gld	Ff

SOIL CLASS: B OBSERVED STANDING GROUNDWATER - NA  
ESTIMATED SEASONAL HIGH WATER TABLE - 120" (ELEV. 52.0)

OBSERVED WEEPING GROUNDWATER - NA  
PERFORMED BY: KAMAL HINDORARY

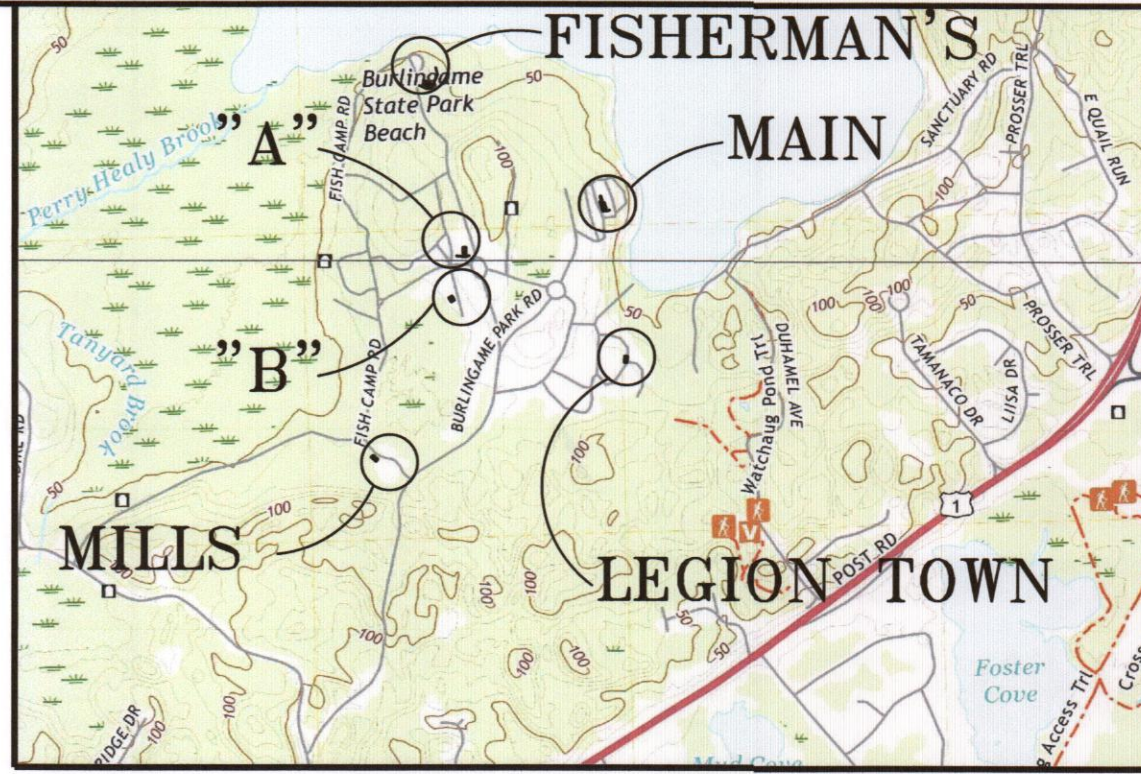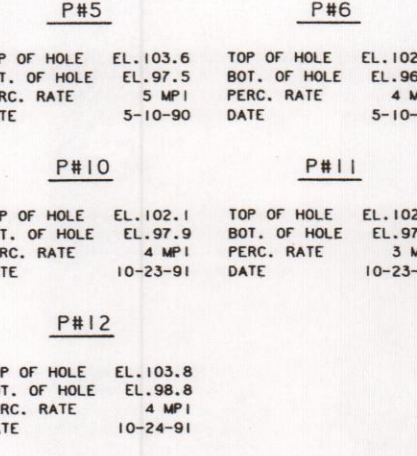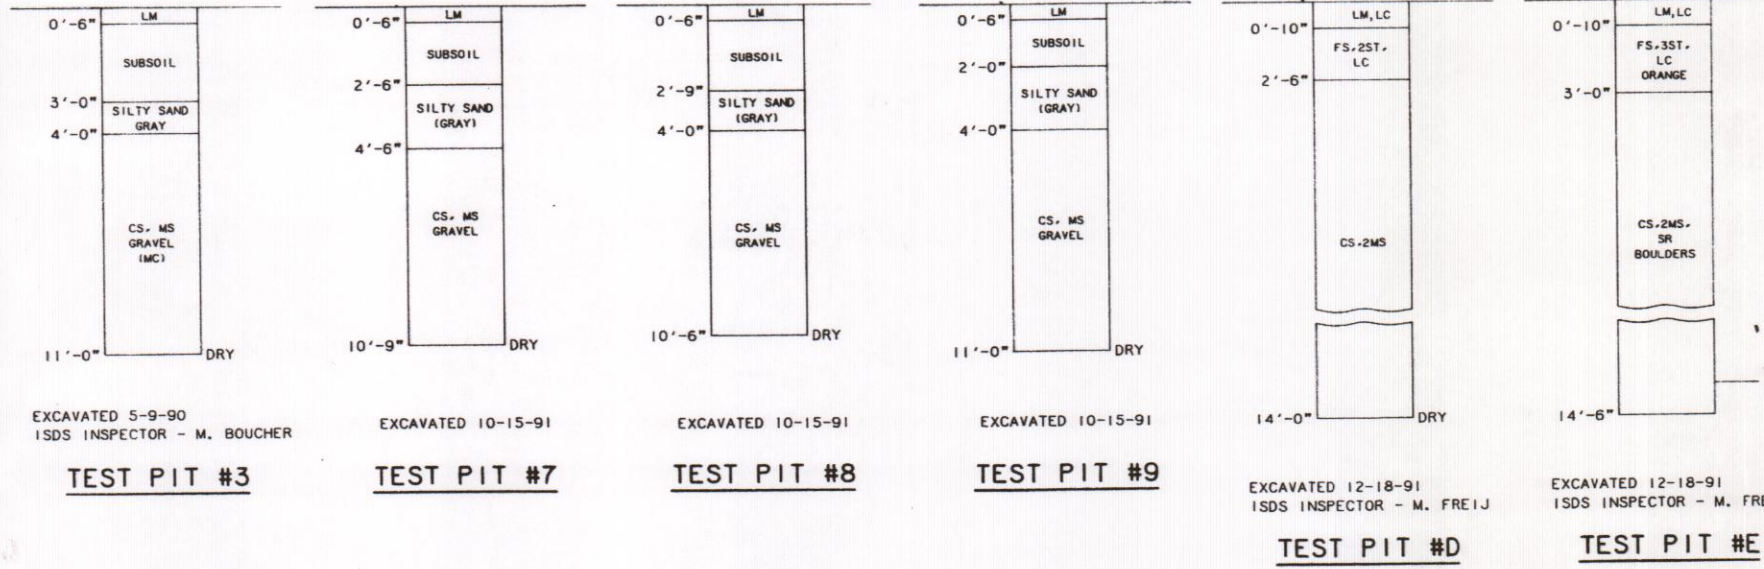

LOCUS MAP

- NOTES:**
- ALL WORK SHALL CONFORM TO THE RHODE ISLAND DEPARTMENT OF ENVIRONMENTAL MANAGEMENT, OFFICE OF WATER RESOURCES "RULES AND REGULATIONS ESTABLISHING MINIMUM STANDARDS RELATING TO LOCATION, DESIGN, CONSTRUCTION AND MAINTENANCE OF ONSITE WASTEWATER TREATMENT SYSTEMS", LATEST EDITION.
  - THE CONTRACTOR SHALL SUBMIT SHOP DRAWINGS TO CAPUTO AND WICK LTD. FOR APPROVAL OF ALL PROPOSED CONSTRUCTION MATERIALS AND EQUIPMENT PRIOR TO ANY CONSTRUCTION.
  - EXISTING ONSITE WASTEWATER TREATMENT SYSTEM (OWTS) PRECAST STRUCTURES ARE TO BE PUMPED OUT, RINSED WITH CLEAN WATER AND PUMPED OUT AGAIN. PUMPING MUST BE PERFORMED BY A STATE LICENSED SEPTIC HAULER AND THE CONTENTS OF THE TANK DISPOSED OF PROPERLY. AFTER PUMPING, THE EXISTING OWNS STRUCTURES MUST BE FILLED WITH FLOWABLE FILL OR REMOVED AND REPLACED WITH GRAVEL BORROW AND 4" LOAM AND SEED.
  - REMOVE ALL PORTIONS OF THE EXISTING OWTS WITHIN 5' OF THE GRAVEL SAND TREATMENT SYSTEM; AND ALL FILL A HORIZON SOIL, B HORIZON SOIL AND SCARIFY 3" OF THE C HORIZON SOIL BELOW THE GRAVEL SAND TREATMENT SYSTEM AND THOUGHLY MIX WITH ASTM C-33 SAND (SEE NOTE 16) TO INTERFACE THE FILL WITH THE SOIL, AND REPLACE ALL REMOVED SOIL WITH ASTM C-33 SAND. A AND B HORIZON LAYERS ARE TO BE REMOVED IN THIS APPLICATION DUE TO COMPACTION CAUSED BY PREVIOUS SYSTEM INSTALLATION AND FILL BEING PLACED ABOVE.
  - UNUSABLE MATERIAL USED TO BACKFILL THE TEST HOLES SHALL BE REMOVED AND REPLACED WITH ASTM C-33 SAND (SEE NOTE 16).
  - ASTM C-33 SAND (SEE NOTE 16) MUST BE PLACED ON SCARIFIED, RELATIVELY DRY NATURAL SOIL. THE CONTRACTOR SHALL PROVIDE FOR DETERMINING AS REQUIRED AND ALL WORK SHALL BE PERFORMED UNDER DRY CONDITIONS.
  - BUILDING SEWER PIPE TO BE 4" P.V.C. SCH. 40 UNLESS OTHERWISE NOTED.
  - PLACE 6" MINIMUM COMPACTED CRUSHED STONE UNDER SEPTIC TANK, ANOXIC TANK, RECIRCULATION TANK, PUMP CHAMBER, ADVANTEX TREATMENT TANKS AND SYSTEM STRUCTURES.
  - INLET AND OUTLET TEES FOR SEPTIC TANK, ANOXIC TANK, RECIRCULATION TANK AND PUMP CHAMBER ARE TO BE LOCATED DIRECTLY BELOW ACCESS COVERS.
  - SEPTIC TANK, ANOXIC TANK, RECIRCULATION TANK, PUMP CHAMBER AND ADVANTEX TREATMENT TANK RISERS/COVERS TO BE AT FINISH GRADE.
  - IF CONDITIONS ENCOUNTERED DURING CONSTRUCTION VARY SUBSTANTIALLY FROM THOSE SHOWN ON THIS PLAN, NOTIFY CAPUTO AND WICK, LTD. BEFORE PROCEEDING WITH CONSTRUCTION. IF IN DOUBT, ASK.
  - NEW SEPTIC TANK SHALL MEET ALL OF THE REQUIREMENTS OF 250-RICR-150-10-6-27.
  - INSPECTION OF THE SEPTIC TANK, ANOXIC TANK, RECIRCULATION TANK, PUMP CHAMBER AND ADVANTEX TREATMENT TANK SHALL BE PART OF THE MAINTENANCE SERVICE FOR THE OWTS AND ALL COMPONENTS SHALL BE CLEANED WHEN REQUIRED.
  - IT IS RECOMMENDED THAT THE SEPTIC TANK BE INSPECTED TWICE A YEAR, AND BE CLEANED WHEN THE SOLIDS EQUAL ONE THIRD THE LIQUID DEPTH.
  - MINIMUM PERIMETER INVERT ELEVATION = 59.50 NO FINISHED GRADE BELOW 59.50 FROM THE EDGE OF THE GRAVEL SAND TREATMENT SYSTEM FOR A 10 FEET MINIMUM.
  - THE SAND MEDIA USED IN CONSTRUCTION SHALL MEET THE ASTM C-33 SPECIFICATIONS. SIEVE ANALYSIS FROM PROPOSED SOURCE IS REQUIRED TO BE SUBMITTED TOGETHER WITH SHOP DRAWINGS. TESTING OF SAND MATERIAL DELIVERED TO THE SITE IS REQUIRED.
  - OWTS INSTALLER MUST BE FAMILIAR WITH ADVANTEX PRODUCTS AND GRAVEL SAND TREATMENT SYSTEMS PROPOSED FOR THIS SITE. SEE ADVANTEX INSTALLATION MANUAL, GRAVEL SAND TREATMENT SYSTEM DESIGN AND INSTALLATION MANUAL, AND RIDEM GUIDELINES FOR ADDITIONAL DETAILS OF INSTALLATION.
  - INSTALLATION SHALL BE IN STRICT CONFORMANCE WITH THE ORENCO ADVANTEX INSTALLATION MANUAL AND GRAVEL SAND TREATMENT SYSTEM INSTALLATION MANUAL AND ALL OTHER APPLICABLE SECTIONS OF 250-RICR-150-6. THE INSTALLATION SHALL ONLY BE PERFORMED BY A RHODE ISLAND DEM LICENSED INSTALLER WHO HAS RECEIVED TRAINING AND IS AUTHORIZED IN WRITING BY THE VENDORS TO INSTALL THE SYSTEM. AUTHORIZATION FROM THE VENDORS SHALL BE SUBMITTED TO ENGINEER PRIOR TO ANY CONSTRUCTION.
  - REFER TO 250-RICR-150-10-6 AND RIDEM GUIDELINES FOR ADDITIONAL INFORMATION CONCERNING THE INSTALLATION, OPERATION AND MAINTENANCE OF THE SYSTEM. THE INSTALLER AND OWNER SHALL REVIEW AND APPLY 250-RICR-150-10-6 AND RIDEM GUIDELINES. THE SYSTEM TO BE CONSTRUCTED BY A INSTALLER LICENSED BY RIDEM AND THOROUGHLY FAMILIAR WITH THE INSTALLATION OF ADVANTEX TREATMENT DEVICES AND GRAVEL SAND TREATMENT SYSTEMS.
  - THE CONTRACTOR IS RESPONSIBLE FOR COORDINATION WITH THE DESIGN ENGINEER IN ORDER TO FACILITATE WITNESSING THE REQUIRED PHASES OF THE SYSTEM INSTALLATION AS STATED IN 250-RICR-150-6.4.7 OF THE "REGULATIONS". FAILURE OF THE CONTRACTOR TO NOTIFY THE DESIGN ENGINEER IN A TIMELY MANNER MAY REQUIRE THE CONTRACTOR TO EXCAVATE AND EXPOSE SYSTEM COMPONENTS FOR OBSERVATION.
  - THE DESIGNER EXPRESSLY DISCLAIMS ANY RESPONSIBILITY FOR THE INSTALLATION AND MAINTENANCE OF THE SYSTEM. IT SHALL BE THE RESPONSIBILITY OF THE INSTALLER TO CONSTRUCT THE SYSTEM IN ACCORDANCE WITH THE ABOVE REFERENCED REGULATIONS.
  - CONTRACTOR SHALL CONTACT "DIG-SAFE" PRIOR TO CONSTRUCTION. LOCATION OF UTILITIES ON THIS PLAN ARE FROM EXISTING INFORMATION, BUT ARE ONLY TO BE CONSIDERED APPROXIMATE.
  - THERE ARE NO PUBLIC WELLS, EXISTING OR PROPOSED, FOUND TO BE LOCATED WITHIN 500 FEET OF THE PROPOSED OWTS EXCEPT AS SHOWN.
  - NO FRESHWATER WETLANDS OBSERVED WITHIN 200 FEET OF THE PROPOSED OWTS. THIS SITE DOES NOT LIE WITHIN A CRITICAL RESOURCE AREA.
  - I CERTIFY THAT THERE ARE NO WELLS FOUND TO BE LOCATED WITHIN 200 FEET OF THE PROPOSED LEACHING AREA, OTHER THAN AS SHOWN ON THIS PLAN. I ALSO CERTIFY THAT THERE ARE NO EXISTING OR PROPOSED DRAINS, FOUNDATION DRAINS OR SUB DRAINS FOUND TO BE LOCATED WITHIN 25 FEET OF THIS PROPOSED OWTS.
  - ALL PIPE JOINTS, PIPE CONNECTIONS AND ACCESS COVERS ARE TO BE WATER TIGHT.
  - PRESSURE PIPE SHALL BE INSTALLED TO MAINTAIN SLOPE BACK TO TANK/PUMP CHAMBER TO DRAIN BETWEEN PUMPING CYCLES. ELIMINATE ANY HIGH OR LOW POINTS THAT MAY PREVENT DRAINING AND/OR AIR POCKETS.
  - CONTRACTOR TO PAY ANY REQUIRED INSTALLATION FEES.
  - CONTROL PANEL AND ALARM TO BE MOUNTED INSIDE BUILDING IN A CONSPICUOUS LOCATION, EXACT LOCATION TO BE COORDINATED WITH OWNER. ALL CONTROL PANELS AND JUNCTION BOXES SHALL BE NEMA 4X.
  - THE PUMP DOSING CONTROLS WILL BE FIELD TESTED IN THE PRESENCE OF THE DESIGN ENGINEER AND ORENCO REPRESENTATIVE. ADJUSTMENT TO CONTROLS ARE THE CONTRACTORS RESPONSIBILITY. CONTRACTOR MUST MAKE WATER AVAILABLE FOR TESTING OF THE CONTROL FLOATS.
  - ALL TREES AND SHRUBS SHALL BE CLEAR AND NO NEW ONES SHALL BE PLANTED WITHIN 10' OF THE GRAVEL SAND TREATMENT SYSTEM.
  - THE GRAVEL SAND TREATMENT SYSTEM LOCATION SHALL BE STAKED OUT AND PROTECTED PRIOR TO ANY SITE PREPARATION ACTIVITIES.
  - NO IMPERVIOUS SURFACE IS TO BE PLACED ABOVE THE GST (LEACHING) SYSTEM.
  - MATERIAL AND EQUIPMENT FROM ALTERNATE MANUFACTURERS MAY BE USED IF EQUAL. APPROVAL FOR ALTERNATE MATERIAL AND/OR EQUIPMENT IS REQUIRED FROM THE OWNER AND ENGINEER. FULL SPECIFICATIONS FOR ALTERNATE EQUIPMENT MUST BE PROVIDED BY THE CONTRACTOR. IF ACCEPTABLE, THE CONTRACTOR MUST PREPARE AND SUBMIT FOR A RIDEM OWTS CONSTRUCTION PERMIT BASED UPON THE REDESIGN.



"Copy of permit and Operation Maintenance contract must be filed in land evidence record at the time of construction"

**CERTIFICATION:**




THIS SURVEY HAS BEEN CONDUCTED AND THE PLAN HAS BEEN PREPARED PURSUANT TO SECTION 9 OF THE RULES AND REGULATIONS ADOPTED BY THE RHODE ISLAND STATE BOARD OF REGISTRATION FOR PROFESSIONAL LAND SURVEYORS ON NOVEMBER 25, 2011, AS FOLLOWS:

**TYPE OF BOUNDARY SURVEY:** LIMITED CONTENT BOUNDARY SURVEY  
**MEASUREMENT SPECIFICATION:** NOT A BOUNDARY SURVEY

**OTHER TYPE OF SURVEY:** DATA ACQUISITION SURVEY (LOCATIONS)  
**CLASS III:** T-2 (IMMEDIATE AREA AROUND BATHHOUSE AND OWTS)

THE PURPOSE OF THIS SURVEY IS TO DEPICT THE EXISTING CONDITIONS IN THE PROJECT AREA FOR CONSTRUCTION AND THE DESIGN OF A NEW ONSITE WASTEWATER TREATMENT SYSTEM.

*David T. Bray* 8/10/2022  
DATE

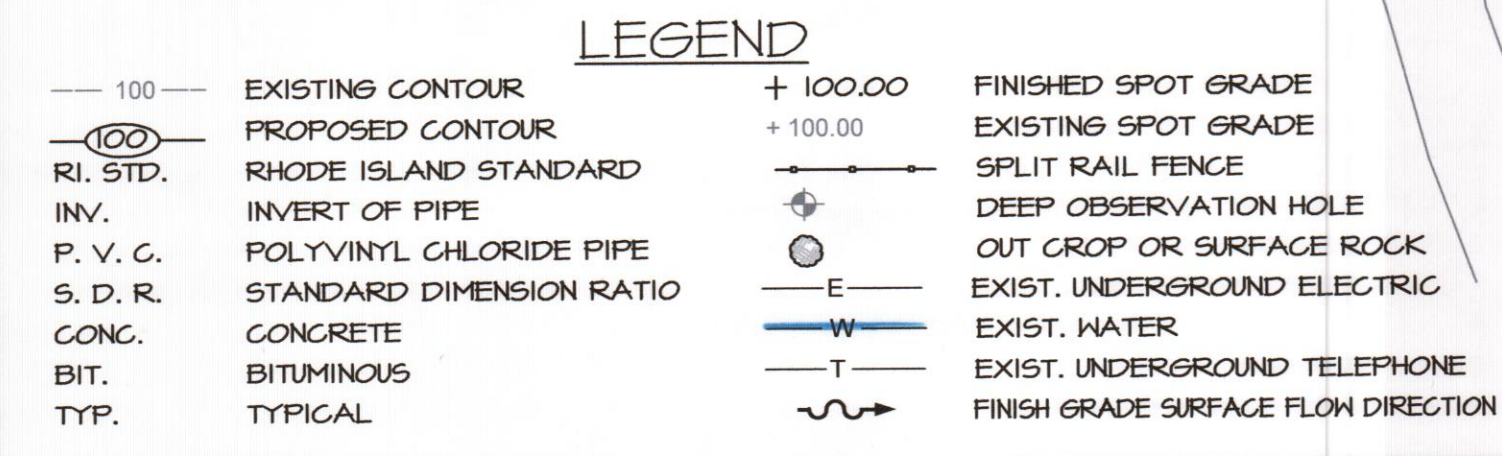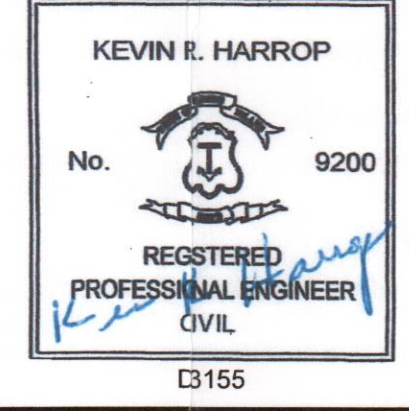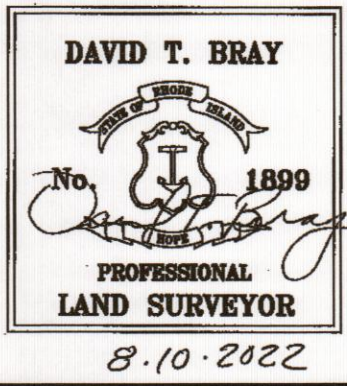

CAPUTO AND WICK LTD. - 1150 PAWTUCKET AVENUE - RUMFORD R.I. 02916

**DESIGN DATA**  
DAILY SEWAGE FLOW:  
50 GPD/CAMP SITE x 150 CAMP SITES = 7500 GALLONS PER DAY (G.P.D.)  
GROUND WATER TABLE: 120"  
DEPTH TO IMPERVIOUS: NOT ENCOUNTERED  
SOIL CLASS: B, SOIL CATEGORY: 3, LOADING RATE: 0.70 GALS./S.F./DAY  
SEPTIC TANK REQUIREMENTS VOLUME = 2 X 7,500 G.P.D. = 15,000 GALLONS  
LEACHING AREA REQUIREMENTS:  
GRAVEL SAND TREATMENT (GST) SYSTEM WITH CATEGORY 1 TREATMENT (ORENCO ADVANTEX TREATMENT AX100)  
ASSIGNED EFFLUENT LOADING RATE = 3.5 GPD PER S.F.  
SQUARE FOOTAGE OF GST REQUIRED = 7500 GPD / 3.5 GPD PER S.F. = 2,143 S.F.  
LENGTH OF GST 6212 REQUIRED = 2,143 S.F. / 17.5 S.F./L.F. = 123 L.F.  
LENGTH OF GST 6212 SPECIFIED: 288 L.F.  
TOTAL GST SYSTEM CAPACITY = 288 L.F. X 17.5 S.F./L.F. X 3.5 G.P.D./S.F. = 17,640 GPD  
17,640 GPD > 7,500 GPD - CAPACITY = 235% OF ANTICIPATED DESIGN FLOW

STATE OF RHODE ISLAND  
DEPARTMENT OF ENVIRONMENTAL MANAGEMENT  
DIVISION OF PLANNING AND DEVELOPMENT

DEMOLITION AND REBUILD OF BATHHOUSES  
BURLINGAME STATE PARK AND CAMPGROUND  
CHARLESTOWN, RHODE ISLAND

FISH CAMP BATHHOUSE - SITE PLAN

Dwg: Scale: 1" = 20'  
Contract No. x Date: MARCH, 2023  
C-1.4 12

BURLINGAME STATE PARK AND CAMPGROUND

OWTS SUBMISSION - MARCH 6, 2023



TH-2A - GROUND ELEV: 58.0 - AUGUST 17, 2021									
HORIZON	DEPTH	DIST	TOPO	MATRIX	RE-DOX FEATURES	Ab. S. CONTR.	TEXTURE	STRUCTURE	CONSISTENCE
Ap	0 - 5"	C	S	2.5YR 6/3			La	2gbd	Vfr
Bw	5" - 29"	C	S	10YR 5/6			La	2gbd	Fr
C1	29" - 120"	C	S	2.5YR 7/3			La	2gbd	Fr

SOIL CLASS: B OBSERVED STANDING GROUNDWATER - NA  
ESTIMATED SEASONAL HIGH WATER TABLE - 120" (ELEV: 48.0)

TH-2B - GROUND ELEV: 62.0 - AUGUST 17, 2021									
HORIZON	DEPTH	DIST	TOPO	MATRIX	RE-DOX FEATURES	Ab. S. CONTR.	TEXTURE	STRUCTURE	CONSISTENCE
Ap	0 - 8"	C	S	2.5YR 6/3			La	2gbd	Vfr
Bw	8" - 28"	C	S	10YR 5/6			La	2gbd	Fr
C1	28" - 120"	C	S	2.5YR 7/3			La	2gbd	Fr

SOIL CLASS: B OBSERVED STANDING GROUNDWATER - NA  
ESTIMATED SEASONAL HIGH WATER TABLE - 120" (ELEV: 52.0)

TH-2B - GROUND ELEV: 62.0 - AUGUST 17, 2021									
HORIZON	DEPTH	DIST	TOPO	MATRIX	RE-DOX FEATURES	Ab. S. CONTR.	TEXTURE	STRUCTURE	CONSISTENCE
Ap	0 - 8"	C	S	2.5YR 6/3			La	2gbd	Vfr
Bw	8" - 28"	C	S	10YR 5/6			La	2gbd	Fr
C1	28" - 120"	C	S	2.5YR 7/3			La	2gbd	Fr

SOIL CLASS: B OBSERVED STANDING GROUNDWATER - NA  
ESTIMATED SEASONAL HIGH WATER TABLE - 120" (ELEV: 52.0)

TH-2B - GROUND ELEV: 62.0 - AUGUST 17, 2021									
HORIZON	DEPTH	DIST	TOPO	MATRIX	RE-DOX FEATURES	Ab. S. CONTR.	TEXTURE	STRUCTURE	CONSISTENCE
Ap	0 - 8"	C	S	2.5YR 6/3			La	2gbd	Vfr
Bw	8" - 28"	C	S	10YR 5/6			La	2gbd	Fr
C1	28" - 120"	C	S	2.5YR 7/3			La	2gbd	Fr

SOIL CLASS: B OBSERVED STANDING GROUNDWATER - NA  
ESTIMATED SEASONAL HIGH WATER TABLE - 120" (ELEV: 52.0)

TH-2B - GROUND ELEV: 62.0 - AUGUST 17, 2021									
HORIZON	DEPTH	DIST	TOPO	MATRIX	RE-DOX FEATURES	Ab. S. CONTR.	TEXTURE	STRUCTURE	CONSISTENCE
Ap	0 - 8"	C	S	2.5YR 6/3			La	2gbd	Vfr
Bw	8" - 28"	C	S	10YR 5/6			La	2gbd	Fr
C1	28" - 120"	C	S	2.5YR 7/3			La	2gbd	Fr

SOIL CLASS: B OBSERVED STANDING GROUNDWATER - NA  
ESTIMATED SEASONAL HIGH WATER TABLE - 120" (ELEV: 52.0)

TH-2B - GROUND ELEV: 62.0 - AUGUST 17, 2021									
HORIZON	DEPTH	DIST	TOPO	MATRIX	RE-DOX FEATURES	Ab. S. CONTR.	TEXTURE	STRUCTURE	CONSISTENCE
Ap	0 - 8"	C	S	2.5YR 6/3			La	2gbd	Vfr
Bw	8" - 28"	C	S	10YR 5/6			La	2gbd	Fr
C1	28" - 120"	C	S	2.5YR 7/3			La	2gbd	Fr

SOIL CLASS: B OBSERVED STANDING GROUNDWATER - NA  
ESTIMATED SEASONAL HIGH WATER TABLE - 120" (ELEV: 52.0)

TH-2B - GROUND ELEV: 62.0 - AUGUST 17, 2021									
HORIZON	DEPTH	DIST	TOPO	MATRIX	RE-DOX FEATURES	Ab. S. CONTR.	TEXTURE	STRUCTURE	CONSISTENCE
Ap	0 - 8"	C	S	2.5YR 6/3			La	2gbd	Vfr
Bw	8" - 28"	C	S	10YR 5/6			La	2gbd	Fr
C1	28" - 120"	C	S	2.5YR 7/3			La	2gbd	Fr

SOIL CLASS: B OBSERVED STANDING GROUNDWATER - NA  
ESTIMATED SEASONAL HIGH WATER TABLE - 120" (ELEV: 52.0)

TH-2B - GROUND ELEV: 62.0 - AUGUST 17, 2021									
HORIZON	DEPTH	DIST	TOPO	MATRIX	RE-DOX FEATURES	Ab. S. CONTR.	TEXTURE	STRUCTURE	CONSISTENCE
Ap	0 - 8"	C	S	2.5YR 6/3			La	2gbd	Vfr
Bw	8" - 28"	C	S	10YR 5/6			La	2gbd	Fr
C1	28" - 120"	C	S	2.5YR 7/3			La	2gbd	Fr

SOIL CLASS: B OBSERVED STANDING GROUNDWATER - NA  
ESTIMATED SEASONAL HIGH WATER TABLE - 120" (ELEV: 52.0)

TH-2B - GROUND ELEV: 62.0 - AUGUST 17, 2021									
HORIZON	DEPTH	DIST	TOPO	MATRIX	RE-DOX FEATURES	Ab. S. CONTR.	TEXTURE	STRUCTURE	CONSISTENCE
Ap	0 - 8"	C	S	2.5YR 6/3			La	2gbd	Vfr
Bw	8" - 28"	C	S	10YR 5/6			La	2gbd	Fr
C1	28" - 120"	C	S	2.5YR 7/3			La	2gbd	Fr




SOIL CLASS: B OBSERVED STANDING GROUNDWATER - NA  
ESTIMATED SEASONAL HIGH WATER TABLE - 120" (ELEV: 52.0)

TH-2B - GROUND ELEV: 62.0 - AUGUST 17, 2021									
HORIZON	DEPTH	DIST	TOPO	MATRIX	RE-DOX FEATURES	Ab. S. CONTR.	TEXTURE	STRUCTURE	CONSISTENCE
Ap	0 - 8"	C	S	2.5YR 6/3			La	2gbd	Vfr
Bw	8" - 28"	C	S	10YR 5/6			La	2gbd	Fr
C1	28" - 120"	C	S	2.5YR 7/3			La	2gbd	Fr

SOIL CLASS: B OBSERVED STANDING GROUNDWATER - NA  
ESTIMATED SEASONAL HIGH WATER TABLE - 120" (ELEV: 52.0)

TH-2B - GROUND ELEV: 62.0 - AUGUST 17, 2021									
HORIZON	DEPTH	DIST	TOPO	MATRIX	RE-DOX FEATURES	Ab. S. CONTR.	TEXTURE	STRUCTURE	CONSISTENCE
Ap	0 - 8"	C	S	2.5YR 6/3			La	2gbd	Vfr
Bw	8" - 28"	C	S	10YR 5/6			La	2gbd	Fr
C1	28" - 120"	C	S	2.5YR 7/3			La	2gbd	Fr

SOIL CLASS: B OBSERVED STANDING GROUNDWATER - NA  
ESTIMATED SEASONAL HIGH WATER TABLE - 120" (ELEV: 52.0)

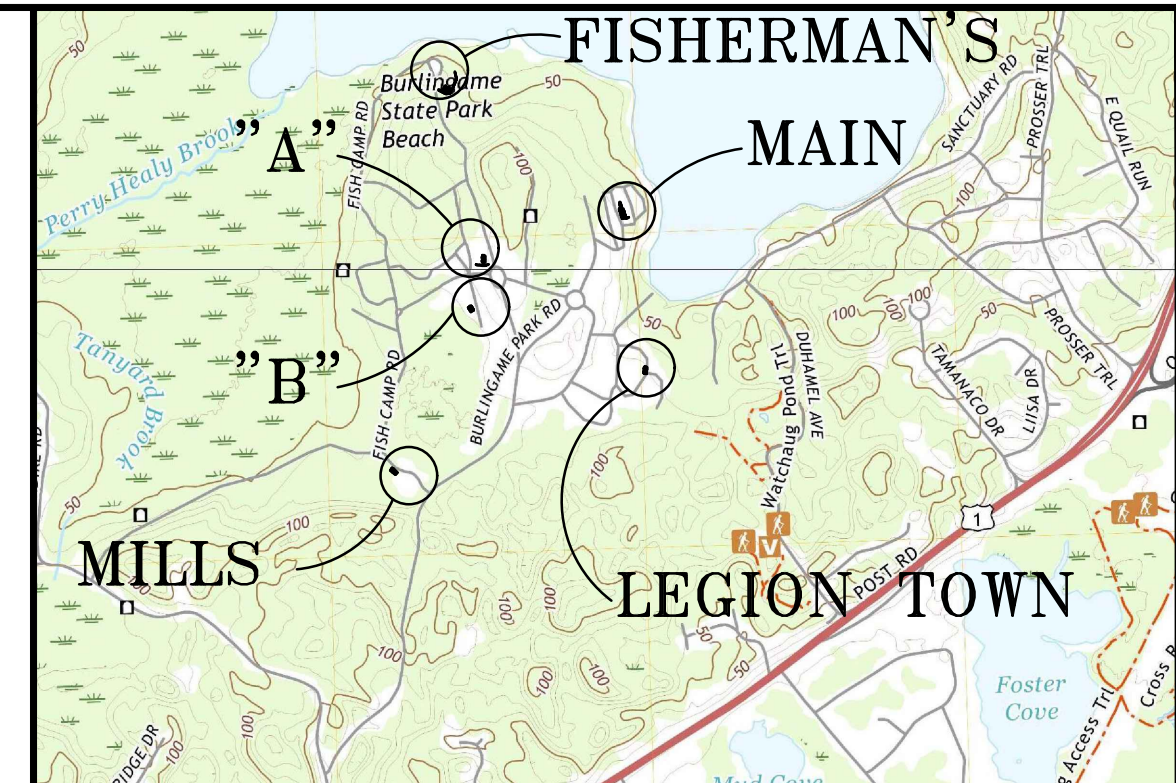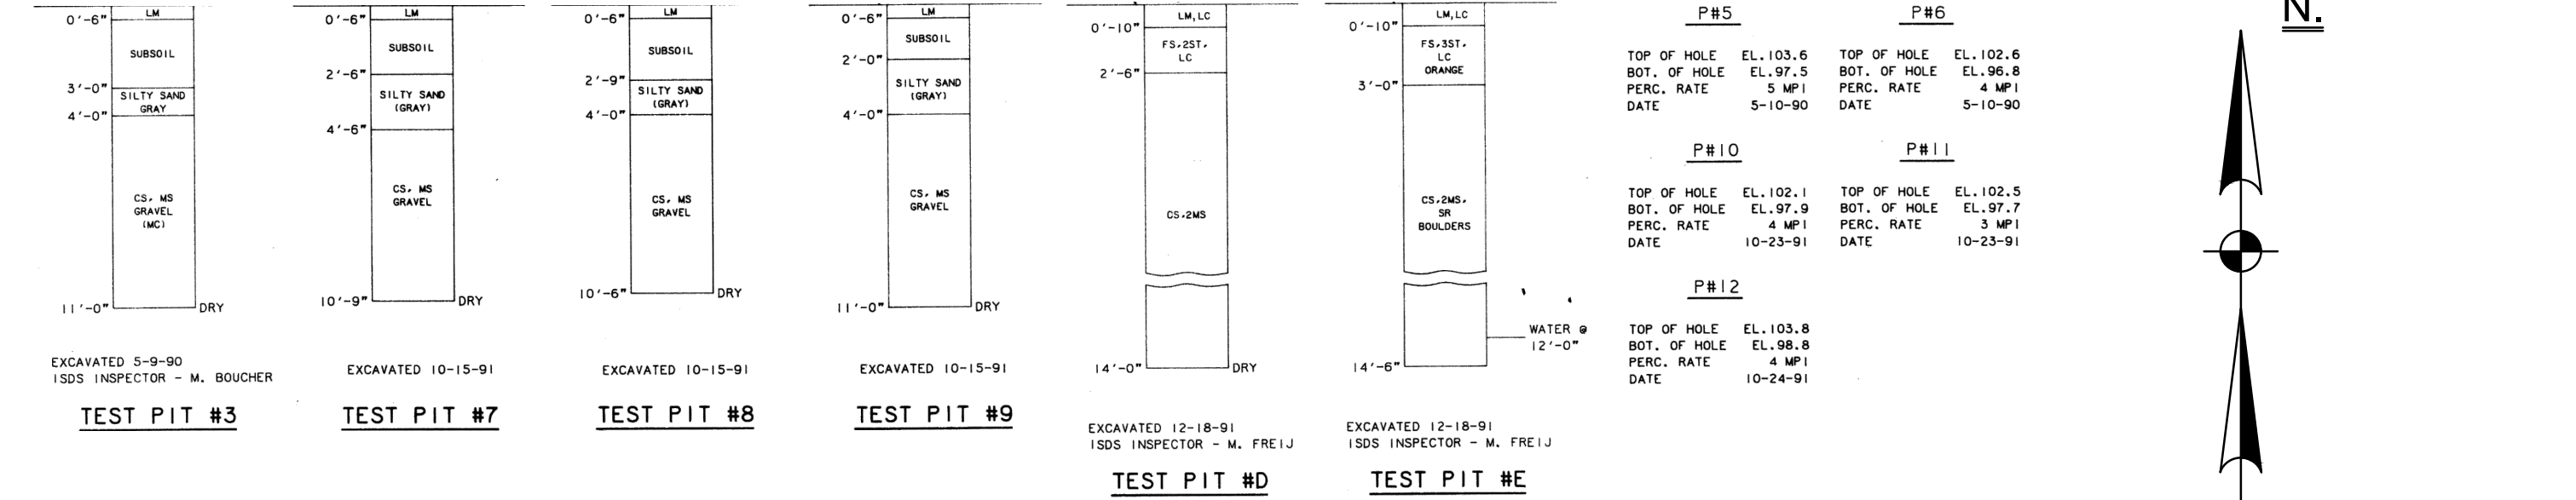

## LOCUS MAP

- NOTES:**
- ALL WORK SHALL CONFORM TO THE RHODE ISLAND DEPARTMENT OF ENVIRONMENTAL MANAGEMENT, OFFICE OF WATER RESOURCES 'RULES AND REGULATIONS ESTABLISHING MINIMUM STANDARDS RELATING TO LOCATION, DESIGN, CONSTRUCTION AND MAINTENANCE OF 'ON-SITE WASTEWATER TREATMENT SYSTEMS', LATEST EDITION.
  - THE CONTRACTOR SHALL SUBMIT SHOP DRAWINGS TO CAPUTO AND WICK LTD. FOR APPROVAL OF ALL PROPOSED CONSTRUCTION MATERIALS AND EQUIPMENT PRIOR TO ANY CONSTRUCTION.
  - EXISTING 'ON-SITE WASTEWATER TREATMENT SYSTEM (OWTS) PRECAST STRUCTURES ARE TO BE PUMPED OUT, RINSED WITH CLEAN WATER AND PUMPED OUT AGAIN. PUMPING MUST BE PERFORMED BY A STATE LICENSED SEPTIC HAULER AND THE CONTENTS OF THE TANK DISPOSED OF PROPERLY. AFTER PUMPING, THE EXISTING OWTS STRUCTURES MUST BE FILLED WITH FLOWABLE FILL OR REMOVED AND REPLACED WITH GRAVEL BORROW AND A LOAM AND SEED.
  - REMOVE ALL PORTIONS OF THE EXISTING OWTS WITHIN 5' OF THE GRAVEL SAND TREATMENT SYSTEM; AND ALL FILL, A HORIZON SOIL, B HORIZON SOIL AND SCARIFY 3" OF THE C HORIZON SOIL BELOW THE GRAVEL SAND TREATMENT SYSTEM AND THOUGHLY MIX WITH ASTM C-33 SAND (SEE NOTE 16) TO INTERFACE THE FILL WITH THE SOIL, AND REPLACE ALL REMOVED SOIL WITH ASTM C-33 SAND. A AND B SOIL HORIZON LAYERS ARE TO BE REMOVED IN THIS APPLICATION DUE TO COMPACTION CAUSED BY PREVIOUS SYSTEM INSTALLATION AND FILL BEING PLACED ABOVE.
  - UNUSABLE MATERIAL USED TO BACKFILL THE TEST HOLES SHALL BE REMOVED AND REPLACED WITH WITH ASTM C-33 SAND (SEE NOTE 16).
  - ASTM C-33 SAND (SEE NOTE 16) MUST BE PLACED ON SCARIFIED, RELATIVELY DRY NATURAL SOIL. THE CONTRACTOR SHALL PROVIDE FOR DEWATERING AS REQUIRED AND ALL WORK SHALL BE PERFORMED UNDER DRY CONDITIONS.
  - BUILDING SEWER PIPE TO BE 4" P. V. C. SCH. 40 UNLESS OTHERWISE NOTED.
  - PLACE 6" MINIMUM COMPACTED CRUSHED STONE UNDER SEPTIC TANK, ANOXIC TANK, RECIRCULATION TANK, PUMP CHAMBER, ADVANTEX TREATMENT TANKS AND SYSTEM STRUCTURES.
  - INLET AND OUTLET TEES FOR SEPTIC TANK, ANOXIC TANK, RECIRCULATION TANK AND PUMP CHAMBER ARE TO BE LOCATED DIRECTLY BELOW ACCESS COVERS.
  - SEPTIC TANK, ANOXIC TANK, RECIRCULATION TANK, PUMP CHAMBER AND ADVANTEX TREATMENT TANK RISERS/COVERS TO BE AT FINISH GRADE.
  - IF CONDITIONS ENCOUNTERED DURING CONSTRUCTION VARY SUBSTANTIALLY FROM THOSE SHOWN ON THIS PLAN, NOTIFY CAPUTO AND WICK, LTD. BEFORE PROCEEDING WITH CONSTRUCTION, IF IN DOUBT, ASK.
  - NEW SEPTIC TANK SHALL MEET ALL OF THE REQUIREMENTS OF 250-RICR-150-10-6.27.
  - INSPECTION OF THE SEPTIC TANK, ANOXIC TANK, RECIRCULATION TANK, PUMP CHAMBER AND ADVANTEX TREATMENT TANK SHALL BE PART OF THE MAINTENANCE SERVICE FOR THE OWTS AND ALL COMPONENTS SHALL BE CLEANED WHEN REQUIRED.
  - IT IS RECOMMENDED THAT THE SEPTIC TANK BE INSPECTED TWICE A YEAR, AND BE CLEANED WHEN THE SOLIDS EQUAL ONE THIRD THE LIQUID DEPTH.
  - MINIMUM PERIMETER INVERT ELEVATION = 59.50 NO FINISHED GRADE BELOW 59.50 FROM THE EDGE OF THE GRAVEL SAND TREATMENT SYSTEM FOR A 10 FEET MINIMUM.
  - THE SAND MEDIA USED IN CONSTRUCTION SHALL MEET THE ASTM C-33 SPECIFICATIONS. SIEVE ANALYSIS FROM PROPOSED SOURCE IS REQUIRED TO BE SUBMITTED TOGETHER WITH SHOP DRAWINGS. TESTING OF SAND MATERIAL DELIVERED TO THE SITE IS REQUIRED.
  - OWTS INSTALLER MUST BE FAMILIAR WITH ADVANTEX PRODUCTS AND GRAVEL SAND TREATMENT SYSTEMS PROPOSED FOR THIS SITE. SEE ADVANTEX INSTALLATION MANUAL, GRAVEL SAND TREATMENT SYSTEM DESIGN AND INSTALLATION MANUAL, AND RIDEM GUIDELINES FOR ADDITIONAL DETAILS OF INSTALLATION.
  - INSTALLATION SHALL BE IN STRICT CONFORMANCE WITH THE ORENCO ADVANTEX INSTALLATION MANUAL AND GRAVEL SAND TREATMENT SYSTEM INSTALLATION MANUAL AND ALL OTHER APPLICABLE SECTIONS OF 250-RICR-150-6. THE INSTALLATION SHALL ONLY BE PERFORMED BY A RHODE ISLAND DEM LICENSED INSTALLER WHO HAS RECEIVED TRAINING AND IS AUTHORIZED IN WRITING BY THE VENDORS TO INSTALL THE SYSTEM. AUTHORIZATION FROM THE VENDORS SHALL BE SUBMITTED TO ENGINEER PRIOR TO ANY CONSTRUCTION.
  - REFER TO 250-RICR-150-10-6 AND RIDEM GUIDELINES FOR ADDITIONAL INFORMATION CONCERNING THE INSTALLATION, OPERATION AND MAINTENANCE OF THE SYSTEM. THE INSTALLER AND OWNER SHOULD REVIEW AND APPLY 250-RICR-150-10-6 AND RIDEM GUIDELINES. THE SYSTEM TO BE CONSTRUCTED BY AN INSTALLER LICENSED BY RIDEM AND THOROUGHLY FAMILIAR WITH THE INSTALLATION OF ADVANTEX TREATMENT DEVICES AND GRAVEL SAND TREATMENT SYSTEMS.
  - THE CONTRACTOR IS RESPONSIBLE FOR COORDINATION WITH THE DESIGN ENGINEER IN ORDER TO FACILITATE WITNESSING THE 'REQUIRED PHASES OF THE SYSTEM INSTALLATION AS STATED IN 250-RICR-150-6.47 OF THE 'REGULATIONS'. FAILURE OF THE CONTRACTOR TO NOTIFY THE DESIGN ENGINEER IN A TIMELY MANNER MAY REQUIRE THE CONTRACTOR TO EXCAVATE AND EXPOSE SYSTEM COMPONENTS FOR OBSERVATION.
  - THE DESIGNER EXPRESSLY DISCLAIMS ANY RESPONSIBILITY FOR THE INSTALLATION AND MAINTENANCE OF THE SYSTEM. IT SHALL BE THE RESPONSIBILITY OF THE INSTALLER TO CONSTRUCT THE SYSTEM IN ACCORDANCE WITH THE ABOVE REFERENCED REGULATIONS.
  - CONTRACTOR SHALL CONTACT 'DIG-SAFE' PRIOR TO CONSTRUCTION. LOCATION OF UTILITIES ON THIS PLAN ARE FROM EXISTING INFORMATION, BUT ARE ONLY TO BE CONSIDERED APPROXIMATE.
  - THERE ARE NO PUBLIC WELLS, EXISTING OR PROPOSED, FOUND TO BE LOCATED WITHIN 500 FEET OF THE PROPOSED OWTS EXCEPT AS SHOWN.
  - NO FRESHWATER WETLANDS OBSERVED WITHIN 200 FEET OF THE PROPOSED OWTS. THIS SITE DOES NOT LIE WITHIN A CRITICAL RESOURCE AREA.
  - I CERTIFY THAT THERE ARE NO WELLS FOUND TO BE LOCATED WITHIN 200 FEET OF THE PROPOSED LEACHING AREA, OTHER THAN AS SHOWN ON THIS PLAN. I ALSO CERTIFY THAT THERE ARE NO EXISTING OR PROPOSED DRAINS, FOUNDATION DRAINS OR SUB DRAINS FOUND TO BE LOCATED WITHIN 25 FEET OF THIS PROPOSED OWTS.
  - ALL PIPE JOINTS, PIPE CONNECTIONS AND ACCESS COVERS ARE TO BE WATER TIGHT.
  - PRESSURE PIPE SHALL BE INSTALLED TO MAINTAIN SLOPE BACK TO TANK/PUMP CHAMBER TO DRAIN BETWEEN PUMPING CYCLES. ELIMINATE ANY HIGH OR LOW POINTS THAT MAY PREVENT DRAINING AND/OR AIR POCKETS.
  - CONTRACTOR TO PAY ANY REQUIRED INSTALLATION FEES.
  - CONTROL PANEL AND ALARM TO BE MOUNTED INSIDE BUILDING IN A CONSPICUOUS LOCATION, EXACT LOCATION TO BE COORDINATED WITH OWNER. ALL CONTROL PANELS AND JUNCTION BOXES SHALL BE NEMA 4X.
  - THE PUMP DOSING CONTROLS WILL BE FIELD TESTED IN THE PRESENCE OF THE DESIGN ENGINEER AND ORENCO REPRESENTATIVE. ADJUSTMENT TO CONTROLS ARE THE CONTRACTOR'S RESPONSIBILITY. CONTRACTOR MUST MAKE WATER AVAILABLE FOR TESTING OF THE CONTROL FLOATS.
  - ALL TREES AND SHRUBS SHALL BE CLEAR AND NO NEW ONES SHALL BE PLANTED WITHIN 10' OF THE GRAVEL SAND TREATMENT SYSTEM.
  - THE GRAVEL SAND TREATMENT SYSTEM LOCATION SHALL BE STAKED OUT AND PROTECTED PRIOR TO ANY SITE PREPARATION ACTIVITIES.
  - NO IMPERVIOUS SURFACE IS TO BE PLACED ABOVE THE GST (LEACHING) SYSTEM.
  - MATERIAL AND EQUIPMENT FROM ALTERNATE MANUFACTURERS MAY BE USED IF EQUAL. APPROVAL FOR ALTERNATE MATERIAL AND/OR EQUIPMENT IS REQUIRED FROM THE OWNER AND ENGINEER. FULL SPECIFICATIONS FOR ALTERNATE EQUIPMENT MUST BE PROVIDED BY THE CONTRACTOR. IF ACCEPTABLE, THE CONTRACTOR MUST PREPARE AND SUBMIT FOR AN RIDEM OWTS CONSTRUCTION PERMIT BASED UPON THE REDESIGN.

## DESIGN DATA

DAILY SEWAGE FLOW:  
50 GPD/CAMPSITE x 150 CAMPSITES = 7500 GALLONS PER DAY (G.P.D.)  
GROUND WATER TABLE: 120"  
DEPTH TO IMPERVIOUS: NOT ENCOUNTERED  
SOIL CLASS: B, SOIL CATEGORY: 3, LOADING RATE: 0.70 GAL/S.F./DAY  
SEPTIC TANK REQUIREMENTS VOLUME = 2 X 7,500 G.P.D. = 15,000 GALLONS  
LEACHING AREA REQUIREMENTS:  
GRAVEL SAND TREATMENT (GST) SYSTEM WITH CATEGORY 1 TREATMENT  
(ORENCO ADVANTEX TREATMENT AX100)  
ASSIGNED EFFLUENT LOADING RATE = 3.5 GPD PER S. F.  
SQUARE FOOTAGE OF GST REQUIRED = 7500 GPD / 3.5 GPD PER S.F. = 2,143 S.F.  
LENGTH OF GST 6212 REQUIRED = 2,143 S.F. / 17.5 S.F./L.F. = 123 L.F.  
LENGTH OF GST 6212 SPECIFIED: 288 L.F.  
TOTAL GST SYSTEM CAPACITY = 288 L.F. X 17.5 S.F./L.F. X 3.5 G.P.D./S.F. = 17,640 GPD  
17,640 GPD > 7,500 GPD - CAPACITY = 235% OF ANTICIPATED DESIGN FLOW



## CERTIFICATION:

THIS SURVEY HAS BEEN CONDUCTED AND THE PLAN HAS BEEN PREPARED PURSUANT TO SECTION 8 OF THE RULES AND REGULATIONS ADOPTED BY THE RHODE ISLAND STATE BOARD OF REGISTRATION FOR PROFESSIONAL LAND SURVEYORS ON NOVEMBER 26, 2015, AS FOLLOWS:

**TYPE OF BOUNDARY SURVEY:** LIMITED CONTENT BOUNDARY SURVEY  
**MEASUREMENT SPECIFICATION:** NOT A BOUNDARY SURVEY  
**OTHER TYPE OF SURVEY:** DATA ACQUISITION SURVEY (LOCATIONS)  
**CLASS II:** T-2 (IMMEDIATE AREA AROUND BATHHOUSE AND OWTS)  
**TOPOGRAPHIC SURVEY ACCURACY:**

THE PURPOSE OF THIS SURVEY IS TO DEPICT THE EXISTING CONDITIONS IN THE PROJECT AREA FOR CONSTRUCTION AND THE DESIGN OF A NEW ON-SITE WASTEWATER TREATMENT SYSTEM.

*David T. Bray* 8/10/2022  
DAVID T. BRAY PLS NO. 1999  
CAPUTO AND WICK LTD., COA NO. A177  
DATE

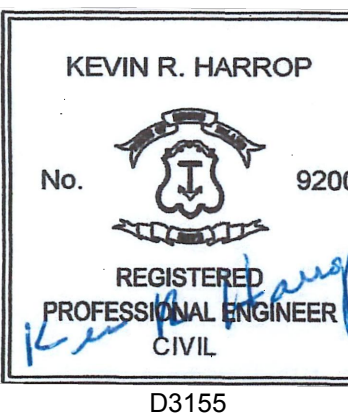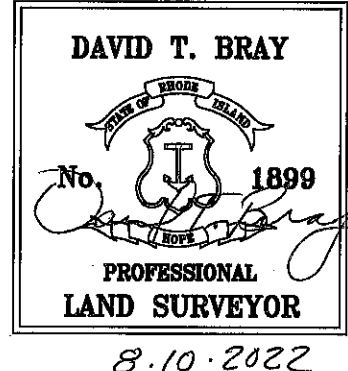

STATE OF RHODE ISLAND  
DEPARTMENT OF ENVIRONMENTAL MANAGEMENT  
DIVISION OF PLANNING AND DEVELOPMENT








DEMOLITION AND REBUILD OF BATHHOUSES  
BURLINGAME STATE PARK AND CAMPGROUND  
CHARLESTOWN, RHODE ISLAND

## FISH CAMP BATHHOUSE - SITE PLAN


Dwg: Scale: 1" = 20'  
Contract No. x Date: MARCH, 2023  
C-1.4  
12

CAPUTO AND WICK LTD. - 1150 PAWTUCKET AVENUE - RUMFORD R.I. 02916



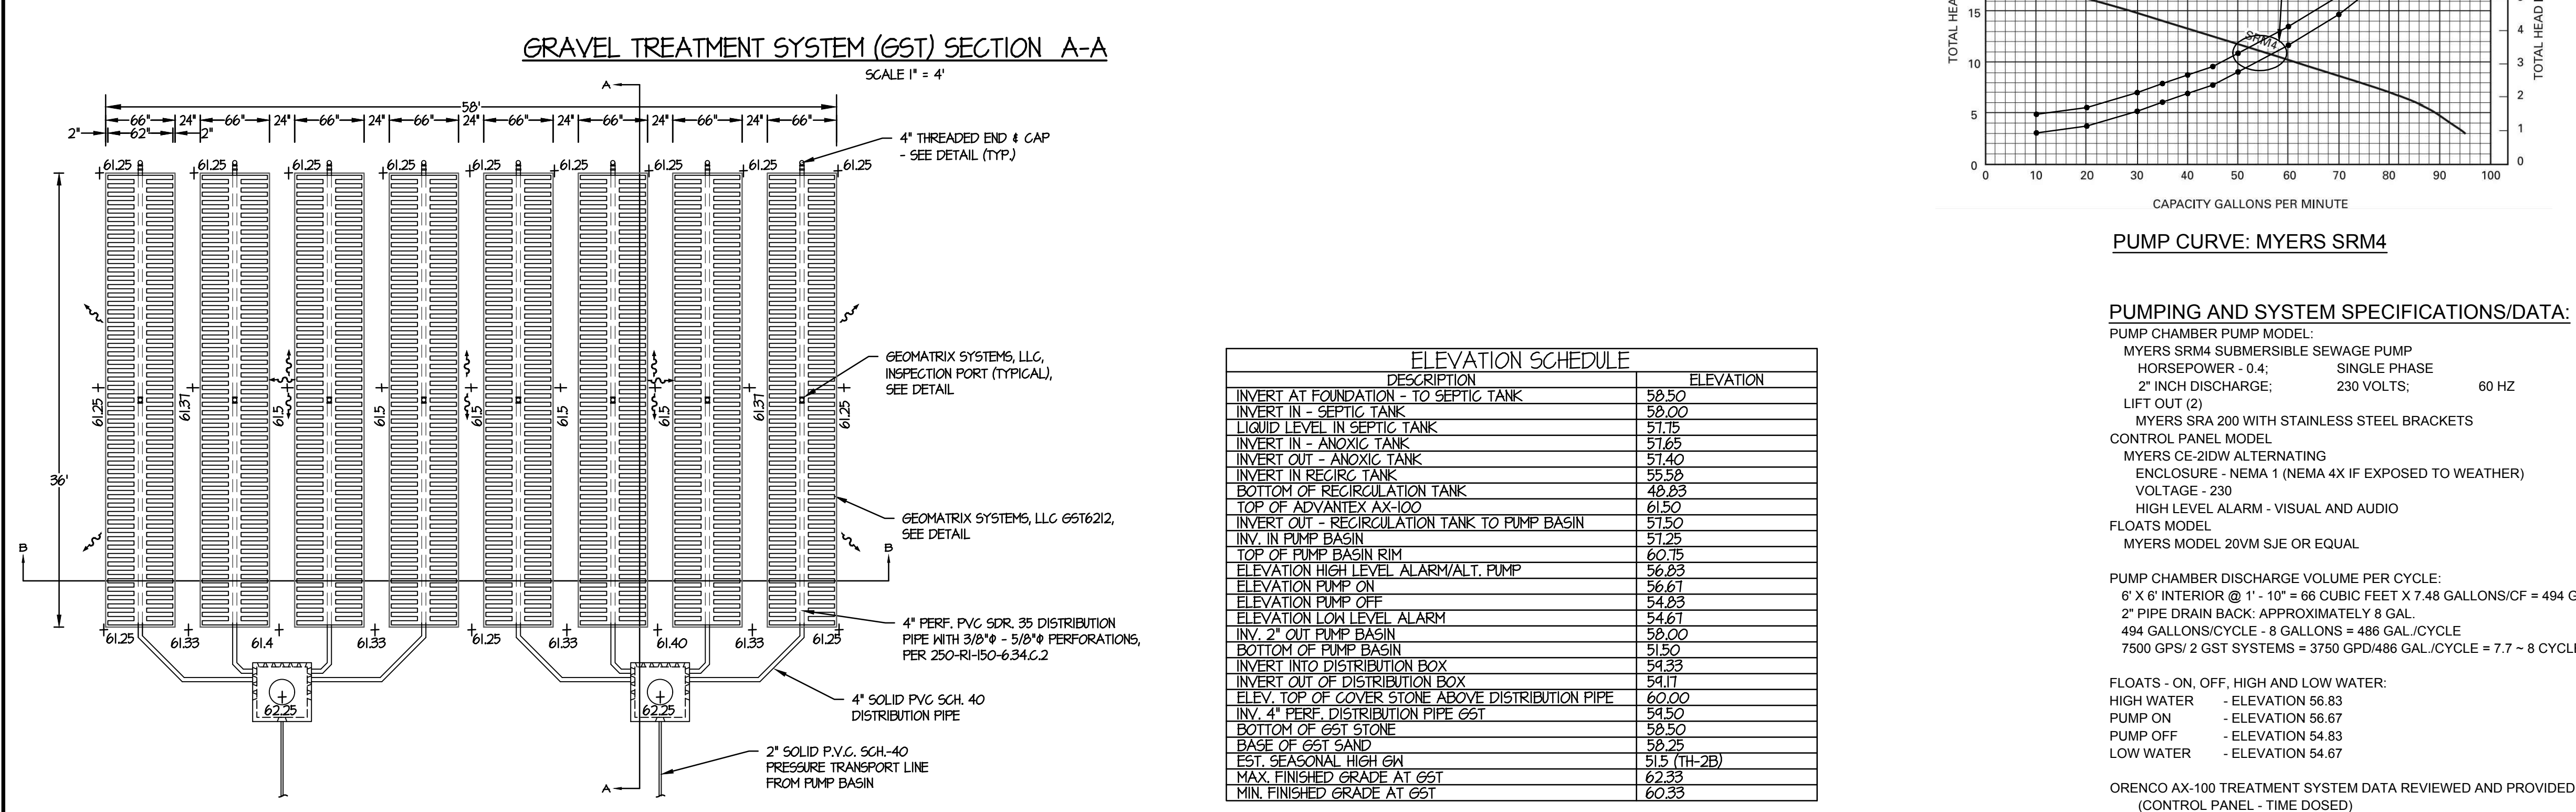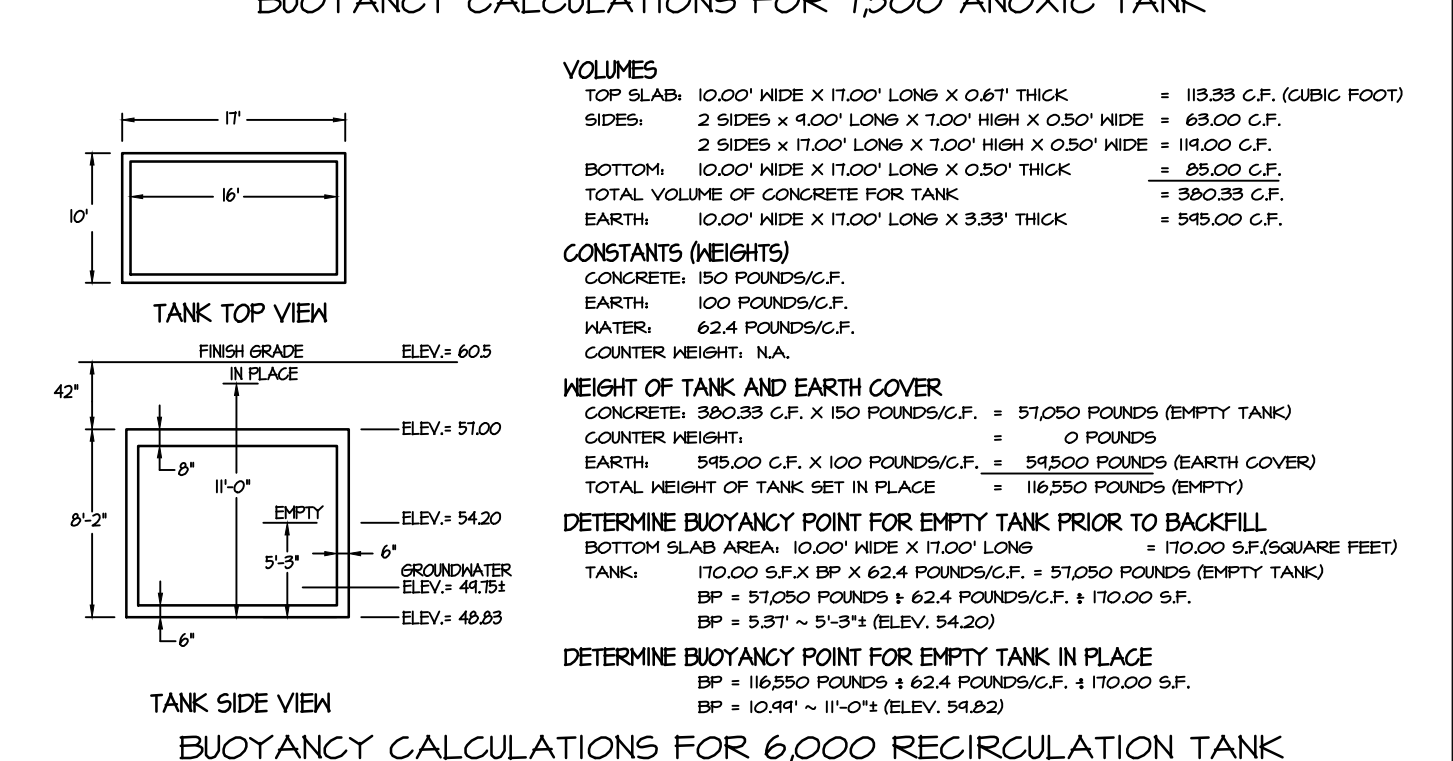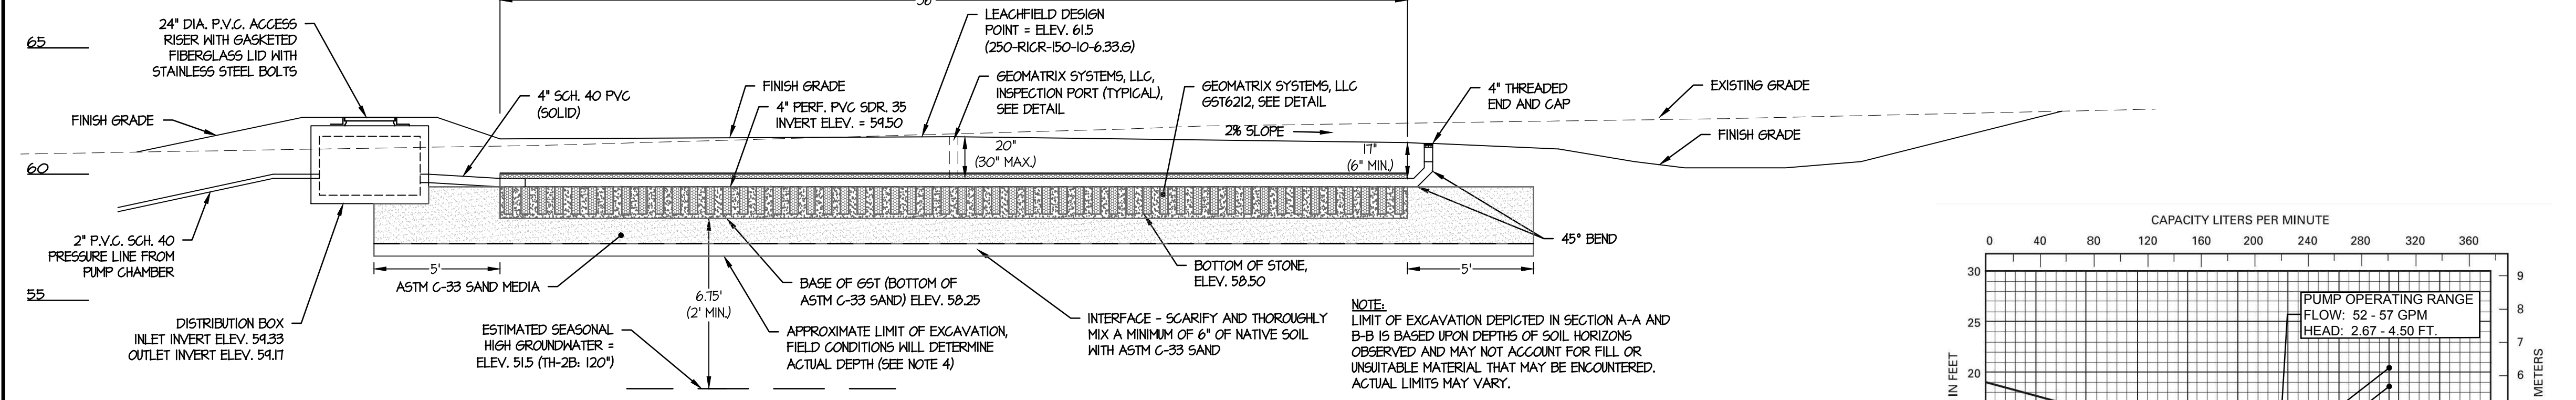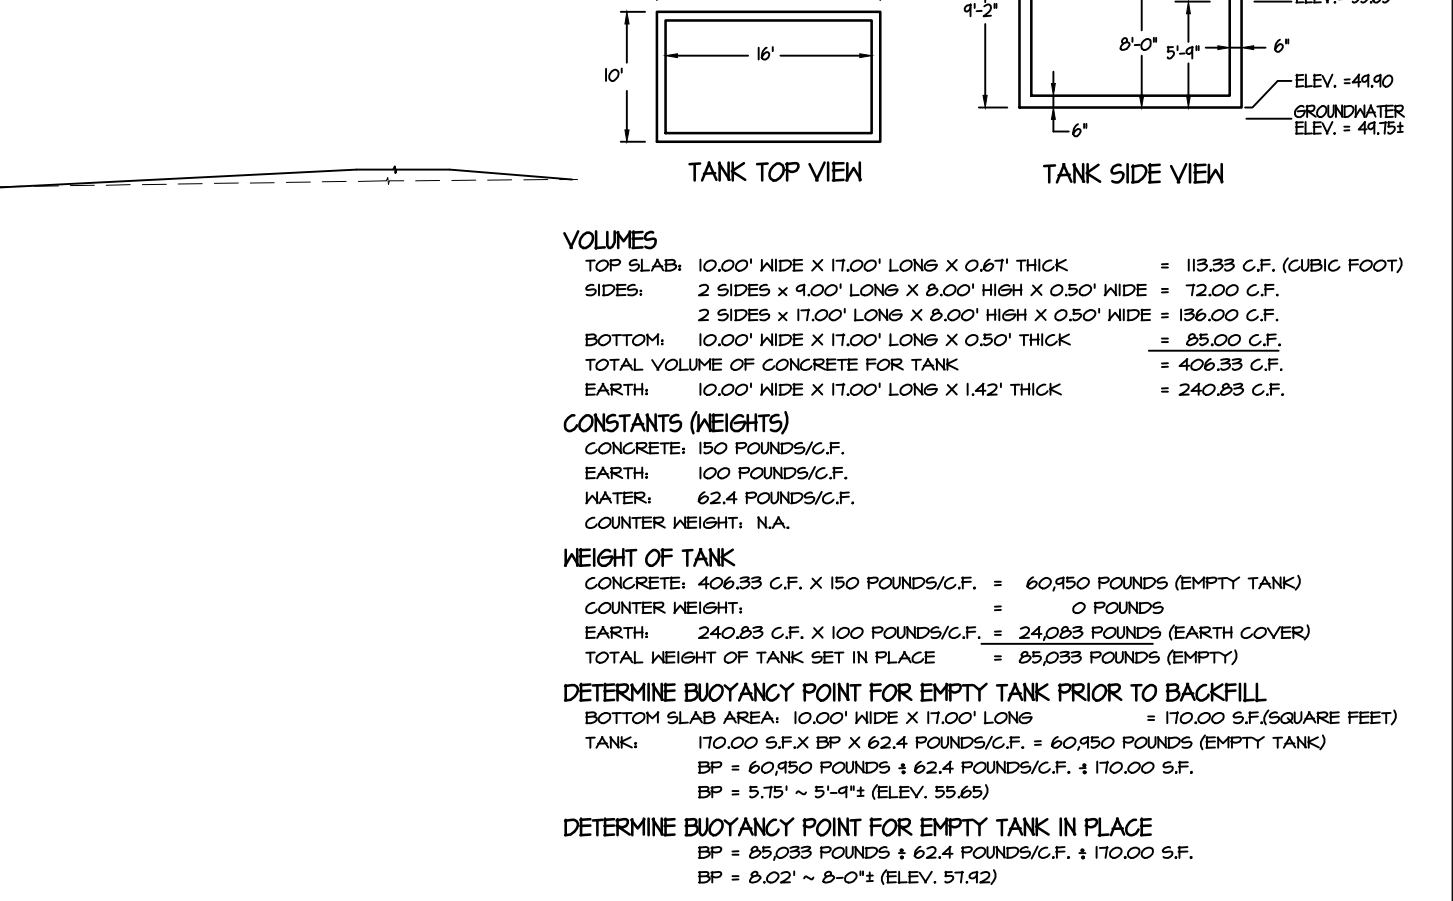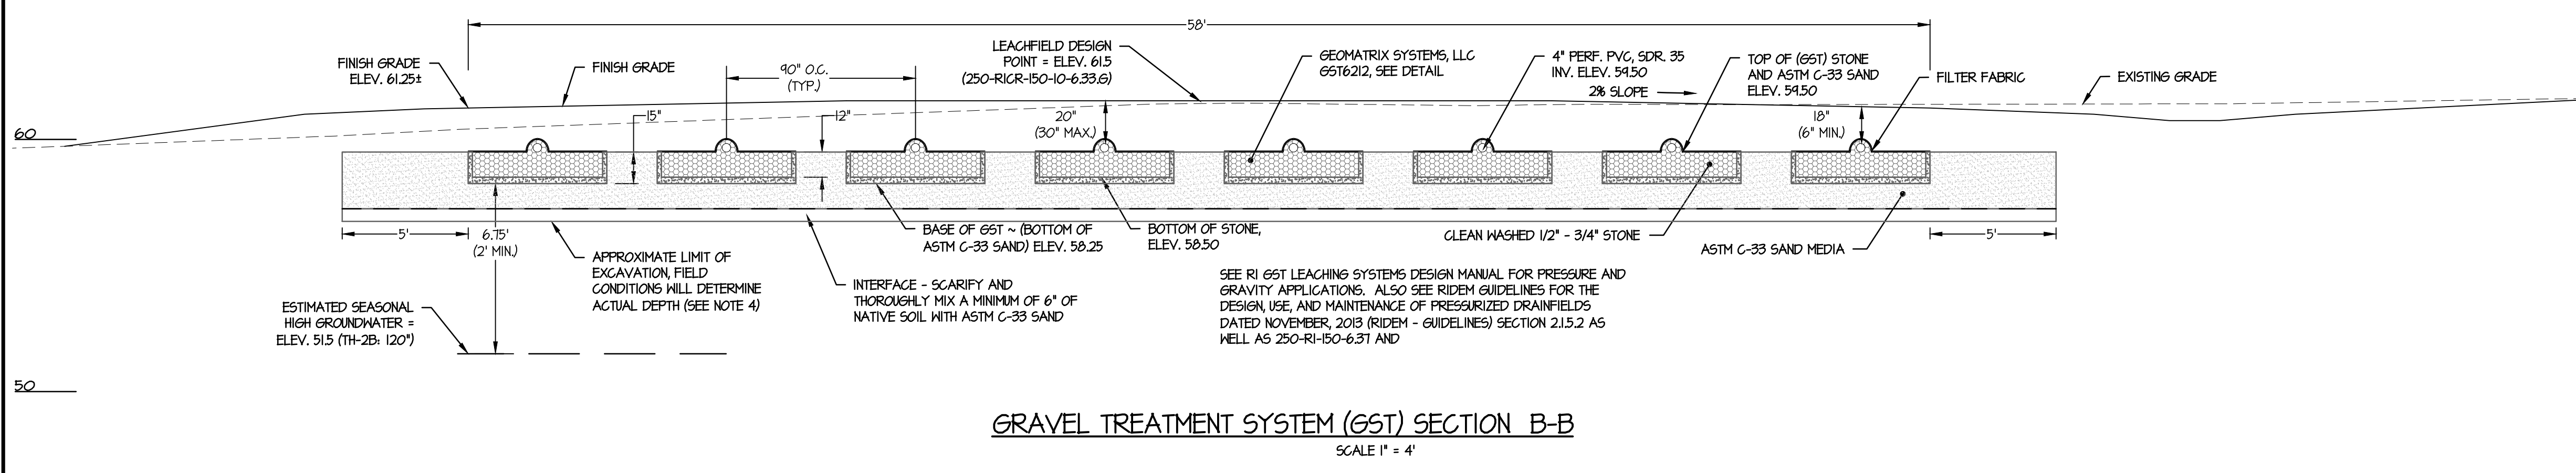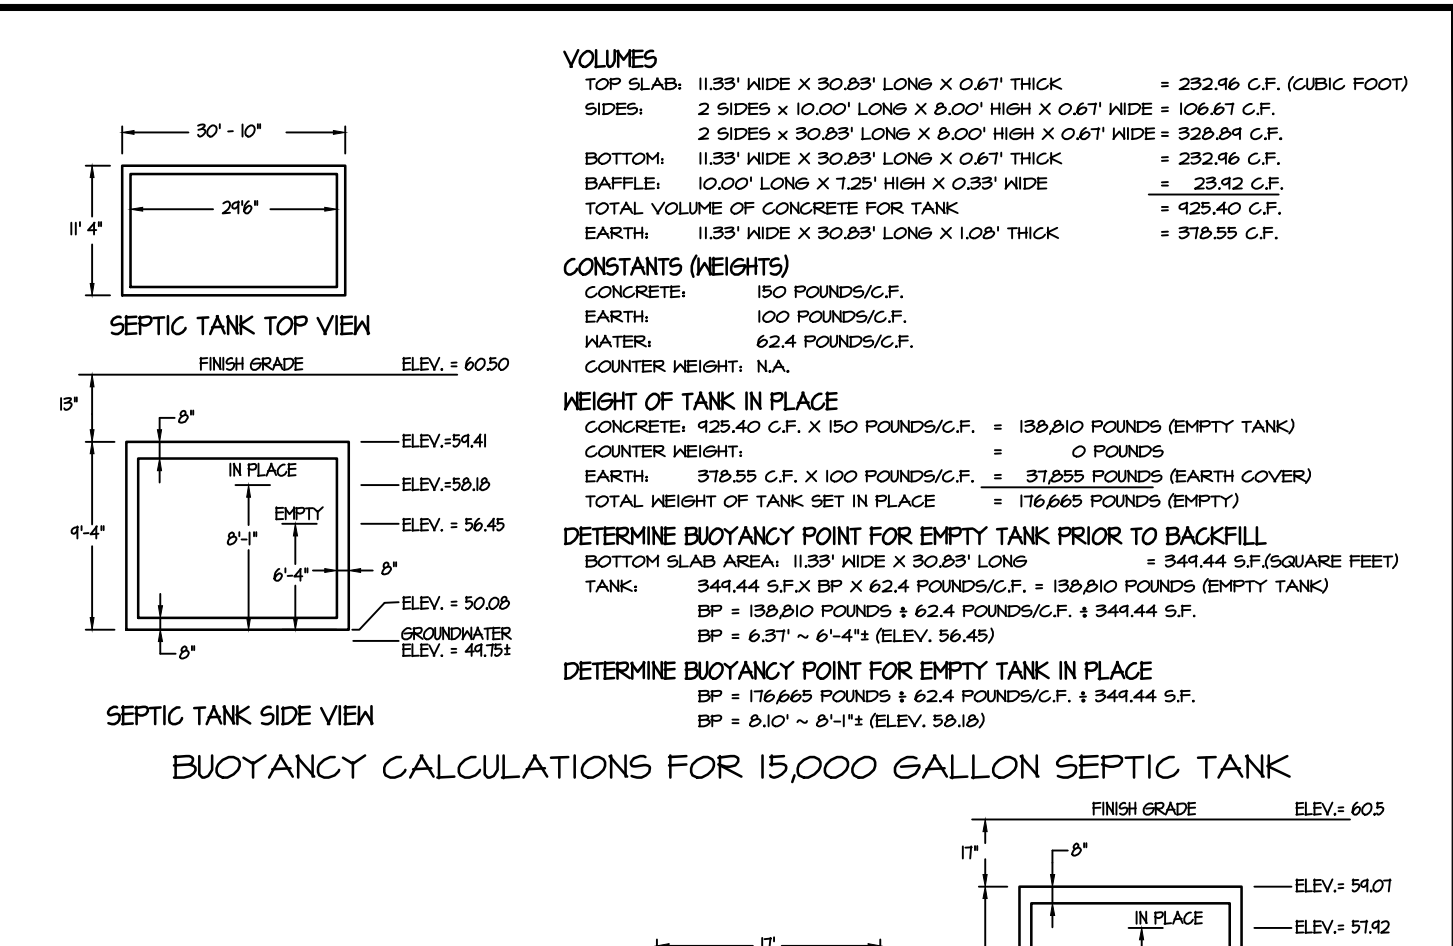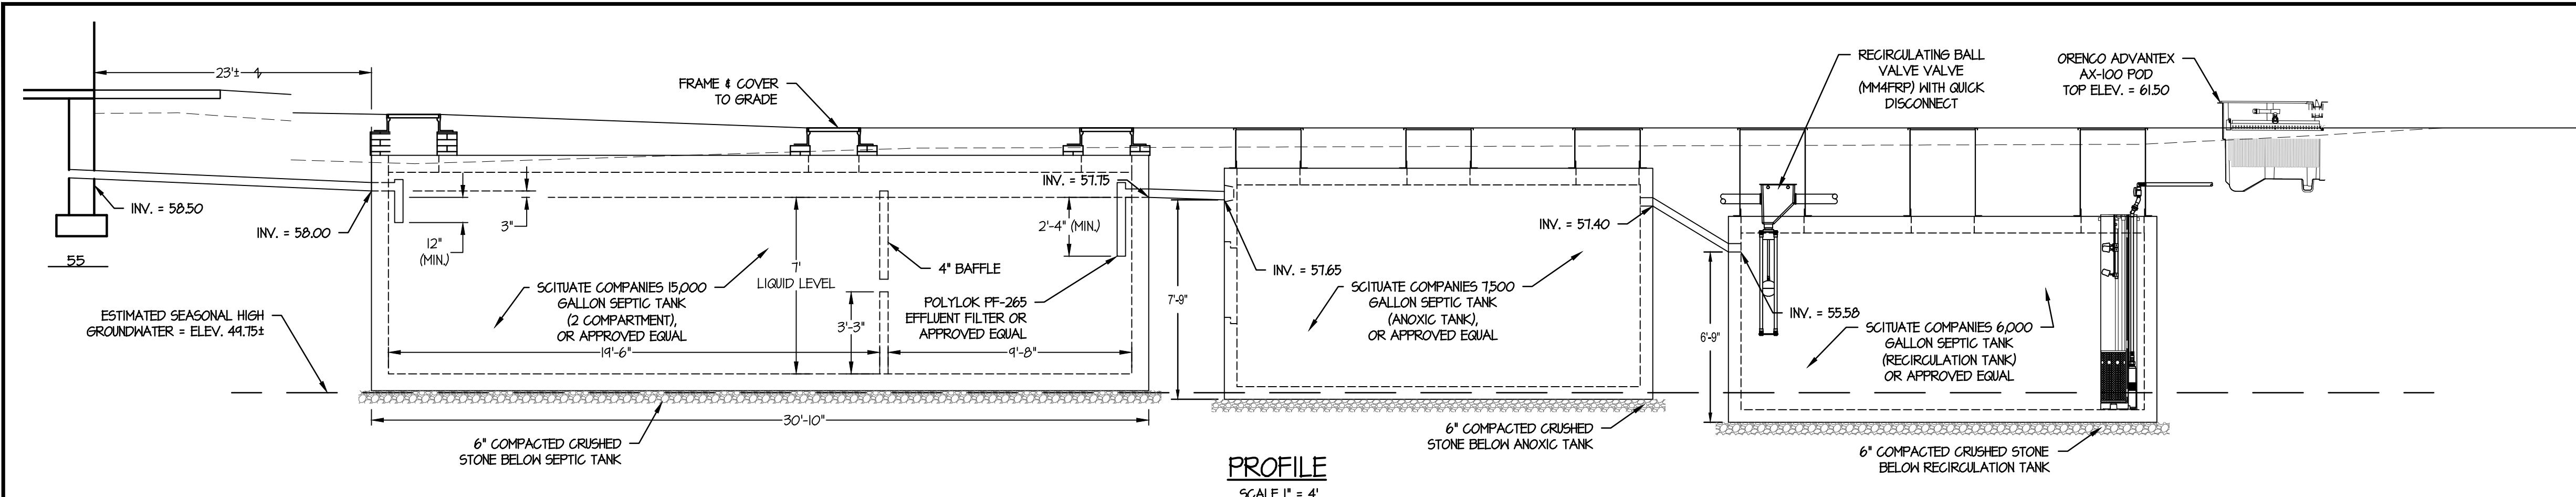

ELEVATION SCHEDULE		
DESCRIPTION		ELEVATION
INVERT AT FOUNDATION - TO SEPTIC TANK		58.50
INVERT IN - SEPTIC TANK		58.00
LIQUID LEVEL IN SEPTIC TANK		57.75
INVERT IN - ANOXIC TANK		57.65
INVERT OUT - ANOXIC TANK		57.40
INVERT IN RECIRC. TANK		55.58
BOTTOM OF RECIRCULATION TANK		49.23
TOP OF ADVANTEX AX-100		61.50
INVERT OUT - RECIRCULATION TANK TO PUMP BASIN		57.50
INV. IN PUMP BASIN		57.25
TOP OF PUMP BASIN RIM		60.75
ELEVATION HIGH LEVEL ALARM/ALT. PUMP		56.23
ELEVATION PUMP ON		56.61
ELEVATION PUMP OFF		54.23
ELEVATION LOW LEVEL ALARM		54.67
INV. 2" OUT PUMP BASIN		58.00
BOTTOM OF PUMP BASIN		51.50
INVERT INTO DISTRIBUTION BOX		54.33
INVERT OUT OF DISTRIBUTION BOX		54.17
ELEV. TOP OF COVER STONE ABOVE DISTRIBUTION PIPE		60.00
INV. 4" PERF. DISTRIBUTION PIPE GST		54.50
BOTTOM OF GST STONE		58.50
BASE OF GST SAND		58.25
EST. SEASONAL HIGH GW		51.5 (TH-2B)
MAX. FINISHED GRADE AT GST		62.33
MIN. FINISHED GRADE AT GST		60.33

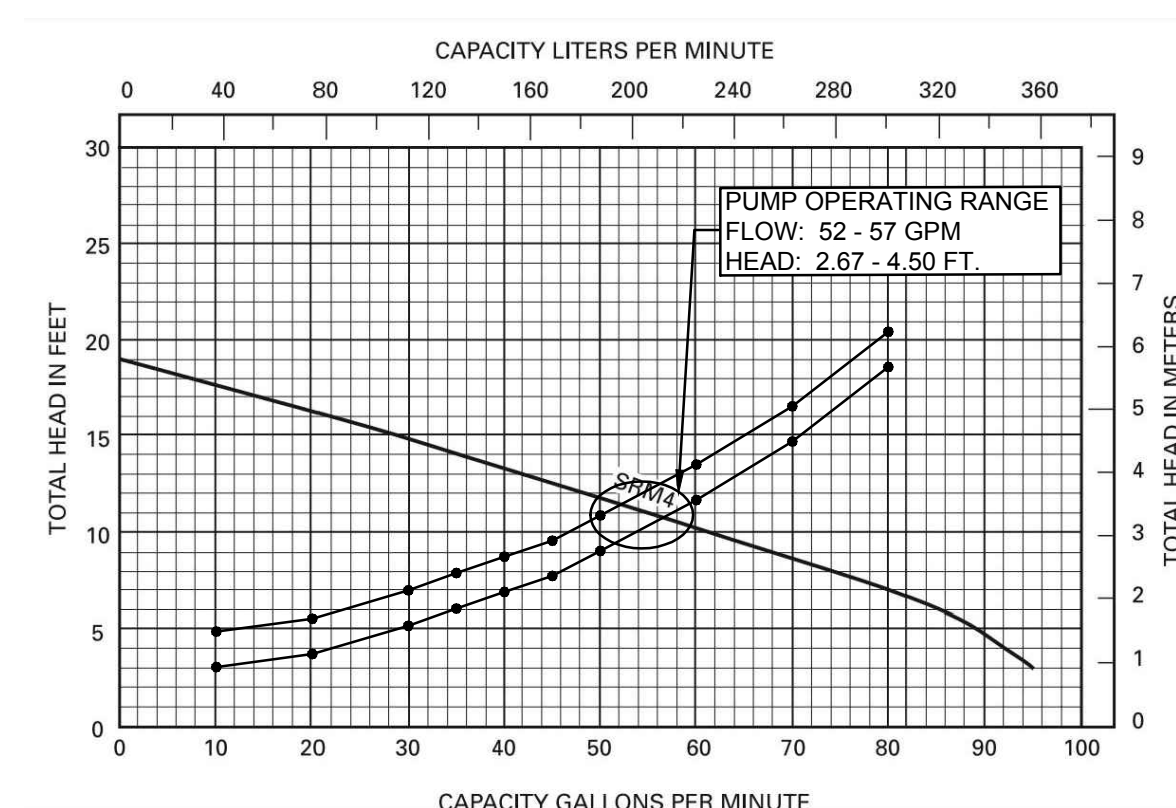

PUMP CURVE: MYERS SRM4

PUMPING AND SYSTEM SPECIFICATIONS/DATA:

PUMP CHAMBER PUMP MODEL:  
MYERS SRM4 SUBMERSIBLE SEWAGE PUMP  
HORSEPOWER - 0.4; SINGLE PHASE  
2" INCH DISCHARGE; 230 VOLTS; 60 HZ  
LIFT OUT (2)  
MYERS SRA 200 WITH STAINLESS STEEL BRACKETS  
CONTROL PANEL MODEL  
MYERS GE-210W ALTERNATING  
ENCLOSURE - NEMA 1 (NEMA 4X IF EXPOSED TO WEATHER)  
VOLTAGE - 230  
HIGH LEVEL ALARM - VISUAL AND AUDIO  
FLOATS MODEL  
MYERS MODEL 20VM SJE OR EQUAL

PUMP CHAMBER DISCHARGE VOLUME PER CYCLE:  
6" X 6" INTERIOR @ 1' - 10" = 66 CUBIC FEET X 7.48 GALLONS/CF = 494 GAL./CYCLE  
2" PIPE DRAIN BACK: APPROXIMATELY 8 GAL.  
494 GALLONS/CYCLE - 8 GALLONS = 486 GAL./CYCLE  
7500 GPD/2 GST SYSTEMS = 3750 GPD/486 GAL./CYCLE = 7.7 ~ 8 CYCLES/DAY/GST

FLOATS - ON, OFF, HIGH AND LOW WATER:  
HIGH WATER - ELEVATION 56.83  
PUMP ON - ELEVATION 56.67  
PUMP OFF - ELEVATION 54.83  
LOW WATER - ELEVATION 54.67

ORENCO AX-100 TREATMENT SYSTEM DATA REVIEWED AND PROVIDED BY ATLANTIC SOLUTIONS  
(CONTROL PANEL - TIME DOSED)  
GRAVEL SAND TREATMENT (GST) SYSTEM DATA REVIEWED BY GEOMATRIX SYSTEMS LLC.

STATE OF RHODE ISLAND  
DEPARTMENT OF ENVIRONMENTAL MANAGEMENT  
DIVISION OF PLANNING AND DEVELOPMENT



DEMOLITION AND REBUILD OF BATHHOUSES  
BURLINGAME STATE PARK AND CAMPGROUND  
CHARLESTOWN, RHODE ISLAND

FISH CAMP BATHHOUSE - OWTS DETAILS


Dwg: Scale: 1" = 20'  
Contract No. x Date: MARCH, 2023

C-2.4  
18





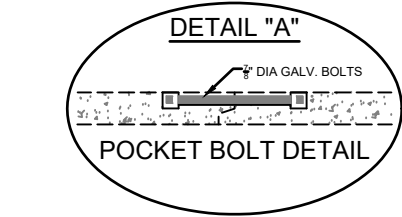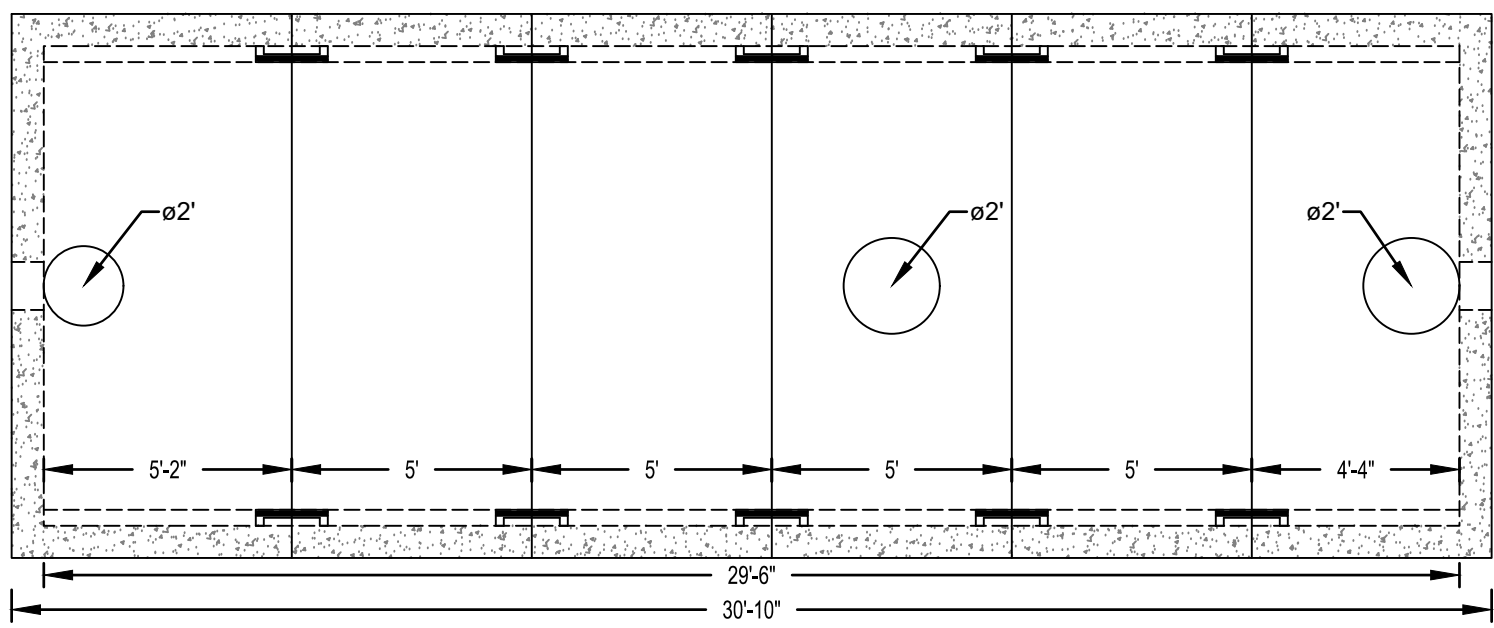


- DESIGN NOTES:
1. CONCRETE 5,000 PSI, @ 28 DAYS
  2. REINFORCING ASTM A-615 GRADE 60 #5 REBAR 12" O.C.B.W. OR EQUAL
  3. STRUCTURE DESIGNED FOR H-20 LOADING WITH 18" TO 5' OF COVER
  4. CONST. JOINT TO HAVE MIN. 1" BUTYL SEALANT
  5. EXTERIOR BITUMINOUS COATING AS REQUIRED.

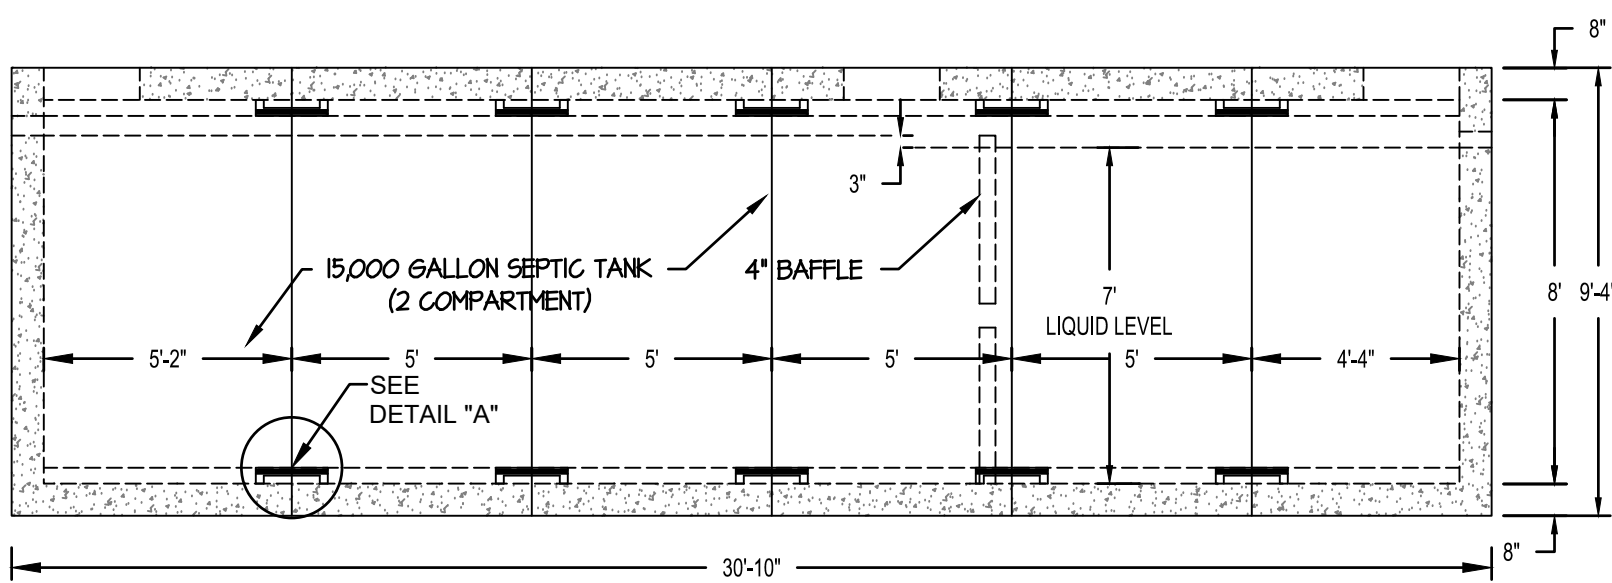


15,000 GALLON TWO COMPARTMENT SEPTIC TANK  
SCALE 1" = 4'

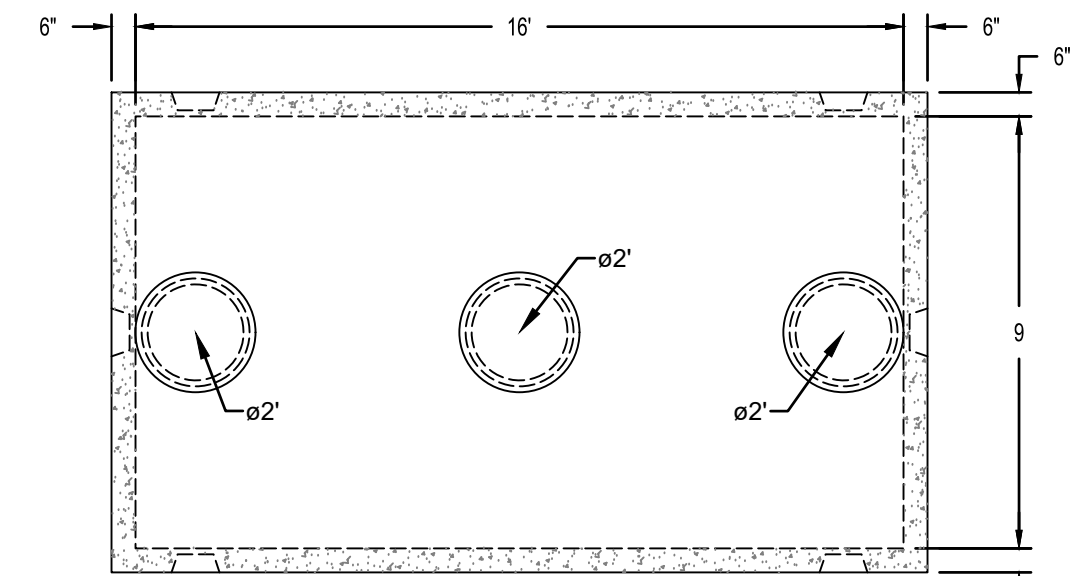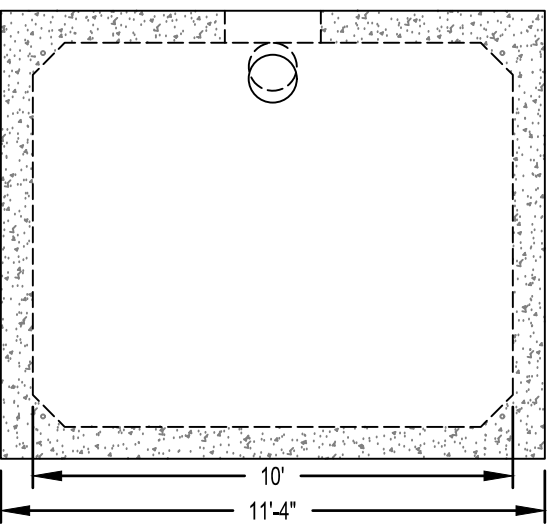

- DESIGN NOTES:
1. CONCRETE 5,000 PSI, @ 28 DAYS
  2. REINFORCING ASTM A-615 GRADE 60 #5 REBAR 12" O.C.B.W. OR EQUAL
  3. STRUCTURE DESIGNED FOR H-20 LOADING WITH 18" TO 5' OF COVER
  4. CONST. JOINT TO HAVE MIN. 1" BUTYL SEALANT
  5. EXTERIOR BITUMINOUS COATING AS REQUIRED.

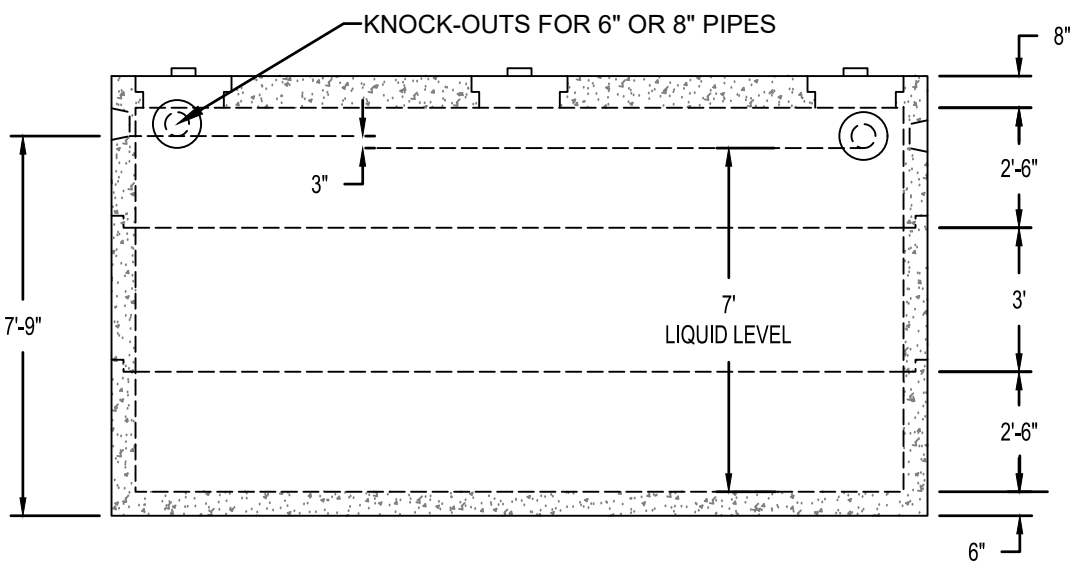


7,500 GALLON ANOXIC TANK  
SCALE 1" = 4'

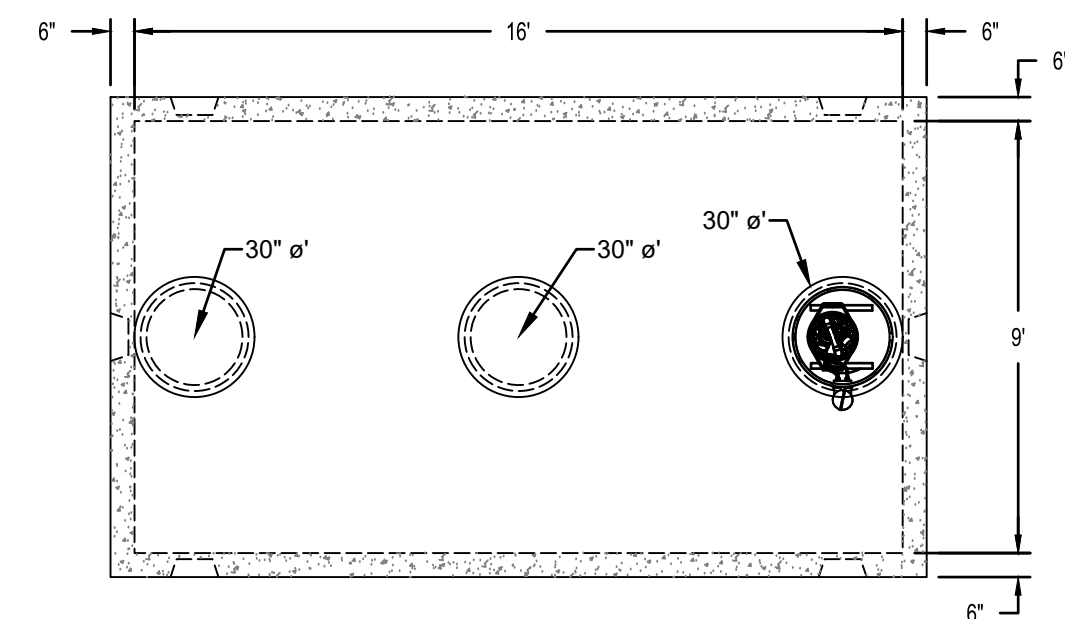


Float Functions	
Y	High Level Alarm & Alternate Pump On
G	Override Timer ON/OFF
W	LL/UR


- DESIGN NOTES:
1. CONCRETE 5,000 PSI, @ 28 DAYS
  2. REINFORCING ASTM A-615 GRADE 60 #5 REBAR 12" O.C.B.W. OR EQUAL
  3. STRUCTURE DESIGNED FOR H-20 LOADING WITH 18" TO 5' OF COVER
  4. CONST. JOINT TO HAVE MIN. 1" BUTYL SEALANT
  5. EXTERIOR BITUMINOUS COATING AS REQUIRED.

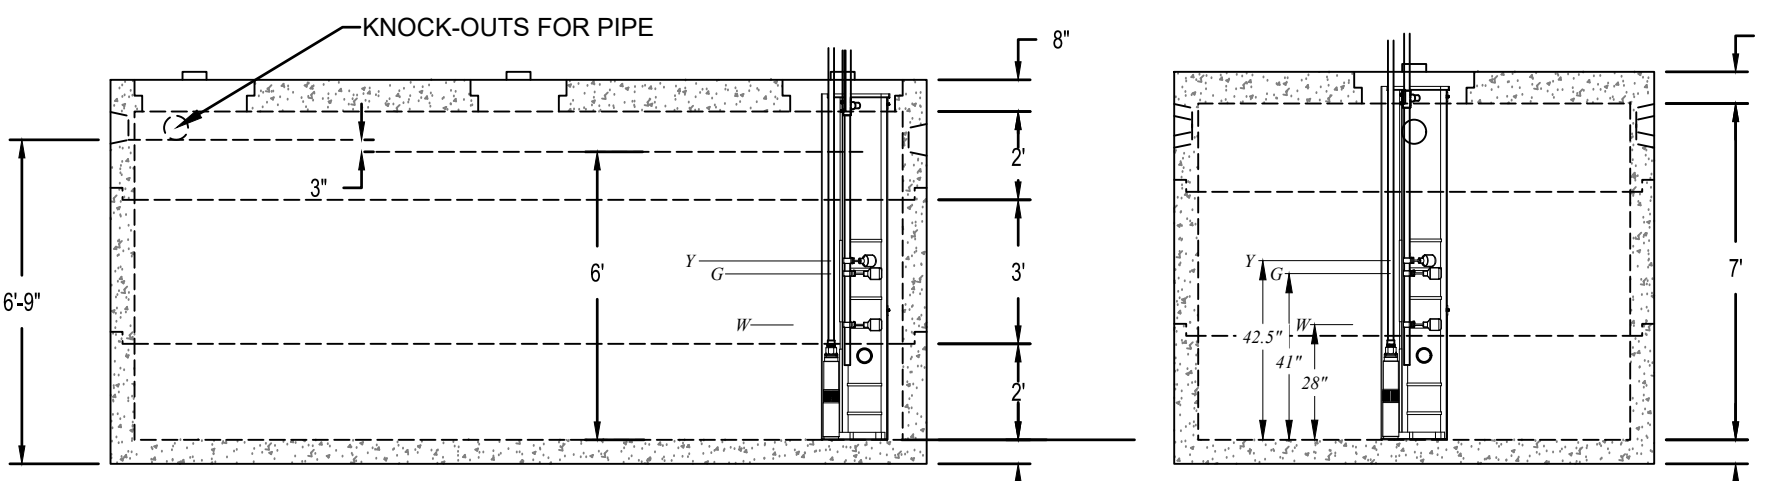

6,000 GALLON RECIRCULATION TANK  
SCALE 1" = 4'

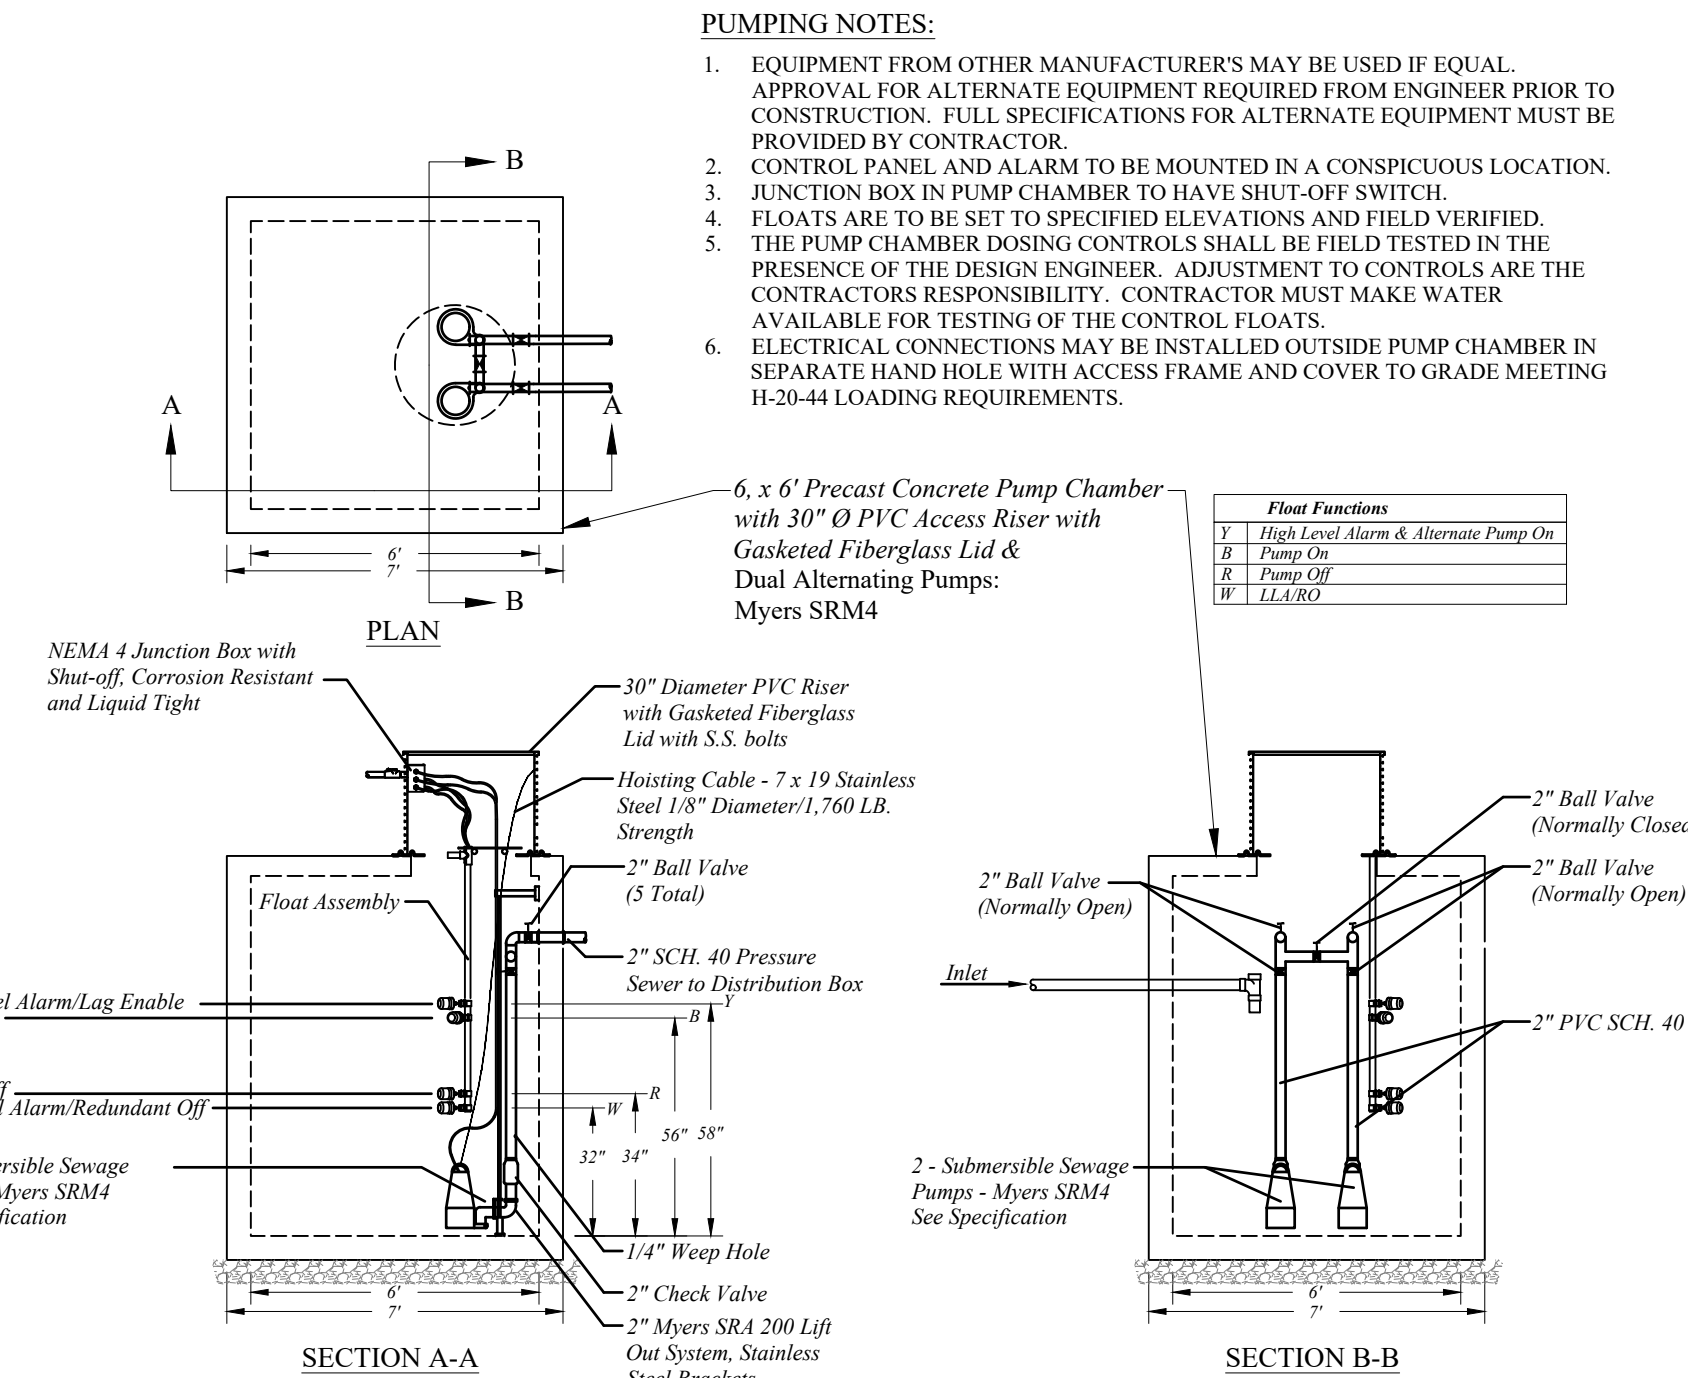

PUMP CHAMBER DETAIL  
SCALE 1" = 4'

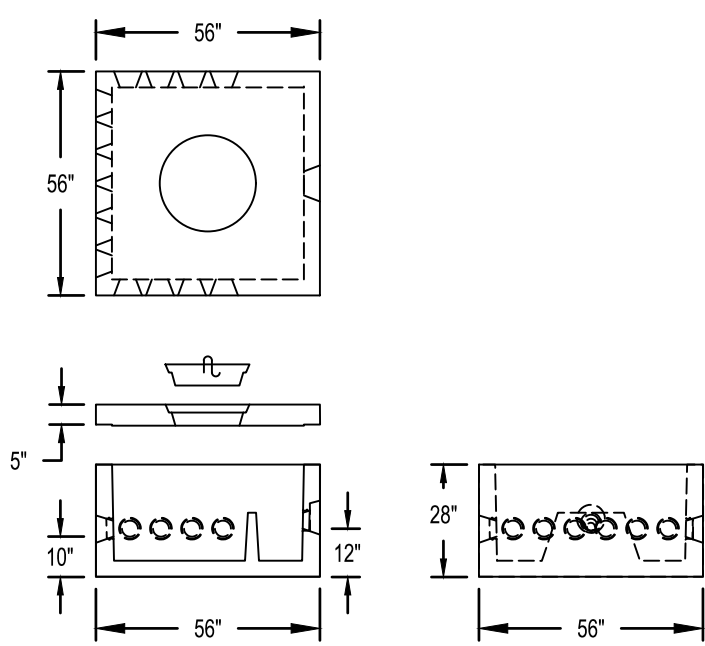

DISTRIBUTION BOX WITH 14 OUTLETS  
SCALE 1" = 4'

STATE OF RHODE ISLAND  
DEPARTMENT OF ENVIRONMENTAL MANAGEMENT  
DIVISION OF PLANNING AND DEVELOPMENT

DEMOLITION AND REBUILD OF BATHHOUSES  
BURLINGAME STATE PARK AND CAMPGROUND  
CHARLESTOWN, RHODE ISLAND

OWTS PRECAST STRUCTURES DETAILS

Dwg: Scale: 1" = 20'  
Contract No. x Date: MARCH, 2023

C-3.1  
21




General Notes

The treatment dosing conveyance system shown in this drawing is acceptable for the following conditions: less than 30 feet of static head and less than 100 feet of 2" dia. Sch. 40 PVC transport pipe.

Where applicable, flow meters are recommended for flow monitoring and dosing adjustment.


For detailed drawings and information, contact Oresco Systems, Inc.

For assistance on maximizing nitrogen reduction, contact Oresco Systems, Inc.

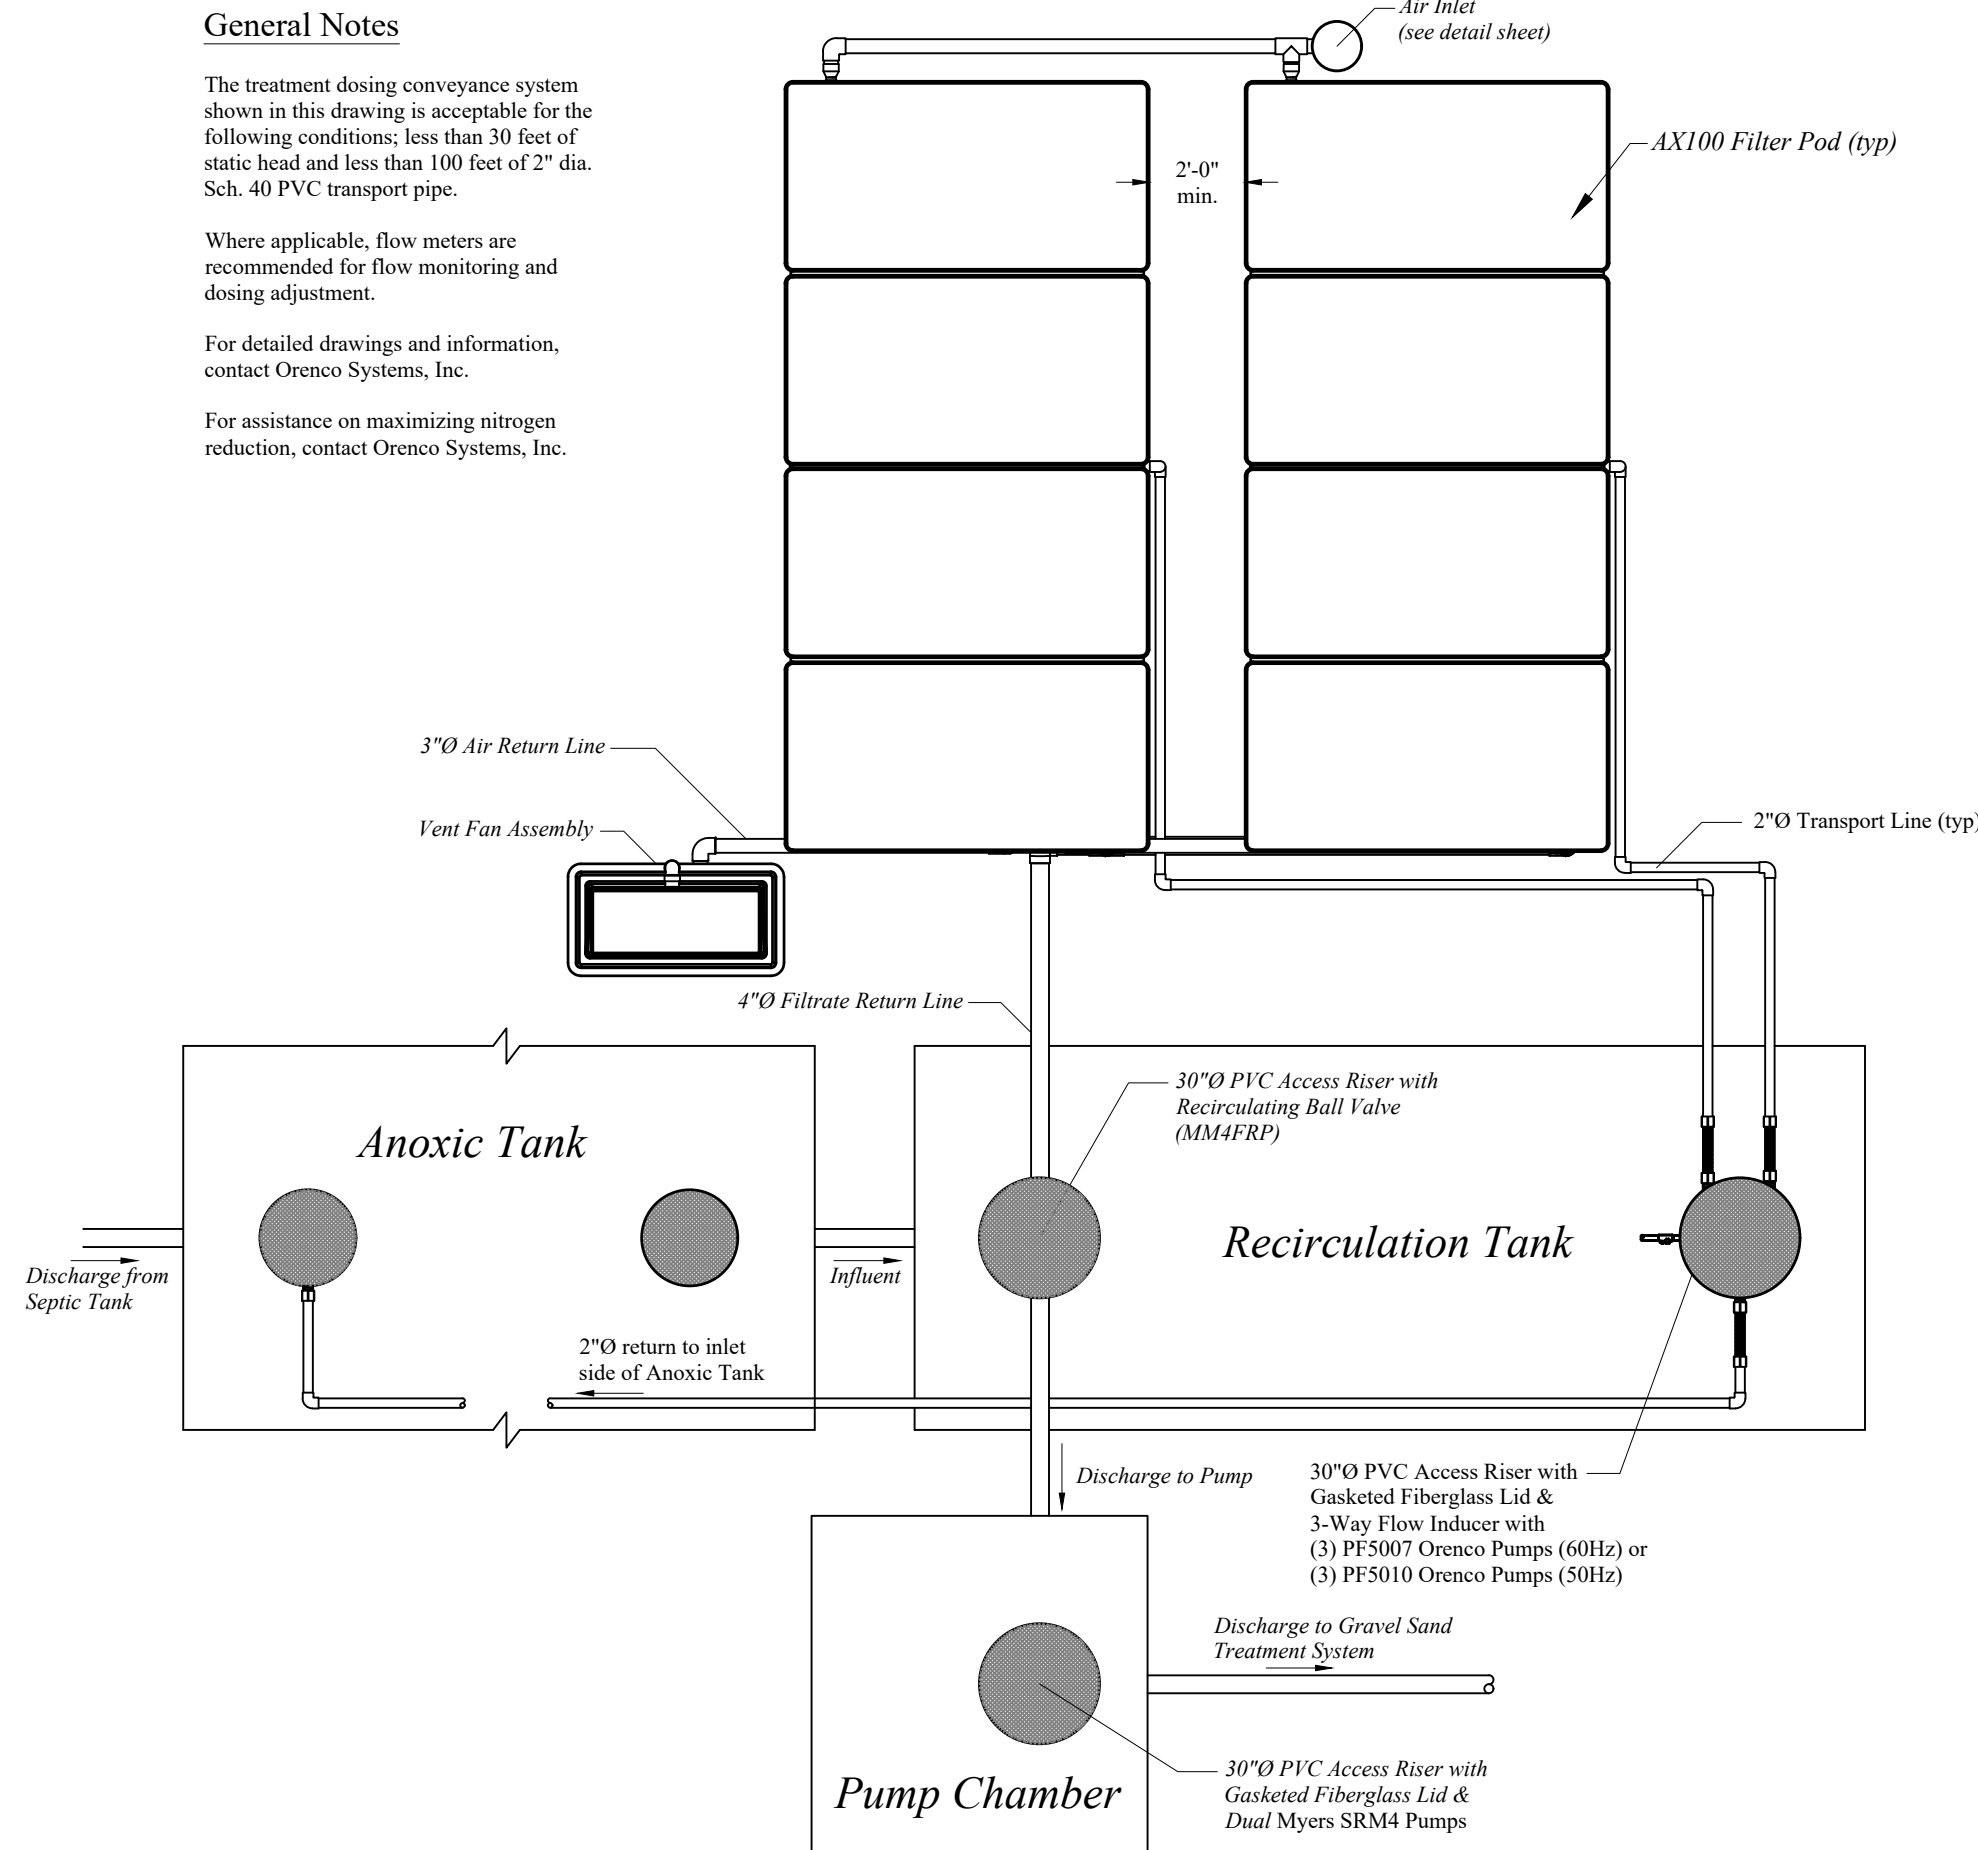





AdvanTex AX100 SYSTEM - MANIFOLDED VENT INLET  
2 POD CONFIGURATION

SCALE 1" = 4'

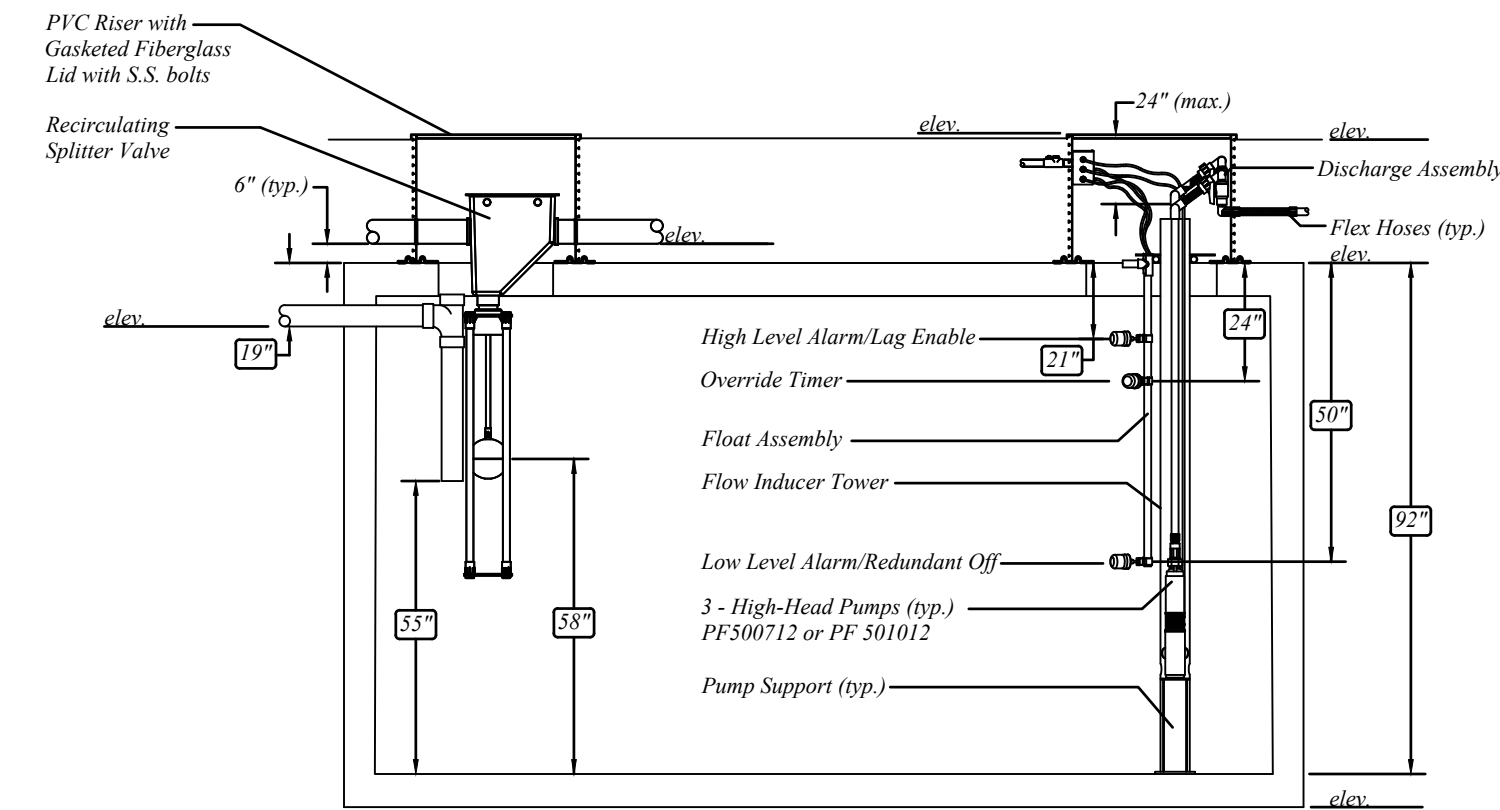


RECIRCULATION TANK FLOAT AND RSV SETTINGS


NOT TO SCALE

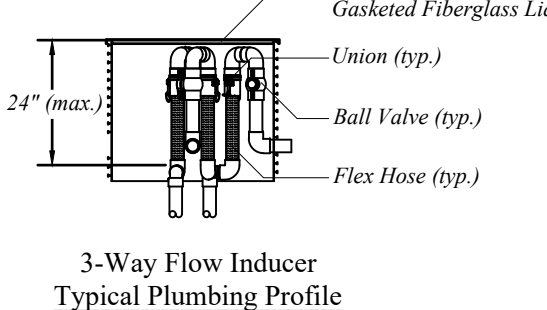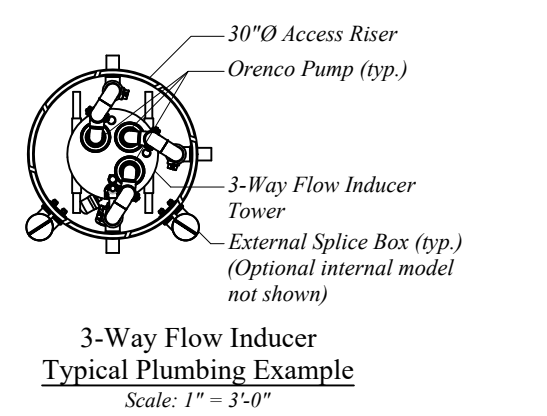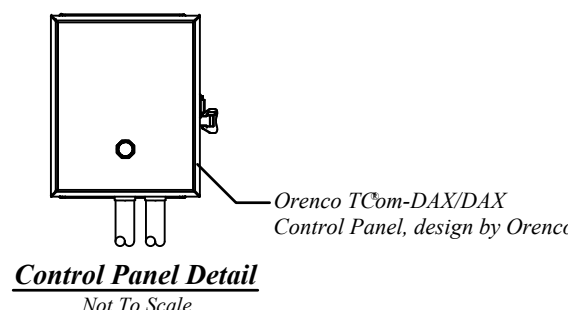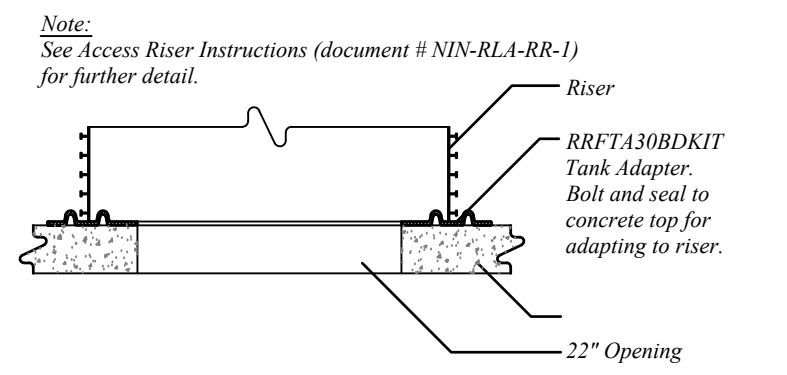











GST Schematics

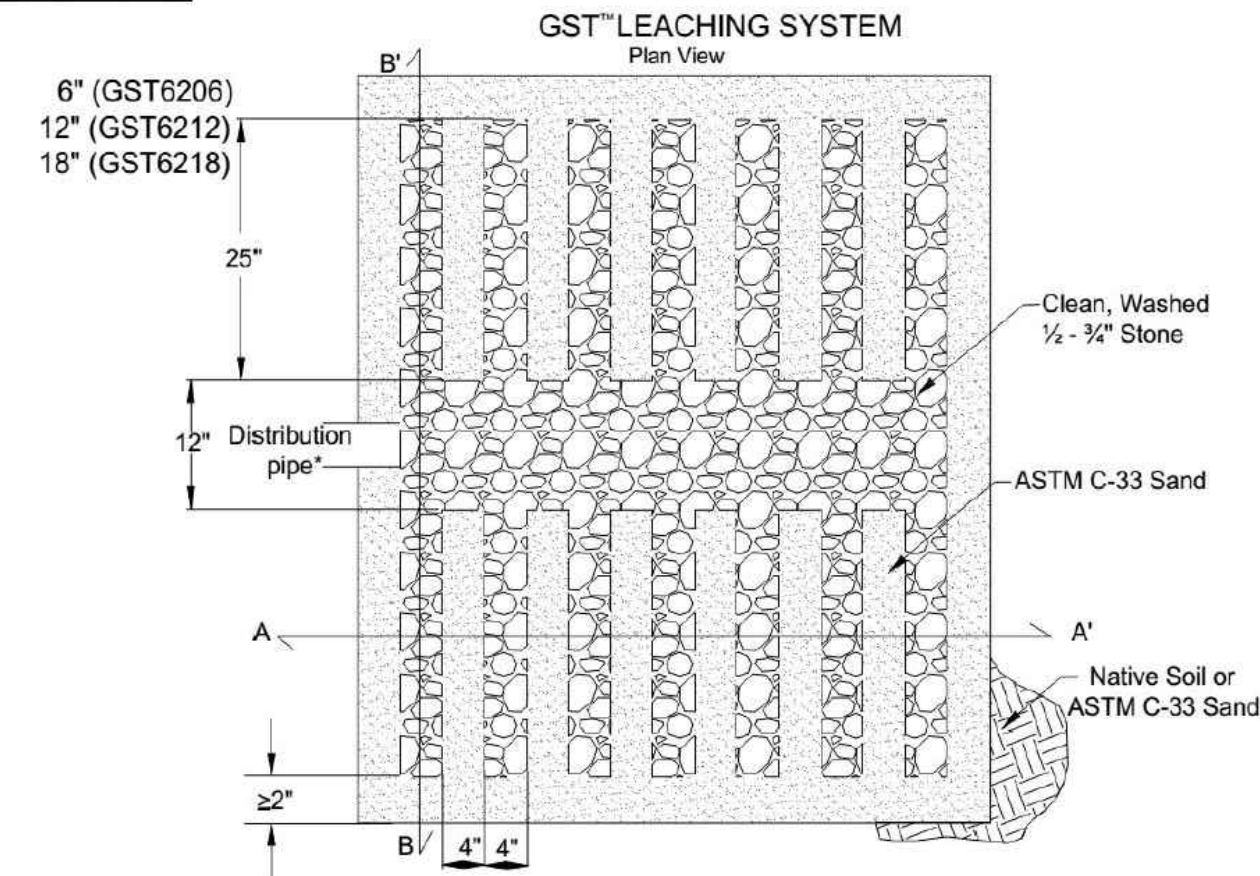

\* Distribution pipe for gravity systems shall comply with RIDEM OWTS Rule 6.34C. Distribution pipe for pressure applications shall comply with RIDEM Guidelines for the Design, Use and Maintenance of Pressurized Drainfields.

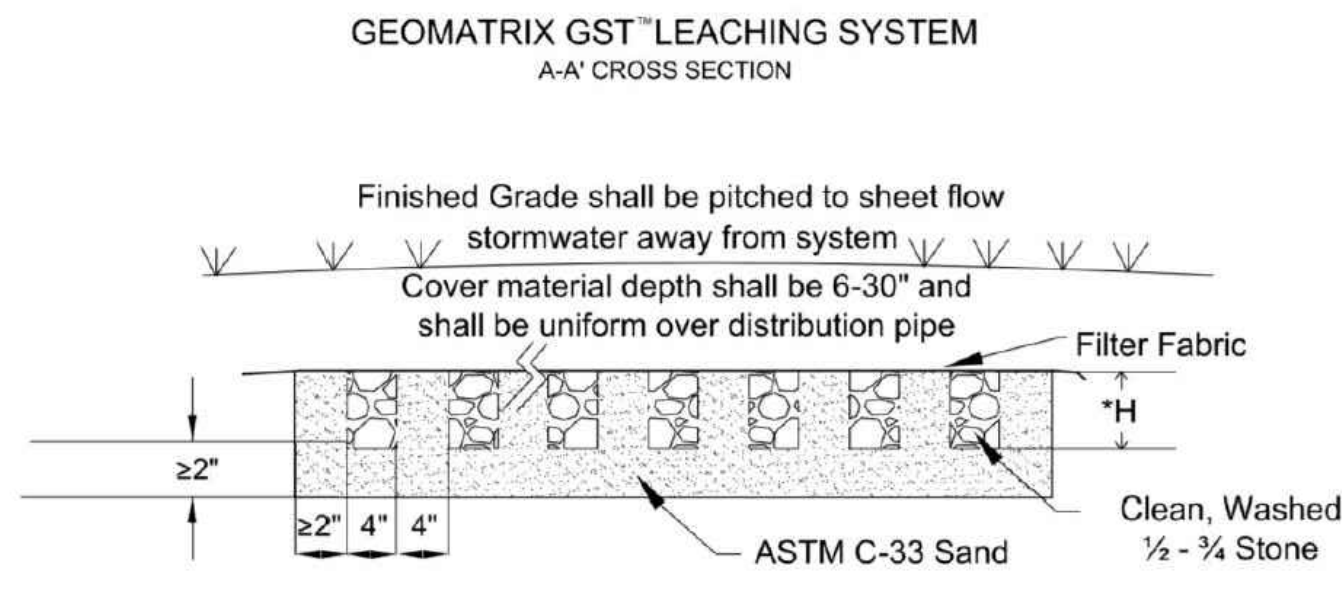

\*H= 6" (GST6206)  
12" (GST6212)  
18" (GST6218)

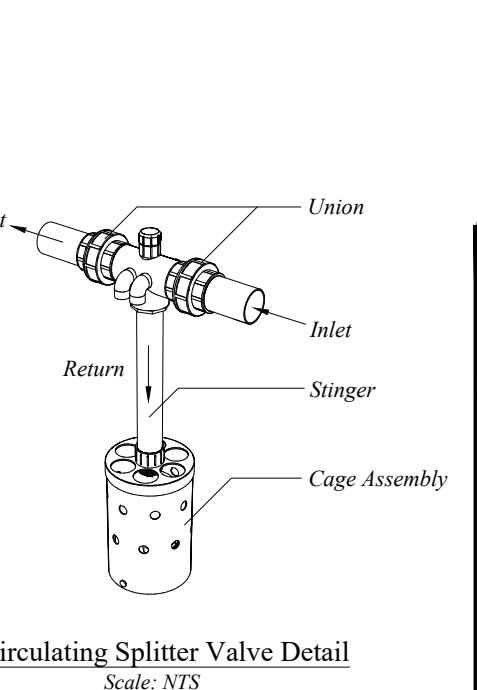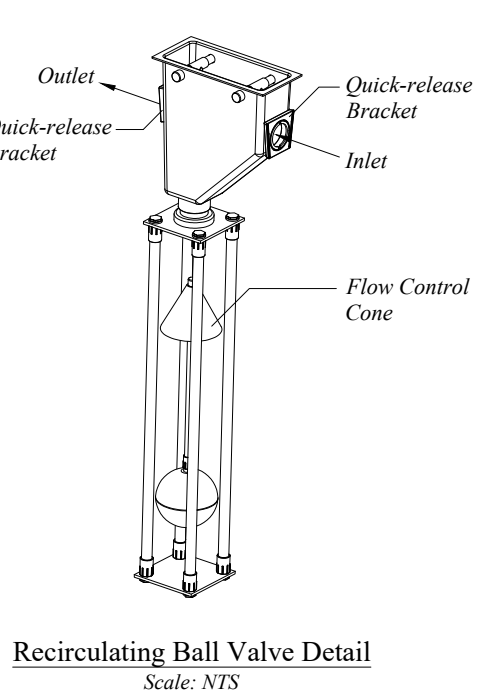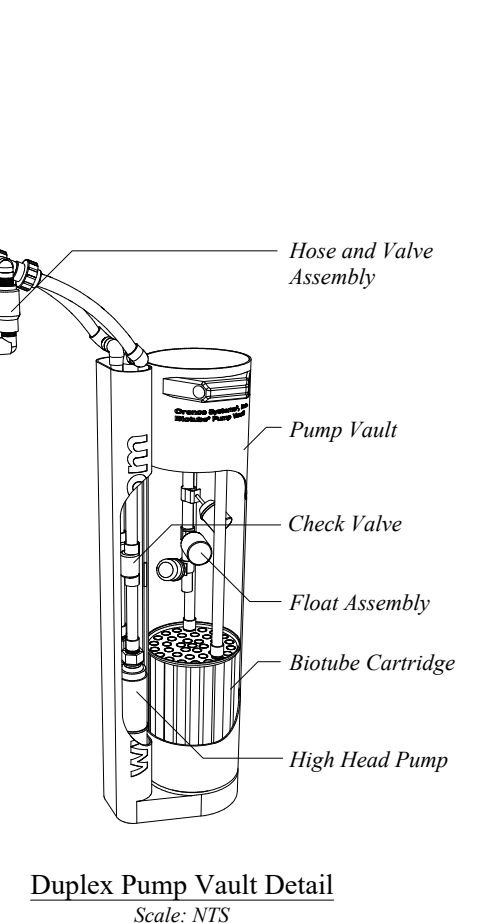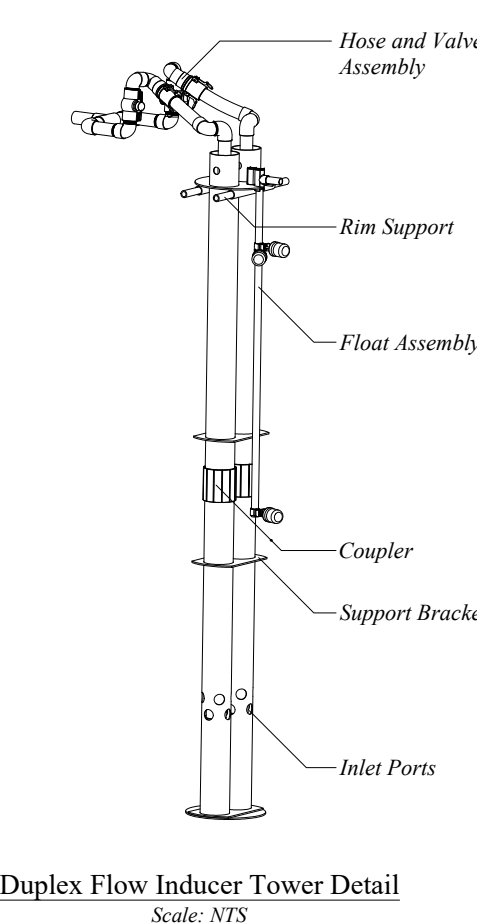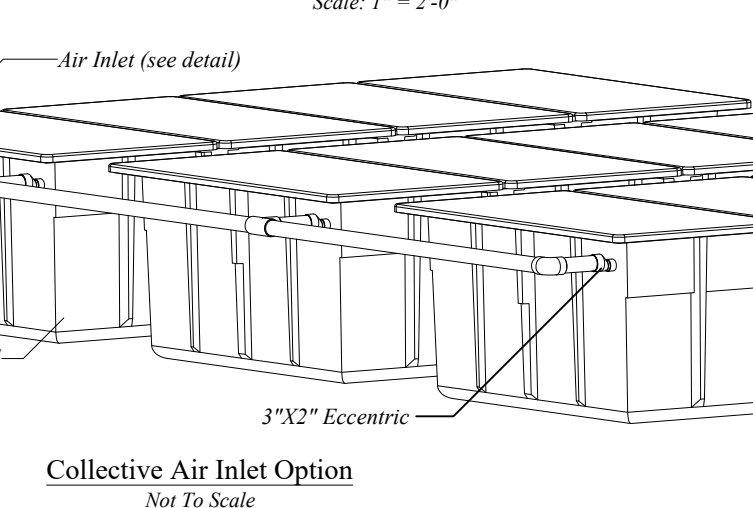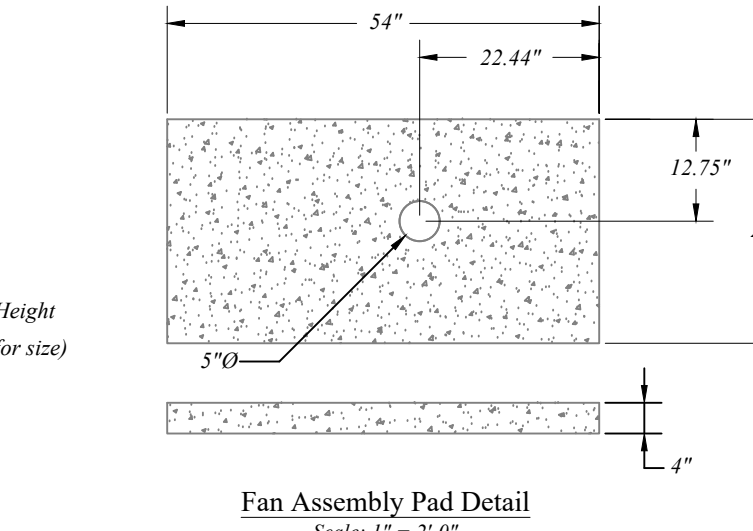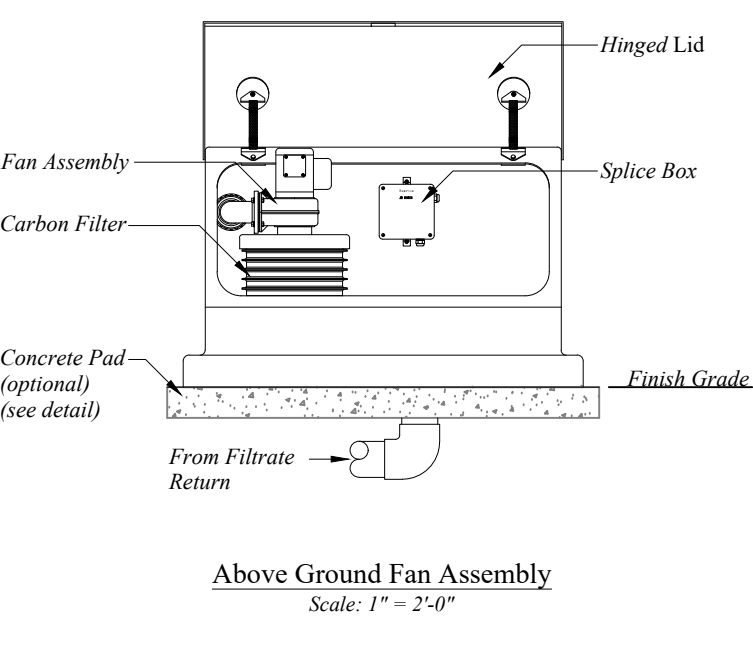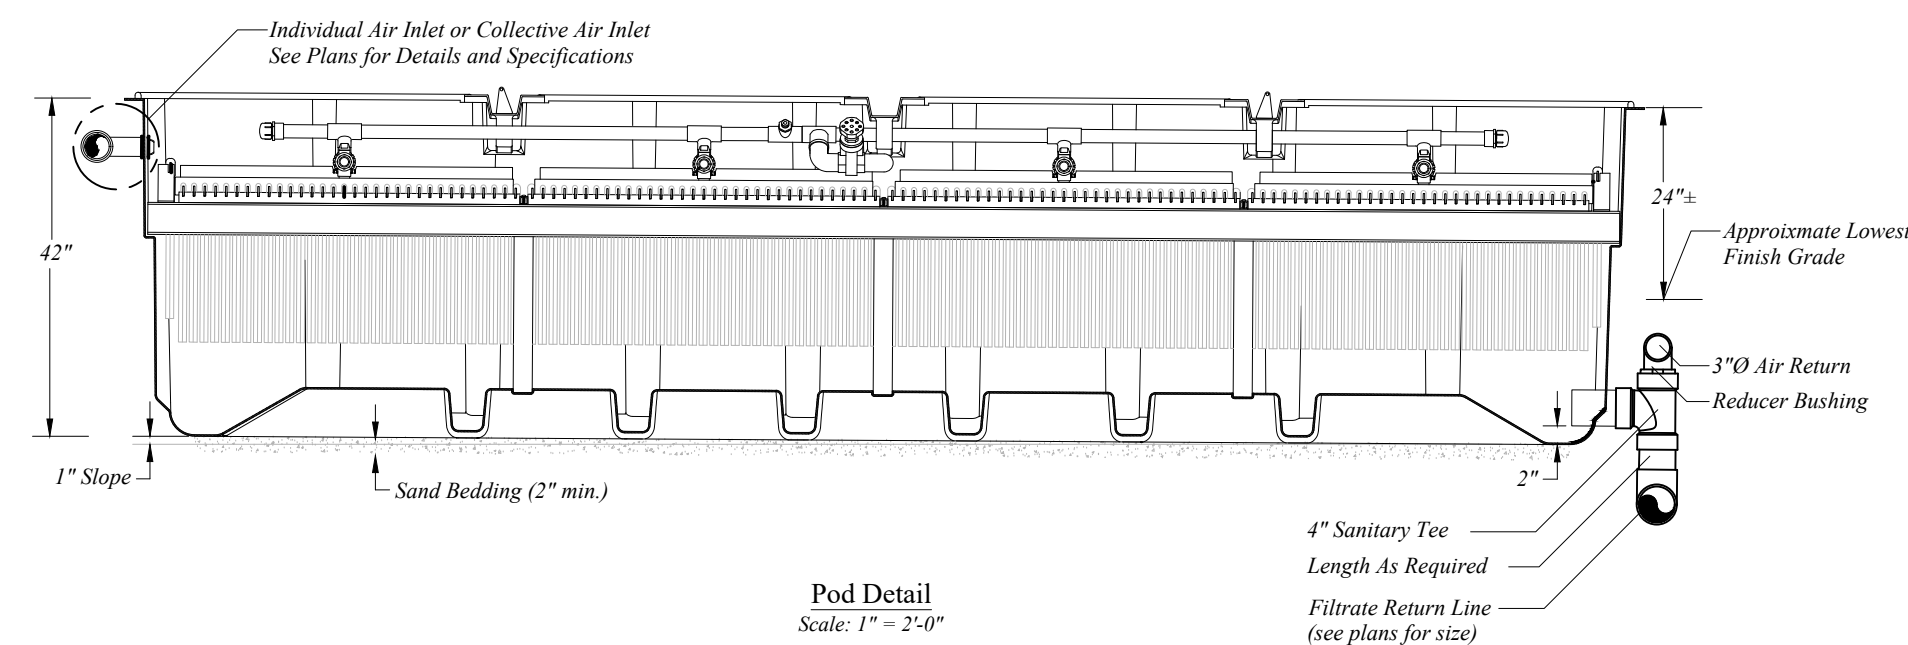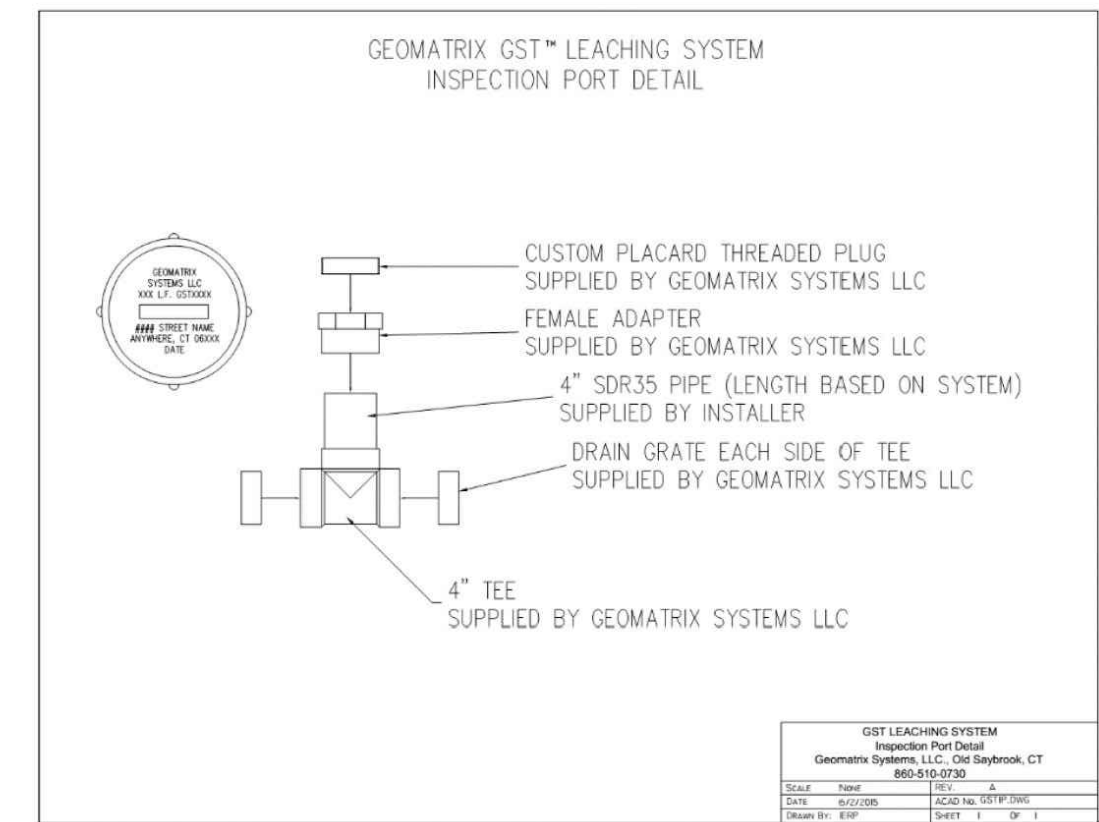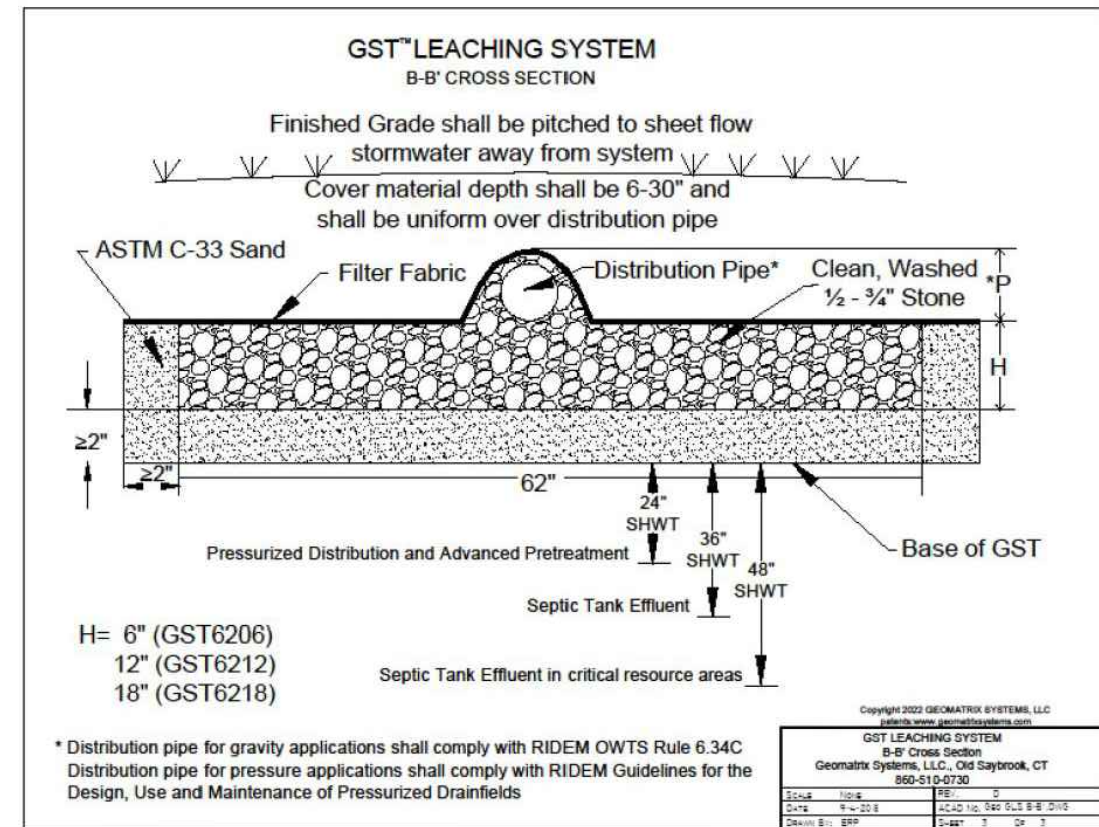

COLLECTIVE AIR INLET DETAIL

SCALE: VARIES

AdvanTex AX100 SYSTEM - MISCELLANEOUS DETAILS

SCALE: VARIES

STATE OF RHODE ISLAND  
DEPARTMENT OF ENVIRONMENTAL MANAGEMENT  
DIVISION OF PLANNING AND DEVELOPMENT

DEMOLITION AND REBUILD OF BATHHOUSES  
BURLINGAME STATE PARK AND CAMPGROUND  
CHARLESTOWN, RHODE ISLAND

OWTS DETAILS

Dwg:	Scale: 1" = 20'	C-3.2
Contract No. x	Date: MARCH, 2023	





# STATE OF RHODE ISLAND AND PROVIDENCE PLANTATIONS

Department of Environmental Management  
Office of Water Resources  
Onsite Wastewater Treatment Systems Program

20.0179 2A,2B  
SHEET 1-2



## Site Evaluation Form Part A – Soil Profile Description

Application Number \_\_\_\_\_

Property Owner: RHODE ISLAND STATE OF (DEM) DIVISION OF PARKS

Property Location: 1-100 BURLINGAME PARK RD, CHARLESTOWN, RI PLAT 15 LOT 10

Date of Test Hole: 8/17/21

Soil Evaluator: KAMAL HINGORANY

License Number: D4005

Weather: CLOUDY

Shaded: Yes ☐ No ☒ Time: 9:30 AM

TH 2A Horizon	Depth	Horizon Boundaries		Soil Colors		Re-Dox			Texture	Structure	Consistence	Soil Category
		Dist	Topo	Matrix	Re-Dox Features	Ab.	S.	Contr.				
Ap	0-5	C	S	2.5YR 6/3	-	-	-	-	Ls	2gbd	VFr	3
Bw <sub>1</sub>	5-29	C	S	10YR 5/6	-	-	-	-	Ls	2gbd	Fr	3
C <sub>1</sub>	29-120	C	S	2.5YR 7/3	-	-	-	-	Ls	2gbd	Fr	3
TH 2B Horizon	Depth	Horizon Boundaries		Soil Colors		Re-Dox			Texture	Structure	Consistence	Soil Category
		Dist	Topo	Matrix	Re-Dox Features	Ab.	S.	Contr.				
Ap	0-8	C	S	2.5YR 6/3	-	-	-	-	Ls	2gbd	VFr	3
Bw	8-28	C	S	10YR 5/6	-	-	-	-	Ls	2gbd	Fr	3
C <sub>1</sub>	28-120	C	S	2.5YR 7/3	-	-	-	-	Ls	2gbd	Fr	3

TH 2A Soil Class B Total Depth 120" Impervious/Limiting Layer Depth 120" (og) GW Seepage Depth - SHWT 120" (og)

TH 2B Soil Class B Total Depth 120" Impervious/Limiting Layer Depth 120" (og) GW Seepage Depth - SHWT 120" (og)

Comments: \_\_\_\_\_

# Part B

**Site Evaluation** – to be completed by Soil Evaluator or Class II or III Designer





**Please use the area below to locate:**

1. Test holes and bedrock test holes,
2. Approximate direction of due north,
3. Offsets from all test holes to fixed points such as street, utility pole, or other permanent, marked object.\*

**\*OFFSETS MUST BE SHOWN**

20.0179 2A, 2B  
SHEET 2-2

**Key:**

-  Approximate location of test holes
-  Approximate location of bedrock test holes
-  Estimated gradient and direction of slope
-  Approximate direction of due north

\*LEACHING FIELD  
NOT LOCATED



SHWTTs	
TH	Depth
2A	120"
2B	120"

1. Relief and Slope: \_\_\_\_\_
2. Presence of any watercourse, wetlands or surface water bodies, within 200 feet of test holes? If yes, locate on above sketch. NO ☒ YES ☐
3. Restrictive Layer or Bedrock within 4' below original ground within 25 feet of test hole? Provide all test hole locations & depths above. NO ☒ YES ☐
4. Presence of existing or proposed private drinking water wells within 200 feet of test holes? If yes, locate on above sketch. NO ☒ YES ☐
5. Public drinking water wells within 500 feet of test holes? If yes, locate on above sketch. NO ☒ YES ☐
6. Is site within the watershed of a public drinking water reservoir or other critical area defined in Rule 6.42? NO ☒ YES ☐
7. Has soil been excavated from or fill deposited on site? If yes, locate on above sketch. NO ☒ YES ☐
8. Site's potential for flooding or ponding: NONE ☒ SLIGHT ☐ MODERATE ☐ SEVERE ☐
9. Landscape position: SHOULDER
10. Vegetation: GRASS
11. Indicate approximate location of property lines and roadways.
12. Additional comments, site constraints or additional information regarding site: \_\_\_\_\_

## Certification

The undersigned hereby certifies that all information on this application and accompanying forms, submittals and sketches are true and accurate and that I have been authorized by the owner(s) to conduct these necessary field investigations and submit this request.

Part A prepared by: [Signature] D4005  
Signature License #

Part B prepared by: [Signature] D4005  
Signature License #

## DO NOT WRITE IN THIS SPACE

**Witnessed Soil Evaluation Decision:** Concur ☐ Inconclusive ☐ Disclaim ☐  
**Unwitnessed Soil Evaluations Decision:** Accept ☐ Inconclusive ☐ Disclaim ☐

Wet Season Determination required ☐ Additional Field Review Required ☐

Explanation: \_\_\_\_\_

Signature Authorized Agent \_\_\_\_\_

Date \_\_\_\_\_



Fish Camp Bathhouse and System Replacement Project  
Burlingame State Park and Campground  
Charlestown, Rhode Island

### **DESIGN NARRATIVE**

RIDEM is in the process of replacing the Bathhouse and Onsite Wastewater System (OWTS) at this location. Soil logs can be found on Sheet C-1.4 together with the proposed site layout and System Design Data and Notes. Details for the system are on Sheets C-2.4, C-3.1 and C-3.2.

Soil evaluations for this OWTS location were conducted on August 17, 2021, soils are Category 3 and the Estimated Seasonal High Water Table depth at the OWTS is 120" or at elevation 52.0±.

In total the six bathhouses for the overall campground accommodate approximately 720 campsites. Utilizing the RIDEM wastewater design flow for a campground with washroom and toilets of 50 gallons per day we determine a daily flow for the entire campground to be approximately 36,000 gallons per day (GPD). The average daily flow per acre of the campground is (36,000 GPD / 847 Acres) 42.5 GPD/Acre. The average daily flow for each bathhouse is approximately 6,000 GPD. In calculating an estimated daily flow for the Fish Camp Bathhouse OWTS we took a conservative approach utilizing 150 campsites at 50 GPD/campsite to determine a design flow for the Fish Camp Bathhouse to be 7,500 GPD which is greater than the 6,000 GPD average. Please see the attached campsite map which depicts the campsites (as highlighted) chosen to be included within the 150 sites utilized for sizing the OWTS. Please note that sites throughout the campground overlap to agree with the conservative estimate. The system as sized is oversized and is considered a large system. The system is used on a seasonal basis between the months of April and October.

The OWTS will utilize Two (2) Orenco AdvanTEX AX100 Pods for advanced treatment. This system is a Category 1 advanced treatment technology. The system will treat the wastewater and reduce the biochemical oxygen demand (BOD) and comply with the latest Orenco system design criteria and thus the RIDEM OWTS criteria. See attached Final Design Review Letter from Orenco.

The systems drainfield is designed as a Geomatrix Gravel Sand Treatment (GST) System. The Loading Rate for Category 1 Technology for the GST is 3.5 GPD/square feet (SF). The minimum size drainfield is 7,500 GPD/3.5 GPD/SF which equals 2,143 SF. We propose to use the GST 6212 and the minimum size drainfield requirement for this application is 123 lineal feet (LF). We propose to use the 288 lineal feet (LF) of GST 6212 which provides 17.5 S.F. per LF, which equals 5,040 SF. and is greater than 2,143 SF (minimum size). The GST system has been divided into two equal drainfields and the GST are spaced 7'6" on center. The two drainfields consist of 4 rows each 36 feet long and 62" wide with a stone depth of 12" below the 4" perforated distribution pipe. See pump selection and system specifications on Sheet C-2.4 for additional information. Please see the attached review letter from Geomatrix.



WATCHAUG POND



FISH CAMP AREA

150

400 AREA

MAIN CAMP AREA

146

150

B  
150

LEGIONTOWN  
CAMP AREA

156

500 AREA

MILLS CAMP AREA

150

- CHECK STATION
- PERMITS
- COMFORT STATION

TO WESTERLY

TO WAKEFIELD & PROVIDENCE



BURLINGAME STATE PARK  
RHODE ISLAND DEPT. OF  
ENVIRONMENTAL MANAGEMENT

LEGEND

- |                                    |                             |
|------------------------------------|-----------------------------|
| A TENTS ONLY                       | Ⓐ WATER                     |
| B SMALL TRAILERS                   | ▨ RESTROOMS<br>WITH SHOWERS |
| C LARGE TRAILERS<br>AND MOTORHOMES | ★ DUMPING STATIONS          |
| M MOTORHOMES                       | ■ CABIN                     |
| P PORTAJONS                        | D DUMPSTERS                 |

DEVELOPED BY:  
PARE CORPORATION  
800-848-1000  
1000 W. 10TH AVE.  
DENVER, CO 80202





01/19/2023

Kevin Harrop  
Caputo & Wick  
1150 Pawtucket Ave  
Rumford, RI 02916

Subject: Final Design Review of Burlingame Park/Fish Camp

Kevin,

Orenco Systems, Inc. ("Orenco") has received the Plans with all required fields completed (attached to this letter), a copy of the plan set showing the designed site layout and configuration plans, and other documents that comprise the Final Design for the Burlingame Park project. Orenco staff reviews the Final Design of all wastewater collection and treatment systems for commercial applications to ensure that the design is compliant with the most current version of the system's applicable design criteria published by Orenco for the specified parameters provided by the system's designer in the Plans. The findings and conclusions of my review of this Final Design are as follows:

## **Design Basis**

The system has been designed for a Type 2, Park application. Influent flow and constituent concentrations and effluent constituent concentration requirements have been provided by the system's designer on the attached Plans and were used in my review of the Final Design.

The influent flow on the Plans were not extrapolated from the metered flows from the subject site, but in our experience, they are consistent with influent flows from other, similar Type 2, Park systems that Orenco has previously observed. As such, I have no reason to doubt the accuracy of the designer's findings and assumptions as to the influent flow, and find that it was reasonable for the designer to use them as the design basis for the system.

## **System Design**

The proposed Final Design of the system consists of a park. Influent will enter a 15,000 gallon Primary Tank, which will then flow into a 7,500 gallon Pre-Anoxic Tank. From here, flow will gravity discharge into a 6,000 gallon Recirculation Tank. The recirc-filtrate blend in this tank will pump into (2) AX100 pods and the filtrate will enter a splitter valve in the front of the Recirculation Tank where it will either be recirculated again or siphon to a drain field.

## **Design Criteria**

The applicable design criteria for this system, which I used to conduct the review of its Final Design, is revision 8.0 of document NDA-ATX-1, titled *Orenco<sup>®</sup> AdvanTex<sup>®</sup> Design Criteria, Commercial Treatment Systems*, which was published by Orenco in October, 2020. A copy of the design criteria can be downloaded from Orenco's online document library at [www.orenco.com/corporate/doclibrary.cfm](http://www.orenco.com/corporate/doclibrary.cfm).

## Findings

The findings of my review as to whether the Final Design complies with Orenco's design criteria for treating wastewater to the effluent constituent concentration requirements provided in the Plans are as follows:

### ***Primary Treatment***

The Final Design specifies the use of 1 - 15,000 U.S. Gallon Primary concrete and 1 - 7,500 U.S. Gallon Primary concrete tanks in series for primary treatment. Using the flow data specified on the Plans the hydraulic retention times for grease capture and primary treatment calculate as follows:

Primary Tank(s) Hydraulic Retention Time (HRT) <sup>1</sup>				
Design Average Flow (gpd)	Design Maximum Day Flow (gpd)	Effective Combined Primary Tankage (gpd)	Avg HRT (days)	Max Day HRT (days)
3,500	7,500	22,500	6.4	3.0

<sup>1</sup> Design Max Day Flow is the maximum daily flow a facility is expected to receive no more than one day within any week's time.

The Primary Tank Sizing Recommendations states that the recommended primary tankage for a Park treatment system should be sized to at a minimum of 3 days of hydraulic retention time at the Design Max Day Flow. Therefore, the configuration and specifications of the primary treatment tanks in the Final Design satisfy Orenco's recommendation for primary tankage for this Park application. This pre-anoxic tank should be sized equal to one day at maximum day design flow and is considered part of the overall primary tank volume.

### ***Recirculation Tank — Standard Stage***

The Final Design further specifies the use of 1 - 6,000 U.S. Gallon concrete tank for recirculation and blending of the AdvanTex-treated effluent with primary tank effluent. Using the flow data specified on the Plans the tank is sized to be equal to 80% of the Maximum Day Design Flow. The recirculation tank for the standard stage should be sized at a minimum of 75% of the Maximum Day Design Flow. Therefore, the specification of the recirculation-blend tank in the Final Design satisfies Orenco's design criteria.

### ***Hydraulic Load — Standard Stage***

The Final Design specifies the use of 2 - AX100 pods, which contain a nominal surface area of 200 square feet of treatment media. Using the flow data specified on the Plans the hydraulic loading rate for the system calculates as follows:

Hydraulic Loading Rate (HLR) — Standard Stage				
Design Average Flow (gpd)	Design Maximum Day Flow (gpd)	Nominal Textile Area (sq. ft.)	Average HLR (gal. per day/sq. ft.)	Peak HLR (gal. per day/sq. ft.)
3,500	7,500	200	17.5	37.5

According to the AdvanTex System Loading Chart in the applicable design criteria, the standard AdvanTex treatment system (Stage 1) should not be hydraulically loaded more than 25 gpd/square foot at Design Average Flow or 50 gpd/square foot at Design Max Day Flow. Therefore, the specified type and number of AdvanTex pods in the Final Design satisfy Orenco's design criteria to achieve the effluent quality listed in the design criteria at a 95% confidence level for this Type 2, Park application.

### Organic Load — Standard Stage

The following influent characteristics provided on the Plans were estimated and not derived from direct sampling. Even though the influent characteristics were not derived from direct sampling, the values provided are consistent with values we have seen in other, similar Type 2, Park applications.

Influent (Primary Tank Effluent) Characteristics — Loading to Textile	
Average BOD <sub>5</sub> (mg/L)	Average TSS (mg/L)
250	200

Based on the average influent biochemical oxygen demand (BOD<sub>5</sub>) concentration and flow data specified on the Plans, the system will receive approximately 7.3 pounds of BOD<sub>5</sub> per day at Design Average Flow, and 15.6 pounds of BOD<sub>5</sub> per day at Maximum Day Design Flow. Using this information, the organic loading rate of the system calculates as:

Organic Loading Rate (OLR) — Standard Stage				
Average Organic Load (lbs/day)	Maximum Organic Load (lbs/day)	Nominal Treatment Area (sq. ft.)	Average OLR (lbs BOD/sq. ft./day)	Maximum OLR (lbs BOD/sq. ft./day)
7.3	15.6	200	0.04	0.08

### Conclusions

I have reviewed the Final Design of the Burlingame Park wastewater treatment system, and have found that the design is compliant with the most current version of the system's applicable design criteria published by Orenco for the specified parameters provided by the system's designer in the Plans. In addition, I noted no anomalies in the site layout or configuration of the system during my review.

Compliance Table — Meets Minimum Design Standards	
	Standard Stage
Recirc Tank Size	Yes
Hydraulic Load	Yes
Organic Load	Yes

As such, the system as designed satisfactorily complies with Orenco's design criteria to meet the following effluent limits specified in the Plans at a 95% confidence level, provided that all influent flows and constituent concentrations specified in the Plans are not exceeded:

Expected Effluent Quality	
Constituent	Average (mg/L)
BOD <sub>5</sub>	20
TSS	20

It is important to note that even though the AdvanTex Treatment System has the capability to meet or exceed the required treatment parameters, there is no way that Orenco can guarantee that a particular system will be operated or maintained in a manner consistent with the Final Design reviewed. Once the facility is placed into operation, the influent flows and constituent concentrations to the facility should be monitored, and if flow or any of the influent constituent concentrations exceed those listed in the Plans, measures should be taken to reduce the flow or constituent concentration to those listed. However, if additional treatment capacity becomes necessary, the system is designed to have the capability to expand to account for the new flow or constituent concentration.

Proper air ventilation is a critical feature of all commercial AdvanTex Treatment Systems, and as such, adequate active ventilation is required for all systems. In addition, please note that disposing of toxics or chemicals into the system is strictly prohibited. Examples of toxics include restaurant degreasers, cleansers, wax strippers for linoleum, carpet shampoo, waste products, or any other toxins. Furthermore, water softener brine discharge is prohibited from being discharged into the AdvanTex Treatment System. Failure to adhere to these policies will void Orenco's limited product warranties.

If you have any questions about my review process, findings, or conclusions, please feel free to call or e-mail me.

Sincerely,



Caleb Castleman  
Systems Engineering  
Orenco Systems Inc.  
(800) 348-9843 ext. 548  
ccastleman@orencosystems.com

Project: Burlingame State Park and Camp Ground  
 Location: Fish Camp

Description	Input values	Units
Finish Grade	60.50	Elevation
Water Table Elevation	49.75	Elevation
Bottom of Tank Elevation	50.08	Elevation
Lowest Pipe Invert	57.75	Elevation
Counter Weight	0.00	lbs
Soil Above Tank	13.00	Inches
Length of Tank	30.83	Feet
Width of Tank	11.33	Feet
Depth of Tank	9.33	Feet
Top of Concrete Thickness	8.00	Inches
Bottom of Concrete Thickness	8.00	Inches
Sides Concrete Thickness	8.00	Inches
<b>Two Compartment Tank</b>		
Compartment Wall Thickness	4.00	Inches
Compartment Wall Height	87.00	Inches
<b>Computed Value</b>		
Submerged Depth	-0.33	Feet
Top/Bottom Surface Area of Tank	349.43	SF
Displaced Volume	-115.31	CF
Volume of Tank Top	232.96	CF
Volume of Tank Sides	435.53	CF
Volume of Tank Bottom	232.96	CF
Volume of Baffle	24.17	CF
Weight of Tank Top	34,943.38	lbs
Weight of Tank Sides	65,330.02	lbs
Weight of Tank Bottom	34,943.38	lbs
Weight of Baffle	3,624.88	lbs
Total Weight of Tank	138,841.66	lbs
Volume of Soil	378.55	CF
Weight of Soil Above Tank	37,855.33	lbs
Uplift Created by Submerged Tank	-7,195.54	lbs
Total Weight of Tank, Counter Weight and Soil	176,696.99	lbs
Exceeds Displaced Volume by	183,892.53	lbs
Buoyance Point for Empty Tank	6.37	Feet (above bottom)
Buoyance Point for Empty Tank	56.45	Elev
Buoyance Point for Tank in Place	8.10	Feet (above bottom)
Buoyance Point for Tank in Place	58.18	Elev

(Soil friction has not been taken into account)

Project: Burlingame State Park and Camp Ground  
 Location: Fish Camp

Description	Input values	Units
Finish Grade	60.50	Elevation
Water Table Elevation	49.75	Elevation
Bottom of Tank Elevation	50.08	Elevation
Lowest Pipe Invert	57.75	Elevation
Counter Weight	0.00	lbs
Soil Above Tank	13.00	Inches
Length of Tank	30.83	Feet
Width of Tank	11.33	Feet
Depth of Tank	9.33	Feet
Top of Concrete Thickness	8.00	Inches
Bottom of Concrete Thickness	8.00	Inches
Sides Concrete Thickness	8.00	Inches
<b>Two Compartment Tank</b>		
Compartment Wall Thickness	4.00	Inches
Compartment Wall Height	87.00	Inches
<b>Computed Value</b>		
Submerged Depth	-0.33	Feet
Top/Bottom Surface Area of Tank	349.43	SF
Displaced Volume	-115.31	CF
Volume of Tank Top	232.96	CF
Volume of Tank Sides	435.53	CF
Volume of Tank Bottom	232.96	CF
Volume of Baffle	24.17	CF
Weight of Tank Top	34,943.38	lbs
Weight of Tank Sides	65,330.02	lbs
Weight of Tank Bottom	34,943.38	lbs
Weight of Baffle	3,624.88	lbs
Total Weight of Tank	138,841.66	lbs
Volume of Soil	378.55	CF
Weight of Soil Above Tank	37,855.33	lbs
Uplift Created by Submerged Tank	-7,195.54	lbs
Total Weight of Tank, Counter Weight and Soil	176,696.99	lbs
Exceeds Displaced Volume by	183,892.53	lbs
Buoyance Point for Empty Tank	6.37	Feet (above bottom)
Buoyance Point for Empty Tank	56.45	Elev
Buoyance Point for Tank in Place	8.10	Feet (above bottom)
Buoyance Point for Tank in Place	58.18	Elev

(Soil friction has not been taken into account)

Project: Burlingame State Park and Camp Ground  
 Location: Fish Camp

Description	Input values	Units
Finish Grade	60.50	Elevation
Water Table Elevation	49.75	Elevation
Bottom of Tank Elevation	49.90	Elevation
Lowest Pipe Invert	57.40	Elevation
Counter Weight	0.00	lbs
Soil Above Tank	17.00	Inches
Length of Tank	17.00	Feet
Width of Tank	10.00	Feet
Depth of Tank	9.17	Feet
Top of Concrete Thickness	8.00	Inches
Bottom of Concrete Thickness	6.00	Inches
Sides Concrete Thickness	6.00	Inches
<b>Two Compartment Tank</b>		
Compartment Wall Thickness	0.00	Inches
Compartment Wall Height	0.00	Inches
<b>Computed Value</b>		
Submerged Depth	-0.15	Feet
Top/Bottom Surface Area of Tank	170.00	SF
Displaced Volume	-25.50	CF
Volume of Tank Top	113.33	CF
Volume of Tank Sides	208.00	CF
Volume of Tank Bottom	85.00	CF
Volume of Baffle	0.00	CF
Weight of Tank Top	17,000.00	lbs
Weight of Tank Sides	31,199.74	lbs
Weight of Tank Bottom	12,750.00	lbs
Weight of Baffle	0.00	lbs
Total Weight of Tank	60,949.74	lbs
Volume of Soil	240.83	CF
Weight of Soil Above Tank	24,083.33	lbs
Uplift Created by Submerged Tank	-1,591.20	lbs
Total Weight of Tank, Counter Weight and Soil	85,033.07	lbs
Exceeds Displaced Volume by	86,624.27	lbs
Buoyance Point for Empty Tank	5.75	Feet (above bottom)
Buoyance Point for Empty Tank	55.65	Elev
Buoyance Point for Tank in Place	8.02	Feet (above bottom)
Buoyance Point for Tank in Place	57.92	Elev

(Soil friction has not been taken into account)

Project: Burlingame State Park and Camp Ground  
 Location: Fish Camp

Description	Input values	Units
Finish Grade	61.25	Elevation
Water Table Elevation	50.50	Elevation
Bottom of Chamber Elevation	51.50	Elevation
Lowest Pipe Invert	57.25	Elevation
Counter Weight	0.00	lbs
Soil Above Chamber	15.00	Inches
Chamber Length	7.00	Feet
Chamber Width	7.00	Feet
Diameter of Opening	2.50	Feet
Chamber Interior Height	7.00	Feet
Top of Concrete Thickness	6.00	Inches
Bottom of Concrete Thickness	6.00	Inches
Concrete Wall Thickness	6.00	Inches
<b>Computed Value</b>		
Submerged Depth	-1.00	Feet
Top Surface Area of Chamber	44.09	SF
Surface Area of Chamber Sides	182.00	SF
Bottom Surface Area of Chamber	49.00	SF
Displaced Volume	-49.00	CF
Volume of Chamber Top	22.05	CF
Volume of Chamber Sides	91.00	CF
Volume of Chamber Bottom	24.50	CF
Weight of Chamber Top	3,306.84	lbs
Weight of Tank Side	13,650.00	lbs
Weight of Chamber Bottom	3,675.00	lbs
Total Weight of Chamber	20,631.84	lbs
Volume of Soil	55.11	CF
Weight of Soil Above Chamber	5,511.41	lbs
Uplift Created by Submerged Chamber	-3,057.60	lbs
Total: Chamber, Counter Weight and Soil	26,143.25	lbs
Exceeds Displaced Volume by	29,200.85	lbs
Buoyance Point for Empty Chamber	6.75	Feet (above bottom)
Buoyance Point for Empty Chamber	58.25	Elev
Buoyance Point for Chamber in Place	8.55	Feet (above bottom)
Buoyance Point for Chamber in Place	60.05	Elev

(Soil friction has not been taken into account)

# Duplex Control Panels

## Applications

Orenco Duplex Control Panels are used to control dual pumps, alarms, and other equipment as specified in pressure sewers and onsite septic systems.



Orenco® DAX2 Control Panel




## General

Orenco Duplex Control Panels are specifically engineered for pressure sewer (STEP) systems and onsite septic treatment systems that require the use of two alternating pumps. Standard features include circuit breakers, an automatic/manual/off motor control toggle for each pump, an audio/visual high level alarm, an alarm reset, and a duplex alternator. Other standard features and options are listed on page 2. Orenco panels are designed for use with mechanical and/or mercury float switches. Listed per UL 508 in the US and Canada.

## Standard Models

DAX1, DAX2

## Product Code Diagram

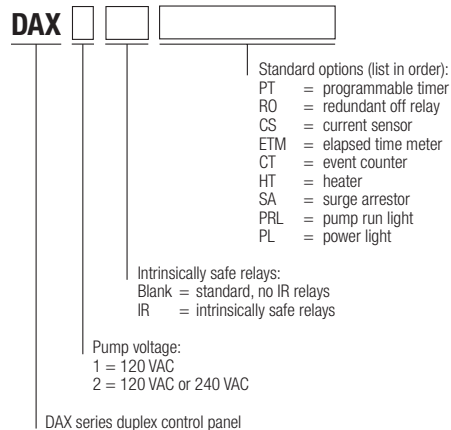

## Materials of Construction

Enclosure	UV-resistant fiberglass, UL Type 4X
Hinges	Stainless steel


## Specifications

### Panel Ratings

DAX1:	120 V, 1 hp, 16 amps, single phase, 60 Hz.
DAX2:	240 V, 3 hp, 16 amps, single phase, 60 Hz.

### Dimensions

Height, in. (mm)	15.5 (394)
Width, in. (mm)	13.5 (343)
Depth, in. (mm)	6.7 (170)

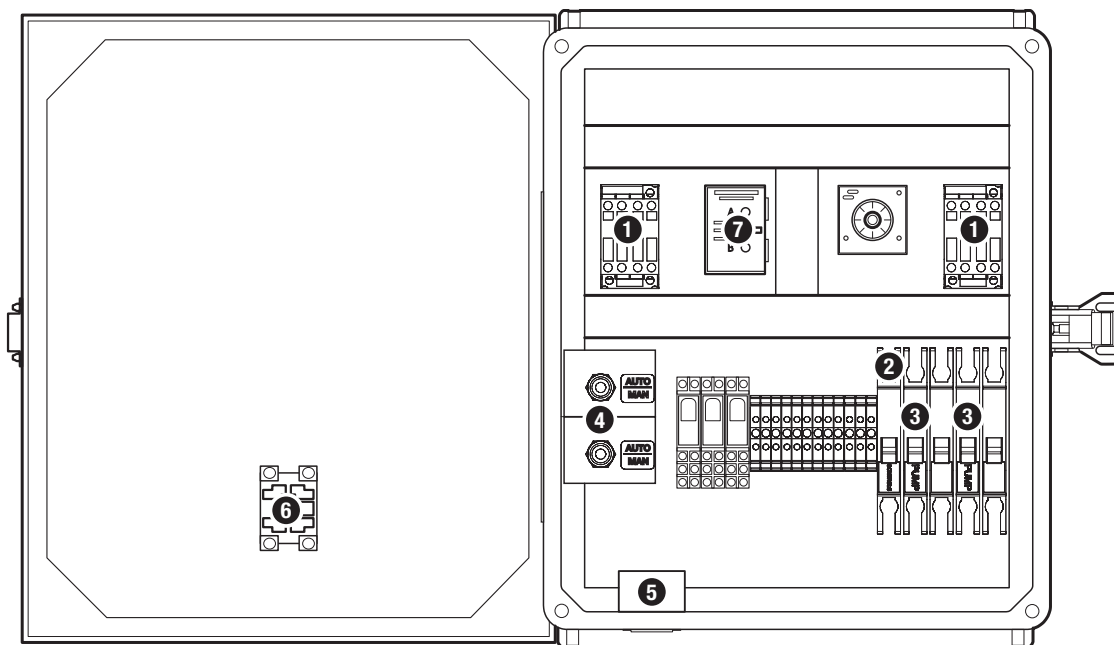

Orenco® DAX2PTRO 240 V panel

## Standard Components

Feature	Specification(s)
1. Motor-Start Contactor	120 V, 16 FLA, 1 hp (0.75 kW), 60 Hz; 2.5 million cycles at FLA (10 million at 50% of FLA). 240 V, 16 FLA, 3 hp (2.24 kW), 60 Hz; 2.5 million cycles at FLA (10 million at 50% of FLA).
2. Controls Circuit Breaker	10 A, OFF/ON switch. Single-pole 120 V. DIN rail mounting with thermal magnetic tripping characteristics.
3. Pump Circuit Breakers	20 A, OFF/ON switch. Single-pole 120 V or double-pole 240 V. DIN rail mounting with thermal magnetic tripping characteristics.
4. Toggle Switches	20 A, 1hp (0.75 kW). Single-pole, double-throw HOA switch,
5. Audible Alarm	95 dB at 24 in. (610 mm), warble-tone sound.
6. Visual Alarm	7/8-in. (22-mm) diameter red lens, "Push-to-silence." UL Type 4X rated, 1 W LED light, 120 V.
7. Duplex Alternator	120 V. Cross-wired style for independent lag pump function. Selector switch for locking one pump into lead position.
Audible Alarm Silence Relay (Not shown)	120 V. Automatic reset. DIN rail mount.

## Optional Features

Feature	Specification(s)	Code Adder
Intrinsically Safe Control Relays	Listed per UL 698A, for Class 1 Div. 1, groups A, B, C, D hazardous locations (requires larger enclosure).	IR
Programmable Timer	120 V. Repeat cycle from 0.05 seconds to 30 hours. Separate variable controls for OFF & ON time periods.	PT
Redundant Off Relay	120 V. Provides a secondary off. Sounds alarm on low level condition. DIN rail mount.	RO
Elapsed Time Meter	120 V, 7-digit, non-resettable. Limit of 99,999 hours; accurate to 0.01 hours.	ETM
Event Counter	120 V, 6-digit, non-resettable.	CT
Heater	Anti-condensation heater. Self-adjusting: radiates additional wattage as temperature drops.	HT
Surge Arrestor	Status light on unit; protects incoming power supply from electrical surges.	SA
Pump Run Light	7/8-in. (22-mm) diameter green lens. UL Type 4X rated, 1 W LED light, 120 V.	PRL
Power Light	7/8-in. (22-mm) diameter green lens. UL Type 4X rated, 1 W LED light, 120 V.	PL

# PF-Series Submersible Effluent Pumps: 1-Phase, 60-Hz, 4-inch (100-mm)

## Applications

Our PF-Series 4-inch (100-mm) Submersible Effluent Pumps are designed to transport screened effluent (with low TSS counts) from septic tanks or dosing tanks. These pumps are constructed of light-weight, corrosion-resistant stainless steel and engineered plastics, and are field-serviceable and repairable with common tools. They're also CSA- and UL-certified to U.S. and Canadian safety standards for effluent pumps.

PF-Series pumps are used in a variety of applications, including pressurized drainfields, packed-bed filters, mounds, aerobic units, effluent irrigation, liquid-only (effluent) sewers, wetlands, lagoons, and more. These pumps are designed to be used with a Biotube® pump vault or after a secondary treatment system.



## Features/Specifications

To specify this pump for your installation, require the following:


- Minimum 24-hour run-dry capability (liquid end) with no deterioration in pump life or performance\*
- 1/8-inch (3-mm) bypass orifice to ensure flow recirculation for motor cooling and to prevent air bind
- Liquid-end repair kits available for better long-term cost of ownership
- TRI-SEAL™ floating impeller design on 10, 20, and 30 gpm (0.6, 1.3, and 1.9 L/sec) models; floating stack design on 50 and 75 gpm (3.2 and 4.7 L/sec) models
- Franklin Electric Super Stainless motor, rated for continuous use and frequent cycling
- Type SOOW 600-V motor cable (model PF751512 uses 14 AWG, SJ00W, 300-V cord)

\* Not applicable for 5-hp (3.73 kW) models

## Standard Models

See specifications chart on page 2 for a list of standard pumps. For a complete list of available pumps, call Orenco.

## Product Code Diagram

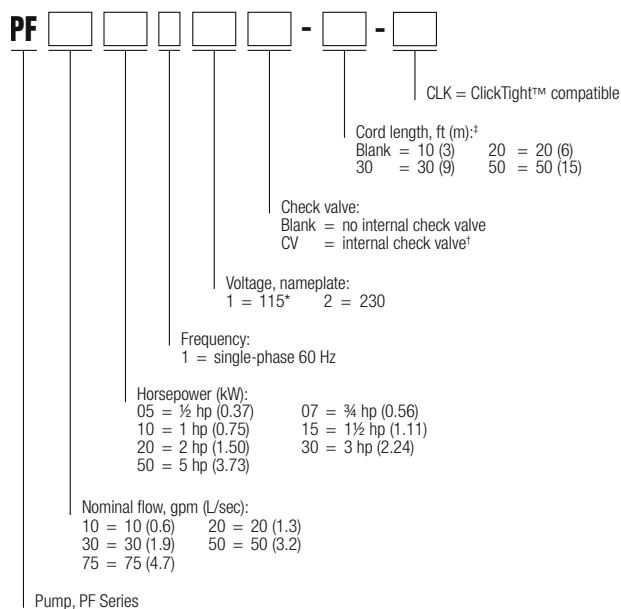

\* ½-hp (0.37 kW) only

<sup>†</sup> Available for 10 gpm (0.6 L/sec), 1/2 hp (0.37 kW)

<sup>‡</sup> Note: 20-ft cords are available only for pumps through 1½ hp

## Specifications

Pump Model	Design gpm (L/sec)	Horsepower (kW)	Phase	Nameplate voltage	Actual voltage	Design flow amps	Max amps	Discharge size and material <sup>1</sup>	Length in. (mm)	Min. liquid level in. (mm)	Weight lb (kg)	Rated cycles per day
PF100511 <sup>9</sup>	10 (0.6)	0.50 (0.37)	1	115	120	12.7	12.7	1 ¼ in. GFP	23.0 (660)	16 (406)	26 (12)	300
PF100511CV <sup>9</sup>	10 (0.6)	0.50 (0.37)	1	115	120	12.7	12.7	1 ¼ in. GFP	23.0 (660)	16 (406)	26 (12)	300
PF100512 <sup>9</sup>	10 (0.6)	0.50 (0.37)	1	230	240	6.3	6.3	1 ¼ in. GFP	23.0 (660)	16 (406)	26 (12)	300
PF100712 <sup>4,5,9</sup>	10 (0.6)	0.75 (0.56)	1	230	240	8.3	8.3	1 ¼ in. GFP	25.9 (658)	17 (432)	30 (14)	300
PF101012 <sup>5,6,9</sup>	10 (0.6)	1.00 (0.75)	1	230	240	9.6	9.6	1 ¼ in. GFP	27.9 (709)	18 (457)	33 (15)	100
PF200511 <sup>9</sup>	20 (1.3)	0.50 (0.37)	1	115	120	12.3	12.5	1 ¼ in. GFP	22.3 (566)	18 (457)	25 (11)	300
PF200512 <sup>9</sup>	20 (1.3)	0.50 (0.37)	1	230	240	6.4	6.5	1 ¼ in. GFP	22.5 (572)	18 (457)	26 (12)	300
PF201012 <sup>4,5,9</sup>	20 (1.3)	1.00 (0.75)	1	230	240	10.5	10.5	1 ¼ in. GFP	28.4 (721)	20 (508)	33 (15)	100
PF201512 <sup>4,5</sup>	20 (1.3)	1.50 (1.11)	1	230	240	12.4	12.6	1 ¼ in. GFP	34.0 (864)	24 (610)	41 (19)	100
PF300511 <sup>9</sup>	30 (1.9)	0.50 (0.37)	1	115	120	11.8	11.8	1 ¼ in. GFP	21.3 (541)	20 (508)	28 (13)	300
PF300512 <sup>9</sup>	30 (1.9)	0.50 (0.37)	1	230	240	6.2	6.2	1 ¼ in. GFP	21.3 (541)	20 (508)	25 (11)	300
PF300712 <sup>9</sup>	30 (1.9)	0.75 (0.56)	1	230	240	8.5	8.5	1 ¼ in. GFP	24.8 (630)	21 (533)	29 (13)	300
PF301012 <sup>4,9</sup>	30 (1.9)	1.00 (0.75)	1	230	240	10.4	10.4	1 ¼ in. GFP	27.0 (686)	22 (559)	32 (15)	100
PF301512 <sup>4,5</sup>	30 (1.9)	1.50 (1.11)	1	230	240	12.6	12.6	1 ¼ in. GFP	32.8 (833)	24 (610)	40 (18)	100
PF302012 <sup>5,6,7</sup>	30 (1.9)	2.00 (1.49)	1	230	240	11.0	11.0	1 ¼ in. SS	35.5 (902)	26 (660)	44 (20)	100
PF303012 <sup>5,6,7,8</sup>	30 (1.9)	3.00 (2.23)	1	230	240	16.8	16.8	1 ¼ in. SS	44.5 (1130)	33 (838)	54 (24)	100
PF305012 <sup>5,6,7,8</sup>	30 (1.9)	5.00 (3.73)	1	230	240	25.6	25.8	1 ¼ in. SS	66.5 (1689)	53 (1346)	82 (37)	100
PF500511 <sup>9</sup>	50 (3.2)	0.50 (0.37)	1	115	120	12.1	12.1	2 in. SS	20.3 (516)	24 (610)	27 (12)	300
PF500512 <sup>9</sup>	50 (3.2)	0.50 (0.37)	1	230	240	6.2	6.2	2 in. SS	20.3 (516)	24 (610)	27 (12)	300
PF500712 <sup>9</sup>	50 (3.2)	0.75 (0.56)	1	230	240	8.5	8.5	2 in. SS	23.7 (602)	25 (635)	31 (14)	300
PF501012 <sup>9</sup>	50 (3.2)	1.00 (0.75)	1	230	240	10.1	10.1	2 in. SS	27.0 (686)	26 (660)	35 (16)	100
PF501512 <sup>4</sup>	50 (3.2)	1.50 (1.11)	1	230	240	12.5	12.6	2 in. SS	32.5 (826)	30 (762)	41 (19)	100
PF503012 <sup>4,5,7,8</sup>	50 (3.2)	3.00 (2.23)	1	230	240	17.7	17.7	2 in. SS	43.0 (1092)	37 (940)	55 (25)	100
PF505012 <sup>5,6,7,8</sup>	50 (3.2)	5.00 (3.73)	1	230	240	26.2	26.4	2 in. SS	65.4 (1661)	55 (1397)	64 (29)	100
PF751012 <sup>9</sup>	75 (4.7)	1.00 (0.75)	1	230	240	9.9	10.0	2 in. SS	27.0 (686)	27 (686)	34 (15)	100
PF751512	75 (4.7)	1.50 (1.11)	1	230	240	12.1	12.3	2 in. SS	33.4 (848)	30 (762)	44 (20)	100

- <sup>1</sup> GFP = glass-filled polypropylene; SS = stainless steel. The 1 ¼-in. NPT GFP discharge is 2 7/8 in. octagonal across flats; the 1 ¼-in. NPT SS discharge is 2 1/8 in. octagonal across flats; and the 2-in. NPT SS discharge is 2 7/8 in. hexagonal across flats. Discharge is female NPT threaded, U.S. nominal size, to accommodate Orenco® discharge hose and valve assemblies. Consult your Orenco Distributor about fittings to connect hose and valve assemblies to metric-sized piping.
- <sup>2</sup> Minimum liquid level is for single pumps when installed in an Orenco Biotube® Pump Vault or Universal Flow Inducer. In other applications, minimum liquid level should be top of pump. Consult Orenco for more information.
- <sup>3</sup> Weight includes carton and 10-ft (3-m) cord.
- <sup>4</sup> High-pressure discharge assembly required.
- <sup>5</sup> Do not use cam-lock option (Q) on discharge assembly.
- <sup>6</sup> Custom discharge assembly required for these pumps. Contact Orenco.
- <sup>7</sup> Capacitor pack (sold separately or installed in a custom control panel) required for this pump. Contact Orenco.
- <sup>8</sup> Torque locks are available for all pumps and are supplied with 3-hp and 5-hp pumps.
- <sup>9</sup> ClickTight™ compatible.



## Materials of Construction

Discharge	Glass-filled polypropylene or stainless steel
Discharge bearing	Engineered thermoplastic (PEEK)
Diffusers	Glass-filled PPO (Noryl GFN3)
Impellers	Celcon® acetal copolymer on 10-, 20-, and 30-gpm models; 50-gpm impellers are Noryl GFN3
Intake screen	Polypropylene
Suction connection	Stainless steel
Drive shaft	7/16-in. hexagonal stainless steel, 300 series
Coupling	Sintered stainless steel, 300 series
Shell	Stainless steel, 300 series
Motor	Franklin motor exterior constructed of stainless steel. Motor filled with deionized water and propylene glycol for constant lubrication. Hermetically sealed motor housing ensures moisture-free windings. All thrust absorbed by Kingsbury-type thrust bearing. Rated for continuous duty. Single-phase motors are equipped with surge arrestors for added security. Single-phase motors through 1.5 hp (1.11 kW) have built-in thermal over-load protection, which trips at 203-221° F (95-105° C).




## Using a Pump Curve

A pump curve helps you determine the best pump for your system. Pump curves show the relationship between flow and pressure (total dynamic head or "TDH"), providing a graphical representation of a pump's optimal performance range. Pumps perform best at their nominal flow rate. These graphs show optimal pump operation ranges with a solid line and show flow rates outside of these ranges with a dashed line. For the most accurate pump specification, use Orenco's PumpSelect™ software.

## Pump Curves

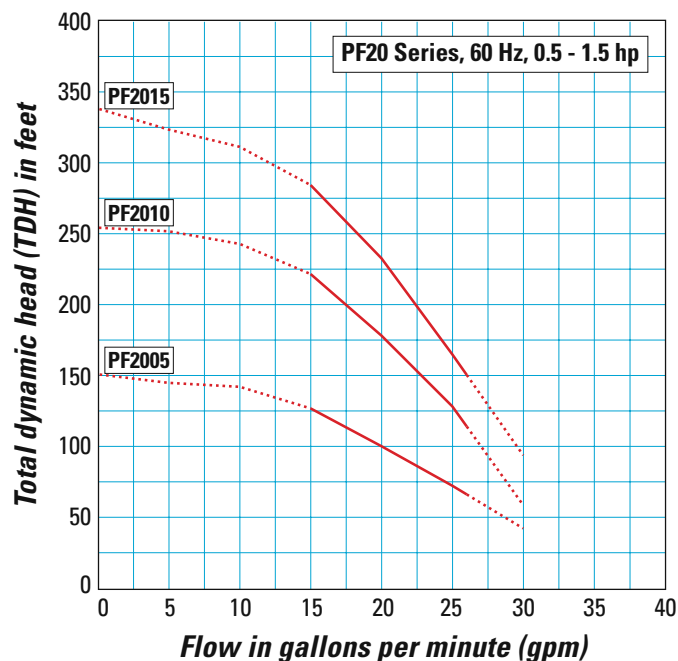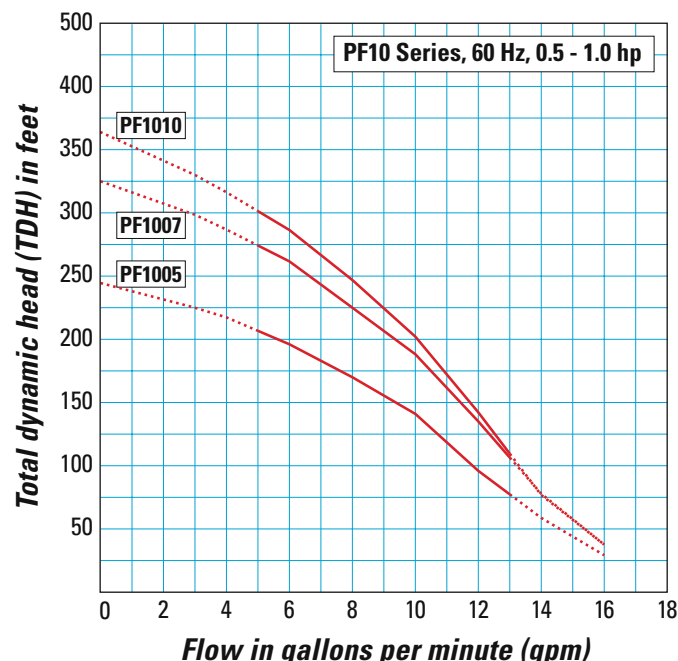


## Pump Curves, cont.

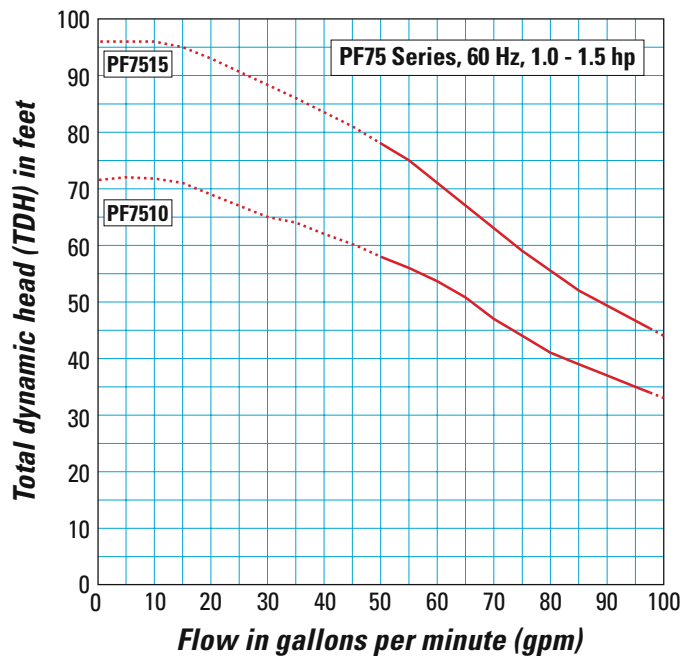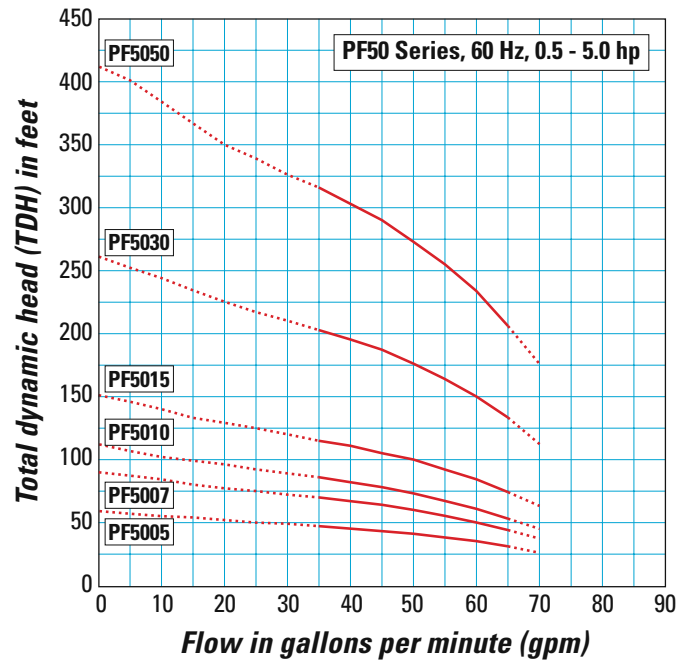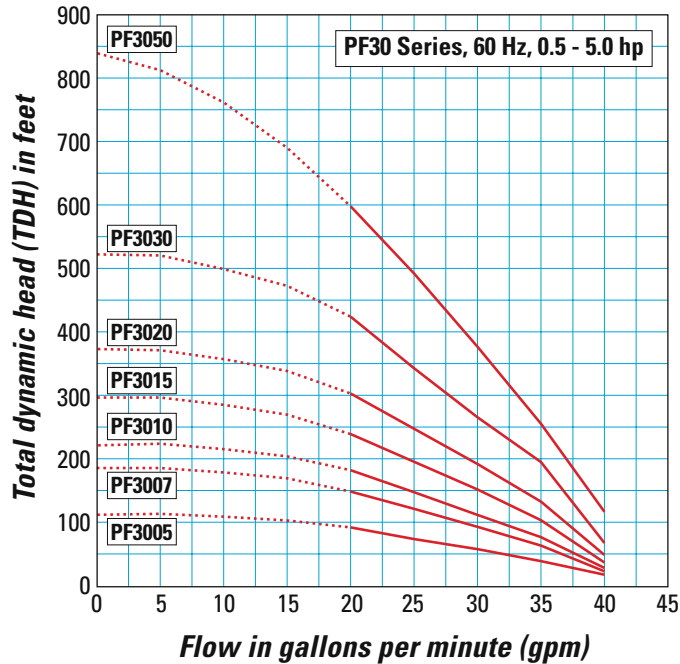

# Distributing Valves

## Applications

Automatic Distributing Valve Assemblies are used to pressurize multiple zone distribution systems including textile filters, sand filters and drainfields.

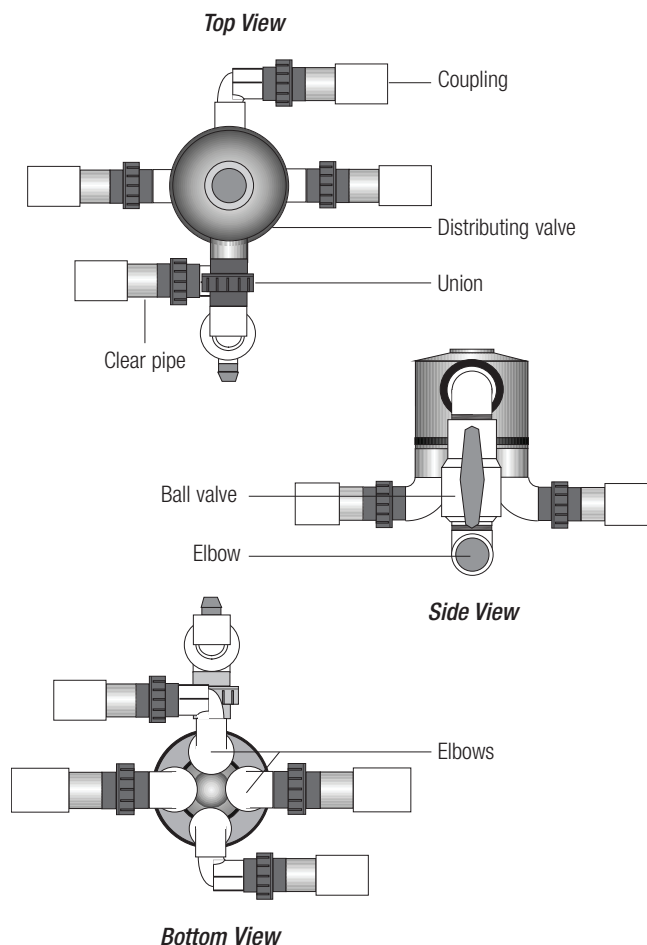

## General


Orenco's Automatic Distributing Valve Assemblies are mechanically operated and sequentially redirect the pump's flow to multiple zones or cells in a distribution field. Valve actuation is accomplished by a combination of pressure and flow. They allow the use of smaller horsepower pumps on large sand filters and drainfields. For example, a large community drainfield requiring 300 gpm (18.90L/sec) can use a six-line valve assembly to reduce the pump flow rate requirement to only 50 gpm (3.14L/sec).

Orenco only warrants Automatic Distributing Valves when used in conjunction with High-Head Effluent Pumps with Biotube® pump vaults to provide pressure and flow requirements, and to prevent debris from fouling valve operation. An inlet ball valve, a section of clear pipe, and a union for each outlet are provided for a complete assembly that is easy to maintain and monitor. Ideal valve location is at the high point in the system. Refer to Automatic Distributing Valve Assemblies (NTP-VA-1) for more information.

## Standard Models

V4402A, V4403A, V4404A, V4605A, V4606A, V6402A, V6403A, V6404A, V6605A, V6606A.

## Product Code Diagram

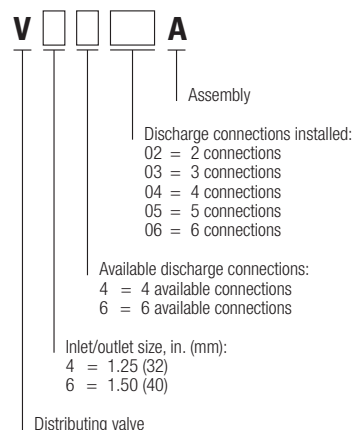

## Materials of Construction

All Fittings	Sch. 40 PVC per ASTM specification
Unions	Sch. 80 PVC per ASTM specification
Ball Valve	Sch. 40 PVC per ASTM specification
Clear Pipe	Sch. 40 PVC per ASTM specification


## Specifications

Model	Inlet Size, in. (mm)	Outlets Size, in. (mm)	Flow Range, gpm (L/sec)	Max Head, ft (m)	Min. Enclosure*
V4402A	1.25 (32)	1.25 (32)	10 – 40 (0.63 – 2.52)	170 (51.816)	VB1217
V4403A	1.25 (32)	1.25 (32)	10 – 40 (0.63 – 2.52)	170 (51.816)	VB1217
V4404A	1.25 (32)	1.25 (32)	10 – 40 (0.63 – 2.52)	170 (51.816)	VB1217
V4605A	1.25 (32)	1.25 (32)	10 – 40 (0.63 – 2.52)	170 (51.816)	RR2418
V4606A	1.25 (32)	1.25 (32)	10 – 40 (0.63 – 2.52)	170 (51.816)	RR2418
V6402A	1.50 (38)	1.50 (38)	15 – 100 (0.95 – 6.31)	345 (105.16)	RR2418
V6403A	1.50 (38)	1.50 (38)	15 – 100 (0.95 – 6.31)	345 (105.16)	RR2418
V6404A	1.50 (38)	1.50 (38)	15 – 100 (0.95 – 6.31)	345 (105.16)	RR2418
V6605A	1.50 (38)	1.50 (38)	15 – 100 (0.95 – 6.31)	345 (105.16)	RR2418
V6606A	1.50 (38)	1.50 (38)	15 – 100 (0.95 – 6.31)	345 (105.16)	RR2418

\* When using an enclosed basin, choose the next larger-sized diameter.

### Table 1. Automatic Distributing Valve Assembly Headloss Equations

Model Series	Equation	Operating Range, gpm (L/sec)
V4400A	$H_L = 0.085 \times Q^{1.45}$	10 - 40 (0.63 – 2.52)
V4600A	$H_L = 0.085 \times Q^{1.58}$	10 - 25 (0.63 – 1.57)
V6400A	$H_L = 0.0045 \times Q^2 + 3.5 \times (1 - e^{-0.06Q})$	15 - 70 (0.95 – 4.42)
V6600A	$H_L = 0.0049 \times Q^2 + 5.5 \times (1 - e^{-0.1Q})$	15 - 70 (0.95 – 4.42)

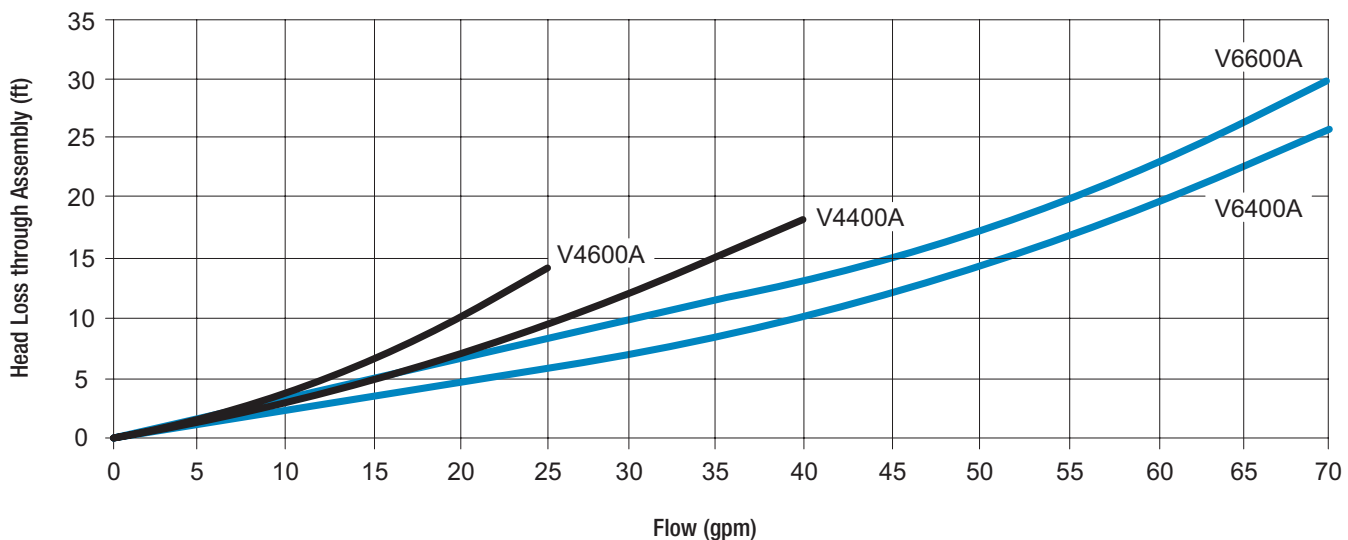

# AdvanTex® AX100 Textile Filter

## Applications

Orenco's AdvanTex® AX100 Treatment System is an innovative technology for onsite treatment of domestic-strength wastewater. The heart of the system is the AdvanTex Filter, a sturdy, watertight fiberglass basin filled with an engineered textile material. This lightweight, highly absorbent textile material treats a tremendous amount of wastewater in a small space. AX100 Treatment Systems are ideal for:

- New construction
- System upgrades and repairs
- Small sites
- Poor soils
- Pretreatment
- Nitrogen reduction
- Price-sensitive markets

For sizing, see AdvanTex® Design Criteria (NDA-ATX-COMM-1-PKG).



*The heart of the AdvanTex® AX100 Treatment System is this sturdy, watertight fiberglass basin filled with an engineered textile material.*

## Features/Specifications

To specify this product, require the following:

- Wastewater treatment to better than secondary treatment standards
- Consistent treatment, even during peak flows
- Timer operation for flow monitoring, flow modulation, and surge control
- Fixed-film, engineered textile media, operated in an unsaturated condition
- Consistent media quality
- Low energy consumption
- Low maintenance requirements
- Complete pre-manufactured package, ready to install
- Watertight construction, corrosion-proof materials, and components
- Foam-core lid provides insulation value of R-6 (RSI-1.1)
- Quiet operation

## Standard Model

AX100

## Specifications\*\*

Length, in. (mm)	191 (4851)
Width, in. (mm)	94 (2388)
Height, in. (mm)	42 (1067)
Area (footprint), ft <sup>2</sup> (m <sup>2</sup> )	128 (11.9)
Dry Weight, lb (kg)	1616 (733)

\* Covered by U.S. patent numbers 6,540,920; 6,372,137; 5,531,894; 5,480,561; 5,360,556

\*\* Nominal values provided. See AdvanTex® Treatment System drawings for exact dimensions.

# AdvanTex<sup>®</sup> Vent Fan Assembly

## Applications


Oreco's AdvanTex<sup>®</sup> Vent Fan Assembly consists of a water-proof fiberglass enclosure with equipment for venting onsite wastewater treatment systems. One enclosure can hold a vent fan with carbon filter and an optional heater.

The vent fan is used in commercial-sized AdvanTex Treatment Systems to gently pull air through the textile media, ensuring that adequate oxygen is available for biological treatment. The carbon filter scrubs the air that the system exhausts. An optional heater can be added where climate requires heating of the air that enters the AdvanTex textile filter pods.

## Standard Models

AXVFACF — AX above ground Vent Fan Assembly with LMF-3 Fan

AXVFACF-HT — AX above ground Vent Fan Assembly with LMF-3 Fan and HT10 Heater

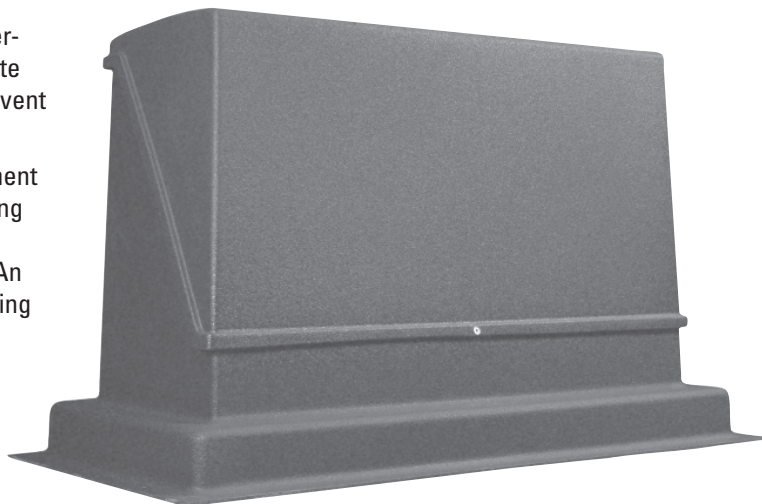

## Enclosure


### Physical Specifications

#### Materials of Construction

Shell	Fiberglass-reinforced polyester (FRP)
Hardware	Stainless steel
Exterior finish	Green, textured, UV resistant
Straps	Nylon

#### Dimensions

Length (L)	50 in. (1270 mm)
Width (W)	24 in. (610 mm)
Height (H)	30 in. (762 mm)
Volume	15.1 ft <sup>3</sup> (0.43 m <sup>3</sup> )
Area (footprint)	8.3 ft <sup>2</sup> (0.77 m <sup>2</sup> )

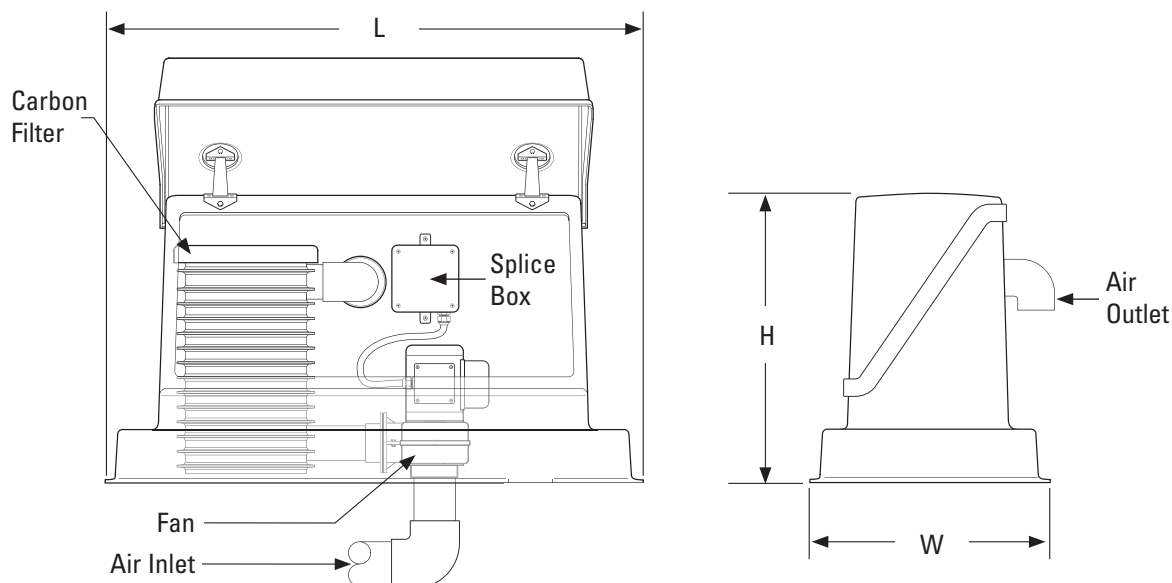

# AdvanTex® Vent Fan Assembly (continued)

## Fan

### Physical Specifications

#### Dimensions




Inlet O.D.	4 in. (100 mm)
Inlet nominal pipe size	4 in. (100 mm)
Outlet I.D.	2-5/8 in. (67 mm)
Outlet Flange O.D.	4-7/8 in. (124 mm)

#### Materials of Construction

Housing	Aluminum
Wheel	Steel

### Performance Data

	60 Hz	50 Hz
Horsepower (kW)	0.08 (0.06 kW)	0.08 (0.06 kW)
Phase	1 phase	1 phase
Volts	115/230	110/220
Amperage	1.4 A/0.7 A	1.8 A/0.9 A
RPM	3400	2900
CFM at 0" H <sub>2</sub> O static pressure	245	205
CFM at 0.4" H <sub>2</sub> O static pressure	220	170
CFM at 0.8" H <sub>2</sub> O static pressure	190	130
CFM at 1.5" H <sub>2</sub> O static pressure	120	N/A

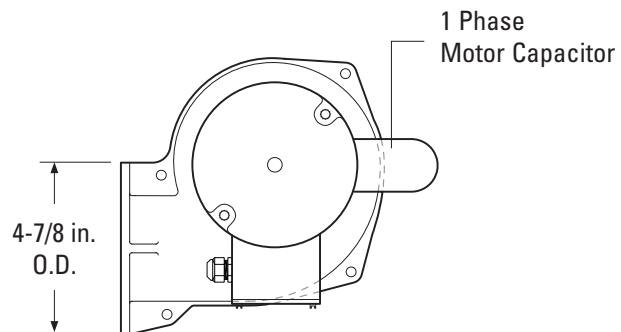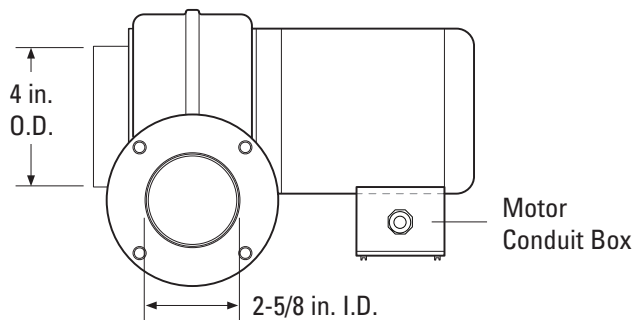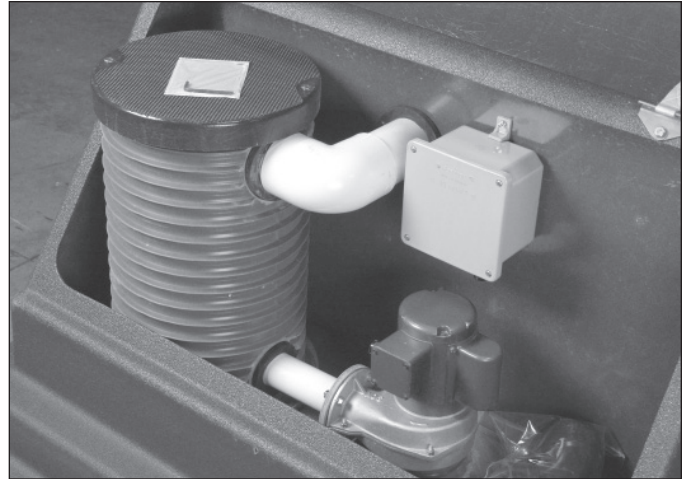

# AdvanTex® Vent Fan Assembly (continued)

## Carbon Filter Basin

### Physical Specifications

#### Dimensions

Outlet diameter	Accepts nominal 3-in. PVC pipe
Inlet diameter	Accepts nominal 2-in. PVC pipe
Height	21.5 in. (546 mm)
Diameter	12 in. (305 mm)

#### Materials of Construction

Housing	PVC
Bottom	Fiberglass-reinforced polyester (FRP)
Interior supports	Polypropylene grid and polyethylene screen
Support rings	PVC
Lid	Fiberglass
Fill material	Activated carbon



## Heater (Optional)

### Physical Specifications

#### Dimensions

Outlet diameter	Fits nominal 3-in. Class 125 PVC pipe
Length (inlet to outlet)	11.75 in. (297 mm)
Width	11.25 in. (286 mm)
Depth	8.25 in. (210 mm)

#### Performance Data

Watts	1000
Volts	120
Amps	8.3



## Miragrid® 22XT

Miragrid® 22XT geogrid is composed of high molecular weight, high tenacity polyester multifilament yarns woven in tension and finished with a PVC coating. Miragrid® 22XT geogrid is inert to biological degradation and resistant to naturally encountered chemicals, alkalis, and acids.

Miragrid 22XT geogrid is used as soil reinforcement in MSE structures such as segmental retaining walls, precast modular block walls, wire faced walls, geosynthetic wrapped faced walls and steepened slopes. Miragrid 22XT is also used in MSE stabilized platforms for voids bridging, embankments on soft soils, landfill veneer stability, reducing differential settlement and for foundation seismic stability.

TenCate Geosynthetics Americas is accredited by Geosynthetic Accreditation Institute – Laboratory Accreditation Program ([GAI-LAP](#)).

MECHANICAL PROPERTIES	TEST METHOD	UNIT	MINIMUM AVERAGE ROLL VALUE
			MD
Tensile Strength @ Ultimate	ASTM D6637 (Method B)	lbs/ft (kN/m)	20559 (300.0)
Tensile Strength @ 5% strain	ASTM D6637 (Method B)	lbs/ft (kN/m)	6700 (97.8)
Mass/Unit Area <sup>1</sup>	(ASTM D5261)	oz/yd <sup>2</sup> (g/m <sup>2</sup> )	28.2 (956)
MINIMUM ROLL VALUE			
Creep Rupture Strength <sup>2</sup>	ASTM D5262/D6992	lbs/ft (kN/m)	14277 (208.3)
Long Term Design Strength <sup>3</sup>		lbs/ft (kN/m)	12361 (180.4)
PHYSICAL PROPERTIES		UNIT	ROLL CHARACTERISTIC
Roll Dimensions <sup>4</sup> (width x length)		ft (m)	12 x 200 (3.6 x 61)
Roll Area		yd <sup>2</sup> (m <sup>2</sup> )	267 (220)
Estimated Roll Weight		lbs (kg)	470 (213)
Label Roll Color			WHITE

<sup>1</sup> Typical Value

<sup>2</sup> 75-year design life based on NTPEP Report [REGEO-2016-01-069](#).

<sup>3</sup> Long Term Design Strength for sand, silt, clay. RF<sub>CR</sub> = 1.44; RF<sub>ID</sub> = 1.05; RF<sub>D</sub> = 1.1 (Installation damage reduction factor for other soils available upon request).

<sup>4</sup> Special order roll lengths are available upon request

Disclaimer: TenCate assumes no liability for the accuracy or completeness of this information or for the ultimate use by the purchaser. TenCate disclaims any and all express, implied, or statutory standards, warranties or guarantees, including without limitation any implied warranty as to merchantability or fitness for a particular purpose or arising from a course of dealing or usage of trade as to any equipment, materials, or information furnished herewith. This document should not be construed as engineering advice. Mirafi® is a registered trademark of Nicolon Corporation. Copyright © 2021 Nicolon Corporation. All Rights Reserved  
FGS000105  
ETQR19





**MYERS<sup>®</sup>**  
**MODEL SRM4**  
**4/10 HORSEPOWER**  
**RESIDENTIAL SEWAGE PUMP**



[WWW.FEMYERS.COM](http://WWW.FEMYERS.COM)

# MYERS® MODEL SRM4

## Residential Sewage Pump

### The Right Choice


The SRM4 solids handling pump is the most reliable 4/10 horsepower residential sewage pump available today. The SRM4 is a plumbers/contractors dream! Its recessed impeller design allows 2" solids to pass freely through the volute without the chance of jamming the impeller. The SRM4 series pump has a national field-proven record of reliability. Look to your Myers distributor for the answer to your residential sewage handling needs ... and across the counter will be the Myers mini solids handling, the SRM4. It works for you! For more information, call your Myers distributor today, or the Myers Ohio sales office at 419-289-6898.



Product Capabilities		
Capacities To	95 gpm	360 lpm
Heads To	18 ft.	5.5 m
	19 ft. shutoff	5.8 m
Pump Down Range Float Switch	7 to 14 in.	178 to 356 mm
Solids Handling Capacity	2 in.	50.8 mm
Liquids Handling	raw sewage, effluent, drain water	
Intermittent Liquid Temp.	up to 140°F	up to 60°C
Motor Electrical Data	4/10 HP shaded pole 1650 RPM	
Electrical	115V, 12A or 230V, 6A, 1Ø, 60 Hz.	
Acceptable pH Range	6 – 9	
Discharge, NPT	2 in.	50.8 mm
Min. Sump Diameter	18 in.	457 mm
	30 in.	762 mm

Note: Consult factory for applications outside these recommendations.

# Pump Features and Applications

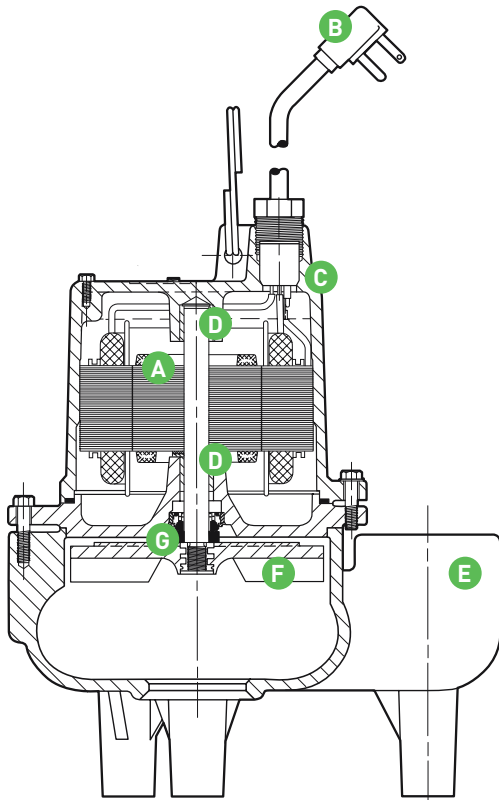

## A. 4/10 HP Motor

Pressed in place and oil-filled for best alignment and heat transfer. Built-in overload protection.

## B. Power Cord

Quick-disconnect watertight fitting.

## C. Motor Housing

Heavy cast iron for efficient heat transfer.

## D. Dual Thrust Washers, Sleeve Bearings

Oil lubricated, enhance smooth operation and extend pump life..

## E. Cast Iron Volute

Passes 2" diameter solids.

## F. Recessed Impeller

Operates out of volute passage, allowing maximum flow of liquids and solids.

## G. Mechanical Shaft Seal

Carbon and ceramic faces, body is stationary, prevents string or trash from winding on seal..

## Mechanical Float Switch

Mercury-free, 90° angle operation. (Piggyback models only).

## Durable Motor Will Deliver Many Years Of Reliable Service.

- Oil-filled motor for maximum heat dissipation and continuous bearing lubrication.
- Overload protected shaded pole motor eliminates starting switches.
- Recessed vortex impeller provides minimal radial loading for long bearing life.




## The SRM4P Is Engineered For Many Years Of Maintenance-Free Operation.

- Wide-angle piggy-back float switch for maximum draw down. (Automatic models.)
- Pump can be operated manually by unplugging piggy-back switch and plugging pump directly into outlet (Automatic models).
- Recessed vortex impeller operates completely out of volute and provides free flow through passage for solids and liquids.

# Performance Data and Dimensions

[Dimensions in mm]

1650 RPM

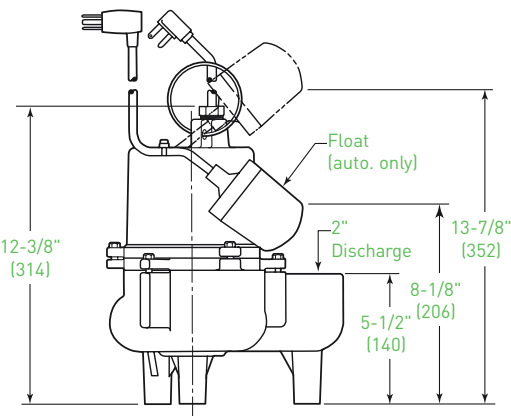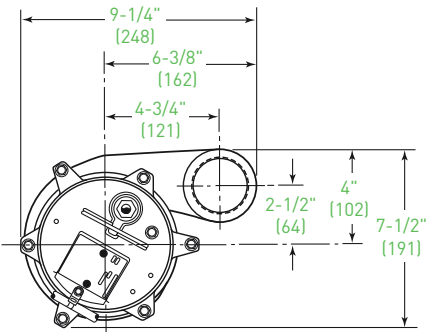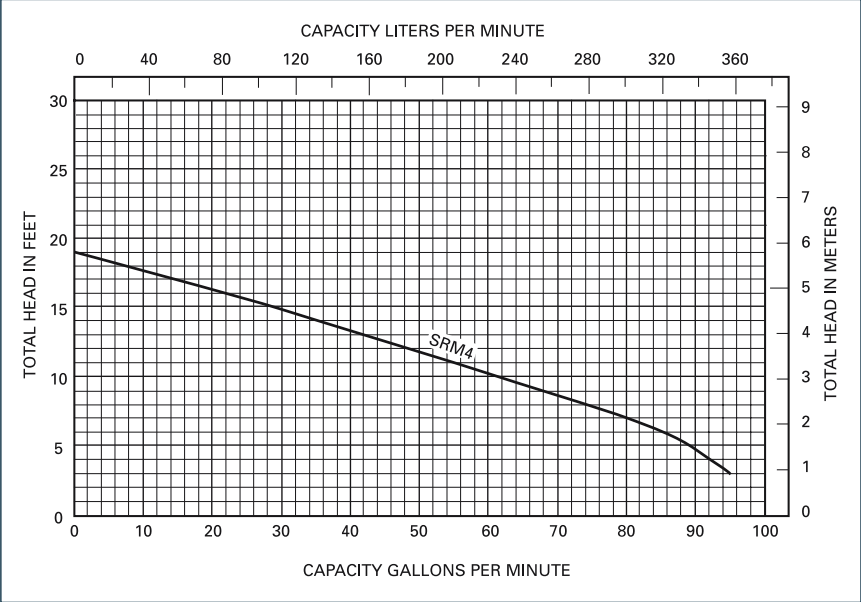

740 EAST 9TH STREET,  
ASHLAND, OHIO 44805  
WWW.FEMYERS.COM

269 TRILLIUM DRIVE, KITCHENER,  
ONTARIO, CANADA N2G 4W5  
WWW.FEMYERS.COM

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.  
K3305 1/2/13 © 2013 Pentair Ltd. All Rights Reserved.



January 13, 2023

David T. Bray, PLS  
President  
Caputo & Wick LTD  
1150 Pawtucket Ave.  
Rumford, RI 02916-1897  
Phone: (401) 434-8880

**RE: Burlingame State Park and Camp Ground, Charlestown, RI**

Dear Mr. Bray:

This letter will confirm that you have been trained and certified to design GST™ Leaching Systems by Geomatrix Systems, LLC ("Geomatrix") in the State of Rhode Island.

This letter also confirms that Geomatrix has reviewed the design of the GST Leaching System proposed for installation at Burlingame State Park and Camp Ground, Charlestown, RI and found the site and design to be suitable and in compliance with the approved design manuals for the aforementioned product.

If you have any questions, please contact me.

Sincerely,  
GEOMATRIX SYSTEMS, LLC


A handwritten signature in black ink, appearing to read "David Jewett". The signature is fluid and cursive, with a long horizontal stroke extending to the right.

David Jewett

Geomatrix Systems, LLC  
114 Mill Rock Road East - Old Saybrook, CT 06475  
Phone: 860-510-0730 – Fax: 860-510-0735



# GST Schematics

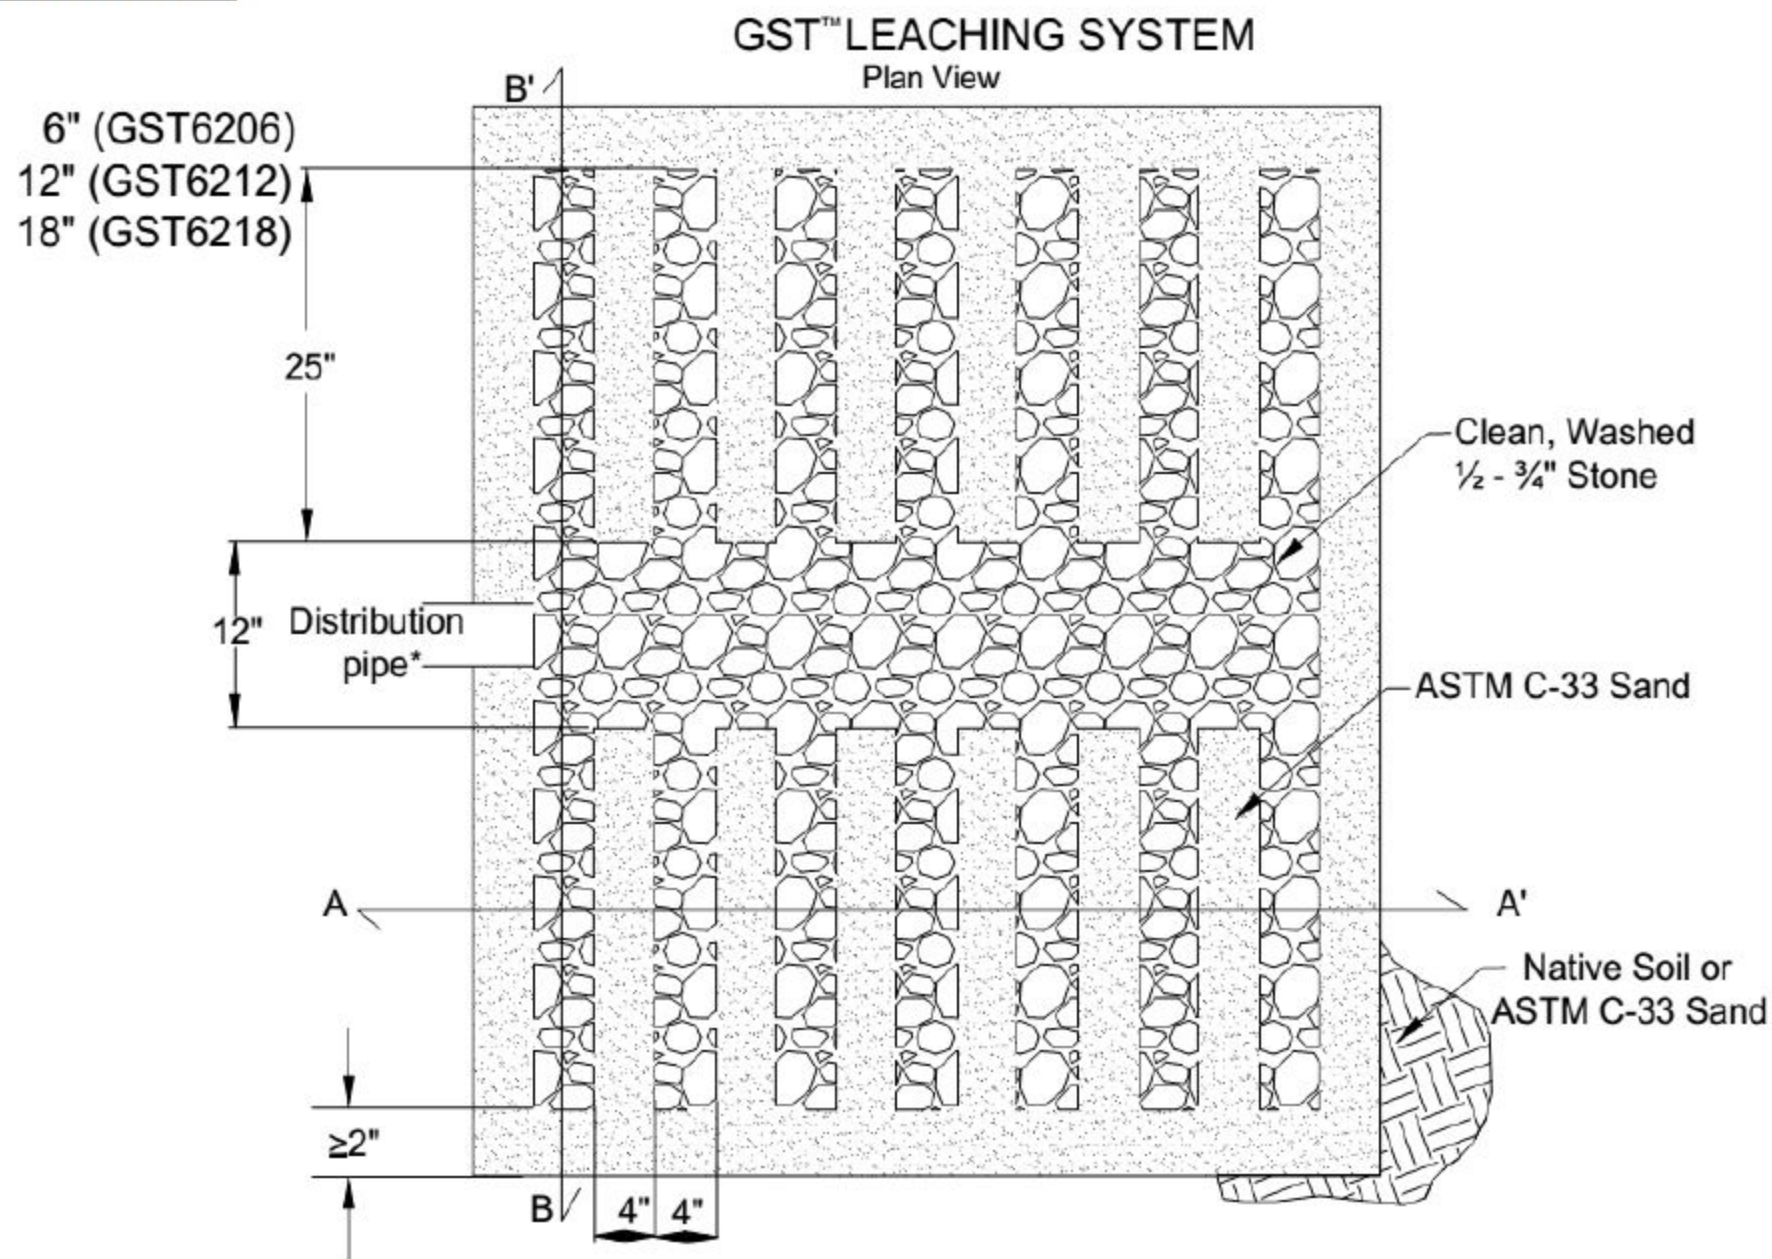


\* Distribution pipe for gravity systems shall comply with RIDEM OWTS Rule 6.34C  
Distribution pipe for pressure applications shall comply with RIDEM Guidelines for the Design, Use and Maintenance of Pressurized Drainfields.

# GEOMATRIX GST™ LEACHING SYSTEM

## A-A' CROSS SECTION

Finished Grade shall be pitched to sheet flow  
stormwater away from system

Cover material depth shall be 6-30" and  
shall be uniform over distribution pipe

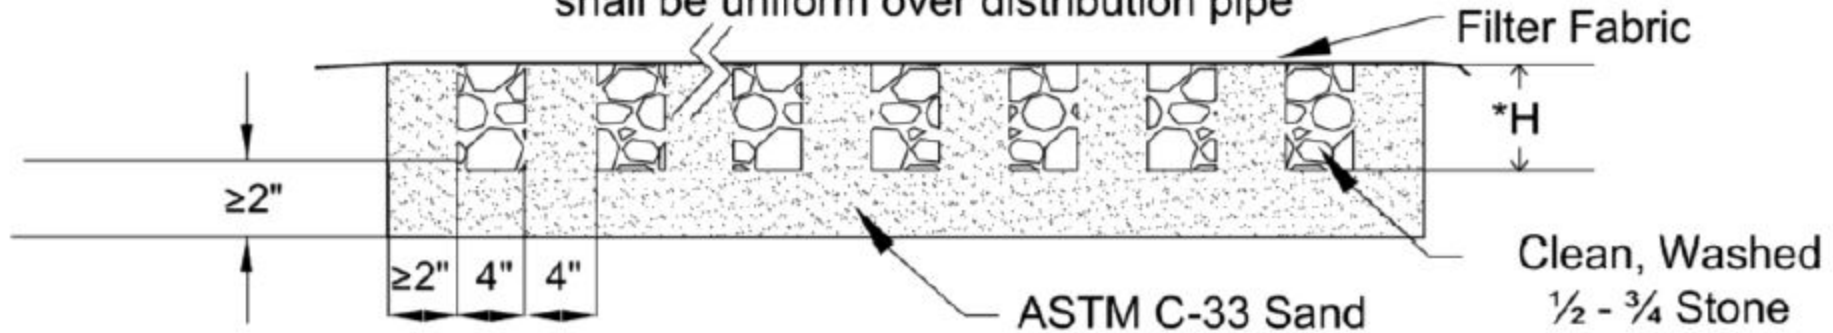


\*H= 6" (GST6206)  
12" (GST6212)  
18" (GST6218)

# GST™ LEACHING SYSTEM

## B-B' CROSS SECTION

Finished Grade shall be pitched to sheet flow  
stormwater away from system

Cover material depth shall be 6-30" and  
shall be uniform over distribution pipe

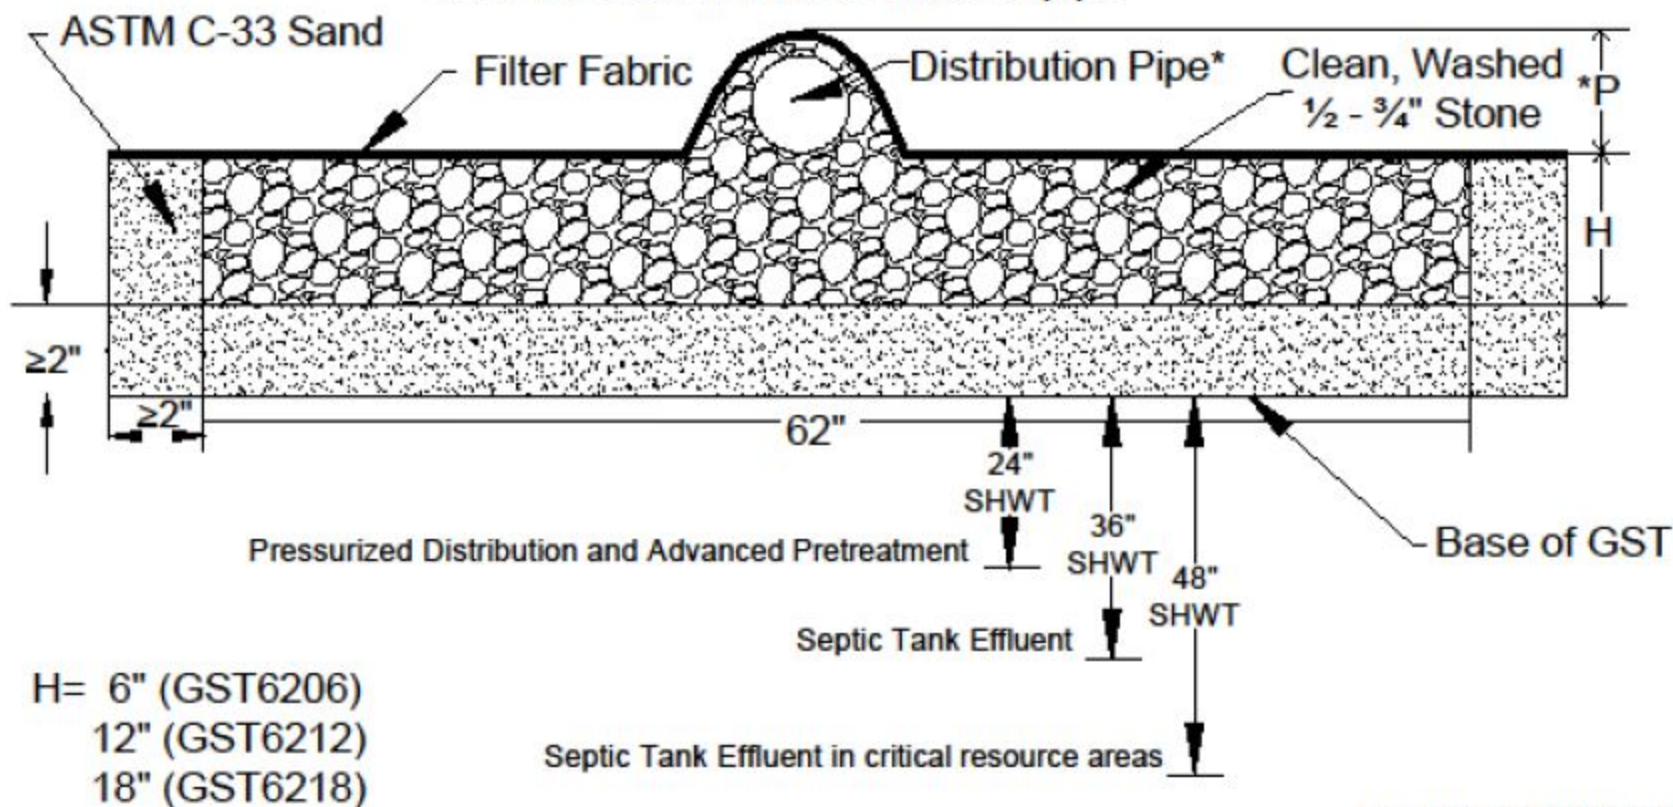

\* Distribution pipe for gravity applications shall comply with RIDEM OWTS Rule 6.34C  
Distribution pipe for pressure applications shall comply with RIDEM Guidelines for the  
Design, Use and Maintenance of Pressurized Drainfields

Copyright 2022 GEOMATRIX SYSTEMS, LLC  
patents: www.geomatrixsystems.com


GST LEACHING SYSTEM

B-B' Cross Section

Geomatrix Systems, LLC., Old Saybrook, CT  
860-510-0730


SCALE	None	REV.	0
DATE	9-4-2018	ACAD No.	040 GLS B-B'.DWG
DRAWN BY:	ERP	SHEET	3 OF 3

# GEOMATRIX GST™ LEACHING SYSTEM INSPECTION PORT DETAIL

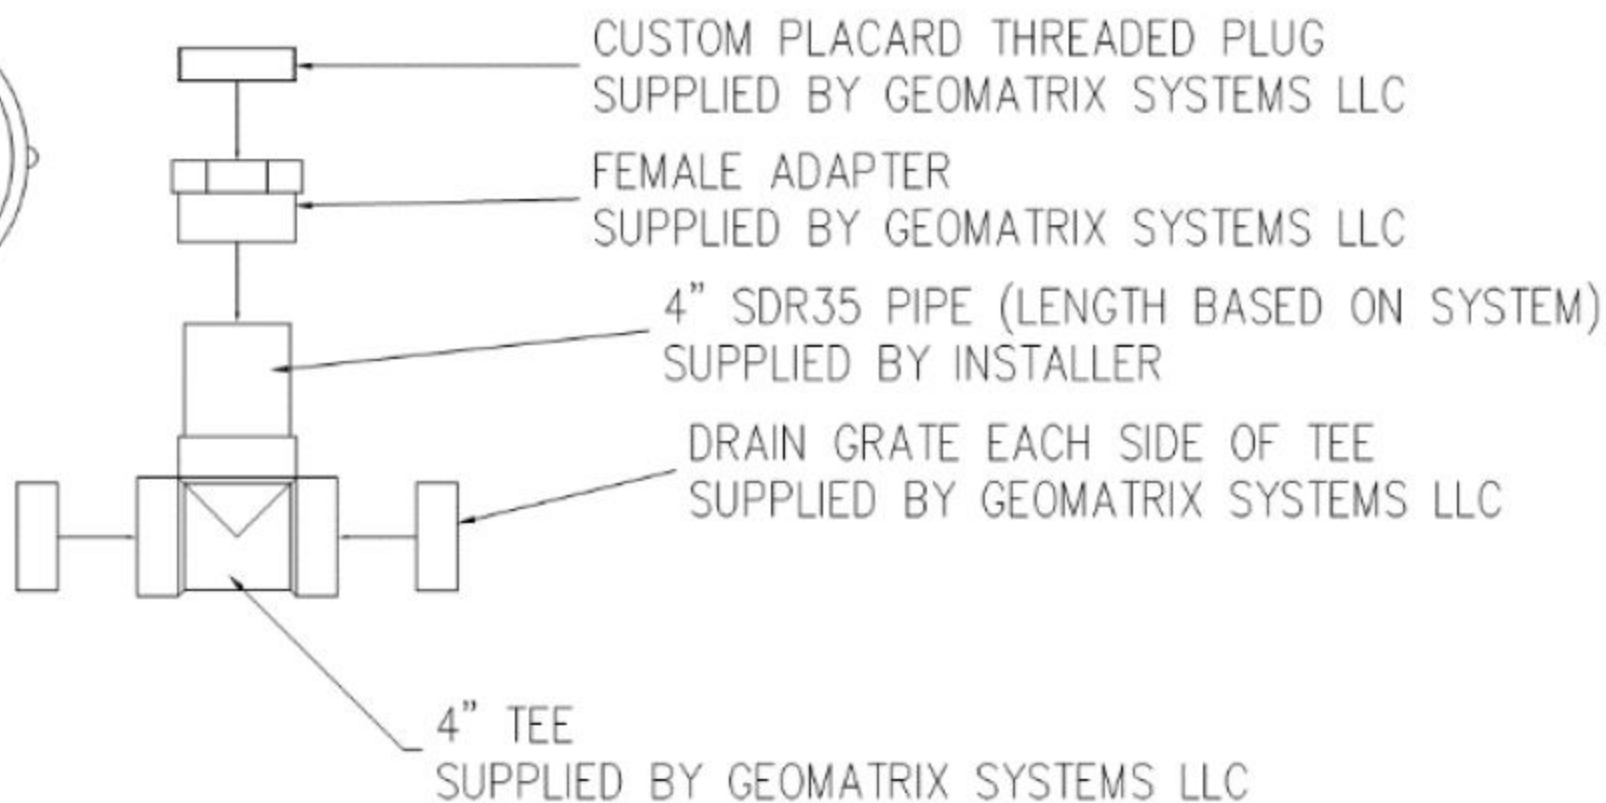


GST LEACHING SYSTEM Inspection Port Detail Geomatrix Systems, LLC., Old Saybrook, CT 860-510-0730			
SCALE	None	REV.	A
DATE	6/2/2015	ACAD No.	GSTIP.DWG
DRAWN BY:	ERP	SHEET	I OF I

# RIDEM GIS MAP

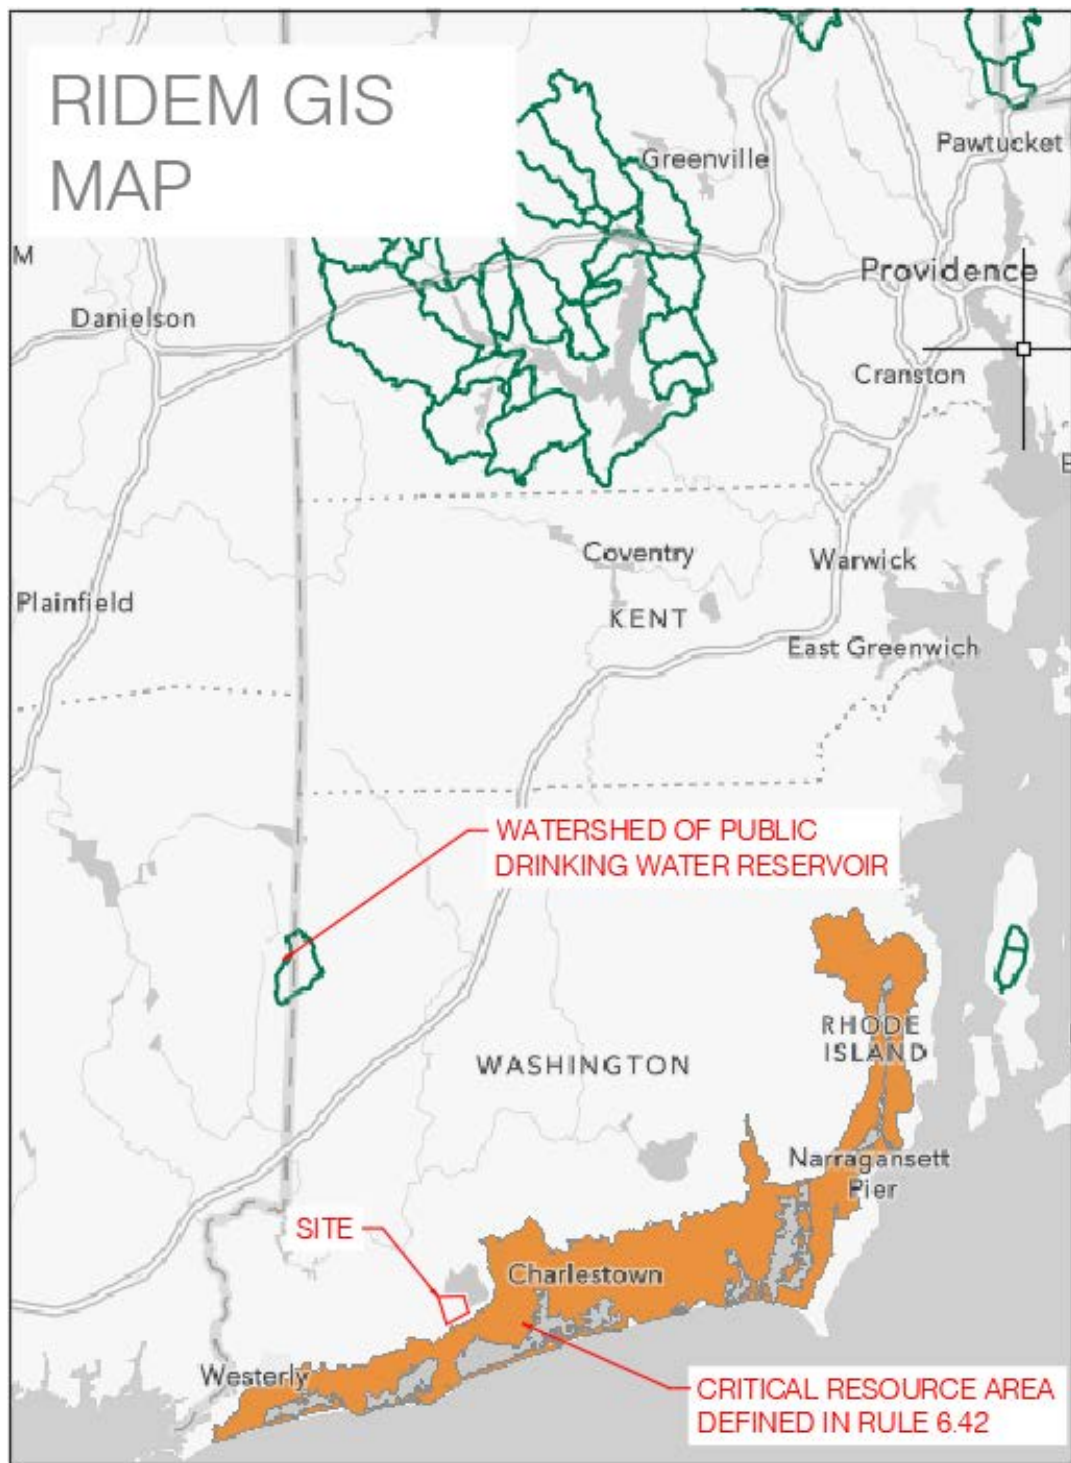



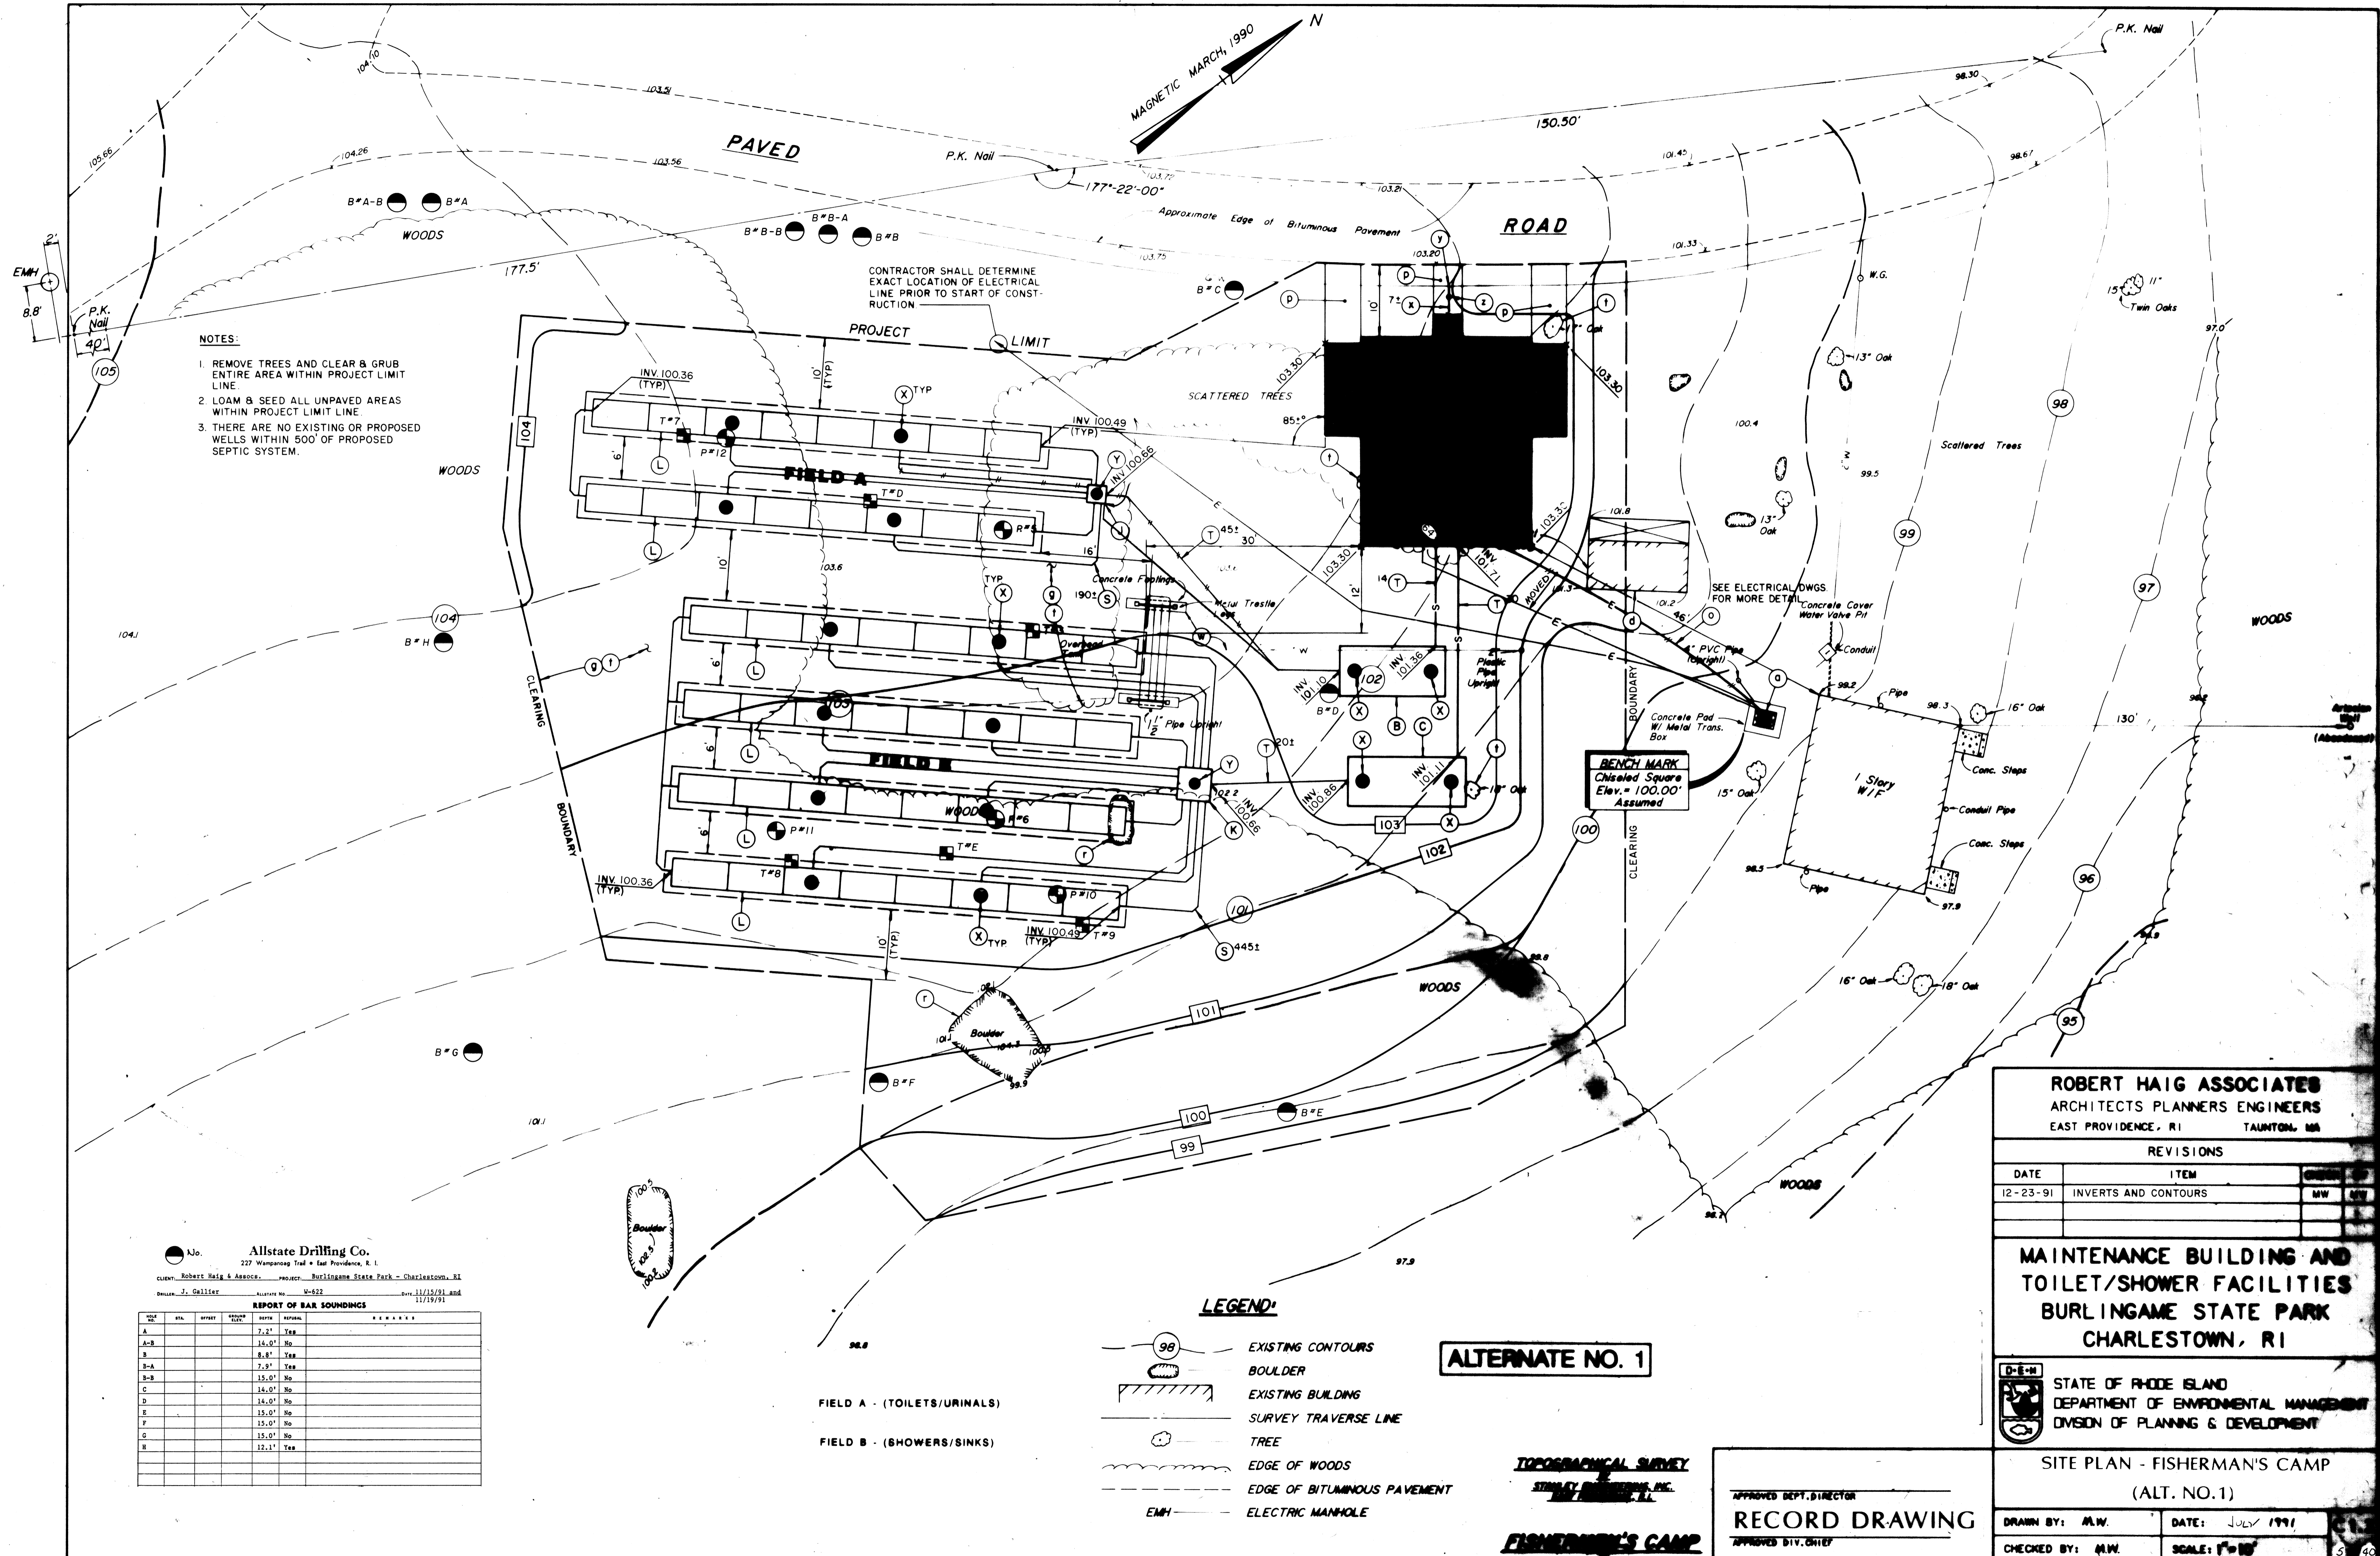





# “Main Camp Bathhouse and Onsite Wastewater Treatment System Replacement”

For

Rhode Island Department of Environmental Management  
Burlingame State Park and Campground

Burlingame Park Road  
Charlestown, Rhode Island

Assessors Map 15 – Lot 10  
Area: 847 Acres±

July 2022  
Rev.: February 2023

Prepared by

Caputo & Wick Ltd.  
1150 Pawtucket Avenue  
Rumford, Rhode Island 02916-1897  
401-434-8880





**RHODE ISLAND DEPARTMENT OF ENVIRONMENTAL MANAGEMENT  
ONSITE WASTEWATER TREATMENT SYSTEM CONSTRUCTION PERMIT**

[www.dem.ri.gov/septic](http://www.dem.ri.gov/septic)



**FOR RIDEM USE ONLY**

APPLICATION No. 2205-1188 DATE RECEIVED 06/14/22 AMOUNT RECEIVED \$ 12000 CHECK # 12345678 NOTE

**TYPE OF APPLICATION (CHECK ALL THAT APPLY)**

- ☐ NEW BUILDING CONSTRUCTION  
☐ ALTERATION  
☐ REPAIR  
☐ TRANSFER
- ☒ A/E TECHNOLOGY TYPE DESIGN  
☐ VARIANCE  
☐ REDESIGN  
☐ JOINT OWTS / WETLANDS PD

**SITE INFORMATION**

BURLINGAME STATE PARK AND CAMPGROUND (MAIN CAMP)  
1400 BURLINGAME PARK ROAD WARREN TOWN  
NO. STREET CITY/TOWN POLE #  
PLAT NUMBER 15 LOT NUMBER 10 SUBDIVISION LOT NUMBER N.A.  
LOT SIZE 3.47 SF/ACRES  
SUBDIVISION NAME N.A.  
SUBDIVISION SITE SUITABILITY CERTIFICATION # N.A.

**OWNER INFORMATION**

STATE OF R.I.  
LAST NAME FIRST NAME M.I.  
235 PROMENADE ST. PROVIDENCE 02108  
NO. STREET CITY/TOWN ZIP CODE

**RIDEM APPLICATION HISTORY**

PREVIOUS SITE TESTING ☒ YES ☐ NO APPLICATION # 2205-1188  
DEPTH TO APPROVED WATER TABLE 30" HOW DETERMINED SOIL EVALUATION  
TEST HOLE # SA DATE EXCAVATED 06/13/21 WETLANDS within 200' OF OWTS ☐ YES ☒ NO  
WETLAND DETERMINATION ☐ YES ☒ NO RIDEM FILE #  DATE / /  
LARGE SYSTEM ☒ YES ☐ NO OCI FILE # IF APPLICABLE Environmental Management

**DESIGN INFORMATION**

BUILDING USE: ☐ Residential ☐ Commercial MAR 6 2023  
☒ Other BATHHOUSE  
WATER SUPPLY: ☐ public water ☒ public well ☐ private well Office of Water Resources  
# OF DESIGN UNITS 150  
UNIT DESIGN FLOW 50 gallons per UNIT (unit) TOTAL DAILY FLOW 7,500 gallons  
TANK SIZE 15,000 gallons DESIGN LOADING RATE 3.5 gpd/sf  
MINIMUM REQUIRED LEACHFIELD AREA 2,143 square feet  
LEACHFIELD TYPE GRAVEL SAND TREATMENT SYSTEM (GST)  
TOTAL AREA OF LEACHFIELD PROVIDED 4,100 square feet

**CERTIFICATION**

I, KEVIN HARRIS (print), the undersigned licensed OWTS designer, certify that I prepared this application and accompanying forms, submittals, plans and sketches in accordance with the RULES of the RIDEM pertaining to OWTS and that all the information provided on this application and accompanying forms, submittals, plans and sketches is true and accurate.

Designer's Signature Kevin Harris License # D 3155

Designer's Email kharris@earthlink.net Phone # 401-424-8888

Business/Company Name Earthlink LLC

I certify that a) I am the owner of the property indicated under the site information on this application, b) I will hire a licensed OWTS installer to install the system proposed herein, c) the system will be installed in strict accordance with this application, d) I will hire and retain the licensed OWTS designer of record to witness and inspect the installation of the system, e) I assume all responsibility for the truth and accuracy of this application and all liability and responsibility for any improper installations of the system on this site and agree to hold the RIDEM harmless from any and all claims relating whatsoever to the system. In the case of a transfer application, I acknowledge that the permit application and plans previously approved and accompanying this application are the operative documents subject to certification.

Owner's Phone Number (401) 222-4700 ext 2774307

Owner's Email MEGAN.DIPRETE@DEM.RI.GOV

Owner(s) Signature M. Diprete

**PERMIT APPROVAL SECTION: DO NOT WRITE BELOW THIS LINE**

Based upon the representations of the owner and the owner's agents, including the representations of the owner's OWTS designer, and the truth and accuracy of all information submitted, this application for an OWTS is hereby approved. The RIDEM assumes no responsibility or liability for the future safe operation or maintenance of the aforesaid system, of the fitness or suitability of this system to this site, nor does it assume any responsibility for the accuracy and truth of the owner's, or the owner's agent's representations. This approval is subject to future suspension or revocation in the event that subsequent examination reveals any data indicated on any application, form, submittal, plan or sketch to be incorrect, or not in compliance with the RULES or any conditions at the site are such that the approved design is not in accordance with the RULES, or in the event that the system discharges inadequately treated wastewater to waters of the State or fails to operate satisfactorily in any other manner.

**IMPORTANT: Additional terms of approval as circled.**

- A. Bottom of leaching area excavation must be inspected by the RIDEM prior to placement of any gravel or stone.
- B. System installation must be inspected by RIDEM prior to covering any component of the system with backfill.
- C. Applicant shall comply with all requirements, conditions and stipulations of variance(s) approved on .
- D. Joint Permit: Designer of record must contact RIDEM prior to start of any site construction.
- E. A/E Technology: additional installation, operation or maintenance requirements may apply (see A/E Technology Certification.)
- F. Copy of this form and Operation/Maintenance contract must be filed in land evidence records prior to conformance.
- G. Proposed construction falls within "Coastal Zone". Contact Rhode Island Coastal Resources Management Council.
- H. Proper erosion and sedimentation controls must be installed prior to start of construction.
- I. Transfer: See original permit for all applicable conditions.
- J. Other See attached design requirements

Signature of RIDEM Official

Date of Approval

Date of Expiration

**DESIGNER**





RHODE ISLAND DEPARTMENT OF ENVIRONMENTAL MANAGEMENT  
ONSITE WASTEWATER TREATMENT SYSTEM CONSTRUCTION PERMIT

www.dem.ri.gov/septic



FOR RIDEM USE ONLY

APPLICATION No. \_\_\_\_\_ DATE RECEIVED \_\_\_\_/\_\_\_\_/\_\_\_\_ AMOUNT RECEIVED \$ \_\_\_\_\_ CHECK # \_\_\_\_\_ NOTE \_\_\_\_\_

TYPE OF APPLICATION (CHECK ALL THAT APPLY)

- ☐ NEW BUILDING CONSTRUCTION  
☐ ALTERATION  
☐ REPAIR  
☐ TRANSFER

- ☒ A/E TECHNOLOGY TYPE ORRICO AX100/BSE  
☐ VARIANCE  
☐ REDESIGN  
☐ JOINT OWTS / WETLANDS PD

SITE INFORMATION

BURLINGAME STATE PARK AND CAMPGROUND (MAIN CAMP)  
1-100 BURLINGAME PARK ROAD CHARLESTOWN

NO. STREET \_\_\_\_\_ CITY/TOWN \_\_\_\_\_ POLE # \_\_\_\_\_

PLAT NUMBER 15 LOT NUMBER 10 SUBDIVISION LOT NUMBER N.A.

LOT SIZE 847 SF/ACRES

SUBDIVISION NAME N.A.

SUBDIVISION SITE SUITABILITY CERTIFICATION # N.A.

OWNER INFORMATION

STATE OF RI DEM

LAST NAME

FIRST NAME

M.I.

235 PROMENADE ST. PROVIDENCE 02908

NO. STREET

CITY/TOWN

ZIP CODE

RIDEM APPLICATION HISTORY

PREVIOUS SITE TESTING ☐ YES ☐ NO APPLICATION # \_\_\_\_\_

DEPTH TO APPROVED WATER TABLE 30" HOW DETERMINED SOIL EVALUATION

TEST HOLE # 5A DATE EXCAVATED 8/18/21 WETLANDS within 200' OF OWTS ☐ YES ☒ NO

WETLAND DETERMINATION ☐ YES ☒ NO RIDEM FILE # \_\_\_\_\_ DATE \_\_\_\_/\_\_\_\_/\_\_\_\_

LARGE SYSTEM ☒ YES ☐ NO OCI FILE # IF APPLICABLE \_\_\_\_\_

DESIGN INFORMATION

BUILDING USE: ☐ Residential ☐ Commercial \_\_\_\_\_

☒ Other BATHHOUSE

WATER SUPPLY: ☐ public water ☒ public well ☐ private well

# OF DESIGN UNITS 150

UNIT DESIGN FLOW 50 gallons per SITE (unit) TOTAL DAILY FLOW 7,500 gallons

TANK SIZE 15,000 gallons DESIGN LOADING RATE 3.5 gpd/sf

MINIMUM REQUIRED LEACHFIELD AREA 2,143 square feet

LEACHFIELD TYPE BOTTOMLESS SAND FILTER

TOTAL AREA OF LEACHFIELD PROVIDED 2,304 square feet

CERTIFICATION

I, KEVIN HARROP (print), the undersigned licensed OWTS designer, certify that I prepared this application and accompanying forms, submittals, plans and sketches in accordance with the RULES of the RIDEM pertaining to OWTS and that all the information provided on this application and accompanying forms, submittals, plans and sketches is true and accurate.

Designer's Signature Kevin Harrop License # D 3155

Designer's Email Kharrop@cw1td.net Phone # 401-434-8880

Business/Company Name CAPUTO and WICK LTD.

I certify that a) I am the owner of the property indicated under the site information on this application, b) I will hire a licensed OWTS installer to install the system proposed herein, c) the system will be installed in strict accordance with this application, d) I will hire and retain the licensed OWTS designer of record to witness and inspect the installation of the system, e) I assume all responsibility for the truth and accuracy of this application and all liability and responsibility for any improper installations of the system on this site and agree to hold the RIDEM harmless from any and all claims relating whatsoever to the system. In the case of a transfer application, I acknowledge that the permit application and plans previously approved and accompanying this application are the operative documents subject to certification.

Owner's Phone Number (401) 222-4700 ext. 2774307

Owner's Email MEGAN.DIPRETE@DEM.RI.GOV

Owner(s) Signature \_\_\_\_\_

PERMIT APPROVAL SECTION: DO NOT WRITE BELOW THIS LINE

Based upon the representations of the owner and the owner's agents, including the representations of the owner's OWTS designer, and the truth and accuracy of all information submitted, this application for an OWTS is hereby approved. The RIDEM assumes no responsibility or liability for the future safe operation or maintenance of the aforesaid system, of the fitness or suitability of this system to this site, nor does it assume any responsibility for the accuracy and truth of the owner's, or the owner's agent's representations. This approval is subject to future suspension or revocation in the event that subsequent examination reveals any data indicated on any application, form, submittal, plan or sketch to be incorrect, or not in compliance with the RULES or any conditions at the site are such that the approved design is not in accordance with the RULES, or in the event that the system discharges inadequately treated wastewater to waters of the State or fails to operate satisfactorily in any other manner.

IMPORTANT: Additional terms of approval as circled.

- A. Bottom of leaching area excavation must be inspected by the RIDEM prior to placement of any gravel or stone.
- B. System installation must be inspected by RIDEM prior to covering any component of the system with backfill.
- C. Applicant shall comply with all requirements, conditions and stipulations of variance(s) approved on \_\_\_\_\_.
- D. Joint Permit: Designer of record must contact RIDEM prior to start of any site construction.
- E. A/E Technology: additional installation, operation or maintenance requirements may apply (see A/E Technology Certification.)
- F. Copy of this form and Operation/Maintenance contract must be filed in land evidence records prior to conformance.
- G. Proposed construction falls within "Coastal Zone". Contact Rhode Island Coastal Resources Management Council.
- H. Proper erosion and sedimentation controls must be installed prior to start of construction.
- I. Transfer: See original permit for all applicable conditions.
- J. Other \_\_\_\_\_

Signature of RIDEM Official

Date of Approval

Date of Expiration





## RHODE ISLAND

### DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

OFFICE OF WATER RESOURCES

235 Promenade Street, Providence, Rhode Island 02908

March 15, 2023

State of Rhode Island  
Rhode Island Department of Environmental Management Division of Planning and Development  
235 Promenade Street  
Providence, RI 02908

**RE: Main Camp Bathhouse  
Burlingame State Park and Campground  
Charlestown, RI  
OWTS Application No. 2105-1188**

Dear Applicant:

Attached herewith are revised monitoring and reporting requirements applicable to the above listed permit. As you are aware the above listed Onsite Wastewater Treatment System (OWTS) permit is granted based on a maximum daily design flow of **7,500** gallons per day and includes 1 - 15,000-gallon septic tank, 1 - 7,500-gallon anoxic tank, 1 - 6,000-gallon recirculation tank, 2 - Advantex AX 100 filter pods followed by a 6 x 6 pump chamber to a Gravel Sand Treatment (GST) type of leaching system.

Advanced treatment systems are utilized to mitigate against possible adverse impacts of residual onsite wastewater pollutants on groundwater quality and surface water quality. Owners of advanced OWTSs with design flows  $\geq 2,000$  gallons per day are subject to regular monitoring and reporting. The following stipulations now apply to your permit:

1. The following discharge limits as measured at the 6 x 6 pump chamber shall apply:

Orencia Systems, Inc. AdvanTex AX-100 – Mode 1  
Biochemical Oxygen Demand (5 Day)  $\leq 20$  mg/L  
Total Suspended Solids  $\leq 20$  mg/L  
Oil & Grease  $\leq 5$  mg/L

2. Wastewater flow shall not exceed a maximum daily flow of **7,500** gallons per day. Wastewater flow shall be monitored and recorded to ensure compliance with this stipulation.
3. Sampling and testing shall be conducted quarterly at the compliance point specified in Item 1 above. Sampling and measurements shall be representative of the monitored activity. The Permittee shall sample and test the wastewater in each system as follows:

Dissolved Oxygen (mg/L) – *Field Test*  
Effluent Temperature (°F) – *Field Test*  
pH (s.u.) – *Field Test*  
Biochemical Oxygen Demand (5-Day) (mg/L)  
Total Suspended Solids (mg/L)  
Oil and Grease (mg/L)  
Alkalinity (mg/L)

4. Corrective Action – Corrective action must be taken as soon as practicable following receipt of monitoring results which indicate that system modifications or maintenance is required. The system must be resampled no sooner than seven (7) days after any adjustment is made to the system and within thirty (30) days of the routine quarterly sample date. Samples must be analyzed for each of the parameters listed in Item 3 for any post corrective action sampling events.
5. Annual Report – All monitoring results including wastewater flow data shall be submitted to the DEM in the form of an annual report. The annual report is due **February 15<sup>th</sup>** of each year. The annual report must summarize all monitoring results and corrective actions implemented during the previous calendar year. A clear determination regarding the compliance status of the OWTS must be made as part of the annual report. The annual report must include a copy of the most recent Operation and Maintenance Contract as proof of compliance with this requirement.
6. The Permittee shall properly operate and maintain all facilities and equipment associated with the OWTS in accordance with the most recent operation and maintenance (O&M) plan. The O&M plan specifies procedures for operation, process control, record keeping, monitoring, weekly maintenance checks, other routine and periodic maintenance, safety and security. Also, the O&M plan includes a contingency plan to address emergency actions and procedures in the event of equipment failure and power loss.
7. Your permit approval is for the discharge of sanitary waste only. No toxic, hazardous or industrial processing waste may be discharged into the system.
8. All septage, sludges, screenings or other pollutants removed from the system shall be disposed in accordance with all applicable state and federal laws.
9. The permit may be automatically transferred by the Permittee to a new owner provided:
  - a. The current Permittee notifies the DEM by certified mail at least thirty (30) days in advance of the proposed transfer date;
  - b. The notice includes the name and address of the new Permittee and a written agreement between the existing and new Permittee containing a specific date for the transfer of permit responsibility, surety and liability between them and;
  - c. The DEM does not notify the existing Permittee and the proposed new Permittee of its intent to modify or reissue the permit.
10. The operator or person in responsible charge of the OWTS shall have at a minimum a Rhode Island Class 1 Wastewater Treatment Plant Operator Certification or an equivalent certification from another jurisdiction acceptable to the DEM. If the operator is not employed directly by the Permittee, a service agreement with the operator shall be entered into and continuously maintained, and a copy of the active service agreement shall be submitted to the DEM as part of the annual report.
11. The permit may be modified, suspended, or revoked for cause. The DEM reserves the right to revise the permit to ensure compliance with applicable state and federal regulations. Failure to comply with the conditions of this permit approval letter may result in an enforcement action.

12. The Permittee shall allow the DEM or their authorized representative to access the OWTS and work areas to inspect equipment, practices, records pertinent to this permit and stipulated compliance requirements, and to sample and monitor the wastewater for the purposes of determining compliance.
13. In the event of treatment interruption, bypass or sewage overflow, the Permittee shall notify the DEM verbally within twenty-four (24) hours. Such incident shall be reported in writing within five (5) days after it becomes known to the Permittee, the report shall include the date and time(s) of the incident, the duration of the incident, and actions taken to correct the problem and prevent a reoccurrence.
14. For purposes of notification, monitoring, compliance or inquiries pursuant to this permit, all correspondence, telephone calls and other contacts must reference the OWTS permit number and shall be directed to:

The Rhode Island Department of Environmental Management  
Onsite Wastewater Treatment Systems Program  
235 Promenade Street  
Providence, RI 02908  
Telephone: (401) 222-3961  
[www.dem.ri.gov/septic](http://www.dem.ri.gov/septic)

Should you have any questions concerning these permit requirements, please contact Tom Angelone by email at [tom.angelone@dem.ri.gov](mailto:tom.angelone@dem.ri.gov) or by phone at 401-222-3961, extension 2777607.

Very truly yours,



Mohamed J. Freij, P.E., PLS  
Supervising Sanitary Engineer

KF

Enclosure(s)

cc: Joseph L. Warner Jr., Charlestown Building Official






TH-5A - GROUND ELEV: 69.2 - AUGUST 18, 2021									
HORIZON	DEPTH	DIST	TOPO	MATRIX	RE-DOX FEATURES	Ab. S. CONTR.	TEXTURE	STRUCTURE	CONSISTENCE
Ap	0 - 10"	C	S	2.5YR 6/3			La	2gbd	Wf
Bw	10" - 30"	C	S	10YR 5/6			La	2gbd	Fr
Bw2	30" - 32"	C	S	2.5YR 7/3	5YR 4/4	M M P	La	2gbd	Fr
C	32" - 120"	C	S	2.5YR 7/3			La	2gbd	Fr

SOIL CLASS: B OBSERVED STANDING GROUNDWATER - NA  
ESTIMATED SEASONAL HIGH WATER TABLE - 30" (ELEV: 66.7)

TH-5B - GROUND ELEV: 60.4 - AUGUST 18, 2021									
HORIZON	DEPTH	DIST	TOPO	MATRIX	RE-DOX FEATURES	Ab. S. CONTR.	TEXTURE	STRUCTURE	CONSISTENCE
Ap	0 - 8"	C	S	2.5YR 6/3			La	2gbd	Wf
Bw	8" - 30"	C	S	10YR 5/6			La	2gbd	Fr
C	30" - 120"	C	S	2.5YR 7/3	5YR 4/4	M M P	La	2gbd	Fr


SOIL CLASS: B OBSERVED STANDING GROUNDWATER - NA  
ESTIMATED SEASONAL HIGH WATER TABLE - 30" (ELEV: 57.9)

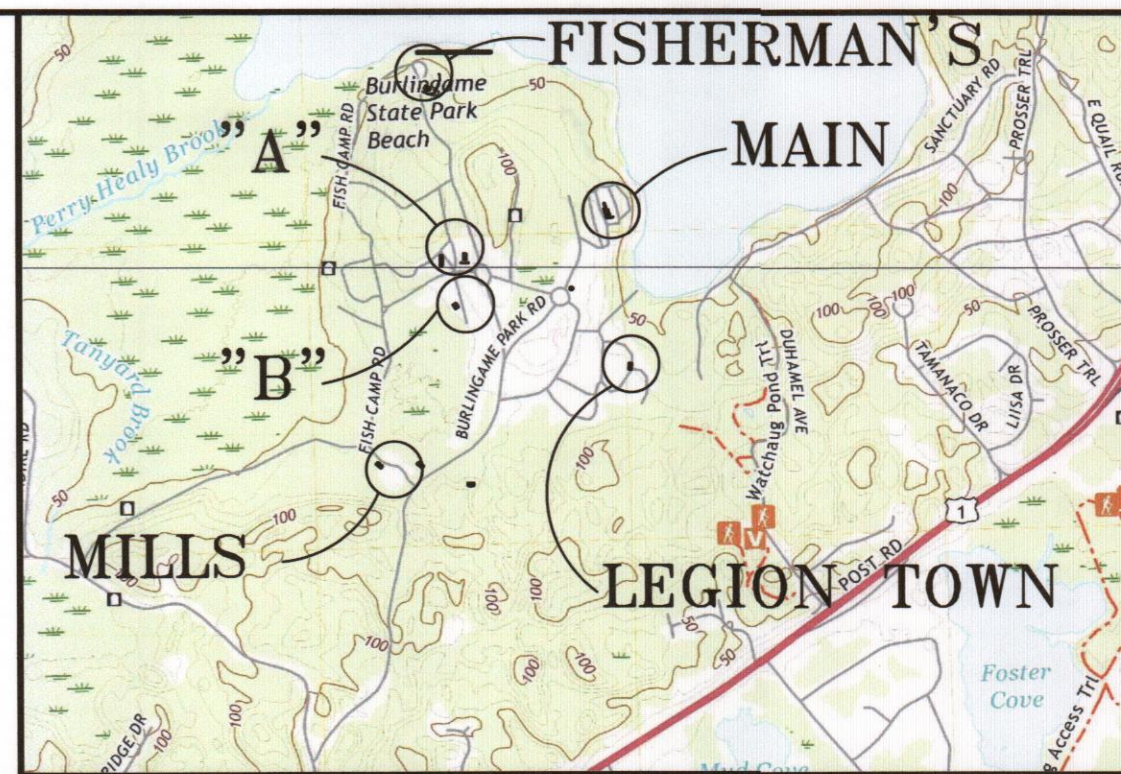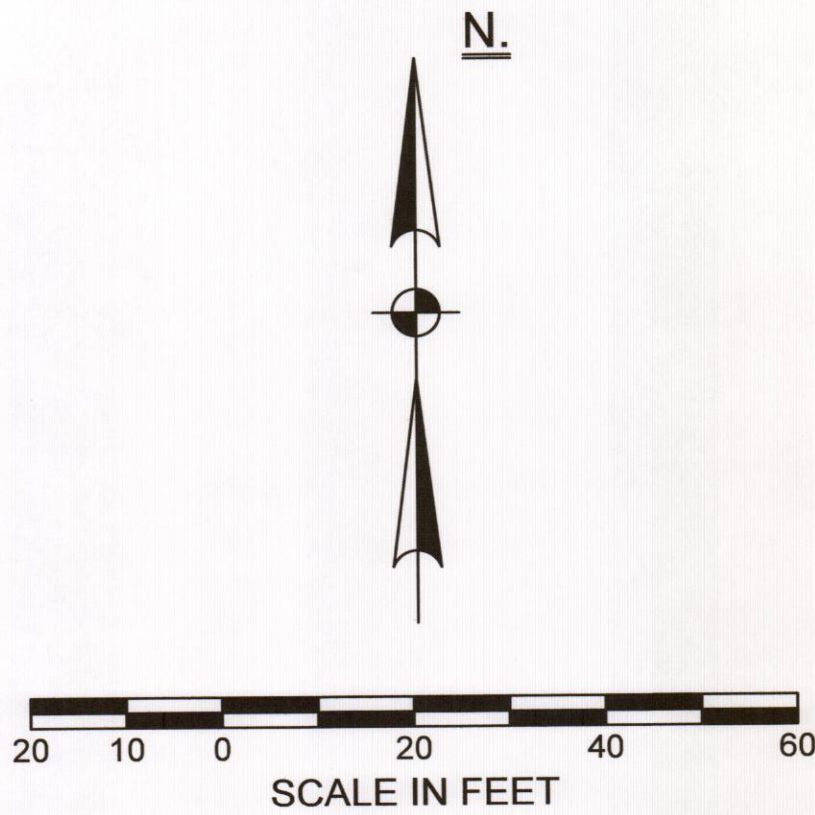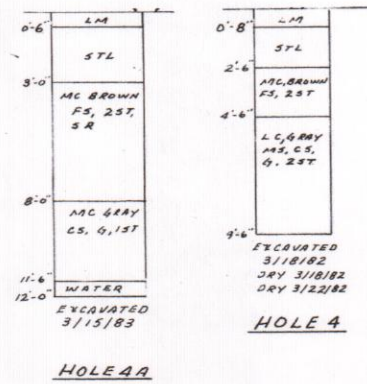

LOCUS MAP


NOTES:

- ALL WORK SHALL CONFORM TO THE RHODE ISLAND DEPARTMENT OF ENVIRONMENTAL MANAGEMENT, OFFICE OF WATER RESOURCES 'RULES AND REGULATIONS ESTABLISHING MINIMUM STANDARDS RELATING TO LOCATION, DESIGN, CONSTRUCTION AND MAINTENANCE OF 'ONSITE WASTEWATER TREATMENT SYSTEMS', LATEST EDITION.
- THE CONTRACTOR SHALL SUBMIT SHOP DRAWINGS TO CAPUTO AND WICK LTD. FOR APPROVAL OF ALL PROPOSED CONSTRUCTION MATERIALS AND EQUIPMENT PRIOR TO ANY CONSTRUCTION.
- EXISTING 'ONSITE WASTEWATER TREATMENT SYSTEM (OWTS) PRECAST STRUCTURES ARE TO BE PUMPED OUT, RINSED WITH CLEAN WATER AND PUMPED OUT AGAIN. PUMPING MUST BE PERFORMED BY A STATE LICENSED SEPTIC HAULER AND THE CONTENTS OF THE TANK DISPOSED OF PROPERLY. AFTER PUMPING, THE EXISTING OWTS STRUCTURES MUST BE FILLED WITH FLOWABLE FILL OR REMOVED AND REPLACED WITH GRAVEL BORROW AND 4" LOAM AND SEED.
- REMOVE ALL PORTIONS OF THE EXISTING OWTS WITHIN 5' OF THE GRAVEL SAND TREATMENT SYSTEM AND ALL FILL, A HORIZON SOIL, HORIZON SOIL AND SCARIFY 3" OF THE C HORIZON SOIL BELOW THE GRAVEL SAND TREATMENT SYSTEM AND THOUGHLY MIX WITH ASTM C-33 SAND (SEE NOTE 16) TO INTERFACE THE FILL WITH THE SOIL, AND REPLACE ALL REMOVED SOIL WITH ASTM C-33 SAND. A AND B SOIL HORIZON LAYERS ARE TO BE REMOVED IN THIS APPLICATION DUE TO COMPACTION CAUSED BY PREVIOUS SYSTEM INSTALLATION AND FILL BEING PLACED ABOVE.
- UNSATURABLE MATERIAL USED TO BACKFILL THE TEST HOLES SHALL BE REMOVED AND REPLACED WITH WITH ASTM C-33 SAND (SEE NOTE 16).
- ASTM C-33 SAND (SEE NOTE 16) MUST BE PLACED ON SCARIFIED, RELATIVELY DRY NATURAL SOIL. THE CONTRACTOR SHALL PROVIDE FOR DEWATERING AS REQUIRED AND ALL WORK SHALL BE PERFORMED UNDER DRY CONDITIONS.
- BUILDING SEWER PIPE TO BE 4" P. V. C. SCH. 40 UNLESS OTHERWISE NOTED.
- PLACE 6" MINIMUM COMPACTED CRUSHED STONE UNDER SEPTIC TANK, ANOXIC TANK, RECIRCULATION TANK, PUMP CHAMBER, ADVANTEX TREATMENT TANKS AND SYSTEM STRUCTURES.
- SEPTIC TANK, ANOXIC TANK, RECIRCULATION TANK AND PUMP CHAMBER ARE TO BE LOCATED DIRECTLY BELOW ACCESS COVERS.
- SEPTIC TANK, ANOXIC TANK, RECIRCULATION TANK, PUMP CHAMBER AND ADVANTEX TREATMENT TANK RISERS/COVERS TO BE AT FINISH GRADE.
- IF CONDITIONS ENCOUNTERED DURING CONSTRUCTION VARY SUBSTANTIALLY FROM THOSE SHOWN ON THIS PLAN, NOTIFY CAPUTO AND WICK, LTD. BEFORE PROCEEDING WITH CONSTRUCTION. IF IN DOUBT, ASK.
- NEW SEPTIC TANK SHALL MEET ALL OF THE REQUIREMENTS OF 250-RICR-150-10-6-27.
- INSPECTION OF THE SEPTIC TANK, ANOXIC TANK, RECIRCULATION TANK, PUMP CHAMBER AND ADVANTEX TREATMENT TANK SHALL BE PART OF THE MAINTENANCE SERVICE FOR THE OWTS AND ALL COMPONENTS SHALL BE CLEANED WHEN REQUIRED.
- IT IS RECOMMENDED THAT THE SEPTIC TANK BE INSPECTED TWICE A YEAR, AND BE CLEANED WHEN THE SOLIDS EQUAL ONE THIRD THE LIQUID DEPTH.
- MINIMUM PERIMETER INVERT ELEVATION = 70.25. NO FINISHED GRADE BELOW 70.25 FROM THE EDGE OF THE GRAVEL SAND TREATMENT SYSTEM FOR A 10 FEET MINIMUM.
- THE SAND MEDIA USED IN CONSTRUCTION SHALL MEET THE ASTM C-33 SPECIFICATIONS. SIEVE ANALYSIS FROM PROPOSED SOURCE IS REQUIRED TO BE SUBMITTED TOGETHER WITH SHOP DRAWINGS. TESTING OF SAND MATERIAL DELIVERED TO THE SITE IS REQUIRED.
- OWTS INSTALLER MUST BE FAMILIAR WITH ADVANTEX PRODUCTS AND GRAVEL SAND TREATMENT SYSTEMS PROPOSED FOR THIS SITE. SEE ADVANTEX INSTALLATION MANUAL, GRAVEL SAND TREATMENT SYSTEM DESIGN AND INSTALLATION MANUAL, AND RIDEM GUIDELINES FOR ADDITIONAL DETAILS OF INSTALLATION.
- INSTALLATION SHALL BE IN STRICT CONFORMANCE WITH THE ORENCO ADVANTEX INSTALLATION MANUAL AND GRAVEL SAND TREATMENT SYSTEM INSTALLATION MANUAL AND ALL OTHER APPLICABLE SECTIONS OF 250-RICR-150-6. THE INSTALLATION SHALL ONLY BE PERFORMED BY A RHODE ISLAND DEM LICENSED INSTALLER WHO HAS RECEIVED TRAINING AND IS AUTHORIZED IN WRITING BY THE VENDORS TO INSTALL THE SYSTEM. AUTHORIZATION FROM THE VENDORS SHALL BE SUBMITTED TO ENGINEER PRIOR TO ANY CONSTRUCTION.
- REFER TO 250-RICR-150-10-6 AND RIDEM GUIDELINES FOR ADDITIONAL INFORMATION CONCERNING THE INSTALLATION, OPERATION AND MAINTENANCE OF THE SYSTEM. THE INSTALLER AND OWNER SHOULD REVIEW AND APPLY 250-RICR-150-10-6 AND RIDEM GUIDELINES. THE SYSTEM TO BE CONSTRUCTED BY A INSTALLER LICENSED BY RIDEM AND THOROUGHLY FAMILIAR WITH THE INSTALLATION OF ADVANTEX TREATMENT DEVICES AND GRAVEL SAND TREATMENT SYSTEMS.
- THE CONTRACTOR IS RESPONSIBLE FOR COORDINATION WITH THE DESIGN ENGINEER IN ORDER TO FACILITATE WITNESSING THE REQUIRED PHASES OF THE SYSTEM INSTALLATION AS STATED IN 250-RICR-150-6.47 OF THE 'REGULATIONS'. FAILURE OF THE CONTRACTOR TO NOTIFY THE DESIGN ENGINEER IN A TIMELY MANNER MAY REQUIRE THE CONTRACTOR TO EXCAVATE AND EXPOSE SYSTEM COMPONENTS FOR OBSERVATION.
- THE DESIGNER EXPRESSLY DISCLAIMS ANY RESPONSIBILITY FOR THE INSTALLATION AND MAINTENANCE OF THE SYSTEM. IT SHALL BE THE RESPONSIBILITY OF THE INSTALLER TO CONSTRUCT THE SYSTEM IN ACCORDANCE WITH THE ABOVE REFERENCED REGULATIONS.
- CONTRACTOR SHALL CONTACT 'DIG-SAFE' PRIOR TO CONSTRUCTION. LOCATION OF UTILITIES ON THIS PLAN ARE FROM EXISTING INFORMATION, BUT ARE ONLY TO BE CONSIDERED APPROXIMATE.
- THERE ARE NO PUBLIC WELLS, EXISTING OR PROPOSED, FOUND TO BE LOCATED WITHIN 500 FEET OF THE PROPOSED OWTS EXCEPT AS SHOWN.
- NO FRESHWATER WETLANDS OBSERVED WITHIN 200 FEET OF THE PROPOSED OWTS. THIS SITE DOES NOT LIE WITHIN A CRITICAL RESOURCE AREA.
- I CERTIFY THAT THERE ARE NO WELLS FOUND TO BE LOCATED WITHIN 200 FEET OF THE PROPOSED LEACHING AREA, OTHER THAN AS SHOWN ON THIS PLAN. I ALSO CERTIFY THAT THERE ARE NO EXISTING OR PROPOSED DRAINS, FOUNDATION DRAINS OR SUB DRAINS FOUND TO BE LOCATED WITHIN 25 FEET OF THIS PROPOSED OWTS.
- ALL PIPE JOINTS, PIPE CONNECTIONS AND ACCESS COVERS ARE TO BE WATERTIGHT.
- PRESSURE PIPE SHALL BE INSTALLED TO MAINTAIN SLOPE BACK TO TANK/PUMP CHAMBER TO DRAIN BETWEEN PUMPING CYCLES. ELIMINATE ANY HIGH OR LOW POINTS THAT MAY PREVENT DRAINING AND/OR AIR POCKETS.
- CONTRACTOR TO PAY ANY REQUIRED INSTALLATION FEES.
- CONTROL PANEL AND ALARM TO BE MOUNTED INSIDE BUILDING IN A CONSPICUOUS LOCATION, EXACT LOCATION TO BE COORDINATED WITH OWNER. ALL CONTROL PANELS AND JUNCTION BOXES SHALL BE NEMA 4X.
- THE PUMP DOSING CONTROLS WILL BE FIELD TESTED IN THE PRESENCE OF THE DESIGN ENGINEER AND ORENCO REPRESENTATIVE. ADJUSTMENT TO CONTROLS ARE THE CONTRACTORS RESPONSIBILITY. CONTRACTOR MUST MAKE WATER AVAILABLE FOR TESTING OF THE CONTROL FLOATS.
- ALL TREES AND SHRUBS SHALL BE CLEAR AND NO NEW ONES SHALL BE PLANTED WITHIN 10' OF THE GRAVEL SAND TREATMENT SYSTEM.
- THE GRAVEL SAND TREATMENT SYSTEM LOCATION SHALL BE STAKED OUT AND PROTECTED PRIOR TO ANY SITE PREPARATION ACTIVITIES.
- NO IMPERVIOUS SURFACE IS TO BE PLACED ABOVE THE GST (LEACHING) SYSTEM.
- MATERIAL AND EQUIPMENT FROM ALTERNATE MANUFACTURERS MAY BE USED IF EQUAL. APPROVAL FOR ALTERNATE MATERIAL AND/OR EQUIPMENT IS REQUIRED FROM THE OWNER AND ENGINEER. FULL SPECIFICATIONS FOR ALTERNATE EQUIPMENT MUST BE PROVIDED BY THE CONTRACTOR. IF ACCEPTABLE, THE CONTRACTOR MUST PREPARE AND SUBMIT FOR AN RIDEM OWTS CONSTRUCTION PERMIT BASED UPON THE REDESIGN.

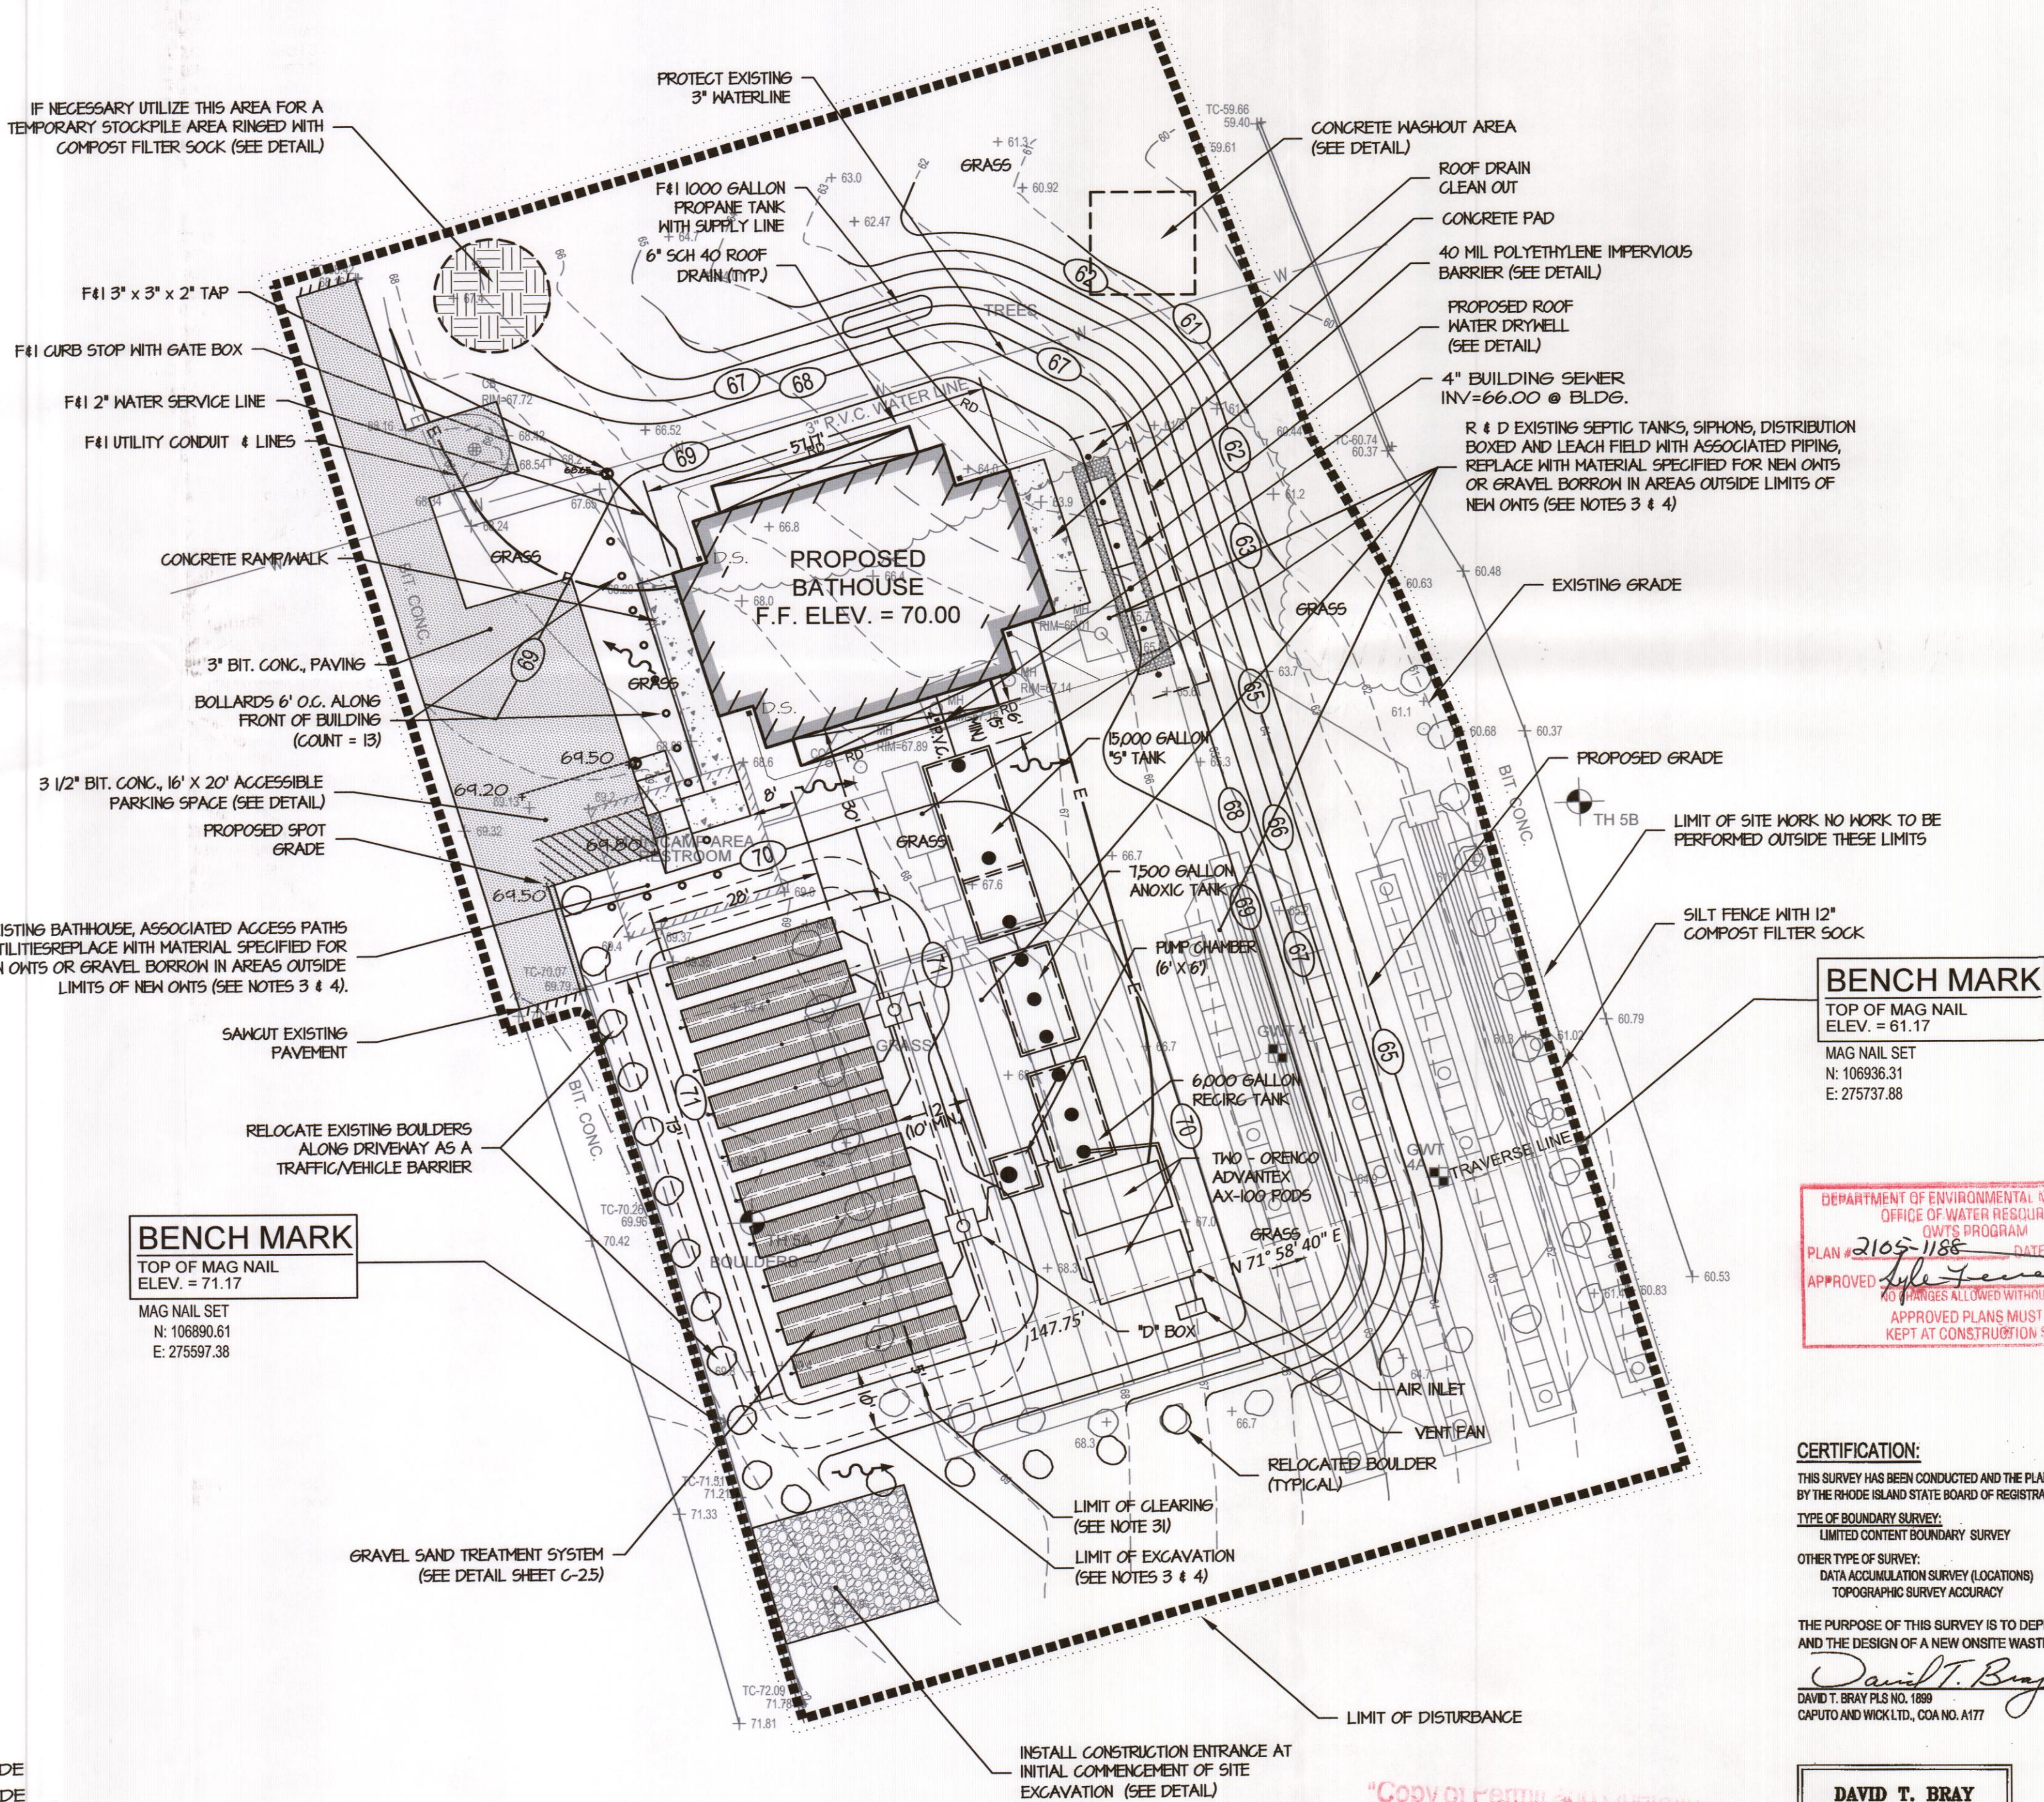



**BENCH MARK**  
TOP OF MAG NAIL  
ELEV. = 71.17  
MAG NAIL SET  
N: 106890.61  
E: 275597.38

**BENCH MARK**  
TOP OF MAG NAIL  
ELEV. = 61.17  
MAG NAIL SET  
N: 106936.31  
E: 275737.88

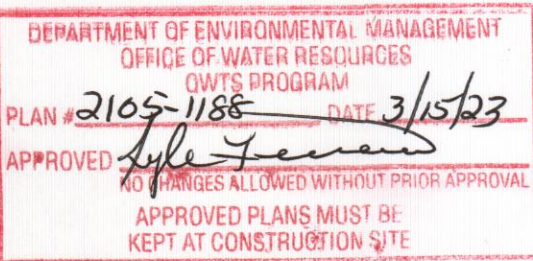

CERTIFICATION:

THIS SURVEY HAS BEEN CONDUCTED AND THE PLAN HAS BEEN PREPARED PURSUANT TO SECTION 8 OF THE RULES AND REGULATIONS ADOPTED BY THE RHODE ISLAND STATE BOARD OF REGISTRATION FOR PROFESSIONAL LAND SURVEYORS ON NOVEMBER 25, 2016, AS FOLLOWS:  
TYPE OF BOUNDARY SURVEY: LIMITED CONTENT BOUNDARY SURVEY  
OTHER TYPE OF SURVEY: DATA ACCUMULATION SURVEY (LOCATIONS)  
TOPOGRAPHIC SURVEY ACCURACY: CLASS III  
T-2 (IMMEDIATE AREA AROUND BATHHOUSE AND OWTS)  
THE PURPOSE OF THIS SURVEY IS TO DEPICT THE EXISTING CONDITIONS IN THE PROJECT AREA FOR CONSTRUCTION AND THE DESIGN OF A NEW ONSITE WASTEWATER TREATMENT SYSTEM.  
DAVID T. BRAY PLS NO. 1889  
CAPUTO AND WICK LTD., COA NO. A177  
DATE: 8/10/2022

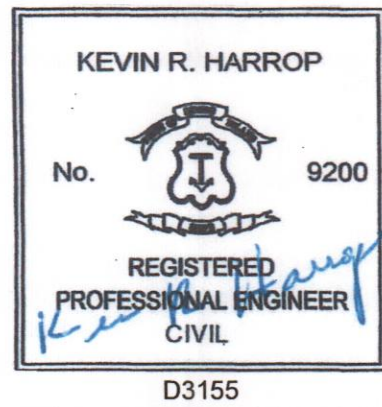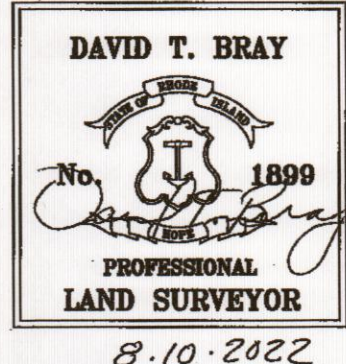

DESIGN DATA

DAILY SEWAGE FLOW:  
50 GPD/CAMPSITE x 150 CAMPSITES = 7500 GALLONS PER DAY (G.P.D.)  
GROUND WATER TABLE: 120"  
DEPTH TO IMPERVIOUS: NOT ENCOUNTERED  
SOIL CLASS: B, SOIL CATEGORY: 3, LOADING RATE: 0.70 GALS./S.F./DAY  
SEPTIC TANK REQUIREMENTS VOLUME = 2 X 7.50 G.P.D. = 15,000 GALLONS  
LEACHING AREA REQUIREMENTS:  
GRAVEL SAND TREATMENT (GST) SYSTEM WITH CATEGORY 1 TREATMENT  
(ORENCO ADVANTEX TREATMENT AX100)  
ASSIGNED EFFLUENT LOADING RATE = 3.5 GPD PER S. F.  
SQUARE FOOTAGE OF GST REQUIRED = 7500 GPD / 3.5 GPD PER S.F. = 2,143 S.F.  
LENGTH OF GST 6212 REQUIRED = 2,143 S.F. / 17.5 S.F./L.F. = 123 L.F.  
LENGTH OF GST 6212 SPECIFIED: 280 L.F.  
TOTAL GST SYSTEM CAPACITY = 280 L.F. X 17.5 S.F./L.F. X 3.5 G.P.D./S.F. = 17,150 GPD  
17,150 GPD > 7,500 GPD - CAPACITY = 228% OF ANTICIPATED DESIGN FLOW

STATE OF RHODE ISLAND  
DEPARTMENT OF ENVIRONMENTAL MANAGEMENT  
DIVISION OF PLANNING AND DEVELOPMENT

DEMOLITION AND REBUILD OF BATHHOUSES  
BURLINGAME STATE PARK AND CAMPGROUND  
CHARLESTOWN, RHODE ISLAND

MAIN CAMP BATHHOUSE - SITE PLAN

Dwg: Scale: 1" = 20'  
Contract No. x Date: FEBRUARY, 2023  
C-1.5 13

CAPUTO AND WICK LTD. - 1150 PAWTUCKET AVENUE - RUMFORD R.I. 02916

BURLINGAME STATE PARK AND CAMPGROUND



TH-5A - GROUND ELEV: 69.2 - AUGUST 18, 2021									
HORIZON	DEPTH	DIST	TOPO	MATRIX	RE-DOX	Ab. S. CONTR.	TEXTURE	STRUCTURE	CONSISTENCE
Ap	0 - 10"	C	S	2.5YR 6/3			La	2gbd	Vfr
Bw	10" - 30"	C	S	10YR 5/6			La	2gbd	Fr
Bw2	30" - 32"	C	S	2.5YR 7/3	5YR 4/4	M M P	La	2gbd	Fr
C	32" - 120"	C	S	2.5YR 7/3			La	2gbd	Fr




SOIL CLASS: B OBSERVED STANDING GROUNDWATER - NA  
ESTIMATED SEASONAL HIGH WATER TABLE - 30" (ELEV: 66.7)

OBSERVED WEEPING GROUNDWATER - NA  
PERFORMED BY: KAMAL HINCORARY

TH-5B - GROUND ELEV: 60.4 - AUGUST 18, 2021									
HORIZON	DEPTH	DIST	TOPO	MATRIX	RE-DOX	Ab. S. CONTR.	TEXTURE	STRUCTURE	CONSISTENCE
Ap	0 - 8"	C	S	2.5YR 6/3			La	2gbd	Vfr
Bw	8" - 30"	C	S	10YR 5/6			La	2gbd	Fr
C	30" - 120"	C	S	2.5YR 7/3	5YR 4/4	M M P	La	2gbd	Fr

SOIL CLASS: B OBSERVED STANDING GROUNDWATER - NA  
ESTIMATED SEASONAL HIGH WATER TABLE - 30" (ELEV: 57.9)

OBSERVED WEEPING GROUNDWATER - NA  
PERFORMED BY: KAMAL HINCORARY

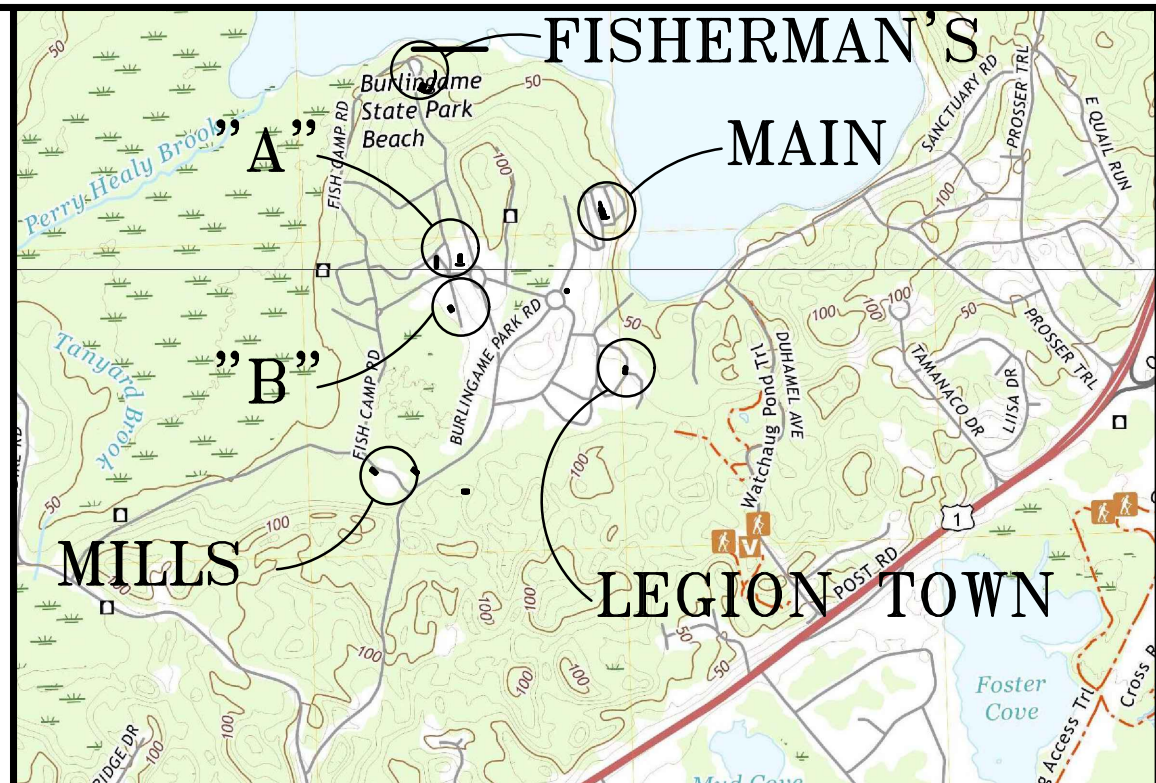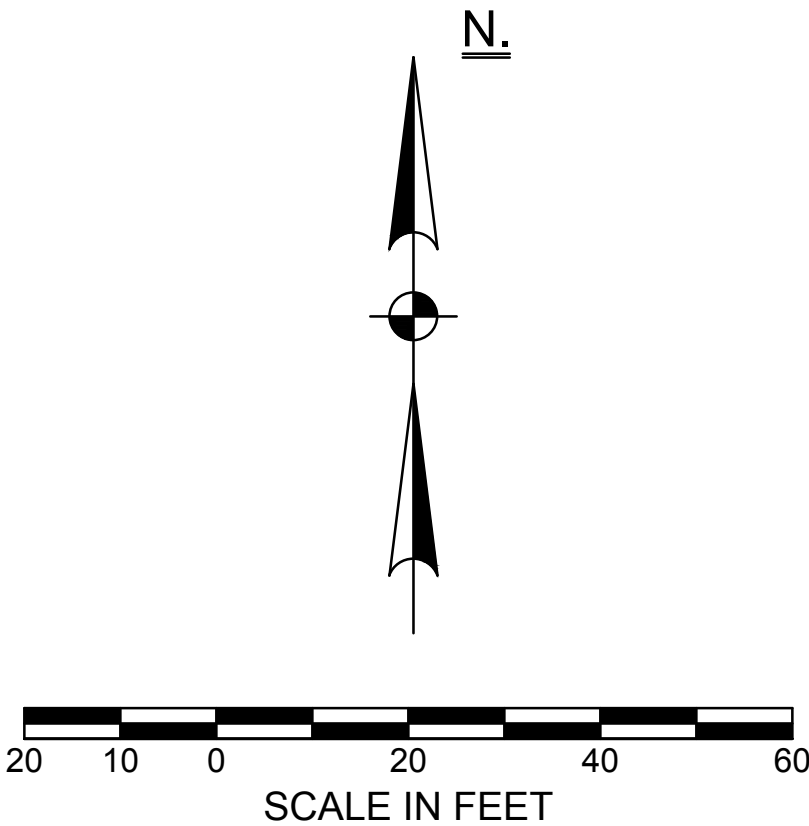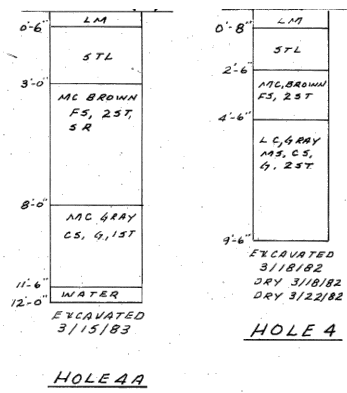

## LOCUS MAP

### NOTES:

- ALL WORK SHALL CONFORM TO THE RHODE ISLAND DEPARTMENT OF ENVIRONMENTAL MANAGEMENT, OFFICE OF WATER RESOURCES 'RULES AND REGULATIONS ESTABLISHING MINIMUM STANDARDS RELATING TO LOCATION, DESIGN, CONSTRUCTION AND MAINTENANCE OF 'ON-SITE WASTEWATER TREATMENT SYSTEMS', LATEST EDITION.
- THE CONTRACTOR SHALL SUBMIT SHOP DRAWINGS TO CAPUTO AND WICK LTD. FOR APPROVAL OF ALL PROPOSED CONSTRUCTION MATERIALS AND EQUIPMENT PRIOR TO ANY CONSTRUCTION.
- EXISTING 'ON-SITE WASTEWATER TREATMENT SYSTEM (OWTS)' PRECAST STRUCTURES ARE TO BE PUMPED OUT, RINSED WITH CLEAN WATER AND PUMPED OUT AGAIN. PUMPING MUST BE PERFORMED BY A STATE LICENSED SEPTIC HAULER AND THE CONTENTS OF THE TANK DISPOSED OF PROPERLY. AFTER PUMPING, THE EXISTING OWTS STRUCTURES MUST BE FILLED WITH FLOWABLE FILL OR REMOVED AND REPLACED WITH GRAVEL BORROW AND 4" LOAM AND SEED.
- REMOVE ALL PORTIONS OF THE EXISTING OWTS WITHIN 5' OF THE GRAVEL SAND TREATMENT SYSTEM, AND ALL FILL, A HORIZON SOIL, B HORIZON SOIL, AND SCARIFY 3" OF THE C HORIZON SOIL BELOW THE GRAVEL SAND TREATMENT SYSTEM AND THOUGHLY MIX WITH ASTM C-33 SAND (SEE NOTE 16) TO INTERFACE THE FILL WITH THE SOIL, AND REPLACE ALL REMOVED SOIL WITH ASTM C-33 SAND. A AND B SOIL HORIZON LAYERS ARE TO BE REMOVED IN THIS APPLICATION DUE TO COMPACTION CAUSED BY PREVIOUS SYSTEM INSTALLATION AND FILL BEING PLACED ABOVE.
- UNSATURABLE MATERIAL USED TO BACKFILL THE TEST HOLES SHALL BE REMOVED AND REPLACED WITH WITH ASTM C-33 SAND (SEE NOTE 16).
- ASTM C-33 SAND (SEE NOTE 16) MUST BE PLACED ON SCARIFIED, RELATIVELY DRY NATURAL SOIL. THE CONTRACTOR SHALL PROVIDE FOR DEWATERING AS REQUIRED AND ALL WORK SHALL BE PERFORMED UNDER DRY CONDITIONS.
- BUILDING SEWER PIPE TO BE 4" P. V. C. SCH. 40 UNLESS OTHERWISE NOTED.
- PLACE 6" MINIMUM COMPACTED CRUSHED STONE UNDER SEPTIC TANK, ANOXIC TANK, RECIRCULATION TANK, PUMP CHAMBER, ADVANTEK TREATMENT TANKS AND SYSTEM STRUCTURES.
- INLET AND OUTLET TEES FOR SEPTIC TANK, ANOXIC TANK, RECIRCULATION TANK AND PUMP CHAMBER ARE TO BE LOCATED DIRECTLY BELOW ACCESS COVERS.
- SEPTIC TANK, ANOXIC TANK, RECIRCULATION TANK, PUMP CHAMBER AND ADVANTEK TREATMENT TANK RISERS/COVERS TO BE AT FINISH GRADE.
- IF CONDITIONS ENCOUNTERED DURING CONSTRUCTION VARY SUBSTANTIALLY FROM THOSE SHOWN ON THIS PLAN, NOTIFY CAPUTO AND WICK, LTD. BEFORE PROCEEDING WITH CONSTRUCTION. IF IN DOUBT, ASK.
- NEW SEPTIC TANK SHALL MEET ALL OF THE REQUIREMENTS OF 250-RICR-150-10-6.27.
- INSPECTION OF THE SEPTIC TANK, ANOXIC TANK, RECIRCULATION TANK, PUMP CHAMBER AND ADVANTEK TREATMENT TANK SHALL BE PART OF THE MAINTENANCE SERVICE FOR THE OWTS AND ALL COMPONENTS SHALL BE CLEANED WHEN REQUIRED.
- IT IS RECOMMENDED THAT THE SEPTIC TANK BE INSPECTED TWICE A YEAR, AND BE CLEANED WHEN THE SOLIDS EQUAL ONE THIRD THE LIQUID DEPTH.
- MINIMUM PERIMETER INVERT ELEVATION = 70.25. NO FINISHED GRADE BELOW 70.25 FROM THE EDGE OF THE GRAVEL SAND TREATMENT SYSTEM FOR A 10 FEET MINIMUM.
- THE SAND MEDIA USED IN CONSTRUCTION SHALL MEET THE ASTM C-33 SPECIFICATIONS. SIEVE ANALYSIS FROM PROPOSED SOURCE IS REQUIRED TO BE SUBMITTED TOGETHER WITH SHOP DRAWINGS. TESTING OF SAND MATERIAL, DELIVERED TO THE SITE IS REQUIRED.
- OWTS INSTALLER MUST BE FAMILIAR WITH ADVANTEK PRODUCTS AND GRAVEL SAND TREATMENT SYSTEMS PROPOSED FOR THIS SITE. SEE ADVANTEK INSTALLATION MANUAL, GRAVEL SAND TREATMENT SYSTEM DESIGN AND INSTALLATION MANUAL, AND RIDEM GUIDELINES FOR ADDITIONAL DETAILS OF INSTALLATION.
- INSTALLATION SHALL BE IN STRICT CONFORMANCE WITH THE ORENCO ADVANTEK INSTALLATION MANUAL AND GRAVEL SAND TREATMENT SYSTEM INSTALLATION MANUAL AND ALL OTHER APPLICABLE SECTIONS OF 250-RICR-150-6. THE INSTALLATION SHALL ONLY BE PERFORMED BY A RHODE ISLAND DEM LICENSED INSTALLER WHO HAS RECEIVED TRAINING AND IS AUTHORIZED IN WRITING BY THE VENDORS TO INSTALL THE SYSTEM. AUTHORIZATION FROM THE VENDORS SHALL BE SUBMITTED TO ENGINEER PRIOR TO ANY CONSTRUCTION.
- REFER TO 250-RICR-150-10-6 AND RIDEM GUIDELINES FOR ADDITIONAL INFORMATION CONCERNING THE INSTALLATION, OPERATION AND MAINTENANCE OF THE SYSTEM. THE INSTALLER AND OWNER SHOULD REVIEW AND APPLY 250-RICR-150-10-6 AND RIDEM GUIDELINES. THE SYSTEM TO BE CONSTRUCTED BY A INSTALLER LICENSED BY RIDEM AND THOROUGHLY FAMILIAR WITH THE INSTALLATION OF ADVANTEK TREATMENT DEVICES AND GRAVEL SAND TREATMENT SYSTEMS.
- THE CONTRACTOR IS RESPONSIBLE FOR COORDINATION WITH THE DESIGN ENGINEER IN ORDER TO FACILITATE WITNESSING THE REQUIRED PHASES OF THE SYSTEM INSTALLATION AS STATED IN 250-RICR-150-4.7 OF THE 'REGULATIONS'. FAILURE OF THE CONTRACTOR TO NOTIFY THE DESIGN ENGINEER IN A TIMELY MANNER MAY REQUIRE THE CONTRACTOR TO EXCAVATE AND EXPOSE SYSTEM COMPONENTS FOR OBSERVATION.
- THE DESIGNER EXPRESSLY DISCLAIMS ANY RESPONSIBILITY FOR THE INSTALLATION AND MAINTENANCE OF THE SYSTEM. IT SHALL BE THE RESPONSIBILITY OF THE INSTALLER TO CONSTRUCT THE SYSTEM IN ACCORDANCE WITH THE ABOVE REFERENCED REGULATIONS.
- CONTRACTOR SHALL CONTACT 'DIG-SAFE' PRIOR TO CONSTRUCTION. LOCATION OF UTILITIES ON THIS PLAN ARE FROM EXISTING INFORMATION, BUT ARE ONLY TO BE CONSIDERED APPROXIMATE.
- THERE ARE NO PUBLIC WELLS, EXISTING OR PROPOSED, FOUND TO BE LOCATED WITHIN 500 FEET OF THE PROPOSED OWTS EXCEPT AS SHOWN.
- NO FRESHWATER WETLANDS OBSERVED WITHIN 200 FEET OF THE PROPOSED OWTS. THIS SITE DOES NOT LIE WITHIN A CRITICAL RESOURCE AREA.
- I CERTIFY THAT THERE ARE NO WELLS FOUND TO BE LOCATED WITHIN 200 FEET OF THE PROPOSED LEACHING AREA, OTHER THAN AS SHOWN ON THIS PLAN. I ALSO CERTIFY THAT THERE ARE NO EXISTING OR PROPOSED DRAINS, FOUNDATION DRAINS OR SUB DRAINS FOUND TO BE LOCATED WITHIN 25 FEET OF THIS PROPOSED OWTS.
- ALL PIPE JOINTS, PIPE CONNECTIONS AND ACCESS COVERS ARE TO BE WATER TIGHT.
- PRESSURE PIPE SHALL BE INSTALLED TO MAINTAIN SLOPE BACK TO TANK/PUMP CHAMBER TO DRAIN BETWEEN PUMPING CYCLES. ELIMINATE ANY HIGH OR LOW POINTS THAT MAY PREVENT DRAINING AND/OR AIR POCKETS.
- CONTRACTOR TO PAY ANY REQUIRED INSTALLATION FEES.
- CONTROL PANEL AND ALARM TO BE MOUNTED INSIDE BUILDING IN A CONSPICUOUS LOCATION, EXACT LOCATION TO BE COORDINATED WITH OWNER. ALL CONTROL PANELS AND JUNCTION BOXES SHALL BE NEMA 4X.
- THE PUMP DOSING CONTROLS WILL BE FIELD TESTED IN THE PRESENCE OF THE DESIGN ENGINEER AND ORENCO REPRESENTATIVE. ADJUSTMENT TO CONTROLS ARE THE CONTRACTORS RESPONSIBILITY. CONTRACTOR MUST MAKE WATER AVAILABLE FOR TESTING OF THE CONTROL FLOATS.
- ALL TREES AND SHRUBS SHALL BE CLEAR AND NO NEW ONES SHALL BE PLANTED WITHIN 10' OF THE GRAVEL SAND TREATMENT SYSTEM.
- THE GRAVEL SAND TREATMENT SYSTEM LOCATION SHALL BE STAKED OUT AND PROTECTED PRIOR TO ANY SITE PREPARATION ACTIVITIES.
- NO IMPERVIOUS SURFACE IS TO BE PLACED ABOVE THE GST (LEACHING) SYSTEM.
- MATERIAL AND EQUIPMENT FROM ALTERNATE MANUFACTURERS MAY BE USED IF EQUAL. APPROVAL FOR ALTERNATE MATERIAL AND/OR EQUIPMENT IS REQUIRED FROM THE OWNER AND ENGINEER. FULL SPECIFICATIONS FOR ALTERNATE EQUIPMENT MUST BE PROVIDED BY THE CONTRACTOR. IF ACCEPTABLE, THE CONTRACTOR MUST PREPARE AND SUBMIT FOR AN RIDEM OWTS CONSTRUCTION PERMIT BASED UPON THE REDESIGN.

### DESIGN DATA

DAILY SEWAGE FLOW:  
50 GPD/CAMPSITE x 150 CAMPSITES = 7500 GALLONS PER DAY (G.P.D.)  
GROUND WATER TABLE: 120"  
DEPTH TO IMPERVIOUS: NOT ENCOUNTERED  
SOIL CLASS: B, SOIL CATEGORY: 3, LOADING RATE: 0.70 GAL/S.F./DAY  
SEPTIC TANK REQUIREMENTS VOLUME = 2 X 7,500 G.P.D. = 15,000 GALLONS  
LEACHING AREA REQUIREMENTS:  
GRAVEL SAND TREATMENT (GST) SYSTEM WITH CATEGORY 1 TREATMENT  
(ORENCO ADVANTEK TREATMENT AX100)  
ASSIGNED EFFLUENT LOADING RATE = 3.5 GPD PER S. F.  
SQUARE FOOTAGE OF GST REQUIRED = 7500 GPD / 3.5 GPD PER S.F. = 2,143 S.F.  
LENGTH OF GST 6212 REQUIRED = 2,143 S.F. / 17.5 S.F./L.F. = 123 L.F.  
LENGTH OF GST 6212 SPECIFIED: 280 L.F.  
TOTAL GST SYSTEM CAPACITY = 280 L.F. X 17.5 S.F./L.F. X 3.5 G.P.D./S.F. = 17,150 GPD  
17,150 GPD > 7,500 GPD - CAPACITY = 229% OF ANTICIPATED DESIGN FLOW


### CERTIFICATION:

THIS SURVEY HAS BEEN CONDUCTED AND THE PLAN HAS BEEN PREPARED PURSUANT TO SECTION 8 OF THE RULES AND REGULATIONS ADOPTED BY THE RHODE ISLAND STATE BOARD OF REGISTRATION FOR PROFESSIONAL LAND SURVEYORS ON NOVEMBER 25, 2015, AS FOLLOWS:

TYPE OF BOUNDARY SURVEY: LIMITED CONTENT BOUNDARY SURVEY  
OTHER TYPE OF SURVEY: DATA ACCUMULATION SURVEY (LOCATIONS)  
TOPOGRAPHIC SURVEY ACCURACY: CLASS B  
T-2 (IMMEDIATE AREA AROUND BATHHOUSE AND OWTS)

THE PURPOSE OF THIS SURVEY IS TO DEPICT THE EXISTING CONDITIONS IN THE PROJECT AREA FOR CONSTRUCTION AND THE DESIGN OF A NEW ON-SITE WASTEWATER TREATMENT SYSTEM.

DAVID T. BRAY 8/10/2022  
CAPUTO AND WICK LTD., COA NO. A177 DATE

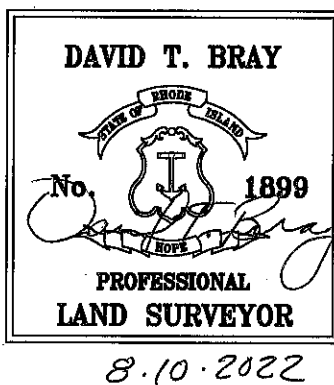

LEGEND			
100	EXISTING CONTOUR	+ 100.00	FINISHED SPOT GRADE
100	PROPOSED CONTOUR	+ 100.00	EXISTING SPOT GRADE
RI. STD.	RHODE ISLAND STANDARD		SPLIT RAIL FENCE
INV.	INVERT OF PIPE		DEEP OBSERVATION HOLE
P. V. C.	POLYVINYL CHLORIDE PIPE		OUT CROP OR SURFACE ROCK
S. D. R.	STANDARD DIMENSION RATIO		EXIST. UNDERGROUND ELECTRIC
CONC.	CONCRETE		EXIST. WATER
BIT.	BITUMINOUS		EXIST. UNDERGROUND TELEPHONE
TYP.	TYPICAL		FINISH GRADE SURFACE FLOW DIRECTION

CAPUTO AND WICK LTD. - 1150 PAWTUCKET AVENUE - RUMFORD R.I. 02916

BURLINGAME STATE PARK AND CAMPGROUND

STATE OF RHODE ISLAND  
DEPARTMENT OF ENVIRONMENTAL MANAGEMENT  
DIVISION OF PLANNING AND DEVELOPMENT

DEMOLITION AND REBUILD OF BATHHOUSES  
BURLINGAME STATE PARK AND CAMPGROUND  
CHARLESTOWN, RHODE ISLAND



MAIN CAMP BATHHOUSE - SITE PLAN

Dwg: Scale: 1" = 20'

Contract No. x Date: FEBRUARY, 2023

C-1.5  
13



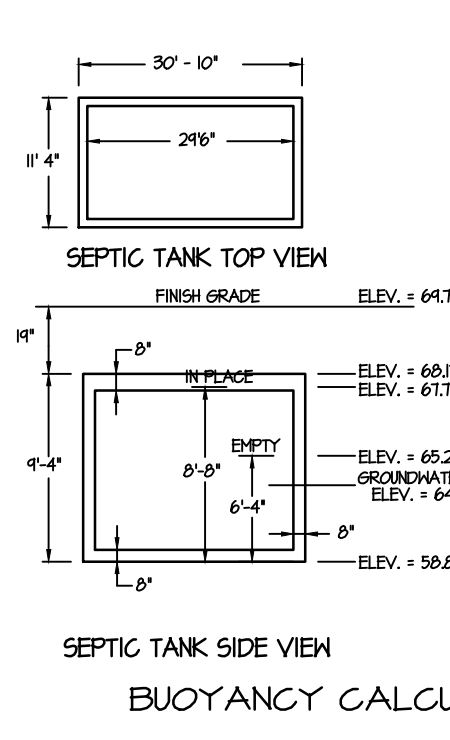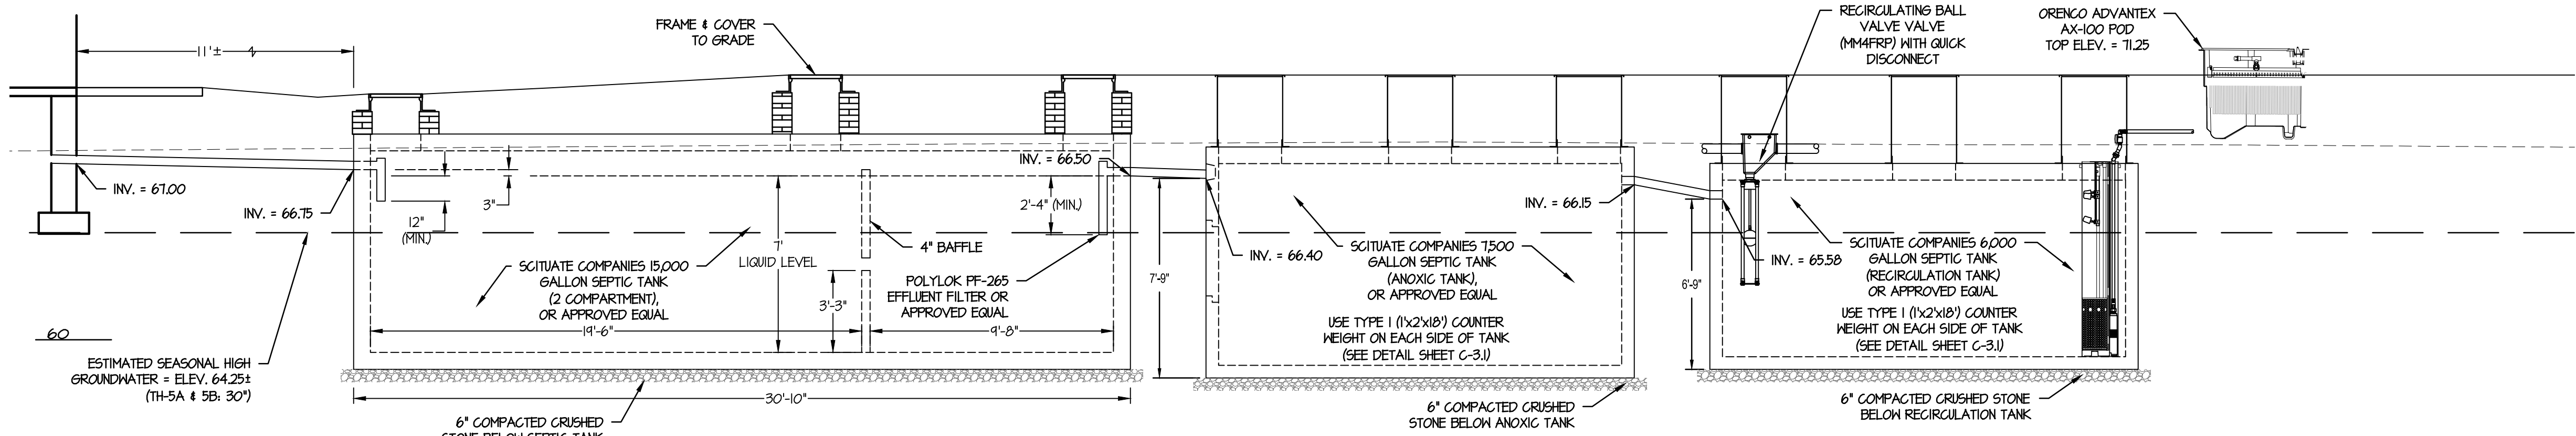

**VOLUMES**  
TOP SLAB: 11.33' WIDE X 30.83' LONG X 0.67' THICK = 232.96 C.F. (CUBIC FOOT)  
SIDES: 2 SIDES X 30.83' LONG X 8.00' HIGH X 0.67' WIDE = 106.61 C.F.  
BOTTOM: 11.33' WIDE X 30.83' LONG X 0.67' THICK = 232.96 C.F.  
BAFFLES: 12.00' LONG X 1.25' HIGH X 0.39' WIDE = 28.52 C.F.  
TOTAL VOLUME OF CONCRETE FOR TANK = 425.04 C.F.  
EARTH: 11.33' WIDE X 30.83' LONG X 1.58' THICK = 551.40 C.F.


**CONSTANTS (HEIGHTS)**  
CONCRETE: 150 POUNDS/C.F.  
EARTH: 100 POUNDS/C.F.  
WATER: 62.4 POUNDS/C.F.  
CONCRETE HEIGHT: N/A

**HEIGHT OF TANK IN PLACE**  
CONCRETE: 925.40 C.F. X 150 POUNDS/C.F. = 138,810 POUNDS (EMPTY TANK)  
EARTH: 551.40 C.F. X 100 POUNDS/C.F. = 55,140 POUNDS (EARTH COVER)  
TOTAL HEIGHT OF TANK SET IN PLACE = 193,950 POUNDS (EMPTY)


**DETERMINE BUOYANCY POINT FOR EMPTY TANK PRIOR TO BACKFILL**  
BOTTOM SLAB AREA: 11.33' WIDE X 30.83' LONG = 349.44 S.F. (SQUARE FEET)  
TANK: 349.44 S.F. X 62.4 POUNDS/C.F. = 15,600 POUNDS (EMPTY TANK)  
BP = 15,600 POUNDS / 62.4 POUNDS/C.F. = 249.44 S.F.  
BP = 6.37' ~ 6'-4" (ELEV. 64.20 ~ EMPTY TANK IS BUOYANT)

**DETERMINE BUOYANCY POINT FOR EMPTY TANK IN PLACE**  
BP = 193,950 POUNDS / 62.4 POUNDS/C.F. = 3109.44 S.F.  
BP = 8.50' ~ 8'-6" (ELEV. 67.38)


**BUOYANCY CALCULATIONS FOR 15,000 GALLON SEPTIC TANK**  
\*MUST SET IN DRY CONDITIONS\*

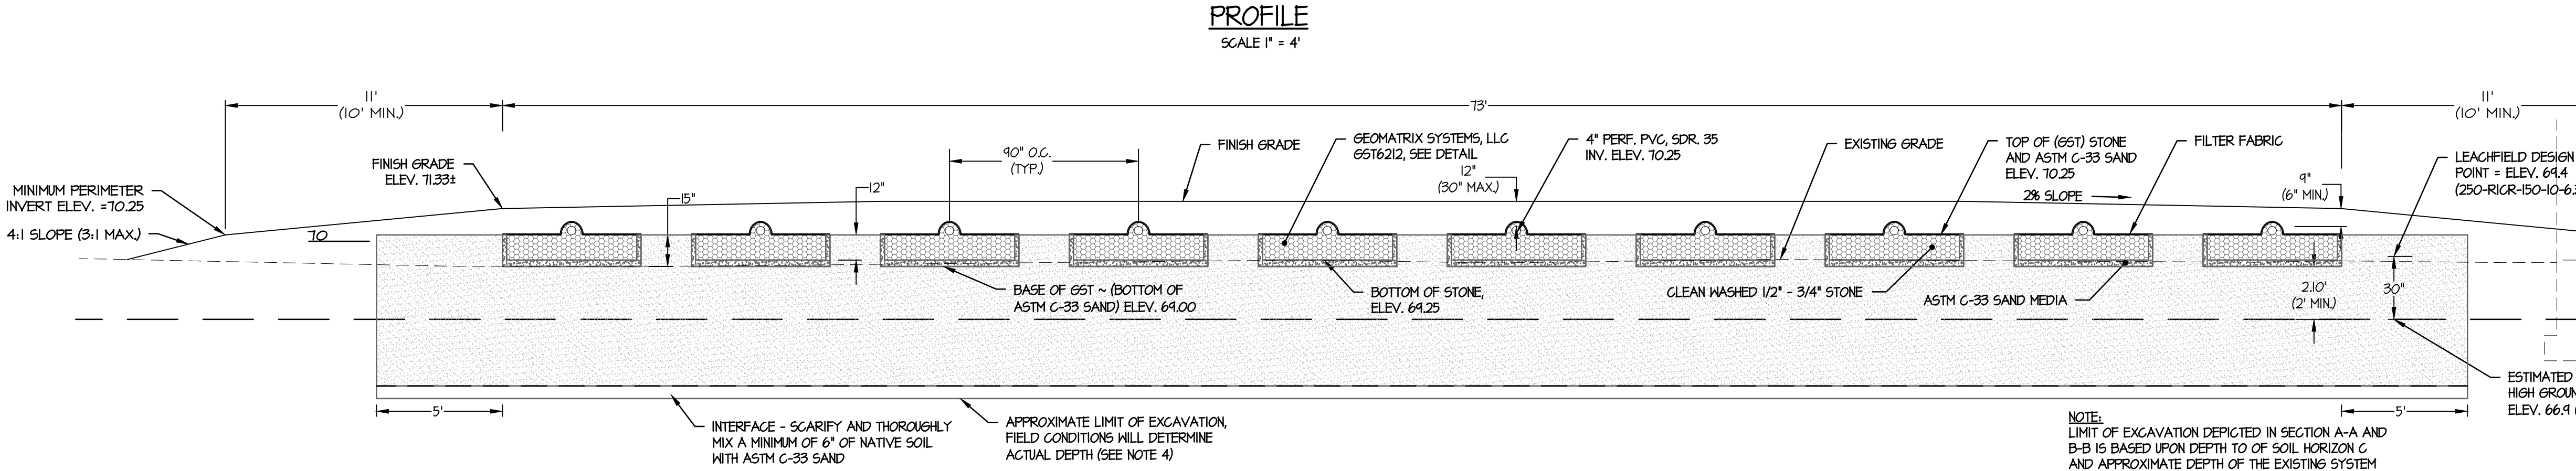

GRAVEL TREATMENT SYSTEM (GST) SECTION B-B  
SCALE 1" = 4'

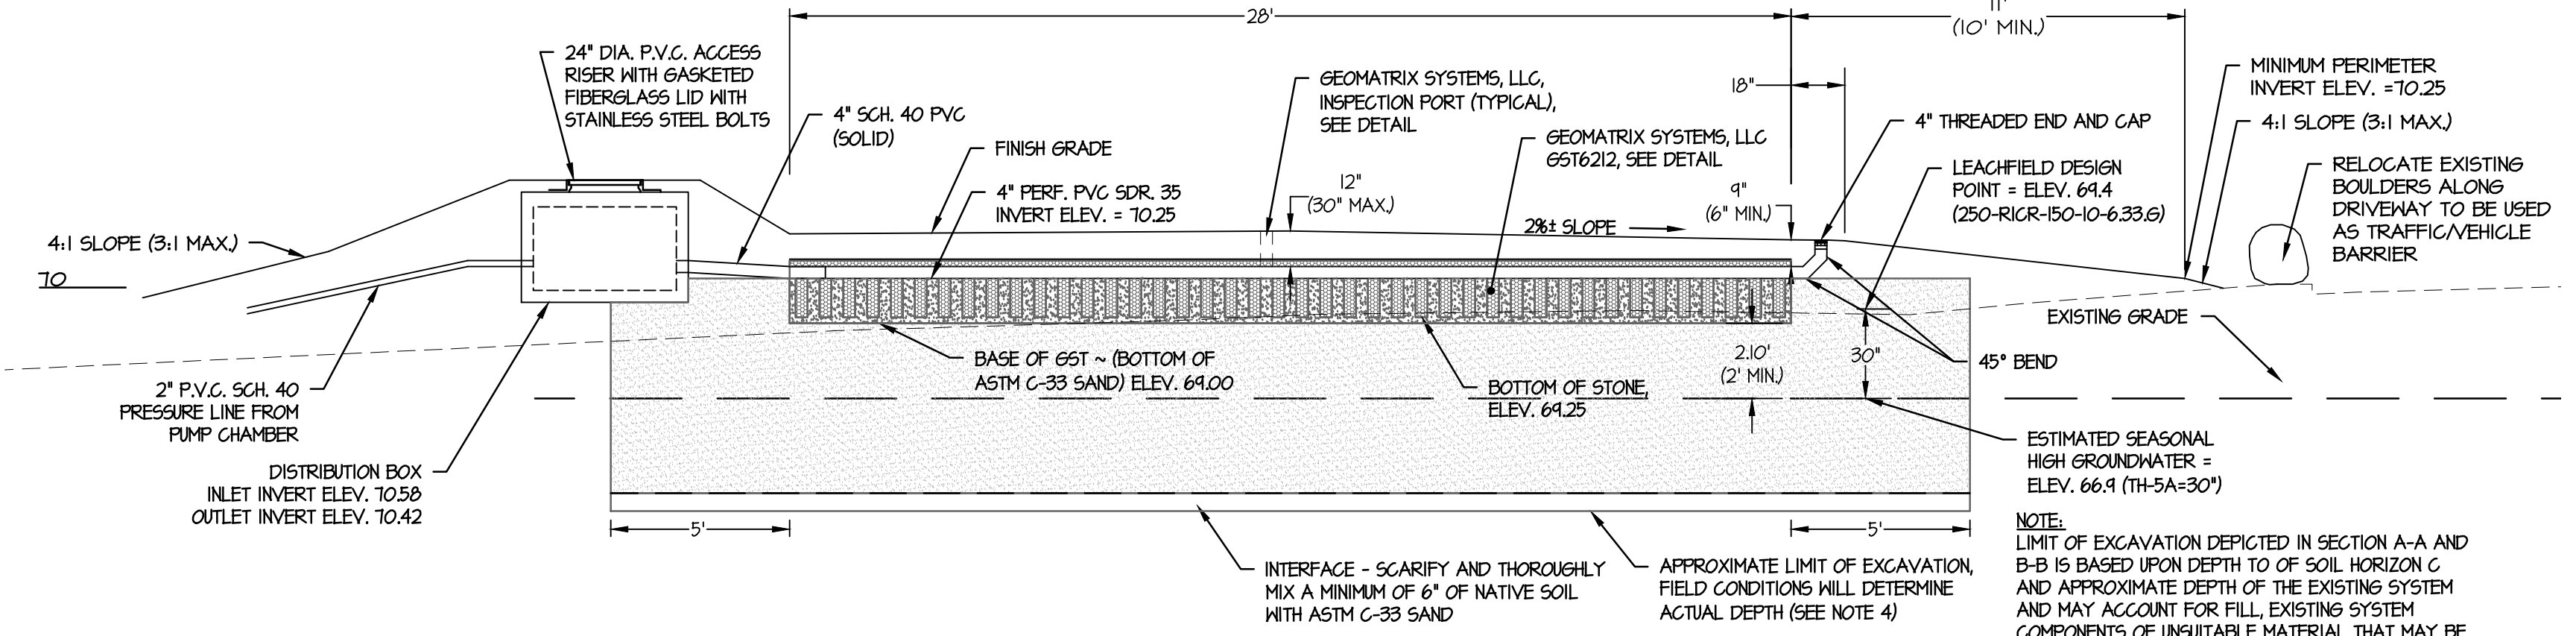


GRAVEL TREATMENT SYSTEM (GST) SECTION A-A  
SCALE 1" = 4'

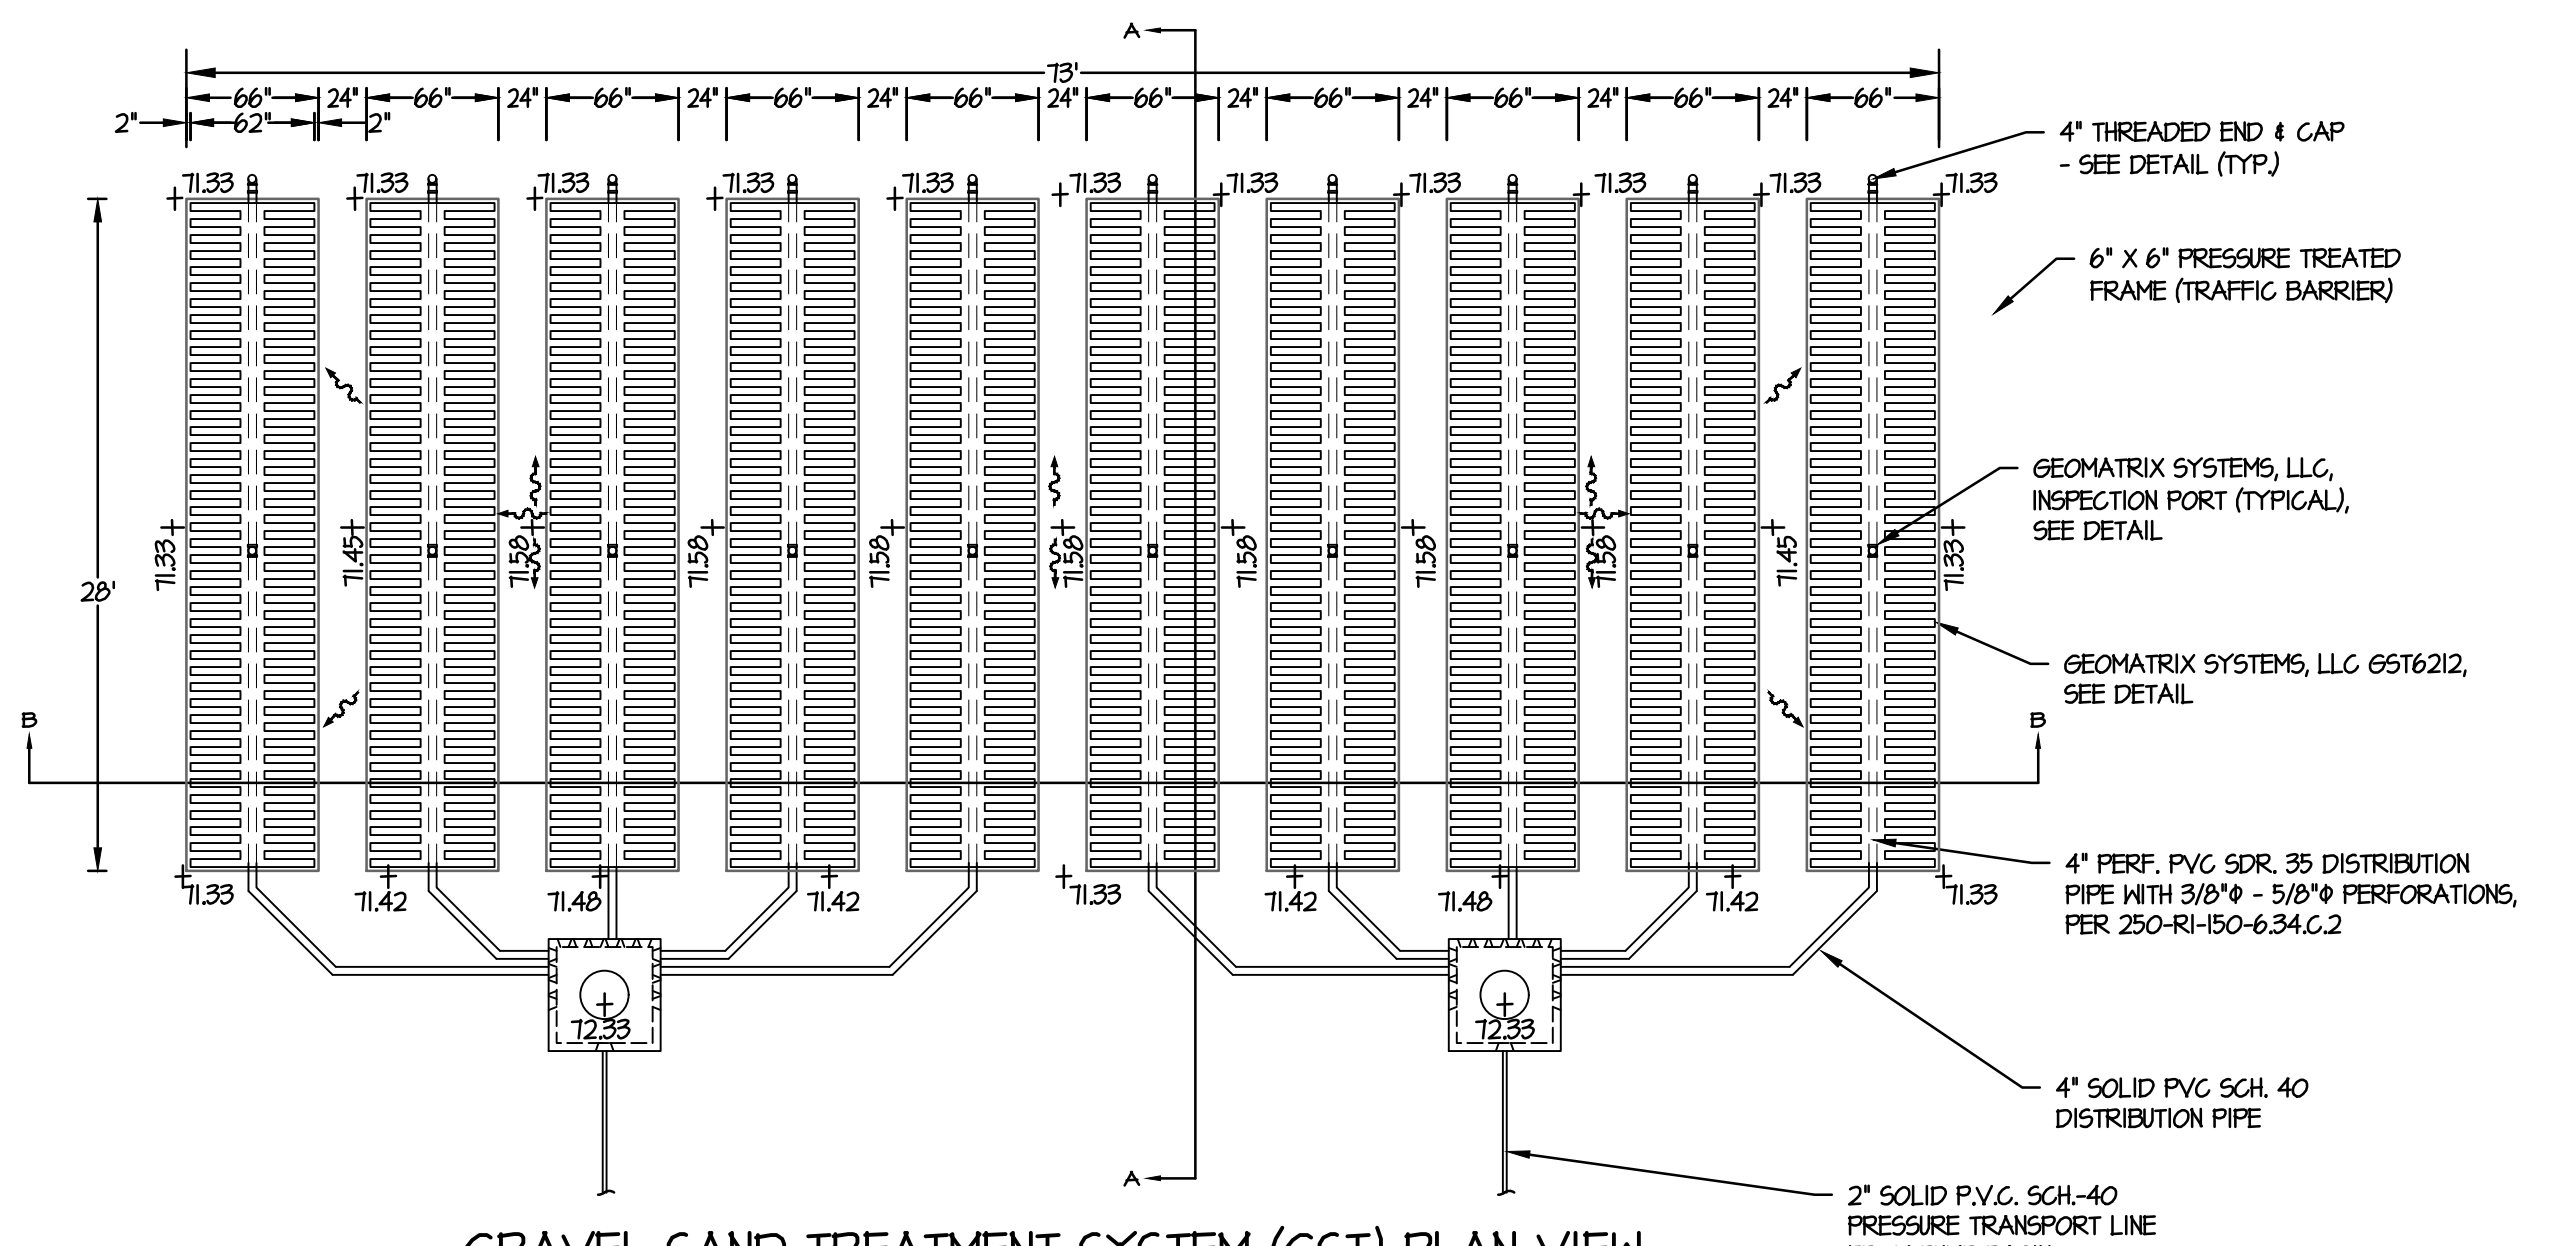

GRAVEL SAND TREATMENT SYSTEM (GST) PLAN VIEW  
SCALE 1" = 8'

ELEVATION SCHEDULE	
DESCRIPTION	ELEVATION
INVERT AT FOUNDATION - TO SEPTIC TANK	61.00
INVERT IN - SEPTIC TANK	66.15
LIQUID LEVEL IN SEPTIC TANK	66.50
INVERT IN - ANOXIC TANK	66.40
INVERT OUT - ANOXIC TANK	66.15
INVERT IN RECIRC. TANK	65.58
BOTTOM OF RECIRCULATION TANK	58.83
TOP OF ADVANTEX AX-100	71.25
INVERT OUT - RECIRCULATION TANK TO PUMP BASIN	61.50
INV. IN PUMP BASIN	61.25
TOP OF PUMP BASIN RIM	71.00
ELEVATION HIGH LEVEL ALARM/ALT. PUMP	65.83
ELEVATION PUMP ON	65.61
ELEVATION PUMP OFF	65.83
ELEVATION LOW LEVEL ALARM	63.61
INV. 2" OUT PUMP BASIN	61.00
BOTTOM OF PUMP BASIN	60.50
INVERT INTO DISTRIBUTION BOX	70.58
INVERT OUT OF DISTRIBUTION BOX	70.42
ELEV. TOP OF COVER STONE ABOVE DISTRIBUTION PIPE	70.15
INV. 4" PERF. DISTRIBUTION PIPE GST	70.25
BOTTOM OF GST STONE	64.25
BASE OF GST SAND	64.00
SEASONAL HIGH GN (30" - DESIGN POINT ELEV. = 64.4)	66.9 (TH-5A)
MAX FINISHED GRADE AT GST	73.08
MIN. FINISHED GRADE AT GST	71.08

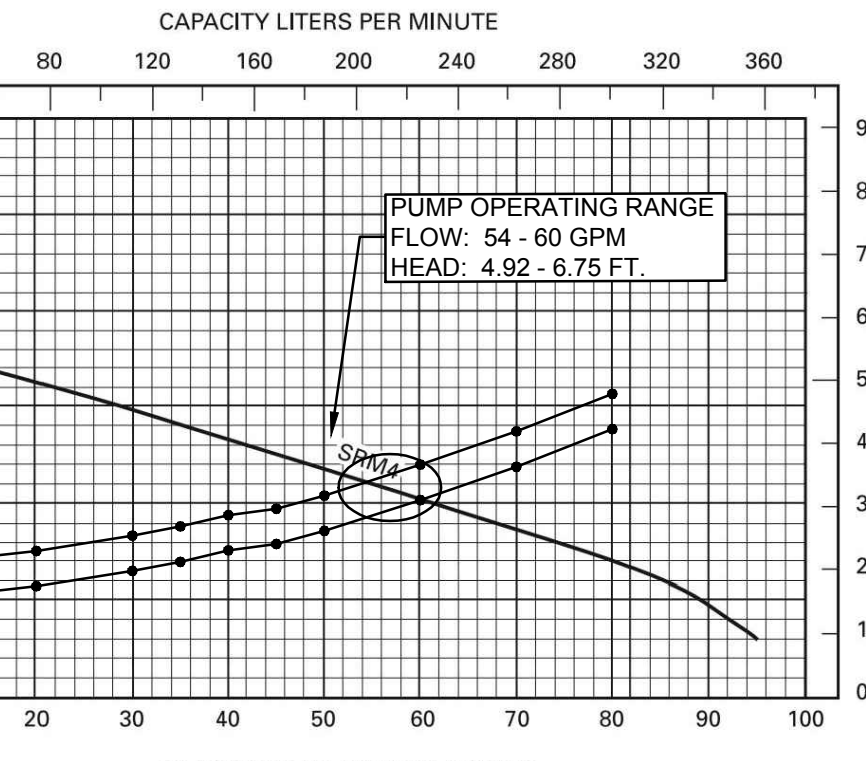

PUMP CURVE: MYERS SRM4

PUMPING AND SYSTEM SPECIFICATIONS/DATA:

**PUMP CHAMBER PUMP MODEL:**  
MYERS SRM4 SUBMERSIBLE SEWAGE PUMP  
HORSEPOWER - 0.4; SINGLE PHASE  
2" INCH DISCHARGE; 230 VOLTS; 60 HZ 6 AMPS  
LIFT OUT (2)  
MYERS SRA 200 WITH STAINLESS STEEL BRACKETS


**CONTROL PANEL MODEL**  
MYERS CE-210W ALTERNATING  
ENCLOSURE - NEMA 1 (NEMA 4X IF EXPOSED TO WEATHER)  
VOLTAGE - 230  
HIGH LEVEL ALARM - VISUAL AND AUDIO  
FLOATS MODEL  
MYERS MODEL 20VM S/E OR EQUAL

**PUMP CHAMBER DISCHARGE VOLUME PER CYCLE:**  
6' X 6' INTERIOR @ 1' - 10" = 66 CUBIC FEET X 7.48 GALLONS/CF = 494 GAL./CYCLE  
2" PIPE DRAIN BACK: APPROXIMATELY 8 GAL.  
494 GALLONS/CYCLE - 8 GALLONS = 486 GAL./CYCLE  
7500 GPM / 2 GST SYSTEMS = 3750 GPD/486 GAL./CYCLE = 7.7 ~ 8 CYCLES/DAY/GST

**FLOATS - ON, OFF, HIGH AND LOW WATER:**  
HIGH WATER - ELEVATION 65.83  
PUMP ON - ELEVATION 65.67  
PUMP OFF - ELEVATION 63.83  
LOW WATER - ELEVATION 63.67

ORENCO AX-100 TREATMENT SYSTEM DATA REVIEWED AND PROVIDED BY ATLANTIC SOLUTIONS (CONTROL PANEL - TIME DOSED)

GRAVEL SAND TREATMENT (GST) SYSTEM DATA REVIEWED BY GEOMATRIX SYSTEMS LLC.

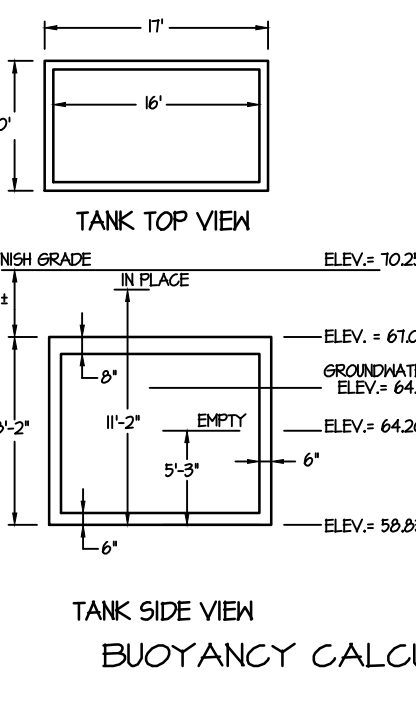

**VOLUMES**  
TOP SLAB: 10.00' WIDE X 17.00' LONG X 0.67' THICK = 118.33 C.F. (CUBIC FOOT)  
SIDES: 2 SIDES X 4.00' LONG X 1.00' HIGH X 0.50' WIDE = 68.00 C.F.  
2 SIDES X 17.00' LONG X 1.00' HIGH X 0.50' WIDE = 19.00 C.F.  
BOTTOM: 10.00' WIDE X 17.00' LONG X 0.50' THICK = 85.00 C.F.  
TOTAL VOLUME OF CONCRETE FOR TANK = 360.33 C.F.  
EARTH: 10.00' WIDE X 17.00' LONG X 3.25' THICK = 552.50 C.F.


**CONSTANTS (HEIGHTS)**  
CONCRETE: 150 POUNDS/C.F.  
EARTH: 100 POUNDS/C.F.  
WATER: 62.4 POUNDS/C.F.  
CONCRETE HEIGHT: 6.30712 POUNDS (TYPE 1 - SEE SCHEDULE SHEET C-3.1)

**HEIGHT OF TANK AND EARTH COVER**  
CONCRETE: 360.33 C.F. X 150 POUNDS/C.F. = 54,050 POUNDS (EMPTY TANK)  
EARTH: 552.50 C.F. X 100 POUNDS/C.F. = 55,250 POUNDS (EARTH COVER)  
TOTAL HEIGHT OF TANK SET IN PLACE = 109,300 POUNDS (EMPTY)

**DETERMINE BUOYANCY POINT FOR EMPTY TANK PRIOR TO BACKFILL**  
BOTTOM SLAB AREA: 10.00' WIDE X 17.00' LONG = 170.00 S.F. (SQUARE FEET)  
TANK: 170.00 S.F. X 62.4 POUNDS/C.F. = 10,608 POUNDS (EMPTY TANK)  
BP = 10,608 POUNDS / 62.4 POUNDS/C.F. = 170.00 S.F.  
BP = 5.75' ~ 5'-9" (ELEV. 63.40 ~ EMPTY TANK IS BUOYANT)

**DETERMINE BUOYANCY POINT FOR EMPTY TANK IN PLACE**  
BP = 109,300 POUNDS / 62.4 POUNDS/C.F. = 1750.00 S.F.  
BP = 11.8' ~ 11'-9" (ELEV. 70.25)

**BUOYANCY CALCULATIONS FOR 6,000 RECIRCULATION TANK**  
\*MUST SET IN DRY CONDITIONS\*

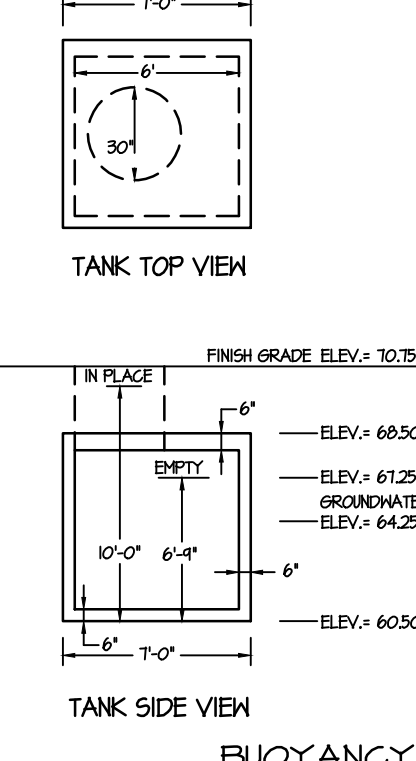

**AREAS**  
TOP: 17.0' X 17.0' = 44.5 S.F. (17 X 125' = 4.81 S.F.) = 44.04 S.F. (SQUARE FEET)

**VOLUMES**  
TOP SLAB: 44.04 S.F. X 0.50' THICK = 22.02 C.F. (CUBIC FOOT)  
SIDES: 2 SIDES X 17.0' LONG X 1.0' HIGH X 0.50' THICK = 44.00 C.F.  
2 SIDES X 6.0' LONG X 1.0' HIGH X 0.50' THICK = 42.00 C.F.  
BOTTOM: 17.00 WIDE X 17.00' LONG X 0.50' THICK = 24.50 C.F.  
TOTAL VOLUME OF CONCRETE FOR TANK = 131.55 C.F.  
EARTH: 44.04 S.F. X 2.25' THICK = 49.20 C.F.


**CONSTANTS (HEIGHTS)**  
CONCRETE: 150 POUNDS/C.F.  
EARTH: 100 POUNDS/C.F.  
WATER: 62.4 POUNDS/C.F.  
CONCRETE HEIGHT: N/A

**HEIGHT OF TANK AND EARTH COVER**  
CONCRETE: 131.55 C.F. X 150 POUNDS/C.F. = 20,633 POUNDS (EMPTY TANK)  
EARTH: 49.20 C.F. X 100 POUNDS/C.F. = 4,920 POUNDS (EARTH COVER)  
TOTAL HEIGHT OF TANK SET IN PLACE = 25,553 POUNDS (EMPTY)

**DETERMINE BUOYANCY POINT FOR EMPTY TANK PRIOR TO BACKFILL**  
BOTTOM SLAB AREA: 17.00' WIDE X 17.00' LONG = 28.75 S.F.  
CHAMBER: 44.04 S.F. X 62.4 POUNDS/C.F. = 20,633 POUNDS (EMPTY TANK)  
BP = 20,633 POUNDS / 62.4 POUNDS/C.F. = 330.82 S.F.  
BP = 6.75' ~ 6'-9" (ELEV. 67.25)

**DETERMINE BUOYANCY POINT FOR EMPTY TANK IN PLACE**  
BP = 25,553 POUNDS / 62.4 POUNDS/C.F. = 409.44 S.F.  
BP = 9.48' ~ 9'-6" (ELEV. 70.48)

**BUOYANCY CALCULATIONS FOR PUMP CHAMBER**  
\*MUST SET IN DRY CONDITIONS\*




STATE OF RHODE ISLAND  
DEPARTMENT OF ENVIRONMENTAL MANAGEMENT  
DIVISION OF PLANNING AND DEVELOPMENT

DEMOLITION AND REBUILD OF BATHHOUSES  
BURLINGAME STATE PARK AND CAMPGROUND  
CHARLESTOWN, RHODE ISLAND


MAIN CAMP BATHHOUSE - OWTS DETAILS

Dwg: C-2.5  
Contract No. x  
Scale: 1" = 20'  
Date: FEBRUARY, 2023  
19





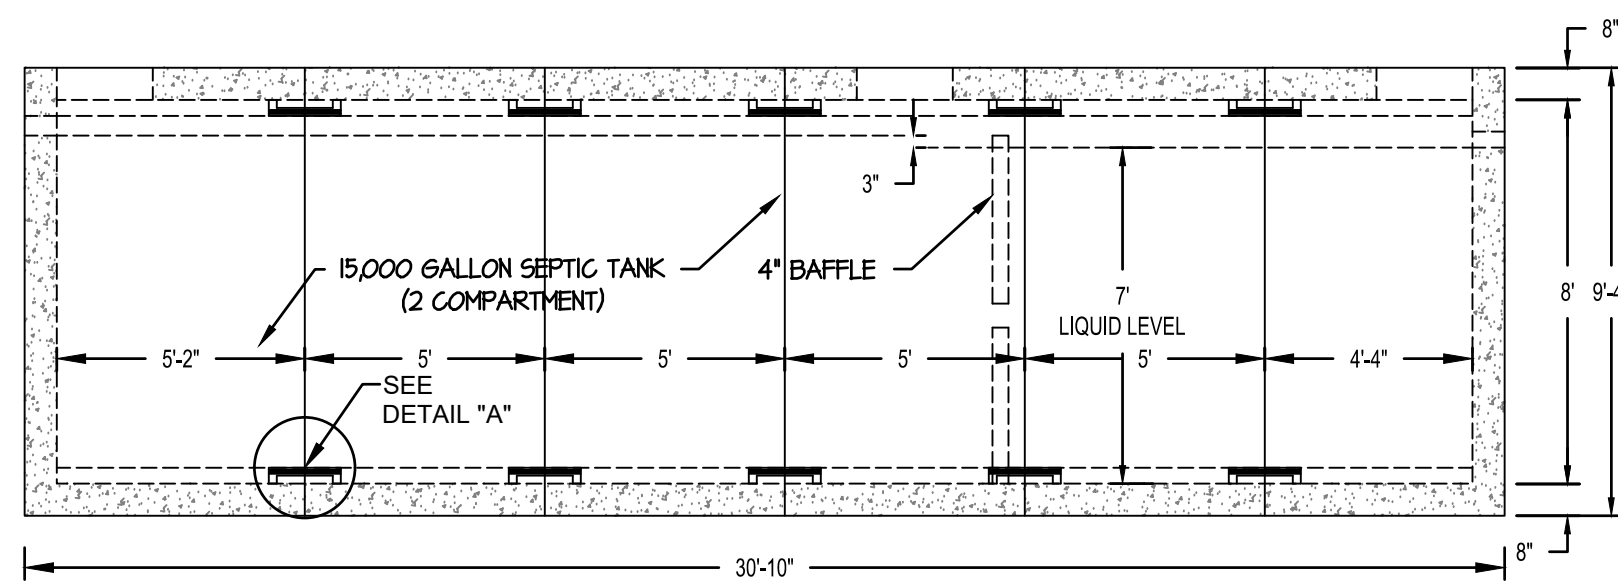


**15,000 GALLON TWO COMPARTMENT SEPTIC TANK**

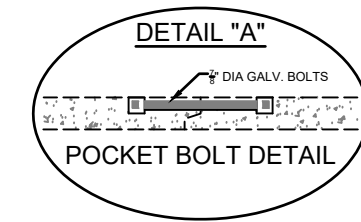


- DESIGN NOTES:**
1. CONCRETE 5,000 PSI. @ 28 DAYS
  2. REINFORCING ASTM A-615 GRADE 60 #5 REBAR 12" O.C.B.W. OR EQUAL
  3. STRUCTURE DESIGNED FOR H-20 LOADING WITH 18" TO 5' OF COVER
  4. CONST. JOINT TO HAVE MIN. 1" BUTYL SEALANT
  5. EXTERIOR BITUMINOUS COATING AS REQUIRED.

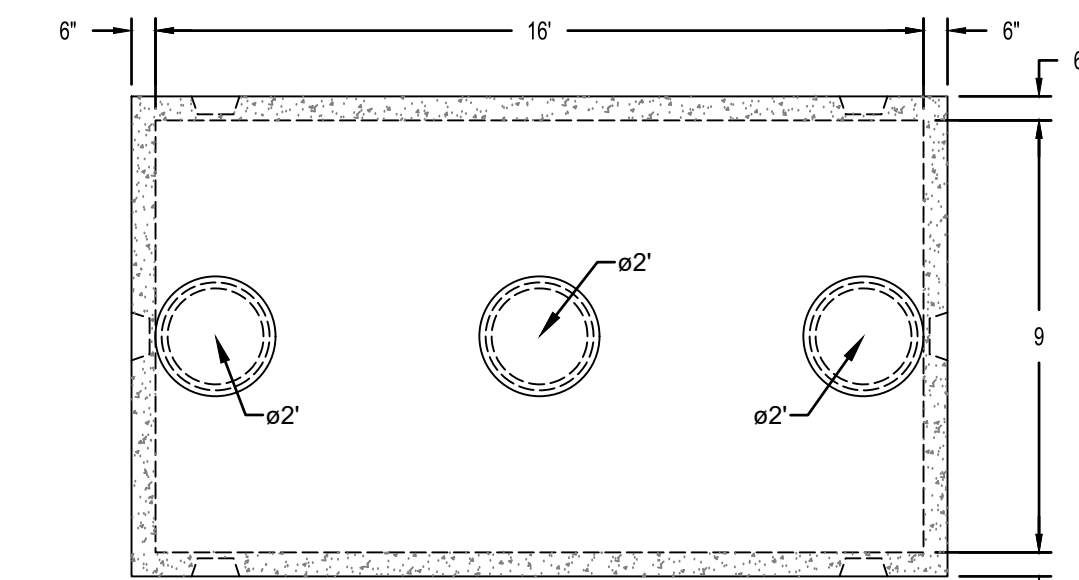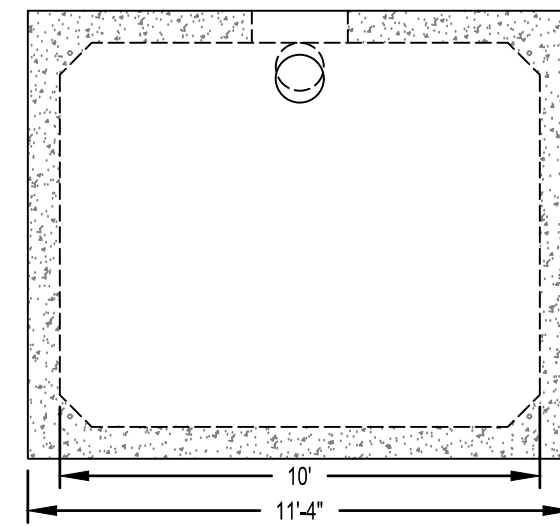


- DESIGN NOTES:**
1. CONCRETE 5,000 PSI. @ 28 DAYS
  2. REINFORCING ASTM A-615 GRADE 60 #5 REBAR  
12" O.C.B.W. OR EQUAL
  3. STRUCTURE DESIGNED FOR H-20 LOADING WITH  
18" TO 5' OF COVER
  4. CONST. JOINT TO HAVE MIN. 1" BUTYL SEALANT
  5. EXTERIOR BITUMINOUS COATING AS REQUIRED

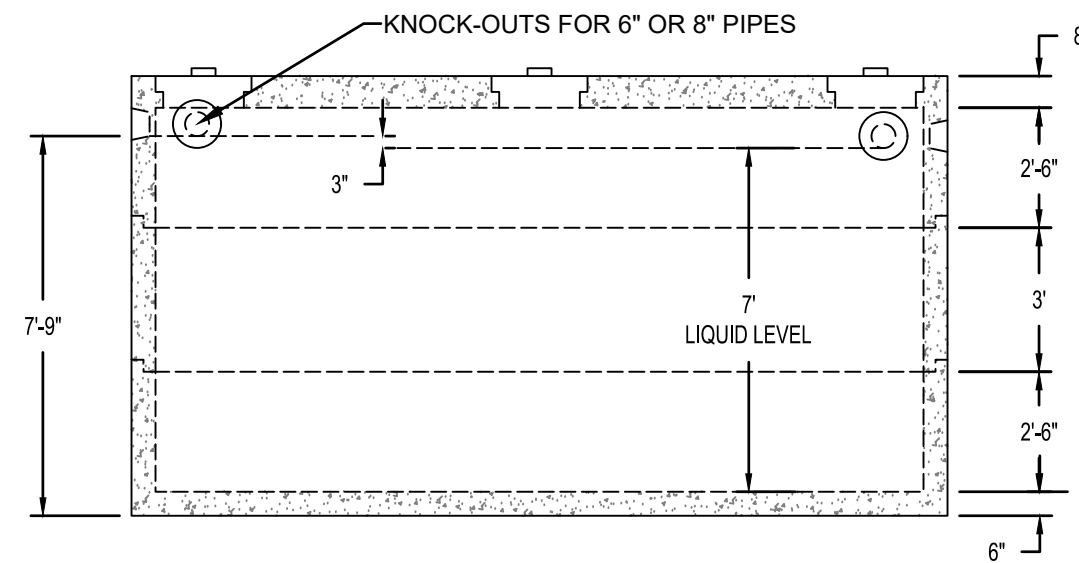

7, 500 GALLON ANOXIC TANK

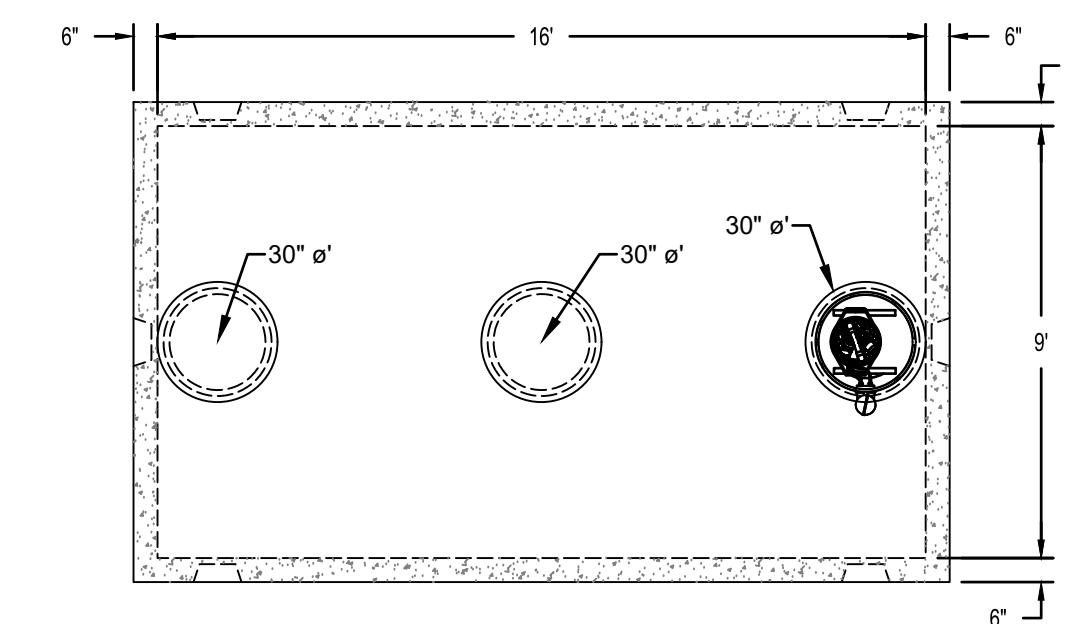


- DESIGN NOTES:**
1. CONCRETE 5,000 PSI. @ 28 DAYS
  2. REINFORCING ASTM A-615 GRADE #6 5 REBAR  
12" O.C.B.W. OR EQUAL
  3. STRUCTURE DESIGNED FOR H-20 LOADING WITH  
18" TO 5' OF COVER
  4. CONST. JOINT TO HAVE MIN. 1" BUTYL SEALANT
  5. EXTERIOR BITUMINOUS COATING AS REQUIRED.

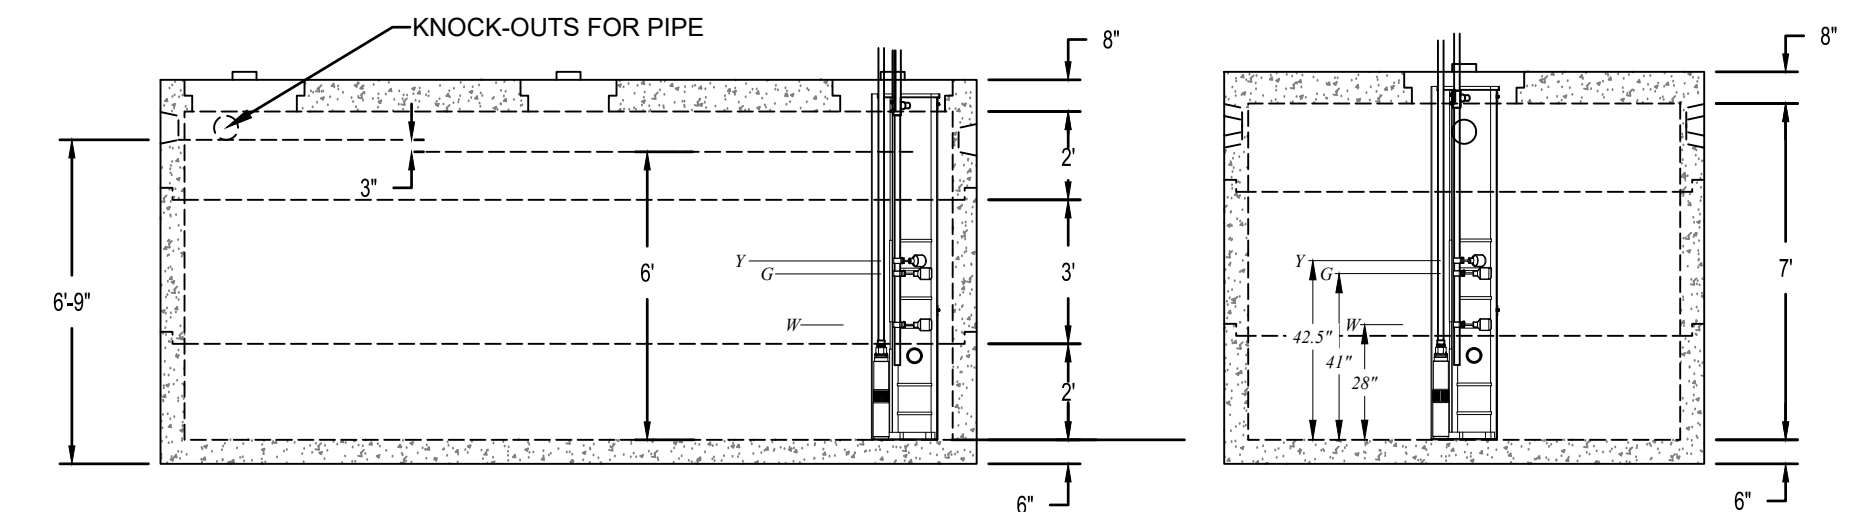

6,000 GALLON RECIRCULATION TANK  
SCALE 1" = 4'


PUMPING NOTES:

1. EQUIPMENT FROM OTHER MANUFACTURERS MAY BE USED IF EQUAL APPROVAL FOR ALTERNATE EQUIPMENT REQUIRED FROM ENGINEER PRIOR TO CONSTRUCTION. FULL SPECIFICATIONS FOR ALTERNATE EQUIPMENT MUST BE SUBMITTED BY CONTRACTOR.
2. CONTROL PANEL AND ALARM TO BE MOUNTED IN A CONSPICUOUS LOCATION. JUNCTION BOX IN PUMP CHAMBER TO HAVE SHUT-OFF SWITCH.
3. EQUIPMENT TO BE SEPARATELY IDENTIFIED BY CONTRACTOR AND IDENTIFIED.
4. THE PUMP CHAMBER DOWNSIDE CONTROLS SHALL BE FIELD TESTED IN THE PRESENCE OF THE DESIGN ENGINEER. ADJUSTMENT TO CONTROLS ARE THE CONTRACTOR'S RESPONSIBILITY. CONTRACTOR TO PROVIDE MAKE WATER AVAILABLE FOR TESTING OF THE CONTROL FLOATS.
5. ELECTRICAL CONNECTIONS MAY BE INSTALLED OUTSIDE PUMP CHAMBER IN SEPARATE HAND HOLES, ACCESS FRAME AND COVER TO GRADE MEETING 10-44-LOADING REQUIREMENTS.

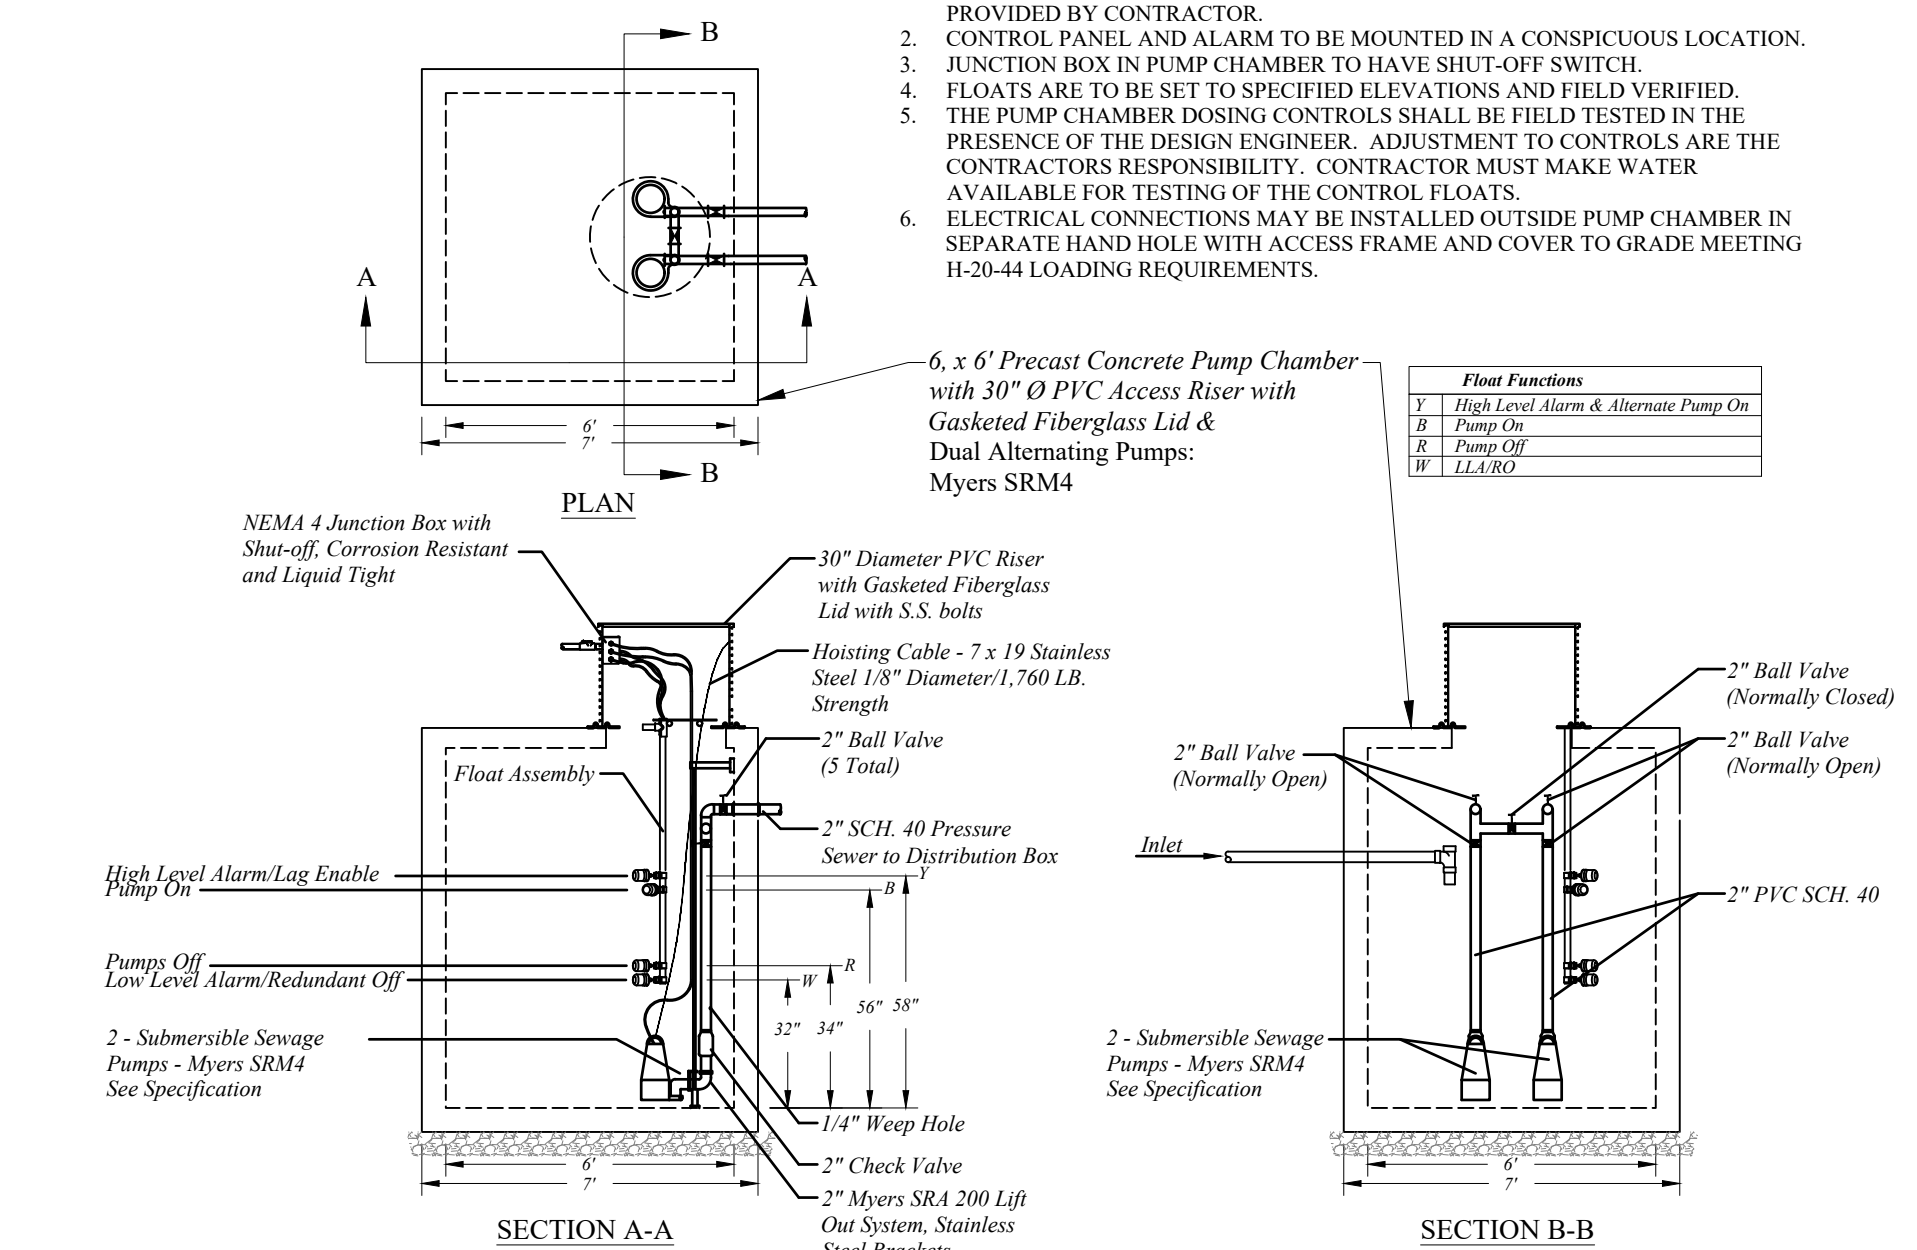


### PUMP CHAMBER DETAIL

SCALE 1" = 4'

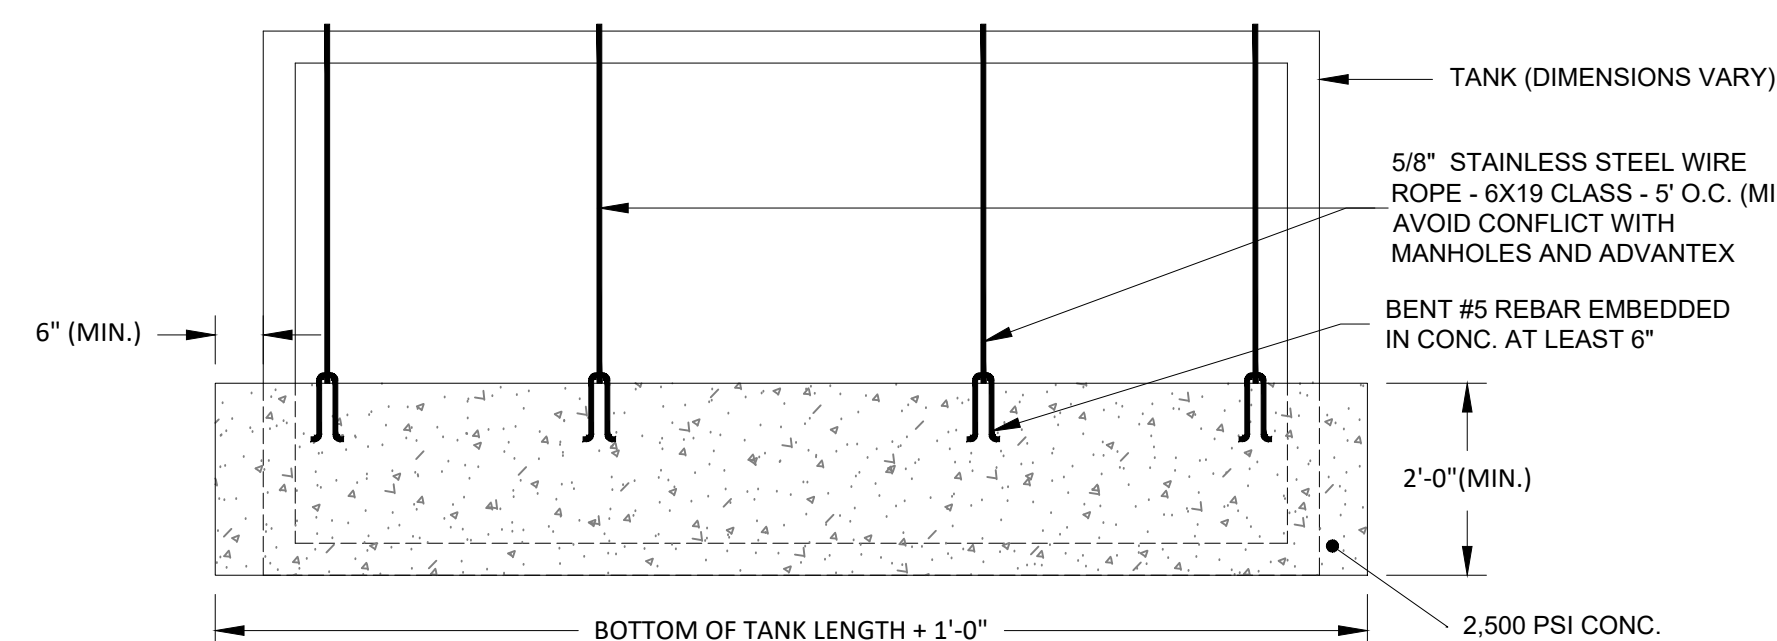

COUNTER WEIGHT: TANK ANTI-FLOATATION SECTIONS

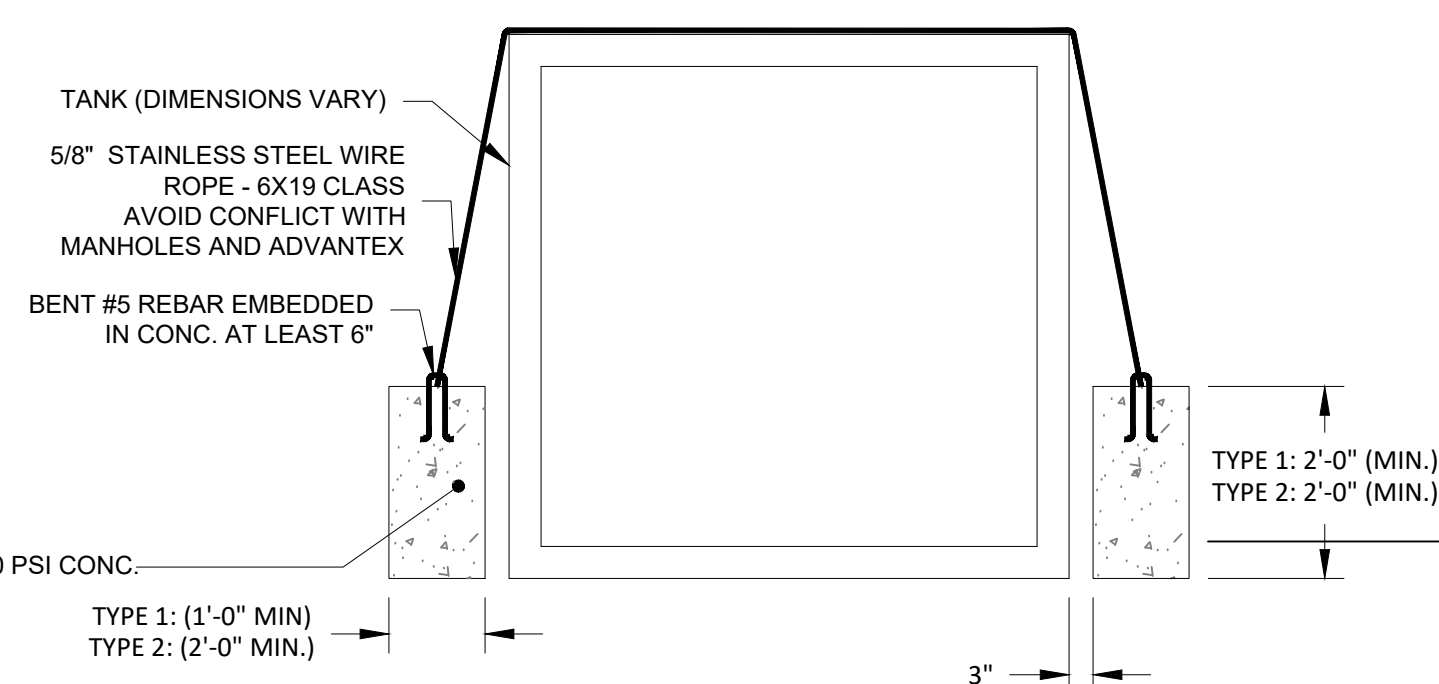

## ANTI-FLOATATION AREA

15,000 GALLON TANK (TYPE 1)	2 SIDES	3+3.83' LONG	X 1.00' WIDE	= 65.66 \$
15,000 GALLON TANK (TYPE 1)	2 SIDES	3+3.83' LONG	X 1.00' WIDE	= 63.66 \$
15,000 GALLON TANK (TYPE 2)	2 SIDES	3+3.83' LONG	X 2.00' WIDE	= 142.32 \$
8,000 GALLON TANK (TYPE 1)	2 SIDES	16.00' LONG	X 1.00' WIDE	= 38.5 \$
8,000 GALLON TANK (TYPE 2)	2 SIDES	16.00' LONG	X 2.00' WIDE	= 76.5 \$
7,500 GALLON TANK (TYPE 1)	2 SIDES	18.00' LONG	X 1.00' WIDE	= 36.5 \$
7,500 GALLON TANK (TYPE 2)	2 SIDES	18.00' LONG	X 2.00' WIDE	= 72.5 \$
6,000 GALLON TANK (TYPE 1)	2 SIDES	18.00' LONG	X 1.00' WIDE	= 36.5 \$
6,000 GALLON TANK (TYPE 2)	2 SIDES	18.00' LONG	X 2.00' WIDE	= 72.5 \$
PUMP CHAMBER (TYPE 1)	1 SIDE	8.00' LONG	X 1.00' WIDE	= 16.6 \$
PUMP CHAMBER (TYPE 2)	2 SIDES	8.00' LONG	X 2.00' WIDE	= 33.6 \$

### ANTI-FLOATATION VOLUMES


16,000 GALLON TANK (TYPE 1)	55.66 G.F. X 2.00' HIGH	= 131.32 G.F.
16,000 GALLON TANK (TYPE 1)	63.68 G.F. X 2.00' HIGH	= 127.36 G.F.
16,000 GALLON TANK (TYPE 2)	127.32 G.F. X 2.00' HIGH	= 254.64 G.F.
8,000 GALLON TANK (TYPE 1)	38.6 F. X 2.00' HIGH	= 76.3 F.
8,000 GALLON TANK (TYPE 1)	76.6 F. X 2.00' HIGH	= 152.0 F.
7,500 GALLON TANK (TYPE 1)	35.5 F. X 2.00' HIGH	= 72.0 F.
7,500 GALLON TANK (TYPE 1)	72.6 F. X 2.00' HIGH	= 144.0 F.
6,000 GALLON TANK (TYPE 1)	35.5 F. X 2.00' HIGH	= 72.0 F.
6,000 GALLON TANK (TYPE 1)	72.6 F. X 2.00' HIGH	= 144.0 F.
PUMP CHAMBER (TYPE 1)	16.5 F. X 2.00' HIGH	= 32.0 F.
PUMP CHAMBER (TYPE 2)	32.5 F. X 2.00' HIGH	= 64.0 F.

## CONSTANTS (WEIGHTS)

CONCRETE:	150 POUNDS/C.F.
WATER:	62.4 POUNDS/C.F.
SUBMERGED CONCRETE:	87.6 POUNDS/C.F.

## WEIGHT OF ANTI-FLOATATION IN PLACE

16,000 GALLON TANK (TYPE 1)	91.32 G.F. X 87.6 POUNDS/G.F.	11,653.6 POUNDS
16,000 GALLON TANK (TYPE 2)	91.32 G.F. X 87.6 POUNDS/G.F.	11,653.6 POUNDS
16,000 GALLON TANK (TYPE 3)	127.32 G.F. X 87.6 POUNDS/G.F.	11,163.2 POUNDS
16,000 GALLON TANK (TYPE 6)	254.64 G.F. X 87.6 POUNDS/G.F.	22,366.5 POUNDS
6,000 GALLON TANK (TYPE 1)	75.6 G.F. X 87.6 POUNDS/G.F.	6,655.6 POUNDS
6,000 GALLON TANK (TYPE 2)	152.0 G.F. X 87.6 POUNDS/G.F.	13,312.2 POUNDS
7,500 GALLON TANK (TYPE 1)	72.2 C.F. X 87.6 POUNDS/C.F.	6,307.2 POUNDS
7,500 GALLON TANK (TYPE 2)	144.0 C.F. X 87.6 POUNDS/C.F.	12,614.4 POUNDS
6,000 GALLON TANK (TYPE 1)	72.2 C.F. X 87.6 POUNDS/C.F.	6,307.2 POUNDS
6,000 GALLON TANK (TYPE 2)	144.0 C.F. X 87.6 POUNDS/C.F.	12,614.4 POUNDS
PUMP CHAMBER (TYPE 1)	32.0 C.F. X 87.6 POUNDS/C.F.	2,803.2 POUNDS
PUMP CHAMBER (TYPE 2)	64.0 C.F. X 87.6 POUNDS/C.F.	5,606.4 POUNDS

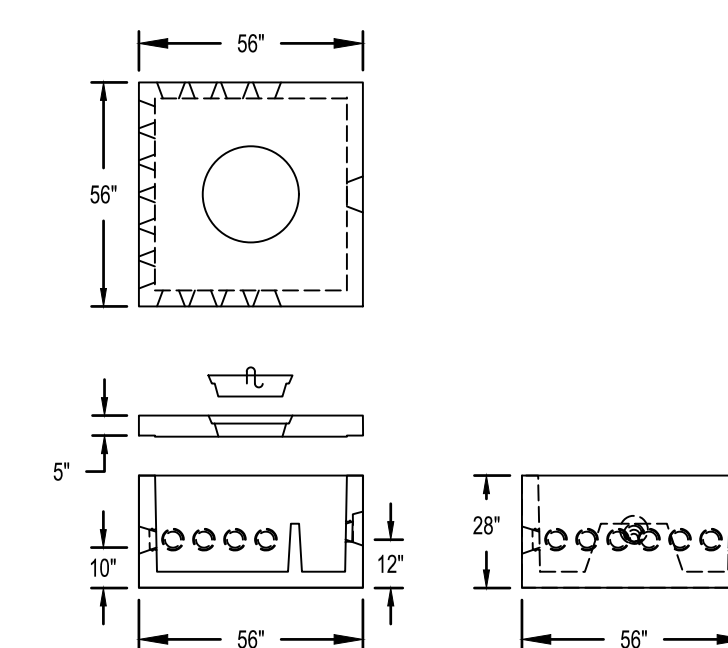

DISTRIBUTION BOX WITH 14 OUTLETS  
SCALE 1" = 4'




General Notes

The treatment dosing conveyance system shown in this drawing is acceptable for the following conditions: less than 30 feet of static head and less than 100 feet of 2" dia. Sch. 40 PVC transport pipe.

Where applicable, flow meters are recommended for flow monitoring and dosing adjustment.


For detailed drawings and information, contact Oresco Systems, Inc.

For assistance on maximizing nitrogen reduction, contact Oresco Systems, Inc.

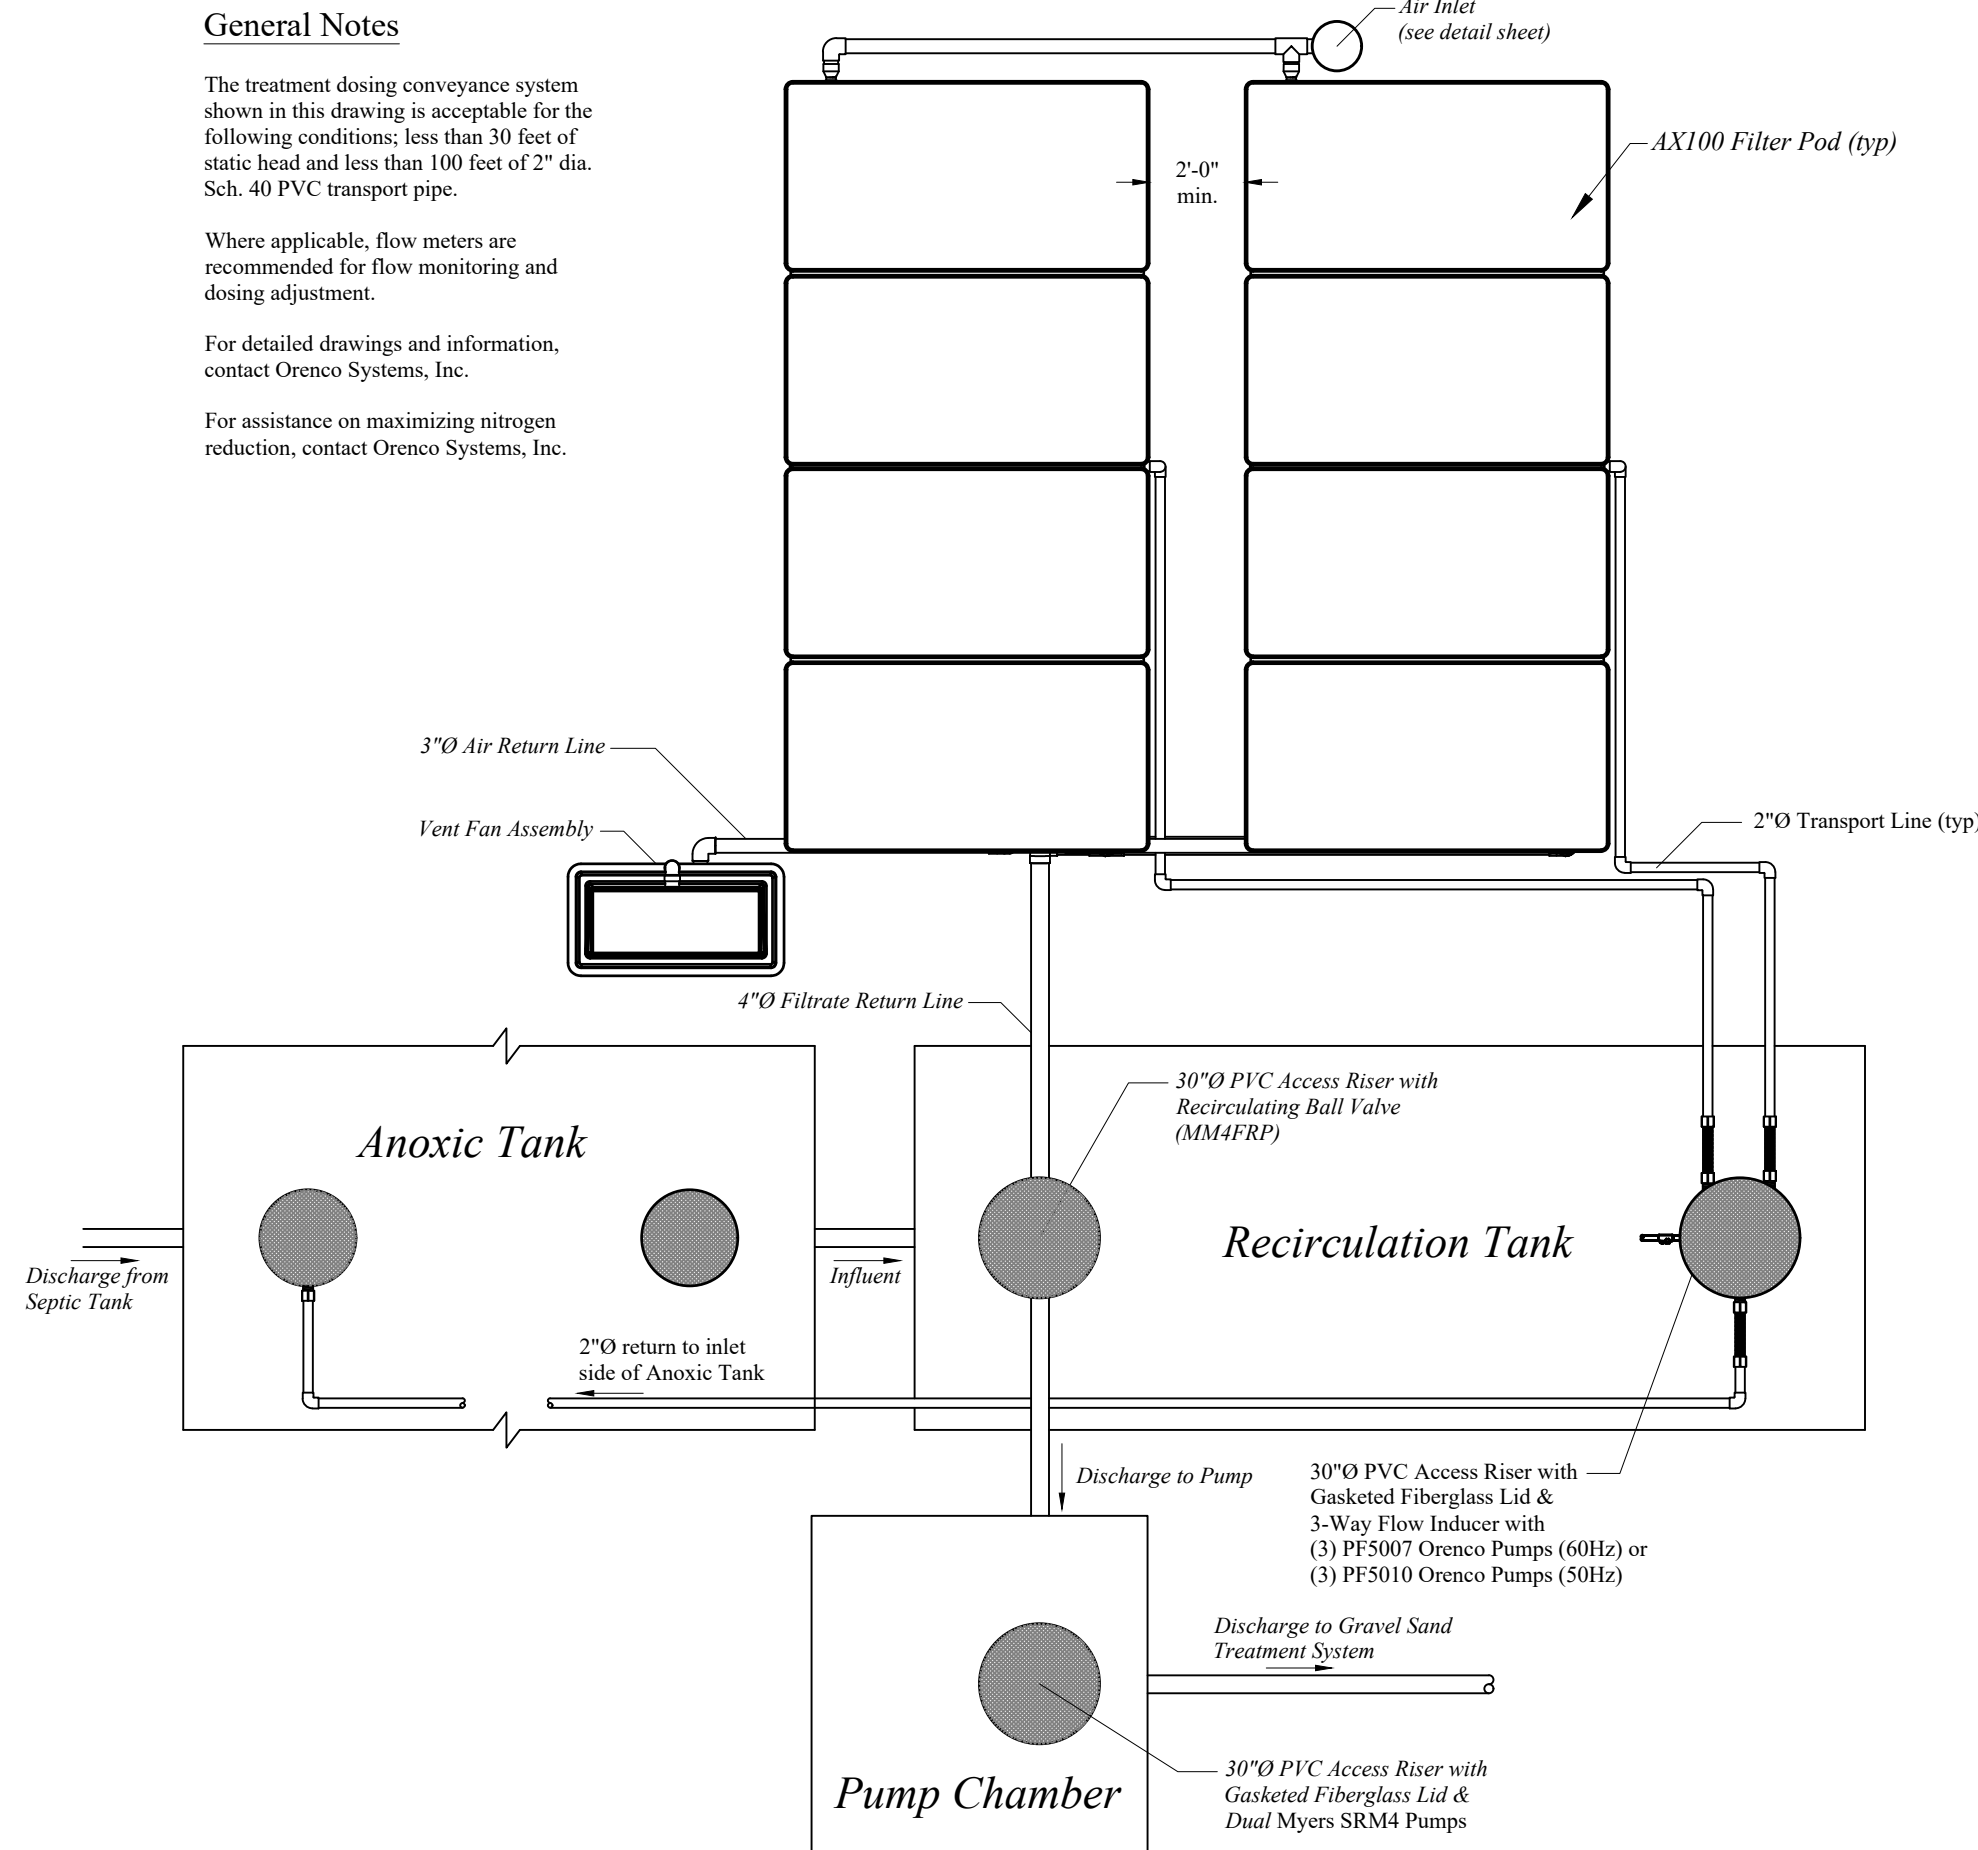





AdvanTex AX100 SYSTEM - MANIFOLDED VENT INLET  
2 POD CONFIGURATION

SCALE 1" = 4'

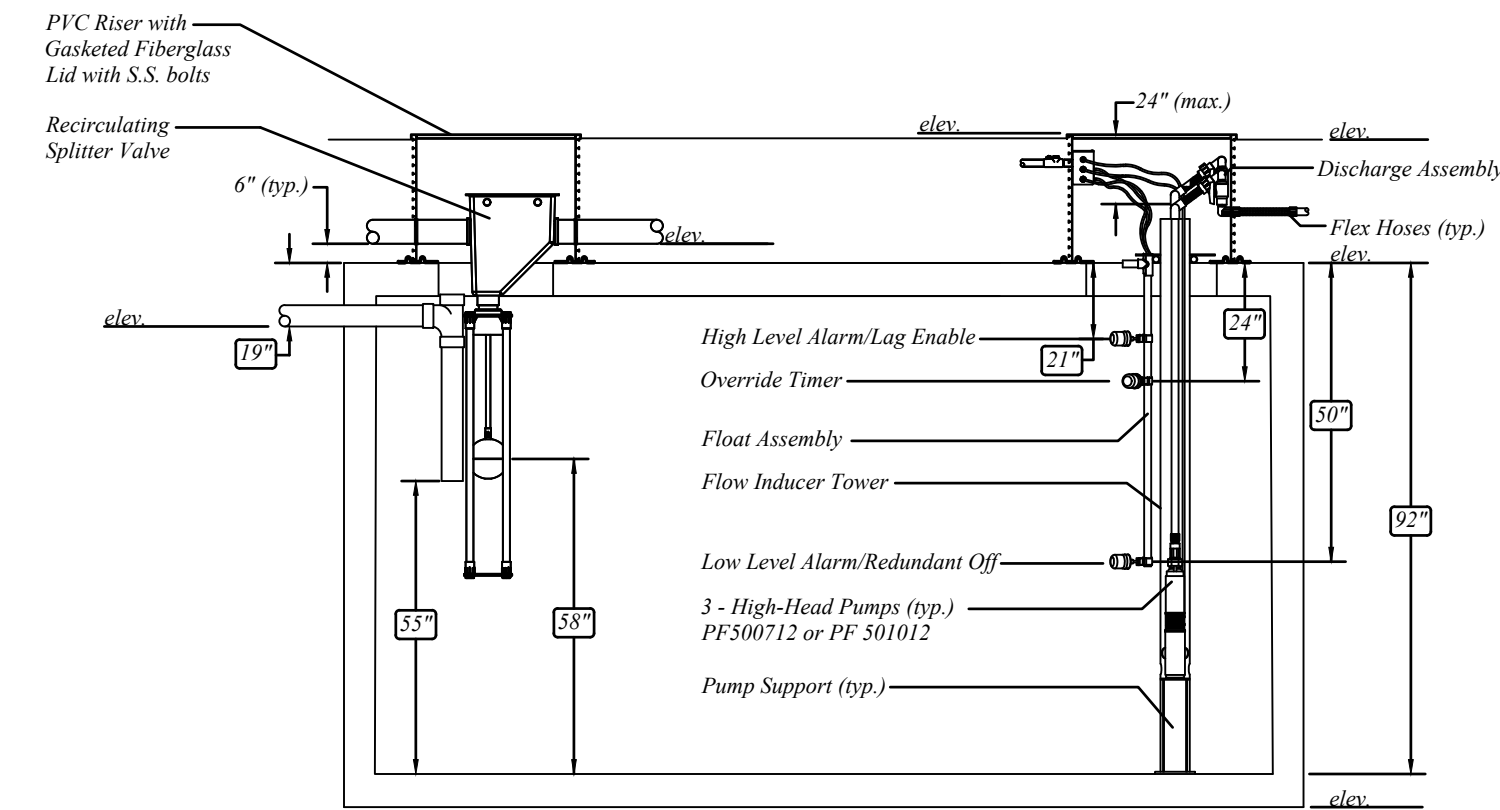


RECIRCULATION TANK FLOAT AND RSV SETTINGS


NOT TO SCALE

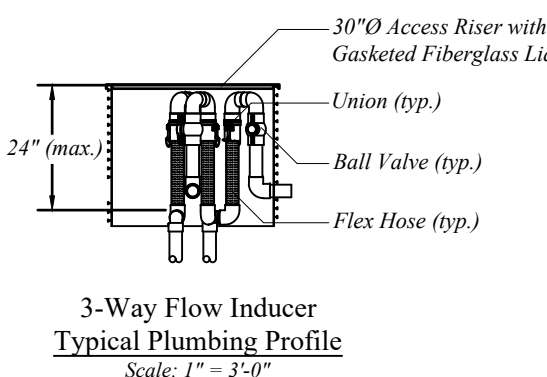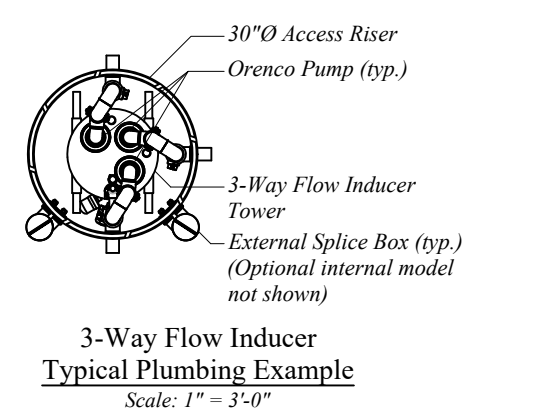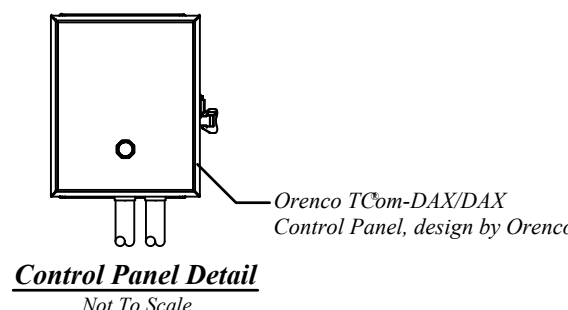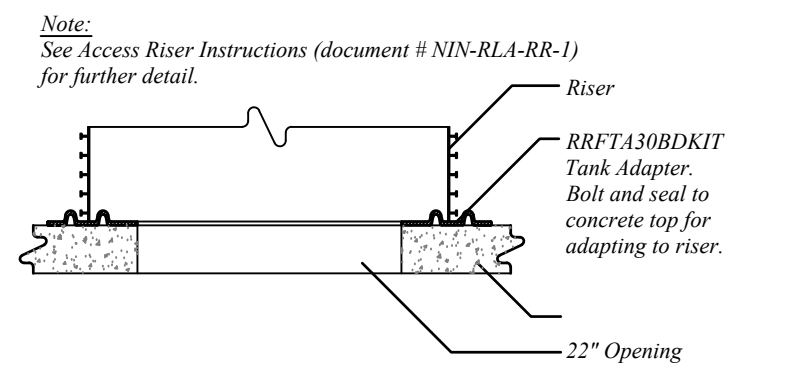











GST Schematics

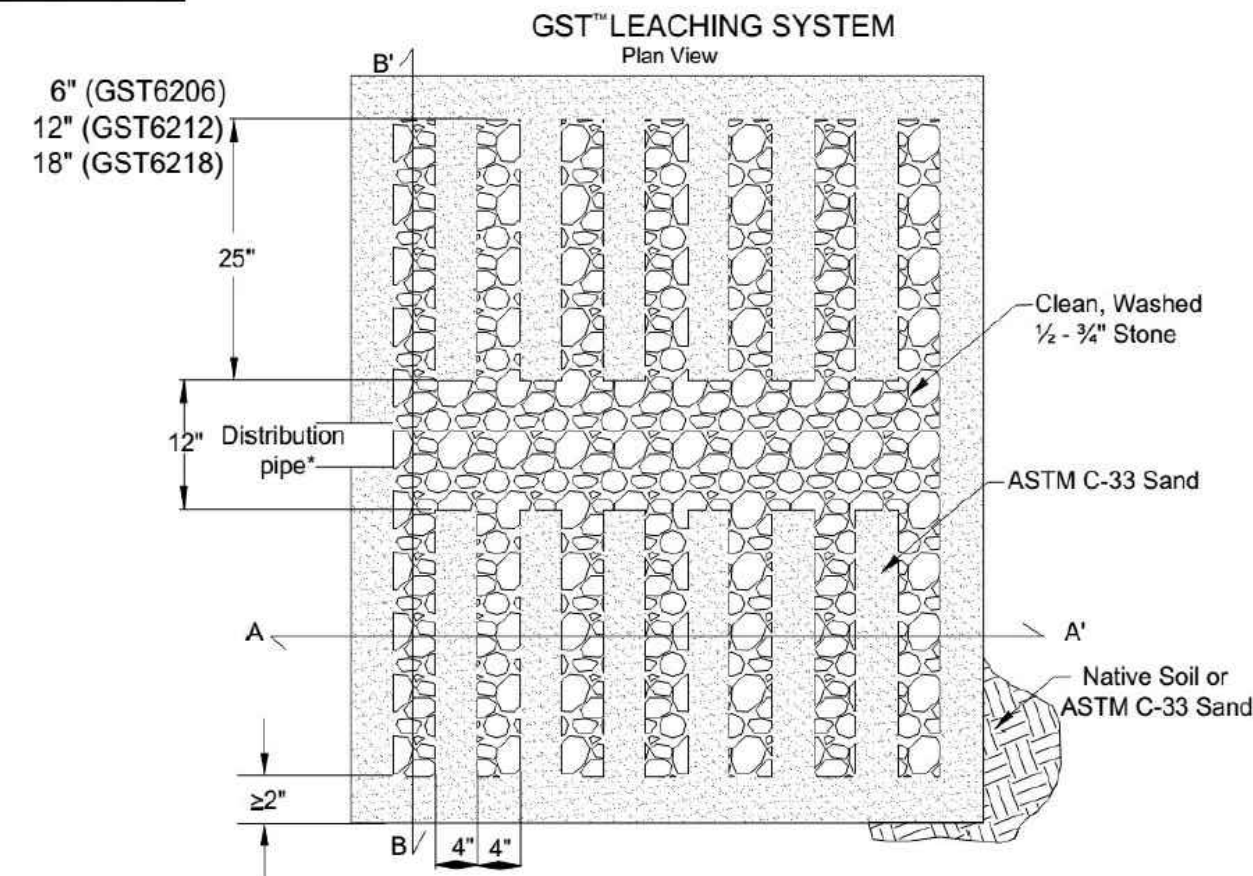

\* Distribution pipe for gravity applications shall comply with RIDEM OWTS Rule 6.34C. Distribution pipe for pressure applications shall comply with RIDEM Guidelines for the Design, Use and Maintenance of Pressurized Drainfields.

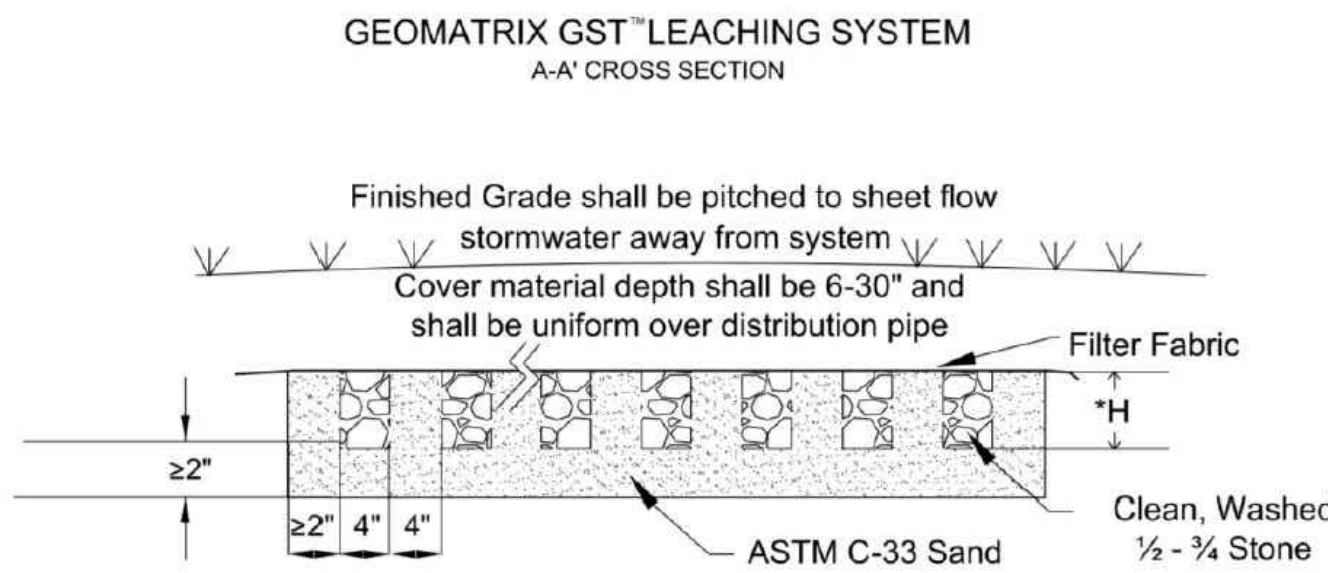

\*H= 6" (GST6206)  
12" (GST6212)  
18" (GST6218)

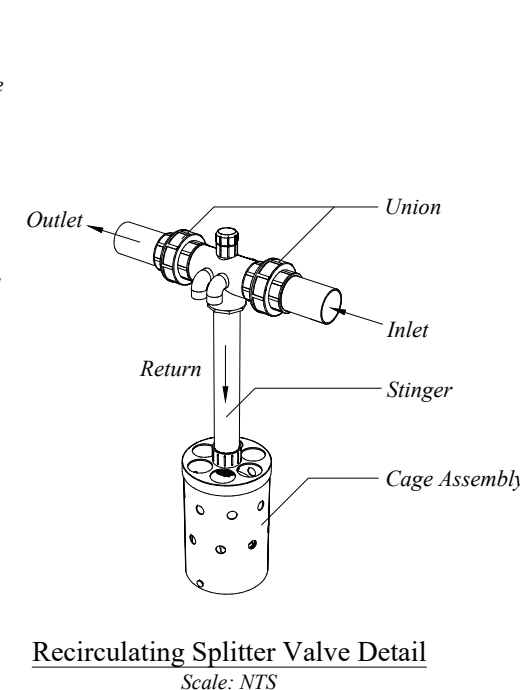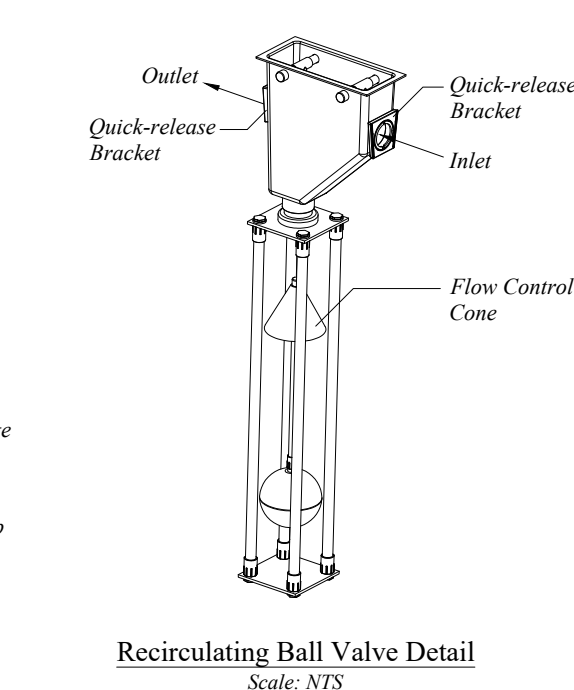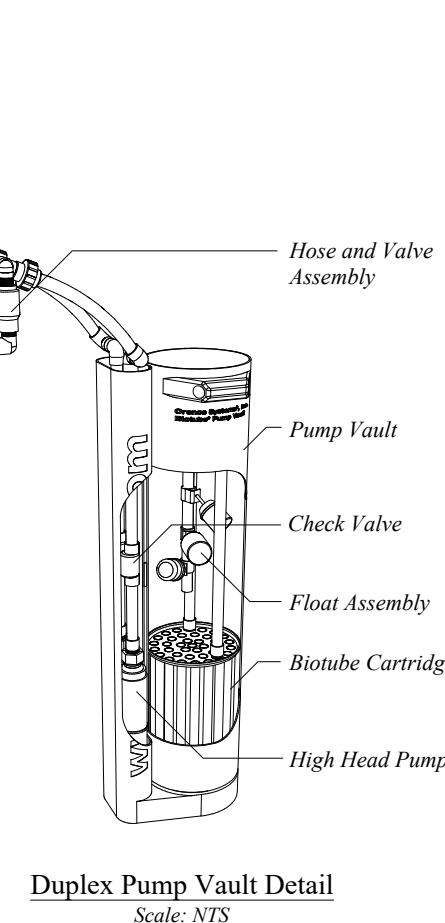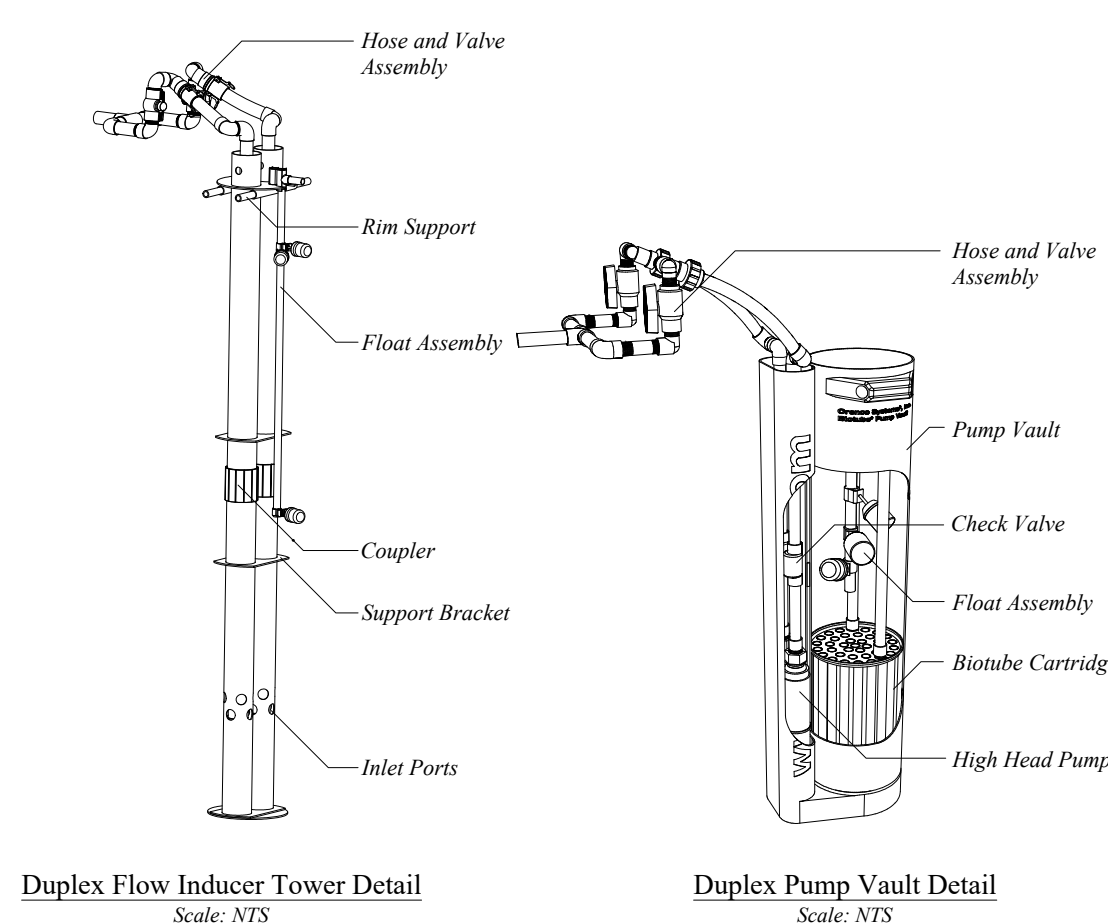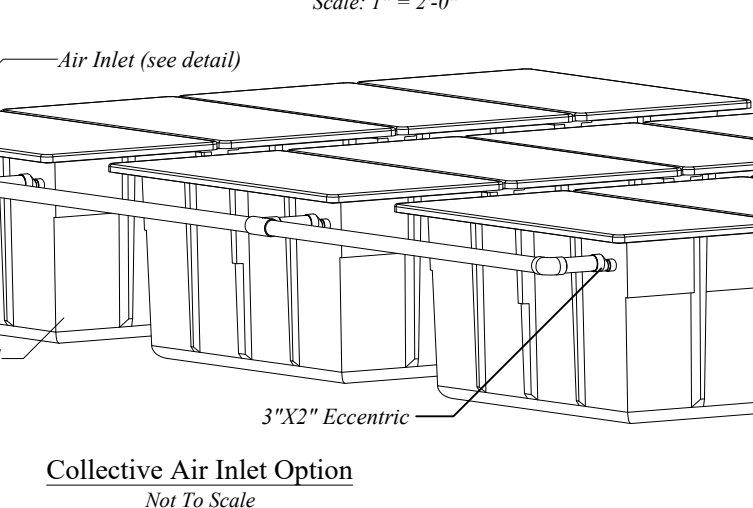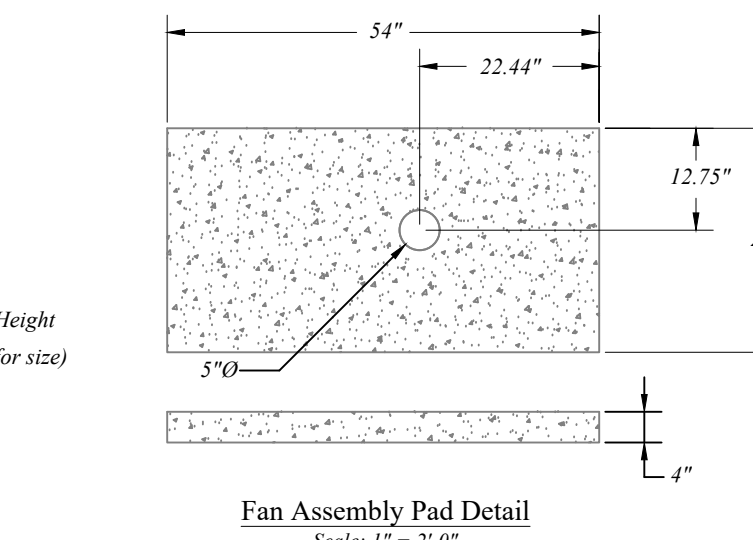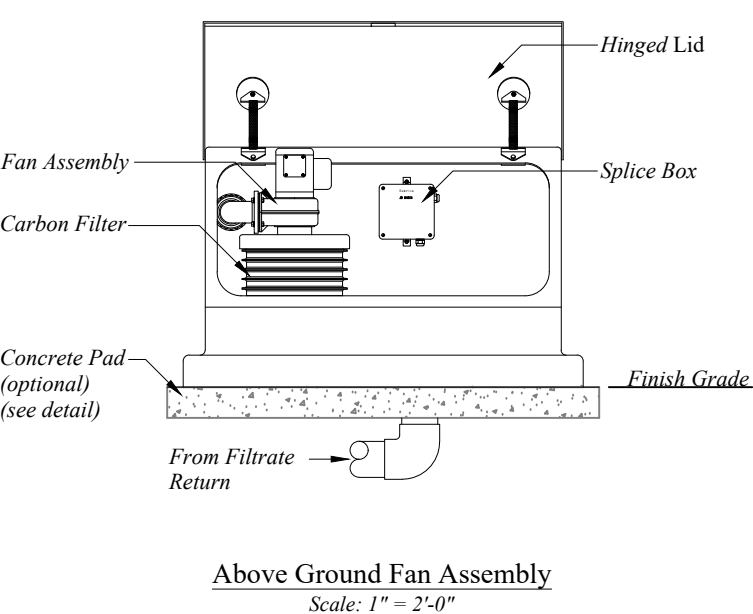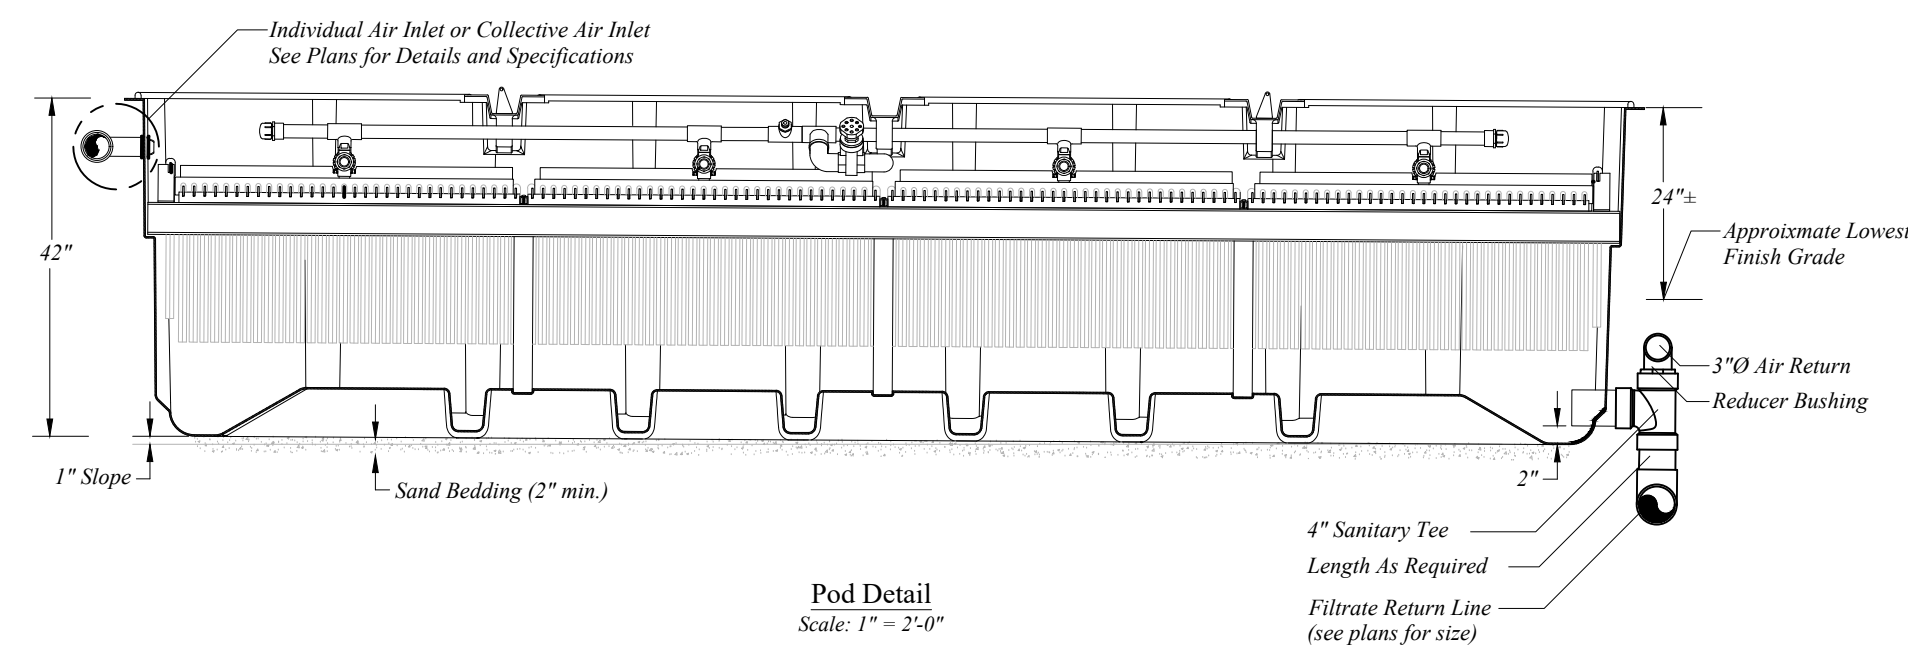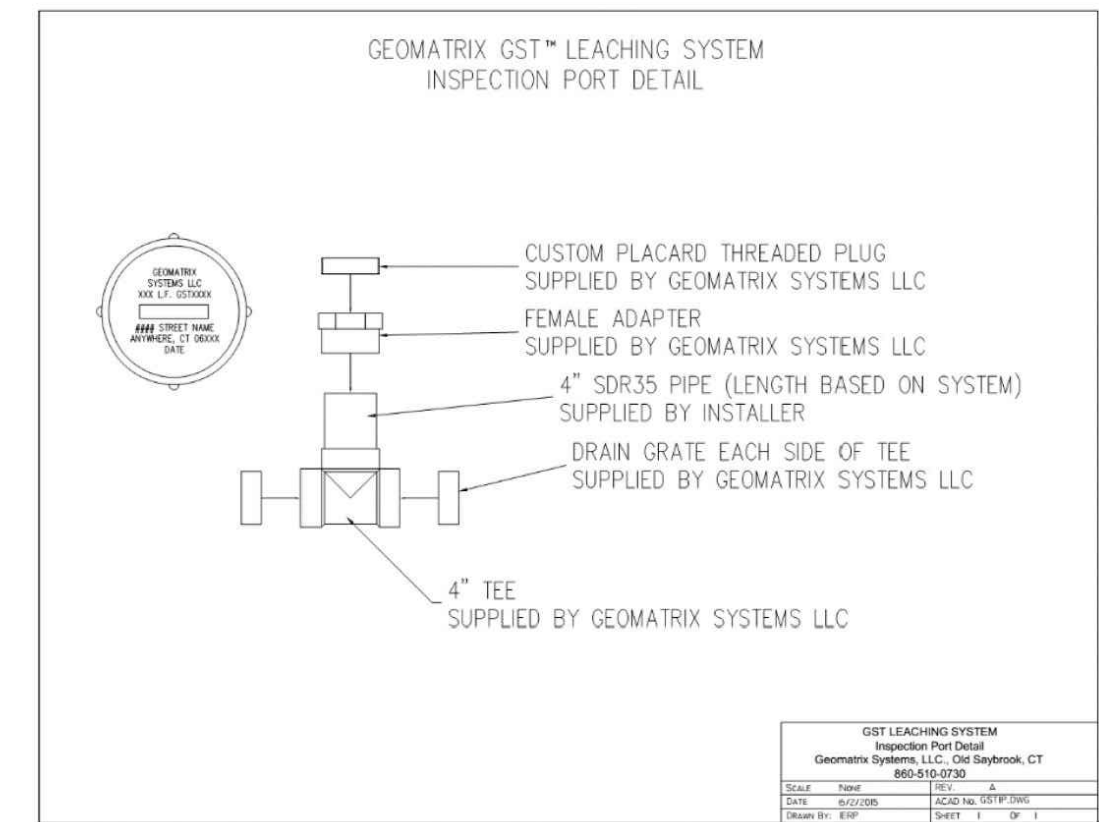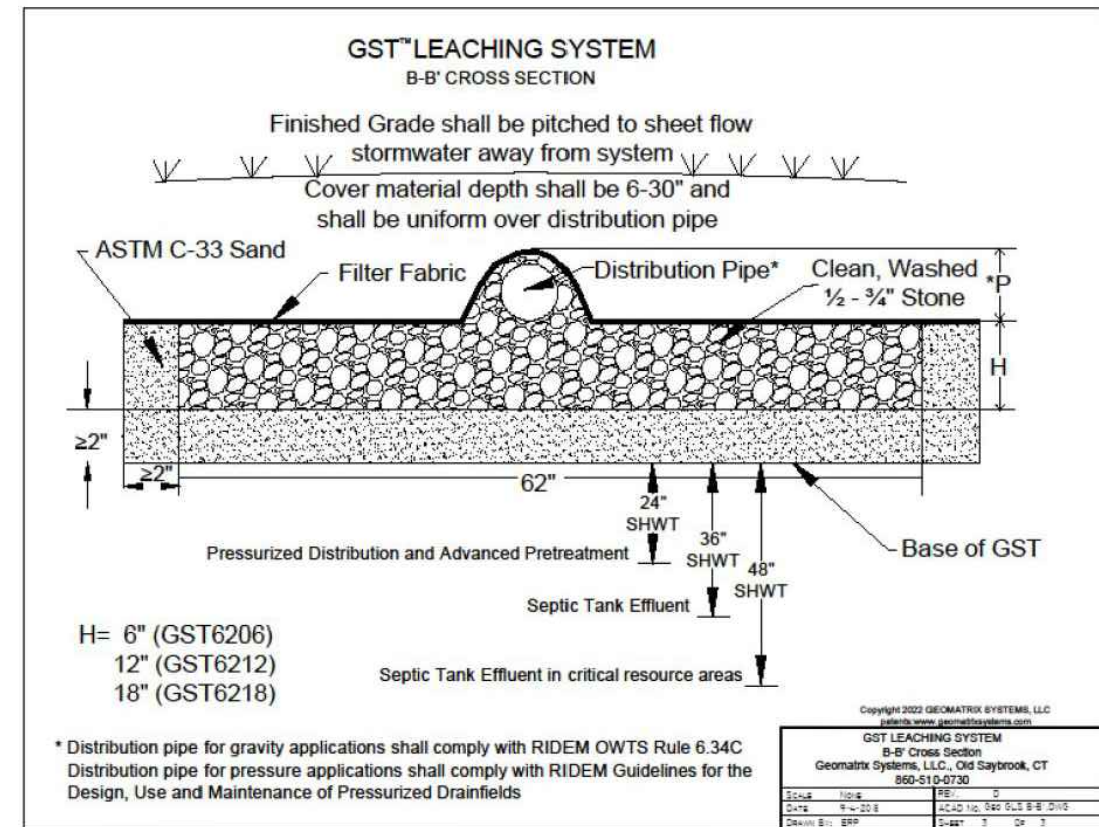

COLLECTIVE AIR INLET DETAIL

SCALE: VARIES

AdvanTex AX100 SYSTEM - MISCELLANEOUS DETAILS

SCALE: VARIES

CAPUTO AND WICK LTD. - 1150 PAWTUCKET AVENUE - RUMFORD R.I. 02916

STATE OF RHODE ISLAND  
DEPARTMENT OF ENVIRONMENTAL MANAGEMENT  
DIVISION OF PLANNING AND DEVELOPMENT

DEMOLITION AND REBUILD OF BATHHOUSES  
BURLINGAME STATE PARK AND CAMPGROUND  
CHARLESTOWN, RHODE ISLAND

OWTS DETAILS

Dwg: Scale: 1" = 20'  
Contract No. x Date: FEBRUARY, 2023  
C-3.2  
22





# STATE OF RHODE ISLAND AND PROVIDENCE PLANTATIONS

Department of Environmental Management  
Office of Water Resources  
Onsite Wastewater Treatment Systems Program

20.0179 6A, 6B  
SHEET 1-2



## Site Evaluation Form Part A – Soil Profile Description

Application Number \_\_\_\_\_

Property Owner: RHODE ISLAND STATE OF (DEM) DIVISION OF PARKS

Property Location: 1-100 BURLINGAME PARK RD, CHARLESTOWN, RI PLAT 15 LOT 10

Date of Test Hole: 8/18/21

Soil Evaluator: KAMAL HINGORANY

License Number: D4005

Weather: CLOUDY

Shaded: Yes ☐ No ☒ Time: 9:30

TH <u>6A</u> Horizon	Depth	Horizon Boundaries		Soil Colors		Re-Dox			Texture	Structure	Consistence	Soil Category
		Dist	Topo	Matrix	Re-Dox Features	Ab.	S.	Contr.				
Ap	0-9	C	S	2.5YR 6/3	-	-	-	-	Ls	2gbd	VFr	3
Bw	9-25	C	S	10YR 5/6	-	-	-	-	Ls	2gbd	Fr	3
C <sub>1</sub>	25-40	C	S	2.5YR 7/3	-	-	-	-	Ls	2gbd	Fr	3
C <sub>2</sub>	40-120	C	C	2.5YR 7/3	5YR 4/4	M	M	P	Ls	2gbd	Fr	3
TH <u>6B</u> Horizon	Depth	Horizon Boundaries		Soil Colors		Re-Dox			Texture	Structure	Consistence	Soil Category
		Dist	Topo	Matrix	Re-Dox Features	Ab.	S.	Contr.				
Ap	0-16	C	S	2.5YR 6/3	-	-	-	-	Ls	2gbd	VFr	3
Bw	16-36	C	W	10YR 5/6	-	-	-	-	Ls	2gbd	Fr	3
C <sub>1</sub>	36-42	C	S	2.5YR 7/3	-	-	-	-	Ls	2gbd	Fr	3
C <sub>2</sub>	42-120	C	S	2.5YR 7/3	5YR 4/4	M	M	P	Ls	2gbd	Fr	3

TH 6A Soil Class B Total Depth 120" Impervious/Limiting Layer Depth 120" (og) GW Seepage Depth - SHWT 40" (og)

TH 6B Soil Class B Total Depth 120" Impervious/Limiting Layer Depth 120" (og) GW Seepage Depth - SHWT 42" (og)

Comments: \_\_\_\_\_

# Part B

**Site Evaluation** – to be completed by Soil Evaluator or Class II or III Designer

**Please use the area below to locate:**


1. Test holes and bedrock test holes,
2. Approximate direction of due north,
3. Offsets from all test holes to fixed points such as street, utility pole, or other permanent, marked object.\*

**\*OFFSETS MUST BE SHOWN**

20.0179 6A, 6B  
SHEET 2-2

**Key:**

- Approximate location of test holes
- Approximate location of bedrock test holes
- Estimated gradient and direction of slope
- Approximate direction of due north

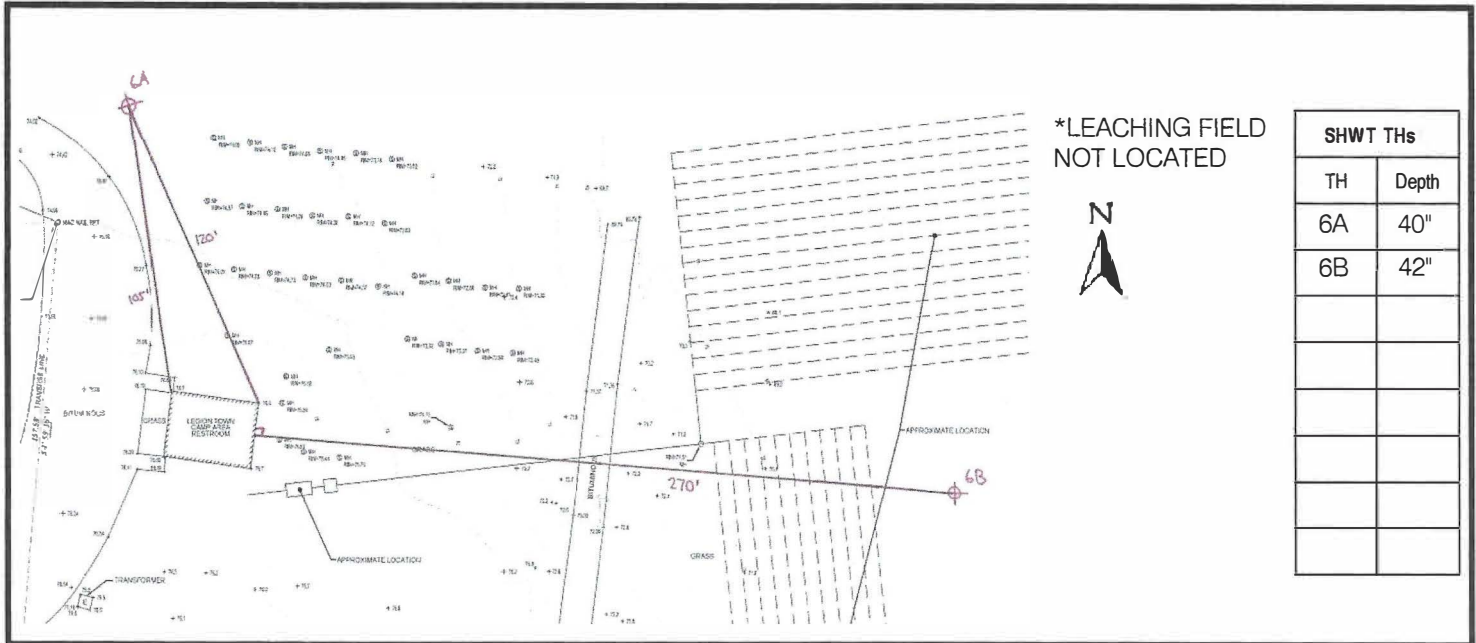

1. Relief and Slope: \_\_\_\_\_
2. Presence of any watercourse, wetlands or surface water bodies, within 200 feet of test holes? If yes, locate on above sketch. NO ☒ YES ☐
3. Restrictive Layer or Bedrock within 4' below original ground within 25 feet of test hole? Provide all test hole locations & depths above. NO ☒ YES ☐
4. Presence of existing or proposed private drinking water wells within 200 feet of test holes? If yes, locate on above sketch. NO ☒ YES ☐
5. Public drinking water wells within 500 feet of test holes? If yes, locate on above sketch. NO ☒ YES ☐
6. Is site within the watershed of a public drinking water reservoir or other critical area defined in Rule 6.42? NO ☒ YES ☐
7. Has soil been excavated from or fill deposited on site? If yes, locate on above sketch. NO ☒ YES ☐
8. Site's potential for flooding or ponding: NONE ☒ SLIGHT ☐ MODERATE ☐ SEVERE ☐
9. Landscape position: SHOULDER
10. Vegetation: GRASS
11. Indicate approximate location of property lines and roadways.
12. Additional comments, site constraints or additional information regarding site: \_\_\_\_\_

## Certification

The undersigned hereby certifies that all information on this application and accompanying forms, submittals and sketches are true and accurate and that I have been authorized by the owner(s) to conduct these necessary field investigations and submit this request.

Part A prepared by: [Signature] D4005 License # \_\_\_\_\_ Part B prepared by: [Signature] D4005 License # \_\_\_\_\_

## DO NOT WRITE IN THIS SPACE

**Witnessed Soil Evaluation Decision:** Concur ☐ Inconclusive ☐ Disclaim ☐  
**Unwitnessed Soil Evaluations Decision:** Accept ☐ Inconclusive ☐ Disclaim ☐

Wet Season Determination required ☐ Additional Field Review Required ☐

Explanation: \_\_\_\_\_

Signature Authorized Agent \_\_\_\_\_

Date \_\_\_\_\_



Main Camp Bathhouse and System Replacement Project  
Burlingame State Park and Campground  
Charlestown, Rhode Island

### **DESIGN NARRATIVE**

RIDEM is in the process of replacing the Bathhouse and Onsite Wastewater System (OWTS) at this location. Soil logs can be found on Sheet C-1.5 together with the proposed site layout and System Design Data and Notes. Details for the system are on Sheets C-2.5, C-3.1 and C-3.2.

Soil evaluations for this OWTS location were conducted on August 18, 2021, soils are Category 3 and the Estimated Seasonal High Water Table depth at the OWTS is 30" or at elevation 67.2±.

In total the six bathhouses for the overall campground accommodate approximately 720 campsites. Utilizing the RIDEM wastewater design flow for a campground with washroom and toilets of 50 gallons per day we determine a daily flow for the entire campground to be approximately 36,000 gallons per day (GPD). The average daily flow per acre of the campground is (36,000 GPD / 847 Acres) 42.5 GPD/Acre. The average daily flow for each bathhouse is approximately 6,000 GPD. In calculating an estimated daily flow for the Main Camp Bathhouse OWTS we took a conservative approach utilizing 150 campsites at 50 GPD/campsite to determine a design flow for the Main Camp Bathhouse to be 7,500 GPD which is greater than the 6,000 GPD average. Please see the attached campsite map which depicts the campsites (a total of 146 as highlighted) chosen to be included within the 150 sites utilized for sizing the OWTS. Please note that sites throughout the campground overlap to agree with the conservative estimate. The system as sized is oversized and is considered a large system. The system is used on a seasonal basis between the months of April and October.

The OWTS will utilize Two (2) Orenco AdvanTEX AX100 Pods for advanced treatment. This system is a Category 1 advanced treatment technology. The system will treat the wastewater and reduce the biochemical oxygen demand (BOD) and comply with the latest Orenco system design criteria and thus the RIDEM OWTS criteria. See attached Final Design Review Letter from Orenco.

The systems drainfield is designed as a Geomatrix Gravel Sand Treatment (GST) System. The Loading Rate for Category 1 Technology for the GST is 3.5 GPD/square feet (SF). The minimum size drainfield is 7,500 GPD/3.5 GPD/SF which equals 2,143 SF. We propose to use the GST 6212 and the minimum size drainfield requirement for this application is 123 lineal feet (LF). We propose to use the 280 lineal feet (LF) of GST 6212 which provides 17.5 S.F. per LF, which equals 4,900 SF. and is greater than 2,143 SF (minimum size). The GST system has been divided into two equal drainfields and the GST are spaced 7'6" on center. The two drainfields consist of 5 rows each 28 feet long and 62" wide with a stone depth of 12" below the 4" perforated distribution pipe. See pump selection and system specifications on Sheet C-2.5 for additional information. Please see the attached review letter from Geomatrix.



WATCHAUG POND



FISH CAMP AREA

150

400 AREA

MAIN CAMP AREA

146

150

B  
150

LEGIONTOWN  
CAMP AREA

156

500 AREA

MILLS CAMP AREA

150

- CHECK STATION
- PERMITS
- COMFORT STATION

TO WESTERLY

TO WAKEFIELD & PROVIDENCE



BURLINGAME STATE PARK  
RHODE ISLAND DEPT. OF  
ENVIRONMENTAL MANAGEMENT

LEGEND

- |                                    |                    |
|------------------------------------|--------------------|
| A TENTS ONLY                       | Ⓐ WATER            |
| B SMALL TRAILERS                   | ▨ RESTROOMS        |
| C LARGE TRAILERS<br>AND MOTORHOMES | ★ DUMPING STATIONS |
| M MOTORHOMES                       | ▩ CABIN            |
| P PORTAJONS                        | D DUMPSTERS        |

DEVELOPED BY:  
**PARE**  
PARE CORPORATION  
800 BROAD ST. W. SUITE 100  
BURLINGAME, RI 02809  
401-394-1100



01/19/2023

Kevin Harrop  
Caputo & Wick  
1150 Pawtucket Ave  
Rumford, RI 02916

Subject: Final Design Review of Burlingame Park/Main Camp

Kevin,

Orenco Systems, Inc. ("Orenco") has received the Plans with all required fields completed (attached to this letter), a copy of the plan set showing the designed site layout and configuration plans, and other documents that comprise the Final Design for the Burlingame Park project. Orenco staff reviews the Final Design of all wastewater collection and treatment systems for commercial applications to ensure that the design is compliant with the most current version of the system's applicable design criteria published by Orenco for the specified parameters provided by the system's designer in the Plans. The findings and conclusions of my review of this Final Design are as follows:

## **Design Basis**

The system has been designed for a Type 2, Park application. Influent flow and constituent concentrations and effluent constituent concentration requirements have been provided by the system's designer on the attached Plans and were used in my review of the Final Design.

The influent flow on the Plans were not extrapolated from the metered flows from the subject site, but in our experience, they are consistent with influent flows from other, similar Type 2, Park systems that Orenco has previously observed. As such, I have no reason to doubt the accuracy of the designer's findings and assumptions as to the influent flow, and find that it was reasonable for the designer to use them as the design basis for the system.

## **System Design**

The proposed Final Design of the system consists of a park. Influent will enter a 15,000 gallon Primary Tank, which will then flow into a 7,500 gallon Pre-Anoxic Tank. From here, flow will gravity discharge into a 6,000 gallon Recirculation Tank. The recirc-filtrate blend in this tank will pump into (2) AX100 pods and the filtrate will enter a splitter valve in the front of the Recirculation Tank where it will either be recirculated again or siphon to a drain field.

## **Design Criteria**

The applicable design criteria for this system, which I used to conduct the review of its Final Design, is revision 8.0 of document NDA-ATX-1, titled *Orenco<sup>®</sup> AdvanTex<sup>®</sup> Design Criteria, Commercial Treatment Systems*, which was published by Orenco in October, 2020. A copy of the design criteria can be downloaded from Orenco's online document library at [www.orenco.com/corporate/doclibrary.cfm](http://www.orenco.com/corporate/doclibrary.cfm).

## Findings

The findings of my review as to whether the Final Design complies with Orenco's design criteria for treating wastewater to the effluent constituent concentration requirements provided in the Plans are as follows:

### ***Primary Treatment***

The Final Design specifies the use of 1 - 15,000 U.S. Gallon Primary concrete and 1 - 7,500 U.S. Gallon Primary concrete tanks in series for primary treatment. Using the flow data specified on the Plans the hydraulic retention times for grease capture and primary treatment calculate as follows:

Primary Tank(s) Hydraulic Retention Time (HRT) <sup>1</sup>				
Design Average Flow (gpd)	Design Maximum Day Flow (gpd)	Effective Combined Primary Tankage (gpd)	Avg HRT (days)	Max Day HRT (days)
3,500	7,500	22,500	6.4	3.0

<sup>1</sup> Design Max Day Flow is the maximum daily flow a facility is expected to receive no more than one day within any week's time.

The Primary Tank Sizing Recommendations states that the recommended primary tankage for a Park treatment system should be sized to at a minimum of 3 days of hydraulic retention time at the Design Max Day Flow. Therefore, the configuration and specifications of the primary treatment tanks in the Final Design satisfy Orenco's recommendation for primary tankage for this Park application. This pre-anoxic tank should be sized equal to one day at maximum day design flow and is considered part of the overall primary tank volume.

### ***Recirculation Tank — Standard Stage***

The Final Design further specifies the use of 1 - 6,000 U.S. Gallon concrete tank for recirculation and blending of the AdvanTex-treated effluent with primary tank effluent. Using the flow data specified on the Plans the tank is sized to be equal to 80% of the Maximum Day Design Flow. The recirculation tank for the standard stage should be sized at a minimum of 75% of the Maximum Day Design Flow. Therefore, the specification of the recirculation-blend tank in the Final Design satisfies Orenco's design criteria.

### ***Hydraulic Load — Standard Stage***

The Final Design specifies the use of 2 - AX100 pods, which contain a nominal surface area of 200 square feet of treatment media. Using the flow data specified on the Plans the hydraulic loading rate for the system calculates as follows:

Hydraulic Loading Rate (HLR) — Standard Stage				
Design Average Flow (gpd)	Design Maximum Day Flow (gpd)	Nominal Textile Area (sq. ft.)	Average HLR (gal. per day/sq. ft.)	Peak HLR (gal. per day/sq. ft.)
3,500	7,500	200	17.5	37.5

According to the AdvanTex System Loading Chart in the applicable design criteria, the standard AdvanTex treatment system (Stage 1) should not be hydraulically loaded more than 25 gpd/square foot at Design Average Flow or 50 gpd/square foot at Design Max Day Flow. Therefore, the specified type and number of AdvanTex pods in the Final Design satisfy Orenco's design criteria to achieve the effluent quality listed in the design criteria at a 95% confidence level for this Type 2, Park application.