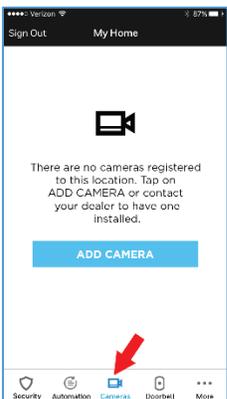
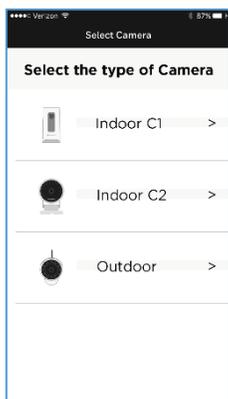
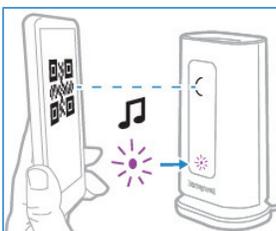
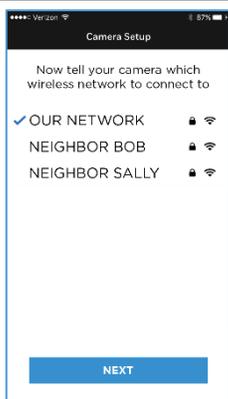
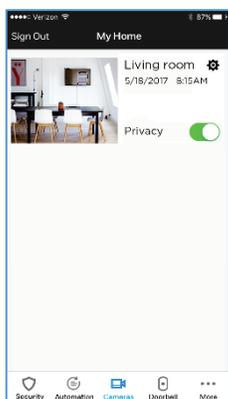


IPCAM-WIC1 HD Wi-Fi Indoor Video Camera

Quick Installation Guide

IPCAM-WIC1 is an HD Wi-Fi video camera intended for indoor use with Honeywell Total Connect® 2.0. Low-light operation is indicated by two small red LEDs located on the front of the camera below the lens. Camera setup requires a Total Connect® 2.0 account and the new Total Connect 2.0 mobile app. **Video Services** must be enabled in AlarmNet 360™. Camera operation requires minimum available bandwidth of 1.5Mbps.

<p>1</p>		<p>For best results, set up only one camera at a time.</p> <p>Download the Total Connect® 2.0 app from the App Store or on Google Play. (Look for the red Total Connect logo.)</p>	
<p>2</p>		<ol style="list-style-type: none">Turn on your smart device's Bluetooth and Wi-Fi.Launch the app and sign in with your Total Connect® 2.0 account.Remove the camera's magnetic base; plug in the power connector.Replace the base but don't connect the camera to AC power yet.	
<p>3</p>		<ol style="list-style-type: none">Press Cameras at the bottom of the app and then ADD CAMERA.Select the type of camera you're installing.Name the camera and press NEXT. <p>The camera remains in setup mode for about 10 minutes.</p>	
<p>4</p>		<ol style="list-style-type: none">Plug in the power supply. After about a minute, the camera sounds a tone.When the camera's LED starts flashing blue, press NEXT on the app.The app displays Pair Your Camera and a QR code appears. (This can take up to 90 seconds.)Show the QR code to the camera from 3 – 7 inches away. When the code has been scanned, the camera sounds a tone.When the app verifies the QR code, choose your system's Wi-Fi network and touch NEXT.Enter the network password and press NEXT.When camera registration is complete, the process is complete*. Press DONE or ADD ANOTHER CAMERA.	
<p>5</p>		<p>After setup, go back to the Video tab and check your newly-registered camera. Touch the thumbnail image to launch a live stream from the camera.</p> <p><i>*The app will tell you if you need to repeat the setup process. This involves resetting the camera. See the other side of this sheet for more information on using the Reset switch</i></p>	

Resetting the Camera

If Wi-Fi fails, or to connect the camera to a different network, use a paper clip to activate the Reset switch.

- To reset the connection, press and hold for 15 seconds
- To join a new/different network:
 - On the app's **Video** screen, press  and delete the camera in **Camera Settings**
 - Press and hold the **Reset** switch for 15 seconds to reset all settings to their factory defaults
 - Unplug the camera and then reconnect it.
 - Repeat the registration procedure.



LED STATUS INDICATOR

During installation

- Blue, blinking Power on. Ready to start setup.
- Blue, steady Connected to the app. Ready to complete setup.
- Purple, steady QR code scan is complete. Restart the Wi-Fi connection process.
- Green, blinking Connecting to Wi-Fi network.
- Red, steady Setup timed out. Unplug the camera, plug it back in and restart setup process.

During operation

- Green, blinking Connecting to Wi-Fi network.
- Green, steady Connected to Wi-Fi and operating. **Note:** The camera is always ready to record but only originates live streaming video when the app calls for a live stream.
- Red, blinking Not connected to Wi-Fi.

*Low-light operation is indicated by two small red LEDs **above** the main LED.*

FEDERAL COMMUNICATIONS COMMISSION (FCC) & INDUSTRY CANADA (IC) STATEMENTS

The user shall not make any changes or modifications to the equipment unless authorized by the Installation Instructions or User's Manual. Unauthorized changes or modifications could void the user's authority to operate the equipment.

CLASS B DIGITAL DEVICE STATEMENT

This equipment has been tested to FCC requirements and has been found acceptable for use. The FCC requires the following statement for your information:

This equipment generates and uses radio frequency energy and if not installed and used properly, that is, in strict accordance with the manufacturer's instructions, may cause interference to radio and television reception. It has been type tested and found to comply with the limits for a Class B computing device in accordance with the specifications in Part 15 of FCC Rules, which are designed to provide reasonable protection against such interference in a residential installation. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- If using an indoor antenna, have a quality outdoor antenna installed.
- Reorient the receiving antenna until interference is reduced or eliminated.
- Move the radio or television receiver away from the receiver/control.
- Move the antenna leads away from any wire runs to the receiver/control.
- Plug the receiver/control into a different outlet so that it and the radio or television receiver are on different branch circuits.
- Consult the dealer or an experienced radio/TV technician for help.

FCC / IC STATEMENT

This device complies with Part 15 of the FCC Rules, and Industry Canada's license-exempt RSSs. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Cet appareil est conforme à la partie 15 des règles de la FCC et exempt de licence RSS d'Industrie Canada. Son fonctionnement est soumis aux conditions suivantes: (1) Cet appareil ne doit pas causer d'interférences nuisibles. (2) Cet appareil doit accepter toute interférence reçue y compris les interférences causant une réception indésirable.

RF EXPOSURE STATEMENT: The antenna(s) used for this device must be installed to provide a separation distance of at least 7.8 inches (20 cm) from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter except in accordance with FCC multi-transmitter product procedures.

MISE EN GARDE EXPOSITION AUX FRÉQUENCES RADIO: L'antenne (s) utilisée pour cet émetteur doit être installée à une distance de séparation d'au moins 7,8 pouces (20 cm) de toutes les personnes.

DECLARACIÓN IFETEL

La operación de este equipo está sujeta a las siguientes dos condiciones

1. Es posible que este equipo o dispositivo no cause interferencia perjudicial y
2. Este equipo debe aceptar cualquier interferencia, incluyendo la que pueda causar su operación no deseada.

DECLARAÇÃO ANATEL

Este equipamento opera em caráter secundário, isto é, não tem direito a proteção contra interferência prejudicial, mesmo de estações do mesmo tipo, e não pode causar interferência a sistemas operando em caráter primário.

TRADEMARKS

Honeywell is a registered trademark of Honeywell International Inc.

For online support visit, <https://mywebtech.honeywell.com/>

For the latest warranty information, visit <http://www.security.honeywell.com/hsc/resources/wa/>



800-23361 6/17 Rev. A

Honeywell

2 Corporate Center Drive, Suite 100
P.O. Box 9040, Melville, NY 11747
© 2017 Honeywell International Inc.
www.honeywell.com/security