

Premium



## The ultimate garage experience

LiftMaster Premium transforms your garage into a seamless extension of your home—quiet, secure, and smart. With connected access and dependable performance, it's built to support your daily routine without disruption.

Heavy Duty DC Motor with Integrated Camera,  
Ring LED, Battery Backup, Wi-Fi®

myQ  
connectivity

built-in  
bluetooth

Motor  
Warranty

integrated  
camera

LED  
lighting

battery  
backup

**LiftMaster**

POWERED BY myQ

# Specifications

## Motor

12V DC, 53 RPM, automatic thermal protection, permanent lubrication

## Mechanics

- Steel chassis, I-Beam rail and trolley, full reinforced chain drive mechanism (63:1 gear reduction and adjustable door arm)
- Auto-force adjustment for changing weather and environmental conditions
- Electronic limits for easy setup
- DC Wi-Fi logic board with built-in surge suppressor

## Power

120V AC, 60 Hz voltage, 2.7A current rating, UL listed, 6' power cord (3-prong)

## Speed

9" per second upward, 6.5" per second downward

## Lighting

2,000 lumens integrated LED (360°)

## Dimensions

Opener head: 10" L x 19" W x 7" H

*Note: when both decorative doors are open, the width of the opener is 30".*

Rail Options:	7' (3707CH)	8' (3706CH)	10' (3710CH)	12' (3712RV)	14' (3714RV)
Installed Length:	122.5"	139"	163"	188"	212"
Max Opening:	7' 6"	8' 6"	10' 6"	12' 6"	14' 6"

Headroom clearance required: 2"

## Warranties

Lifetime: Motor

5 Year: LED and Parts

1 Year: Battery, Camera and Accessories

## Security+ 3.0™

Radio controls:

Operating range up to 1300 ft; Operating temperature: -40F to 150F; Two 3-Button Remote Controls (L993M). Remote Control Code Format: Security+3.0, premium remote control is backwards compatible to all LiftMaster® openers manufactured since January, 1997; Garage Door Opener Code Format: Security+3.0; Anti-burglary coding.

Encrypted controls:


Smart Control Panel® (L958W); Program remote controls, keypads and myQ accessories; Maintenance Alert System, easy Wi-Fi setup.

## myQ® Radio

902-928 MHz 50-channel FHSS (frequently hopping spread spectrum); Provides 2-way communication from garage door opener and myQ accessories; Enables monitoring and control of garage door openers via smartphone or tablet.

## HomeLink® compatible (version 4.0 or higher)

Visit [HomeLink.com](http://HomeLink.com) for additional information.

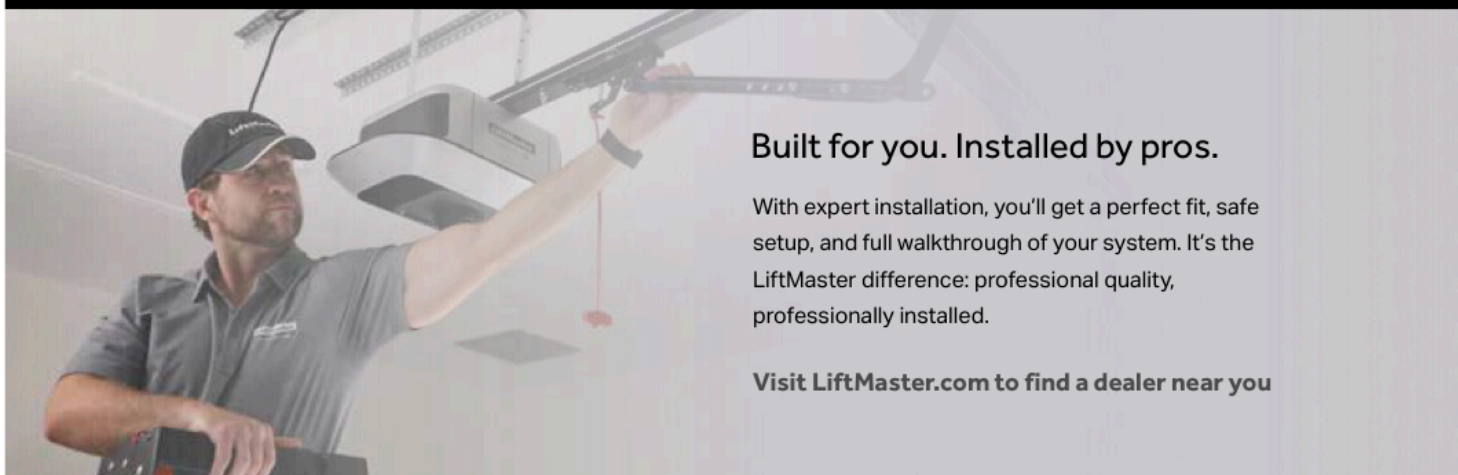

## Built for you. Installed by pros.

With expert installation, you'll get a perfect fit, safe setup, and full walkthrough of your system. It's the LiftMaster difference: professional quality, professionally installed.

Visit [LiftMaster.com](http://LiftMaster.com) to find a dealer near you

# 4690L

The LiftMaster 4690L redefines what a garage door opener should be like—quiet, connected, and built around your life. Its ultra-sturdy chain drive keeps the peace on early mornings and late nights, while Corner to Corner Lighting™ coverage brightens your entire garage the moment you step in. With integrated myQ® connectivity and an adjustable video camera that lets you keep eyes on what matters most, you stay connected from anywhere. For homeowners who want everyday convenience without disruption, the 4690L delivers lasting comfort, visibility, and peace of mind.



## Features that matter most

### Battery Backup

Keeps your garage working—even when the power goes out.

### myQ® Connectivity

Open. Close. Monitor. From anywhere.

### Chain Drive + DC Motor

Designed for smooth and quiet performance.

### All-day visibility

Wide-angle, night vision lets you see your garage—day or night.

### Lifetime warranty

Backed by a lifetime motor warranty.

### Heavy Duty Motor

Designed for high-use garages and harsh conditions.

### Corner to Corner Lighting™

360° LED Lighting brightens your garage from every angle.

### Motion detection

Lights the way automatically for additional safety.

## 360° Adjustable Camera


With its built-in swivel mount, this camera lets you easily adjust the 130° wide-angle lens to capture any direction. Stay connected to your garage anytime with live streaming through the myQ app.

## Corner to Corner Lighting

Motion-activated 360° LED lighting floods your garage with full, even brightness—engineered for visibility, safety, and hands-free convenience. Its sleek, modern design enhances your space while delivering reliable illumination for everyday use.

## Never locked out

When the power goes out, LiftMaster keeps you moving. With built-in Battery Backup, your garage door continues working—so you're never locked out when it matters most.



## Do more with myQ

Use the myQ app to control, secure and monitor your garage and conveniently share and manage access to your home without sharing passcodes or keys. Also, take the hassle out of service repair and easily connect to a trusted Dealer through the myQ app.



## Included in the box



### 3-Button Remote Control (2)

Operates up to 3 openers or myQ light accessories. Safeguards your home with Security+ 3.0®.

L933M



### Smart Control Panel®

Displays time and temperature, allows for easy programming and automatically activates light when you enter the garage.

L958W



### Garage Door Opener Battery

Integrated battery back up allows you to open and close your door even when the power is out.

485LM