




# Core Alignment Fusion splicer 90S+ kit




**ACTIVE FUSION**  
CONTROL TECHNOLOGY




**ACTIVE BLADE**  
MANAGEMENT TECHNOLOGY

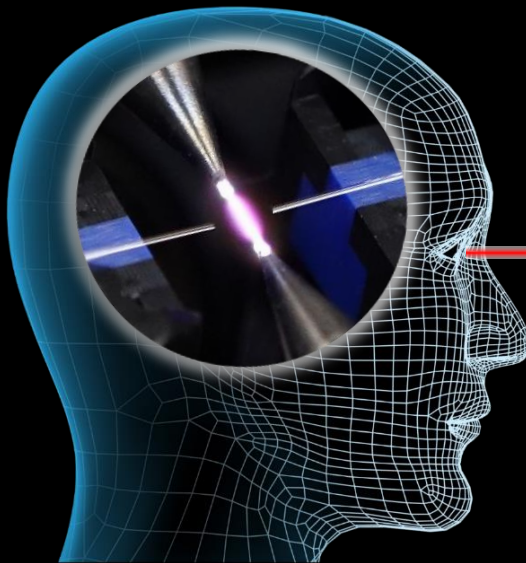

*Enhanced Splice Quality*

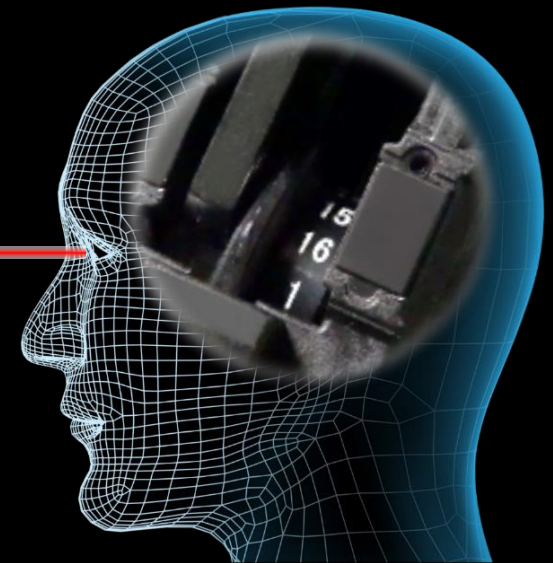


# Active Fusion Control Technology




## ACTIVE FUSION CONTROL TECHNOLOGY

### 1. Active Fusion control by cleave condition

One of main causes of high splice loss is bad cleave end face. The 90S+ analyzes the condition of both L and R cleave end faces and performs optimal fusion control. This advanced technology improves splice loss significantly and reduces the risk of re-installation.

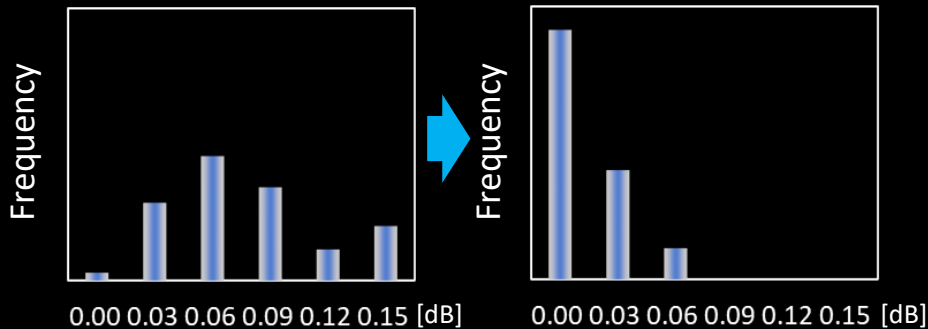


Splice loss with large cleave angle :  $3 < \theta < 5$  degree

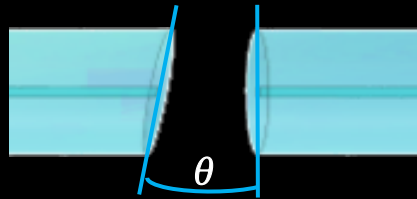

\*G.652 splicing result measured with a cut-back method. The splicing result changes depending on the fiber type and fiber characteristics.


### 2. Active Fusion control by fiber brightness

Fusion is easily affected by changes in the environment. The 90S+ uses real-time fusion parameter control by analyzing the fiber's brightness intensity during fusion. It contributes to stable, reduced splice loss.

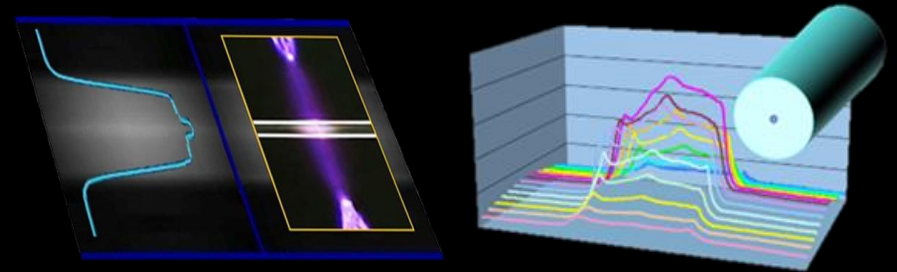


### 3. Active Fusion control by fiber discrimination

Adequate splice parameters may differ depending on fiber type. The 90S+ automatically applies the optimum splice parameters depending on the fiber type.

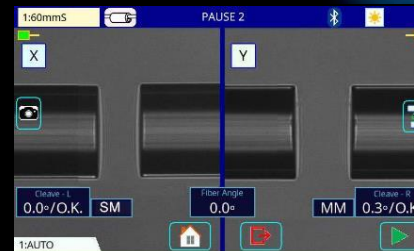


Left:G.652-Right:G.651

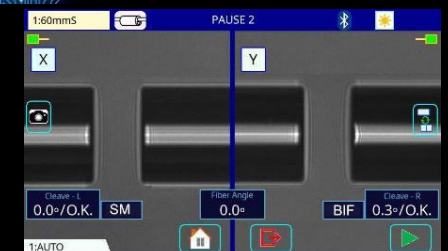

Left:G.652-Right:G.657



# Active Blade Management Technology



**ACTIVE BLADE**  
MANAGEMENT TECHNOLOGY

## 1. Active Blade rotation by motor

The 90S+ and CT50 fiber cleaver are enabled with wireless data connectivity. This capability allows automatic cleaver blade rotation when the 90S+ judges the blade is worn. The 90S+ can connect to two CT50s simultaneously.

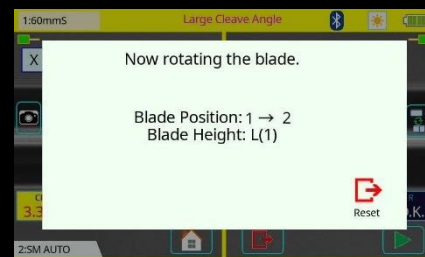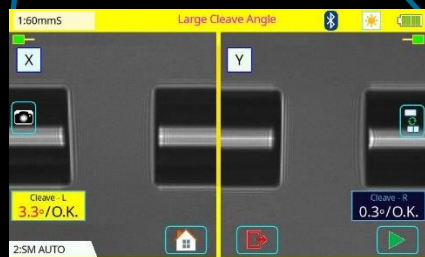

## 2. Active Blade life management

The 90S+ displays the remaining blade life and informs the user when a blade height change, position change, or new blade is required.


	No.1	No.2	No.3	No.4	No.5	No.6	No.7	No.8
HR	0	0	0	0	0	0	0	0
MR	0	0	0	0	0	0	0	0
LR	1060	0	0	0	0	0	0	0
	No.9	No.10	No.11	No.12	No.13	No.14	No.15	No.16
HR	0	0	0	0	0	0	0	0
MR	0	0	0	0	0	0	0	0
LR	0	0	0	0	0	0	0	0

Blade Height : L(1)  
Recommended Position



	No.1	No.2	No.3	No.4	No.5	No.6	No.7	No.8
HR	0	0	0	0	0	0	0	0
MR	0	0	1175	1167	1522	1134	1530	1439
LR	1060	1041	1175	1167	1522	1134	1530	1439
	No.9	No.10	No.11	No.12	No.13	No.14	No.15	No.16
HR	0	0	0	0	0	0	0	0
MR	0	0	0	0	0	0	0	0
LR	1185	1218	1025	1407	1338	1484	1259	1060

Blade Height : L(1)  
Recommended Position

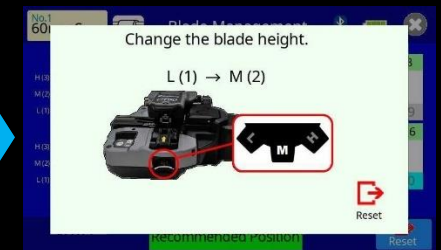

	No.1	No.2	No.3	No.4	No.5	No.6	No.7	No.8
HR	1439	1530	1259	1185	1134	1530	1422	1439
MR	1484	1185	1218	1025	1407	1338	1484	1060
LR	1060	1041	1175	1167	1522	1134	1530	1439
	No.9	No.10	No.11	No.12	No.13	No.14	No.15	No.16
HR	1041	1175	1167	1522	1439	1530	1218	1258
MR	1422	1530	1439	1218	1375			
LR	1185	1218	1025	1407	1338			


Blade Height : L(3)  
Recommended Position



# Enhanced Splice Quality

The below graphs show the number of cleaves on the horizontal line with frequency of large cleave angle, bad cleave shape and no cleave at all. When the frequency of large cleave angle increases, **Active Blade** Management Technology can detect this increasing ratio point and rotate the blade position automatically. **Active Blade** Management Technology significantly reduces frequency of large cleave angles occurring but even when it does occur **Active Fusion** Control Technology can reduce high splice loss by precise fusion control.


The 90S+ can minimize the occurrence of high splice loss and contribute to reduce the risk of re-Installation by using these 2 key technologies together.

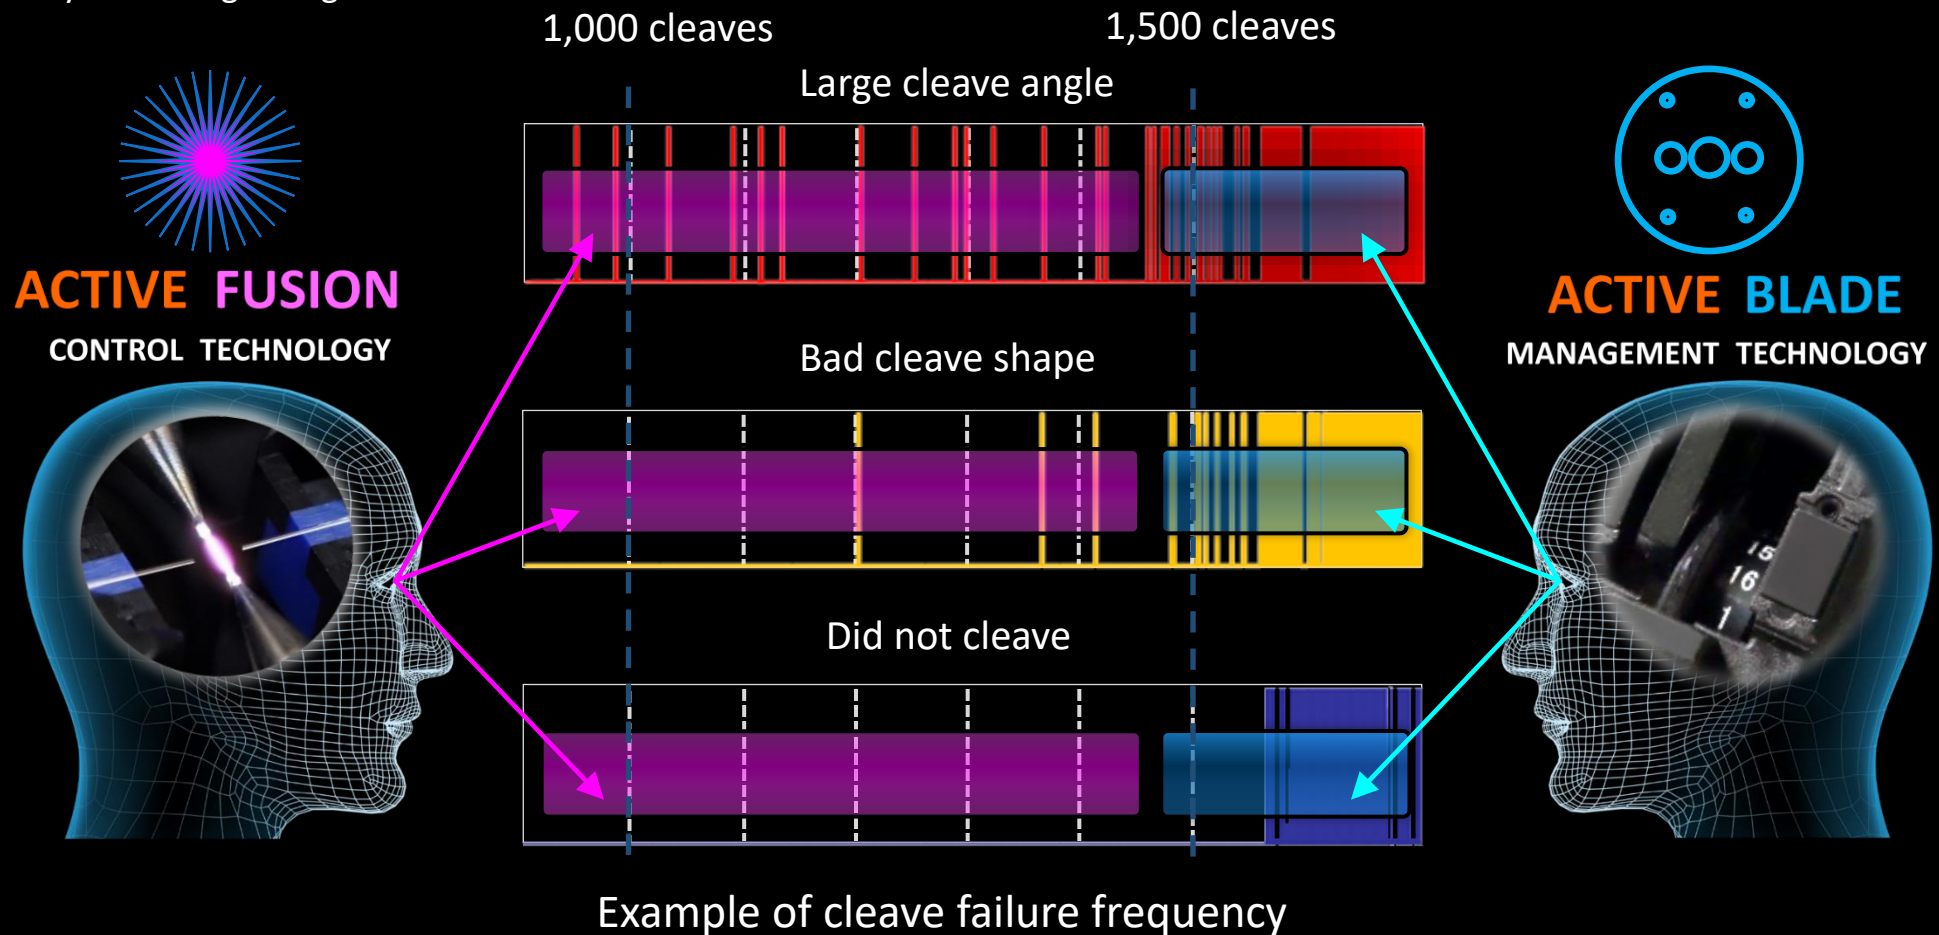

# Operation Time Reduction

## 1. Automatic Open-Close Wind protectors


The faster automated features of the 90S+ reduce installation times. With this splicer, an operator can complete the entire splice process from splicing to heating without touching the 90S+ and only moving the fiber.

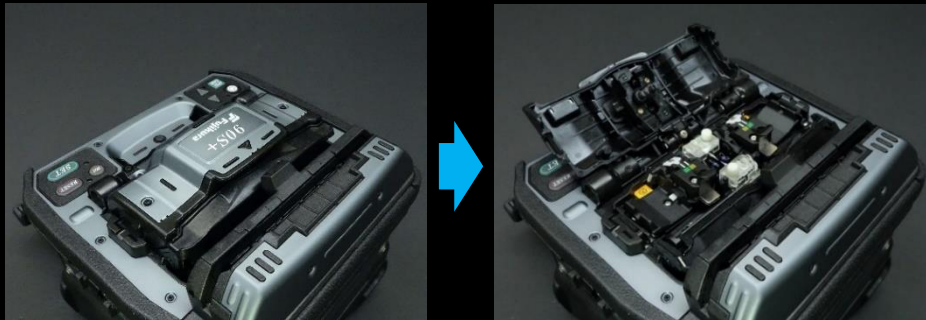

Automatic Open-Close wind protectors

## 2. Operation time reduction

The shape of the sheath clamp is optimized for 60mm length protection sleeves. The length from splice point to the edge of the sheath clamp is 30mm. Therefore, it is easy to center the protection sleeve over the splice by using your fingers to reference the splice point.

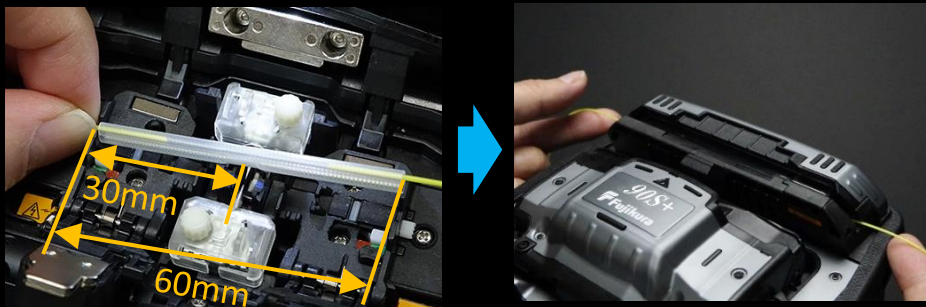


Easy centering

Automatic heater clamp

## 3. Fiber retention clamp


The fiber retention clamps support the automated operations. When the sheath clamps open automatically after splicing, the fiber retention clamps gently hold the spliced fiber to keep it from flying out. The retention clamps release when the fiber is lifted by the operator.

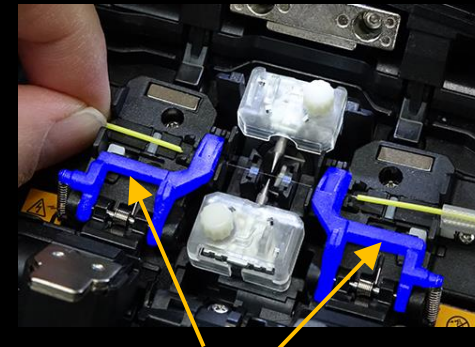

Fiber retention clamps

## 4. Operation time reduction

These functions enable the 90S+ to reduce operation time by 50% over the previous model.

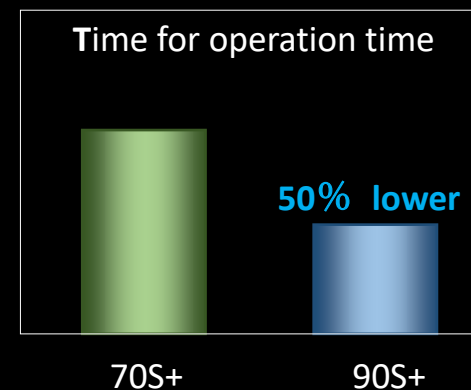

# User Friendly


## 1. Carrying Case

There are multiple ways to utilize the 90S+ carrying case. The 90S+ is ready to use just by opening the case, but it is also possible to use the 90S+ on top of the carrying case or only with the work tray depending on the work environment.



## 2. Work Tray



The work tray has many functions. There are two drawers for storage which are large enough to store tools or battery packs. Also, the work tray can be divided in two, so it is configurable to fit your work space.

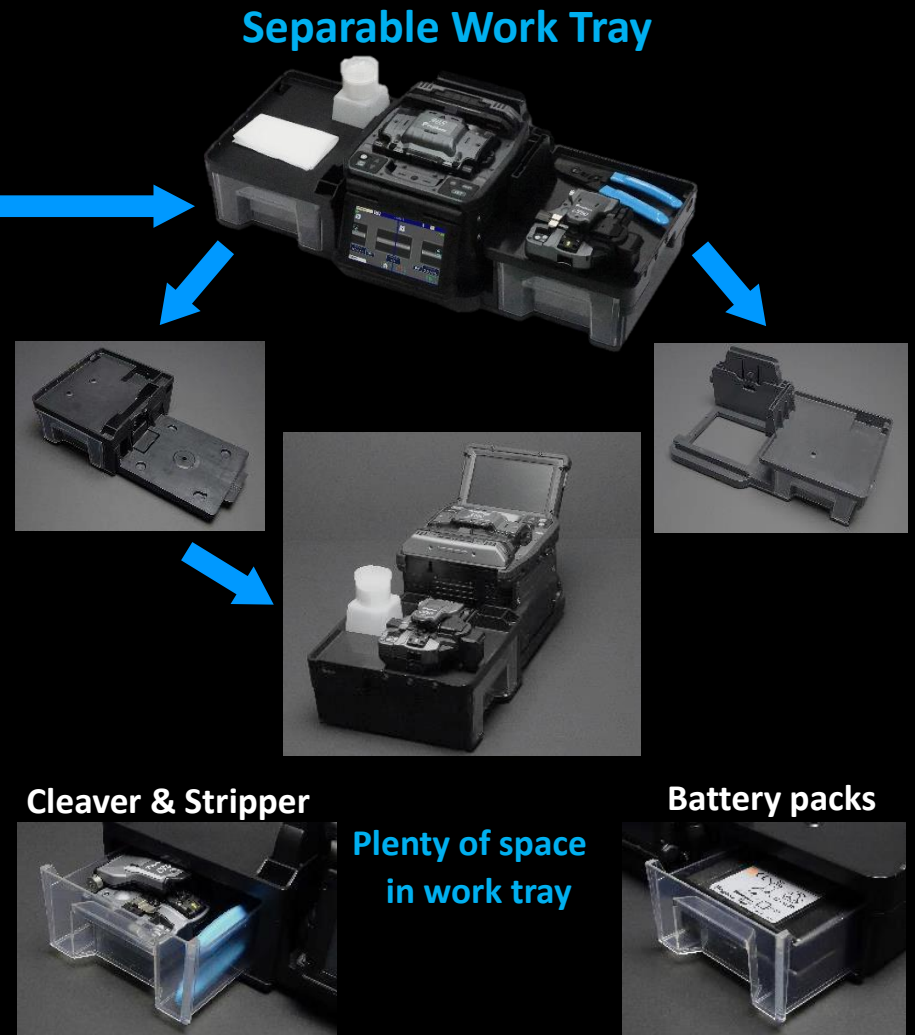

# User Friendly


## 3. Loose tube Compatibility

The sheath clamp of the 90S+ is compatible with loose tube fiber. The Protrusion part on of the sheath clamp for loose tube fiber engages or retracts by simply changing the switch position with your finger.

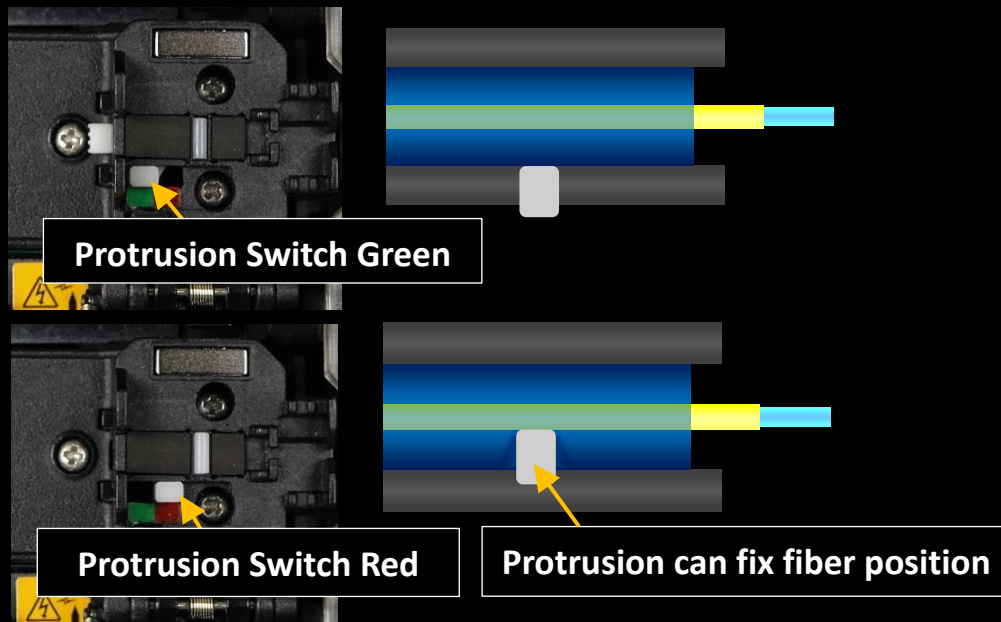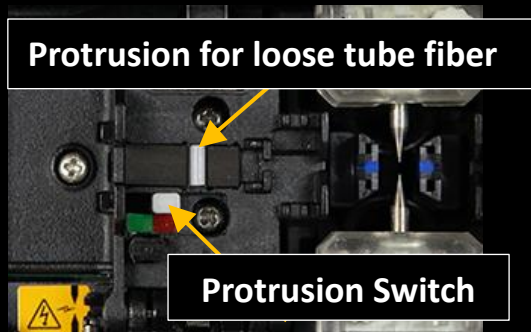


## 4. Tool-less Electrodes and illumination

The 90S+ electrodes come as an “assy” including the fixing screw. You can rotate the screw by hand without tools, enabling easy electrode replacement.

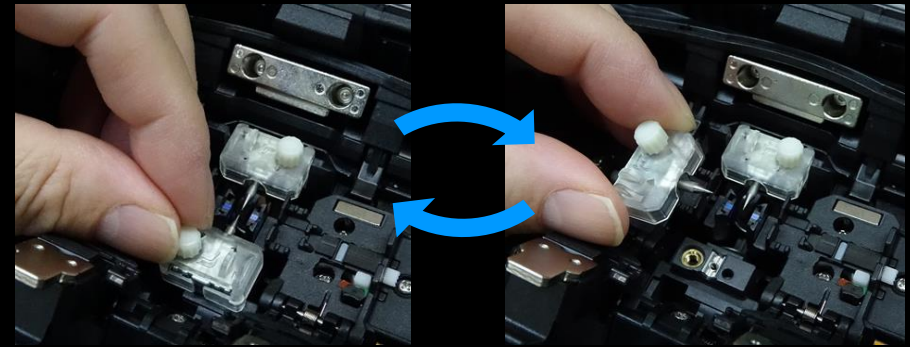

The transparent electrode covers support wider illumination of the v-groove. As the sheath clamp opens on the opposite side of the illumination lamp, the sheath clamp area is illuminated without shadow.

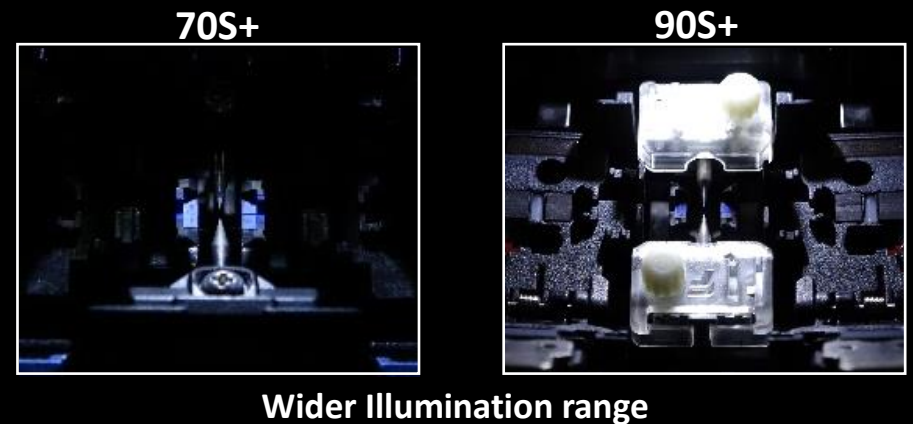

# Standard Package

## 90S+ Standard Package



Description	Model No.	Qty
Core Alignment Fusion Splicer	90S+	1pc
(1) Battery Pack*	BTR-15	1pc
(2) AC Adapter	ADC-20	1pc
(3) AC Power Cord	ACC-14, 15, 16, 17 or 18	1pc
(4) USB Cable	USB-01	1pc
(5) Fusion Splicer Strap	ST-02	1pc
(6) Electrodes, for spare	ELCT2-16B	1pair
(7) Fiber Holder Set Plate	SP-03	1pair
(8) Carrying Case	CC-39	1pc
(9) Work Tray Left	WT-09L	1pc
(10) Work Tray Right	WT-09R	1pc
(11) Work Tray J-Plate	JP-09	1pc
(12) Tripod Screw	TS-03	2pcs
(13) Carrying Case Strap	ST-03	1pc
(14) Alcohol Dispenser	AP-02	1pc
(15) Quick Reference Guide	QRG-02-E	1pc
(16) Instruction Manual	PDF file stored in Splicer	
Single Fiber Stripper	SS03	1pc
Optical Fiber Cleaver	CT50	1pc
(1) Fiber Scrap Collector	FDB-05	1pc
(2) Fiber Setting Plate	AD-10-M24	1pc
(3) Case, for cleaver	CC-37	1pc
(4) Hexagonal Wrench	HEX-01	1pc

\* Please follow IATA regulation when shipping the battery by air.



# Specifications



## 90S+ Specifications

Item		Specification
Fiber alignment method		Active core alignment
Fiber count can be spliced		Single fiber
Applicable fiber	Fiber type	Single mode optical fiber Multi mode optical fiber
	Cladding dia.	80 to 150µm *1
Applicable coating	Sheath clamp	Coating dia. : Max. 3000µm Cleave length : 5 to 16mm *1
Fiber splice performance	Splice loss *2	ITU-T G.652 : Avg. 0.02dB
		ITU-T G.651 : Avg. 0.01dB
		ITU-T G.653 : Avg. 0.04dB
		ITU-T G.654 : Avg. 0.04dB
		ITU-T G.655 : Avg. 0.04dB
	ITU-T G.657 : Avg. 0.02dB	
Splice time *3	SM FAST mode : Avg. 7 to 9sec.	
	AUTO mode : Avg. 14 to 16sec.	
Applicable protection sleeve	Sleeve type	Heat shrinkable sleeve
	Sleeve length	Max. 66mm
	Sleeve dia.	Max. 6.0mm before shrinking
Sleeve heat performance	Heat time *4	60mm slim mode : Avg. 9 to 10sec. 60mm mode : Avg. 13 to 15sec.
Fiber tensile test force		Approx. 2.0N
Electrode life *5		Approx. 5000 splices
Physical description	Dimensions W	Approx. 170mm without projection
	Dimensions D	Approx. 173mm without projection
	Dimensions H	Approx. 150mm without projection
	Weight	Approx. 2.8kg including battery
Environmental condition	Temperature	Operate : -10 to 50°C Storage : -40 to 80°C
	Humidity	Operate : 0 to 95%RH non-condensing Storage : 0 to 95%RH non-condensing
	Altitude	Max. 5000m
AC adaptor	Input	AC100 to 240V, 50/60Hz, Max. 1.5A
Battery pack	Type	Rechargeable Lithium Ion
	Output	Approx. DC14.4V, 6380mAh
	Capacity *6	Approx. 300 splice and heat cycles
	Temperature	Recharge : 0 to 40°C Long Term Storage : -20 to 30°C
Display	Battery life *7	Approx. 500 recharge cycles
	LCD monitor	TFT 4.9 inches with touch screen
Illumination	Magnification	Approx. 200 to 320x
	V-grooves	LED lamp
Interface	PC	USB2.0 Mini B type
	External LED lamp	USB2.0 A type Approx. DC5V, 500mA
	Ribbon Stripper	Mini DIN 6pin DC12V, Max. 1A
	Wireless *8	Bluetooth 4.1 LE
Data storage	Splice mode	100 splice modes
	Heat mode	30 heat modes
	Splice result	20000 splices
	Splice image	100 images
Screw hole for tripod		1/4-20UNC
Other features	Automatic functions	Splice mode select by fiber type analysis
		Fusion control
		Wind protector : open and close
		Sheath clamp : open
		Heater lid : open and close
	Heater clamp : open and close	
Reference guide	Video and PDF file stored in splicer	
Sheath clamp	Easy sleeve positioning clamp	
Electrode	Replaceable without tool	

## 90S+ Options

Item	Model	Remark
Fiber holder	FH-70-200	200µm coating diameter
	FH-70-250	250µm coating diameter
	FH-70-900	900µm coating diameter
	FH-FC-20	900µm in 2mm diameter cable
	FH-FC-30	900µm in 3mm diameter cable
DC Adapter	DCA-03	Connect AC adapter not through battery
DC power cord	DCC-20	Car cigar socket to BTR-15/DCA-03
	DCC-21	Car battery to BTR-15/DCA-03
Transfer Clamp	CLAMP-DC-12	Transferring drop cable on work tray
J-Plate	JP-10	Attaching to splicer, not to work tray
	JP-10-FC	JP-10 with fiber clamps
Protection sleeve	FP-03	60mm, Max. 900µm coating diameter
	FP-03(L=40)	40mm, Max. 900µm coating diameter
	FP-03M	FP-03 with magnetic material

### Notes

\*1 Use CT58 and FH-70-160 for splicing 80µm cladding dia. and 160µm coating dia. fiber.

length range depending on fiber type  
 5 to 16mm : 125µm cladding dia. and 250µm coating dia.  
 10 to 16mm : 125µm cladding dia. and 400 or 900µm coating dia.  
 5 to 10mm : 80µm cladding dia. and 160µm coating dia.  
 5 to 16mm : 150µm cladding dia. and 250µm coating dia.

\*2 Measured with a cut-back method relevant to ITU-T and IEC standard after splicing Fujikura identical fibers. The average splice loss changes depending on the environmental condition and fiber characteristics.

\*3 Measured at room temperature. The definition of splice time is from the fiber image appeared in LCD monitor to the estimated loss displayed. The average splice time changes depending on the environmental conditions, fiber type, and fiber characteristics.

\*4 Measured at room temperature with the AC adapter. The heat time is defined from the start beep sound to the finish beep sound. The average heat time changes depending on the environmental conditions, sleeve type and battery pack condition.

\*5 The electrode life changes depending on the environmental conditions, fiber type and splice modes.

\*6 Test condition

- (1) Splice and heat time : 1 minute cycle
- (2) Using the splicer power save settings, subject to our testing condition.
- (3) Using a not degraded battery
- (4) At room temperature

The battery capacity changes when testing with different conditions from the above.

\*7 The battery capacity decreases to a half after approx. 500 discharge and recharge cycles, The battery life is shortened further when using outside of the storage temperature range, operating temperature range, if completely discharged by storing for a long time without recharging.

\*8 Bluetooth® mark and logos are the registered trademarks of Bluetooth SIG, Inc.

# Specifications

## CT50 Specifications



Item		Specification	
Applicable fiber	Fiber type	Single mode optical fiber Multi mode optical fiber	
	Fiber count	Single and up to 16 fiber ribbon	
	Cladding dia.	Approx. 125µm	
Applicable coating	Fiber setting plate	AD-10-M24 : Max. 900µm coating diameter AD-50 : Max. 3mm coating diameter AD-16A : Max. 900µm coating diameter 1 fiber + Max. 250µm coating diameter 1 fiber	
		Fiber holder	Coating shape. : Refer to splicer options
		Cleave length	AD-10-M24 : 5 to 20mm *1 AD-50 *C.D. : coating diameter C.D. = 250µm or less : 5 to 20mm *1 250µm < C.D. < =900µm : 10 to 20mm 900µm < C.D. < =3mm : 14 to 20mm AD-16A : 5 to 20mm *1
Cleave angle *2	Single fiber	Avg. 0.3 to 0.9 degrees	
	Fiber ribbon	Avg. 0.3 to 1.2 degrees	
Blade life *3		Approx. 60000 fiber cleaves	
Physical description	Dimensions W	Approx. 117mm without projection *4	
	Dimensions D	Approx. 94mm without projection *4	
	Dimensions H	Approx. 59mm without projection *4	
	Weight	Approx. 306g including battery and AD-10-M24	
Environmental condition	Temperature	Operate : -10 to 50°C Storage : -40 to 80°C	
	Humidity	Operate : 0 to 95%RH non-condensing Storage : 0 to 95%RH non-condensing	
Battery		2 pieces of LR03, AAA dry battery	
Wireless interface *5		Bluetooth 4.1 LE	
Screw hole for tripod		1/4-20UNC	
Holding mechanism for the fiber holder		Equipped	
Other features	Blade rotation	Motorized rotation Manual rotation dial	
		Replaceable parts	Blade Clamp arm

## CT50 Options

Item	Model	Remark
Fiber Setting Plate	AD-50	Max. 3mm coating diameter
	AD-16A	Max. 900µm coating diameter 1 fiber + Max. 250µm coating diameter 1 fiber
Blade	CB-08	Blade for replacement
Clamp Arm	ARM-CT50-01	Clamp arm with anvil for replacement
Fiber Scrap Collector	FDB-05	Spare scrap collector
Side cover	SC-CT50-01	Side cover instead of scrap collector
Spacer	SPA-CT08-10	Cleave length 10mm
	SPA-CT08-09	Cleave length 9mm
	SPA-CT08-08	Cleave length 8mm

### Notes

\*1 When the cleave length is less than 10mm, the coating diameter should be 250µm or less. Also, a blade height adjustment is required before cleaving. The average cleave angle is worse than the specification when the cleave length is less than 10mm.

\*2 Measured with an interferometer at room temperature, not with a splicer. A new blade was used to cleave both the single fibers and ribbon fibers. The average cleave angle changes depending on the environmental conditions, blade condition, operating method, and cleanliness.

\*3 The blade life changes depending on the environmental conditions, operating method, and the fiber type cleaved.

\*4 Measured in a condition when closing the lever.

\*5 Bluetooth® mark and logos are the registered trademarks of Bluetooth SIG, Inc.



Please visit our web site!

<https://www.optic-product.fujikura.com/>

**BEST QUALITY SERVICE**  
- SINCE 1978 -

### Fujikura Ltd.

1-5-1, Kiba, Koto-ku, Tokyo 135-8512, Japan

General inquiries : +81-3-5606-1164

Service & support : +81-43-484-3962

<https://www.fujikura.com>

### Fujikura Asia Ltd.

438A Alexandra Road, Block A Alexandra Technopark #08-03 Singapore 119967

General inquiries, Service & support : +65-6-278-8955

<https://www.fujikura.com.sg>

### Fujikura Europe Ltd.

C51 Barwell Business Park, Leatherhead Road, Chessington, Surrey, KT9 2NY, UK

General inquiries : +44-20-8240-2000

Service & support : +44-20-8240-2020

<https://www.fujikura.co.uk>

### AFL

110 Hidden Lake Circle Duncan, SC 29334, USA

General inquiries : +1-800-235-3423

Service & support : +1-800-866-3602

<https://www.aflglobal.com>

### Fujikura (China) Co., Ltd.

7th Floor, Shanghai Hang Seng Bank Tower, 1000 Lujiazui Ring Road, Pudong New Area, Shanghai 200120, CHINA

General inquiries, service & support : +86-21-6841-3636

<http://www.fujikura.com.cn>