

InteliNeo 5500



Order code: INEO5500BAA

Controller for parallel hybrid applications

Datasheet

Product description

- InteliNeo 5500 is a microgrid controller that offers a cost-effective solution for combining traditional grid or gen-sets with renewable energy sources to create a reliable and efficient power generation system.

Key benefits

- One controller for renewables and storage devices
- Configurable microgrid applications MPTM and MINT
- Modbus client onboard for flexible integration of devices via RTU or TCP
- Clear visualisation of critical information on the 5" built-in colour TFT display



Key features

- Modbus Client support of up to 9* devices for RTU/TCP communications to inverters and storage systems
- Cooperation with up to 8* gen-sets/mains controllers for complex systems
- Load & Var sharing between microgrid power sources and Deep Sea Electronics' (DSE) DSE8610/8620 MKII controllers on one site*
- Supports black start of grid-forming battery storage systems
- Built-in PLC interpreter with the use of ComAp's free PLC Editor
- AirGate 2.0 for easy connection to your equipment remotely, without worrying about your asset's IP address
- User-defined protections and setpoints on top of default parameters



- Remote control and monitoring of your gen-set operations with WebSupervisor, our cloud-based fleet management tool
- Compatible load/Var sharing and power management with other ComAp solutions
- Event-based history for fast and easy troubleshooting
- Peak shaving for limiting the import from the mains (e.g., due to higher prices)
- Load shedding ensuring the most important loads are running even when there is a lack of power
- Keeping your business and data as safe as possible with design to the ISA 62443 level 2 - level 3 security requirements
- Slots for plug-in modules for 4G and GPS, additional Ethernet port, RS232/485 connection or additional binary inputs/outputs

*Features available with software key

Application overview

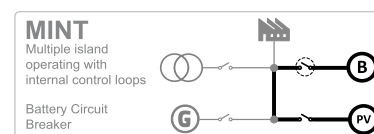

Terminals and dimensions

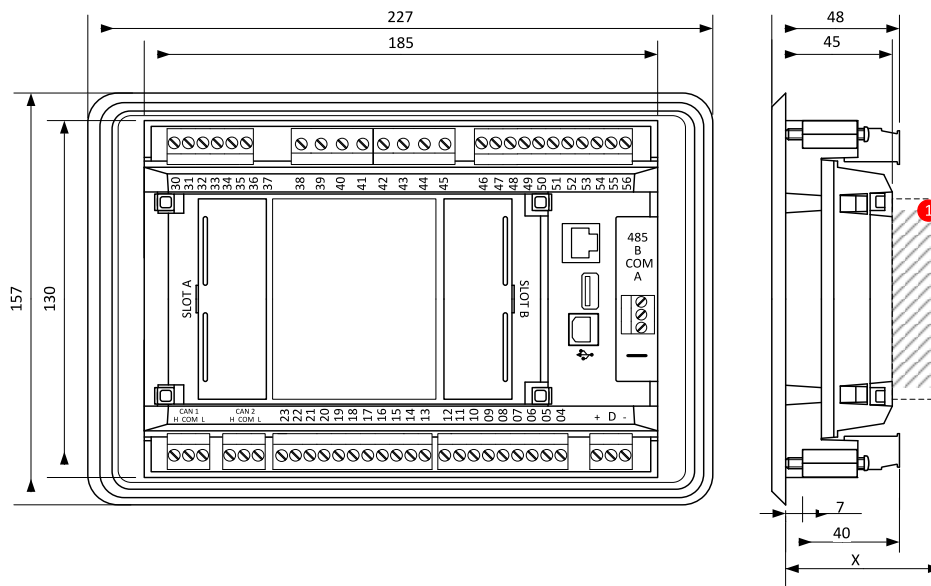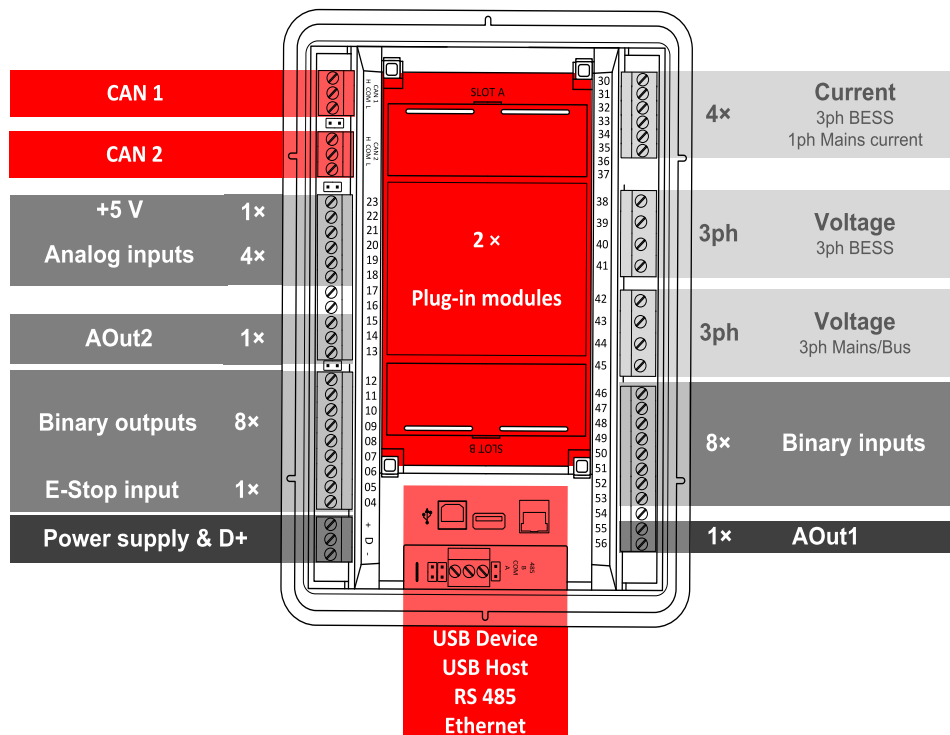

Plug-In module

Note: Dimensions are in millimeters, dimension of "x" depends on a plug-in module,

Note: The final depth of the controller depends on the selected plug-in module – it can vary between 47 mm and "x" mm. Mind also the size of connectors and cables (e.g. in case of RS232 connector, add about 60 mm more for standard RS232 connector and cable).

Note: The controller is mounted into panel doors as a standalone unit using provided holders. The requested cutout size is 187 × 132 mm. Use the screw holders delivered with the controller to fix the controller into the door.

Technical data



Power supply

| | |
|-------------------------------------|----------------------|
| Power supply range | 8-36 V DC |
| Power consumption (without modules) | 6 W |
| RTC battery | Replaceable, 3V |
| Fusing power | 5 A / 6 × 0.5 A BOUT |
| Fusing ESTOP | 2 A |
| Max. Heat Dissipation | 10 W |

Operating conditions

| | |
|---|---|
| Protection degree | IP65 |
| Operating temperature | -30 °C to +70 °C (-40 °C to +70 °C)* |
| Storage temperature | -30 °C to +80 °C |
| Operating humidity | 95 % non-condensing (EN 60068-2-30) |
| Vibration | 5-25 Hz, ± 1.6 mm 25-100 Hz, a = 4 g |
| Shocks | a = 500 m/s ² |
| Surrounding air temperature rating 70 °C. | |
| Suitable for pollution degree 2. | |

Voltage measurement

| | |
|---|--|
| Measurement inputs | 3ph-n BESS voltage 3ph-n Mains voltage |
| Measurement range | 10-277 V AC / 10-480 V AC (EU) 10-346 V AC / 10-600 V AC (US/Canada) |
| Linear measurement and protection range (maximal voltage) | 350 V AC Ph-N / 660 V AC Ph-Ph |
| Accuracy | 1 % |
| Frequency range | 30-70 Hz (accuracy 0.1 Hz) |
| Input impedance | 0.72 MΩ ph-ph , 0.36 MΩ ph-n |

AOut1/VRO

| | |
|-----------|--------------|
| Isolation | Isolated |
| Type | max ±10 V DC |

Aout2/SRO

| | |
|-----------|--------------------------------------|
| Isolation | Non-isolated |
| Type | ±10 V DC PWM selectable by jumper |

Display

| | |
|------------|------------------------|
| Type | Build-in colour TFT 5" |
| Resolution | 800 × 480 px |

Communications

| | |
|------------|---------------------------|
| USB device | Non-isolated, USB type B |
| USB host | Non-isolated, USB type A |
| RS 485 | Isolated |
| Ethernet | 10/100 Mbit |
| CAN 1A | Isolated, 250/50 kbps |
| CAN 2A | Terminator impedance 120Ω |

Current measurement

| | |
|----------------------|--|
| Measurement inputs | 3ph BESS current 1ph Mains current |
| Measurement range | 5 A |
| Max. allowed current | 10 A |
| Accuracy | ±20 mA for 0-2 A; 1 % of value for 2-5 A |
| Input impedance | < 0.1 Ω |

E-Stop

| |
|---|
| Dedicated terminal for safe Emergency Stop input. |
| Physical supply for binary outputs 1 & 2. |

Binary inputs

| | |
|-----------------------|--|
| Number | 8, non-isolated |
| Close/Open indication | 0-2 V DC close contact 6-36 V DC open contact |

Binary outputs

| | |
|--------------|--------------------------|
| Number | 8, non-isolated |
| Max. current | BO 1-8 = 0.5 A |
| Switching to | Positive supply terminal |

Analog inputs

| | |
|----------|--|
| Number | 4, switchable (R/U/I) |
| Range | R = 0-2500 Ω; U = 0-10 V; I = 0-20 mA |
| Accuracy | R: ±2 % from value ±5 Ω in range 0-250 Ω R: ±4 % from value in range 250 Ω-2500 Ω U: 1 % from value ±100 mV I: 1 % from value ±0.2 mA |

+5 V Power supply output

| | |
|--------------|--------|
| Max. current | 100 mA |
|--------------|--------|

Note: *) If the device is powered on above -30 °C

Available simulator

| | |
|---------------------------|-------------|
| Product | Order code |
| InteliNeo 6000 StarterKit | SM1INEO6BAB |

Available plug-in modules

| Product | Description | Order code |
|--------------|--|-----------------------------|
| CM-RS232-485 | Dual port interface | CM223248XBX |
| CM2-4G-GPS | 4G & GPS plug-in communication module | CM24GGPSXBX |
| CM3-Ethernet | Internet / Ethernet plug-in communication module | CM3ETHERXBX |
| EM-BIO8-EFCP | 8 additional binary inputs/outputs | EM2BIO8EXBX |

Note: Controller has 2 slots for plug-in modules.

Available external displays

| Product | Description | Order code |
|----------------------|--|-----------------------------|
| InteliVision 5.2 | 5" TFT external display with 800x480 px resolution | RD2IV5BXBAA |
| InteliVision 10Touch | 10.1" Touchscreen display uni with 1280 x 800 px resolution | RD1IV10TBPF |
| InteliVision 13Touch | 13.3" Marine certified display unit with 1920 x 1080 px resolution | RD1IV13TBME |
| InteliVision 18 | 18.5" Touchscreen display unit with 1366 x 768 px resolution | RD31840PBIE |

Available CAN modules

| Product | Description | Order code |
|---------------|--|-----------------------------|
| IGL-RA15 | Remote Annunciator w/ 15 programmable LEDs | EM2IGLRABAA |
| Inteli AIN8 | 8 Analog Input Channels and 1 RPM/Impulse Input Module | I-AIN8 |
| Inteli IO8/8 | 16 Configurable Binary Inputs/Outputs and Analog Outputs Module | I-IO8/8 |
| IGS-PTM | 4 Analog Inputs, 1 Analog Output, 8 Binary Inputs and 8 Binary Outputs | IGS-PTM |
| Inteli AIN8TC | 8 Analog Input Channels for termocouples measurement | I-AIN8TC |
| Inteli AIO9/1 | 4 Analog Inputs for differential voltage measurement, 4 Analog Input equipment channels, 1 Analog Input for resistance measurement and 1 Analog Output | I-AIO9/1 |
| I-CR | CAN Repeater Module | I-CR |
| I-CR-R | CAN Redundancy Module | I-CR |

Functions and protections

Support of functions and protections as defined by ANSI (American National Standards Institute):

| Description | ANSI code | Description | ANSI code | Description | ANSI code |
|---|---------------|---------------------------|-----------|--------------------|-----------|
| Master unit | 1 | Load shedding | 32P | AC circuit breaker | 52 |
| Stopping device | 5 | Master sequence device | 34 | Power factor | 55 |
| Multi-function device | 11 | Undercurrent | 37 | Overvoltage | 59 |
| Speed and frequency matching device | 15 | Unit sequence starting | 44 | Alarm relay * | 74 |
| Data communications device | 16EFT 16SC | Current unbalance | 46 | Vector shift | 78 |
| Starting-to-running transition contractor | 19 | Voltage unbalance | 47 | Reclosing relay | 79 |
| Distance relay | 21 | Incomplete sequence relay | 48 | Overfrequency | 81H |
| Synchronizing-check | 25 | Temperature monitoring | 49T | Underfrequency | 81U |
| Thermal relay | 26 | Overcurrent | 50/50TD | ROCOF | 81R |




E-mail: info@comap-control.com
 Web: www.comap-control.com

ComAp 
 The heart of smart control

| | | | | | |
|--------------|----|--------------------------|--------|---------------------------------|----|
| Undervoltage | 27 | Earth fault current | 50N+64 | Auto selective control/transfer | 83 |
| Annunciator | 30 | Overcurrent IDMT | 51 | Regulating device | 90 |
| Overload | 32 | Earth fault current IDMT | 51+64 | | |

* extension module IGL-RA15 required

Certifications and standards

| | | |
|--|--|---|
| <ul style="list-style-type: none"> > EN 61000-6-2 > EN 61000-6-4 > EN 61010-1 > EN 60068-2-1 (-40 °C/16 h) > EN 60068-2-2 (70 °C/16 h) | <ul style="list-style-type: none"> > EN 60068-2-6 (2±25 Hz / ±1,6 mm; 25±100 Hz / 4,0 g) > EN 60068-2-27 (a=500 m/s²; T=6 ms) > EN 60068-2-30 (25/55 °C, RH 95%, 48 h) > UKCA |  |
|--|--|---|

Grid codes

| |
|--|
| European Requirements for Generators, 2016/631 |
| <ul style="list-style-type: none"> > UK ENA EREC G99 |

List of SW Key Features

| SW Key Feature | Order Code |
|------------------------------|-------------|
| Deep Sea Electronics support | SKDSESUPP01 |
| Intercontroller Expansion | SKCAN2EXP01 |



E-mail: info@comap-control.com
 Web: www.comap-control.com

