

AREA SCHEDULE

WDQR 2021 Area Requirements
6 Person 4 Bed House: 110m²

WDQR 2021 General Storage Requirements
2 Person 1 Bed Walk-Up: 3m²

GF
Store 1 0.97m²

FF
Store 2 0.81m²
A/C 1.22m²
Total: 3.00m²

PLAN
MEP & PLANT PROVISIONS

Information presented indicatively for coordination with all - including manufacturer & model specification - TBC by relevant specialist consultant / subcontractor. All revisions to the plant specification must be reported for coordination.

CONSTRUCTIONS


External walls 413mm
Internal walls 120mm
Intermediate floors 400mm

Constructional thicknesses are indicative only & must be coordinated with fabric requirements for acoustic, fire & thermal performances on a site-by-site basis. All TBC by the constructional preferences of the appointed contractor.


COMMENTARY

Layouts successfully integrate low carbon plant without compromising spatial or storage requirements.

MVHR units & hot water cylinders could be installed above counter height to accommodate additional storage below, pending coordination of heating & ventilation infrastructure. ASHPs could move to blank gable (current party wall) if HT used as detached unit, pending site layout & landscaping.

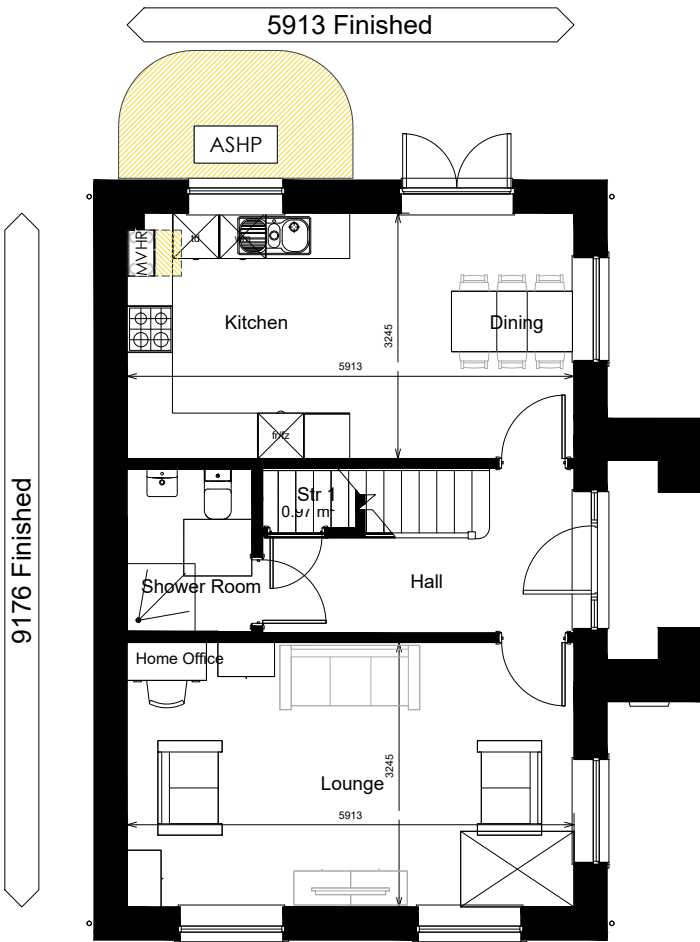

Ground Floor Plan

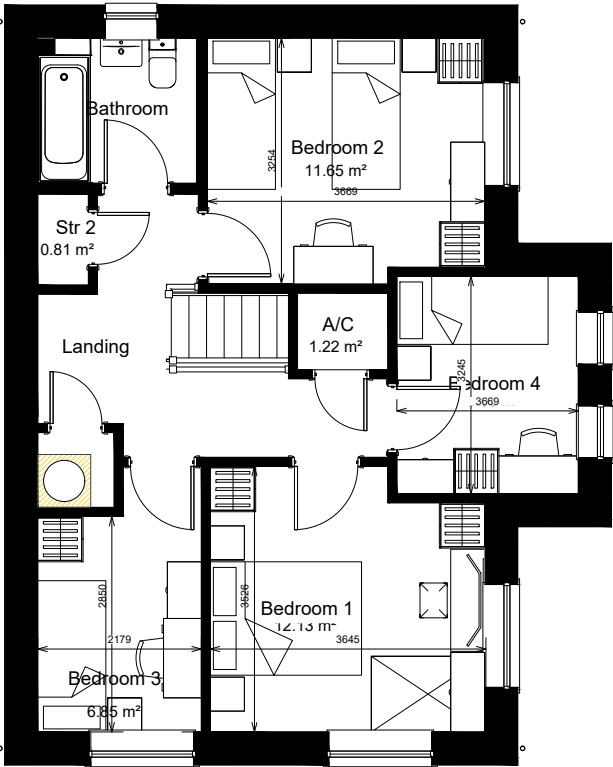


First Floor Plan

LOW CARBON PLANT

Dimensions denote minimum installation & maintenance clearances, extrapolated to hatched areas. All as defined by manufacturer's requirements refer to product literature for specifics.

ASHP

ASHP
Vaillant aroTHERM plus 3.5 / 5 / 7kW
dimensions: 765 / 965x1100x490mm (hwd)
Vaillant aroTHERM plus 3.5kW: HT 211
Vaillant aroTHERM plus 5kW: HT 421 & HT 531
Vaillant aroTHERM plus 7kW: HT 641

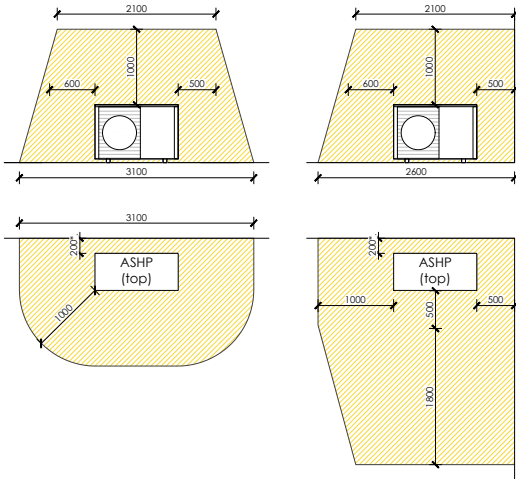


*Clearance for heating only: +50mm if ASHP provides cooling.

MVHR

MVHR
Nuair MRXBOX-ECO2
dimensions: 504x607x357mm (hwd)
Volume flow: 40-324m³/h
Heat recovery: 83.0%* at 225m³/h
N.B. Maintenance clearances to be coordinated with Nuair prior to installation.

Hot Water Cylinder HT 641

Mixergy cylinder 150 / 210L
dimensions: 1255 / 1585x545mm (hd)
Mixergy 150L for HT 211
Mixergy 210L for HT 421



A1 Original sheet size				
<small>Note: This Drawing is copyright, its use or reproduction is subject to permission from Spring Design Consultancy Limited. All rights are reserved until invoices are paid in full. Contact SDC regarding terms & conditions. Check printed scale, responsibility is not accepted for reproduction of digital media or measuring from this document. Only figured dimensions to be used for construction. No responsibility will be taken for any design used for construction prior to receipt of relevant approvals. Report doubts/discrepancies to project Architect.</small>				
Rev	Date	By	CHK	Description

Client: Bluefield Land		Project: Cwmgors Ammanford		Drawing Title: HT 641 Floor Plans	
Drawing Status: CONCEPT DESIGN	Date: Jan 2024	Drawn By: 	Checked: 	Director: 	Scale: 1:50@A1
Job No: 2625	Drawing No: 641(02)200	Rev: 	Unit 2 Chapel Barns Merthyr Mawr Bridgend CF32 0LS t: 01656 656267 e:mail@spring-consultancy.co.uk		

