




BUILDING QUOTE

700 Series Pre-Designed Barn Kit

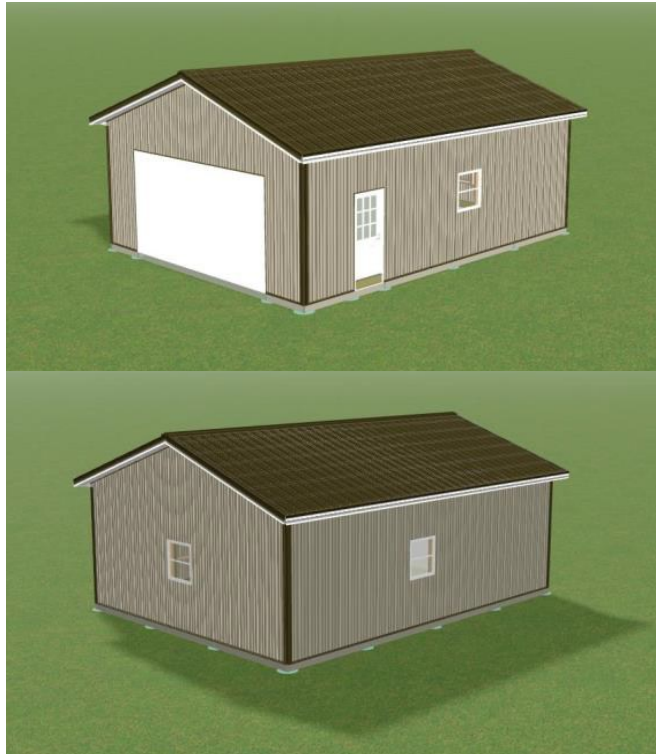

700 Series Pre-Designed Barn Kit

700 Series: 768 SF - 24' X 32' X 10'

JUNE 2025 PRICING

PLANS & MATERIALS SHIPPED TO YOU

\$14,459

MUST HAVE DOWN PAYMENT BY 06/15/25

700 Series: 768 SF - 24' X 32' X 10'

THIS PACKAGE INCLUDES THE FOLLOWING

- Size: 24' Wide X 32' Deep X 10' Tall Pole Barn
- Framing for One 16x8 Overhead Door (Door not included)
- One 9-lite Entry Door
- 3 Silverline Single-Hung 3x3 Windows

Building Frame Specifications:

- Pre-Engineered Wood Trusses 4 / 12 Pitch 4' O/C Standard Bottom Chord
- 3 Ply 2x6 Green Post (Lifetime warranty on all posts)
- (Eaves 8' O.C.) (Gables 8' O.C.)
- Post Hole 3' 6"D X 1' 6"W With Composite Pads
- Pine SYP #1 2x10 Double Truss Carrier
- Flat SPF 2x4 2' O.C. Roof Purlins And SPF 2x4 2' O.C. Wall Girts
- Treated YP #1 T&G EZV 2x8 Skirt Board (2 Rows)

Roofing, Siding and Trim Specifications:

- (roof color shown - Burnished Slate) 28 Ga. Parallel Rib with factory attached Dripstop moisture wicking material
- (wall color shown - Taupe) 28 Ga. Parallel Rib & House-Wrap
- (trim color shown - Burnished Slate) 28 Ga. Parallel Rib W/ 1" Fasteners
- Burnished Slate Siding Trim
- 1' Overhang With T-4 Center Vent Aluminum Soffit 12" + - BW

Door, Window and Acc. Specifications:

- 1 - 4300 16X8 Clopay Overhead Door (insulated door R-6.5) **Not Included**
- 1 - 3/0 x 6/8 LH FGS 9-LITE WHITE GBG INSWING MAN DOOR,
- 3 - 3/0 x 3/0 Silverline Single Hung

**TOTAL COST INCLUDES: ALL MATERIAL / FASTENERS / TAXES / DELIVERY
ASSEMBLY, GROUND EXCAVATION, & CONCRETE NOT INCLUDED IN COST**



Home Owner to provide necessary permitting.

**can ship to all counties in Ohio – most of Indiana – northern Kentucky – western Pennsylvania – northern West Virginia – southern Michigan - CALL OUR OFFICE FOR VERIFICATION ON DELIVERY