




BUILDING QUOTE

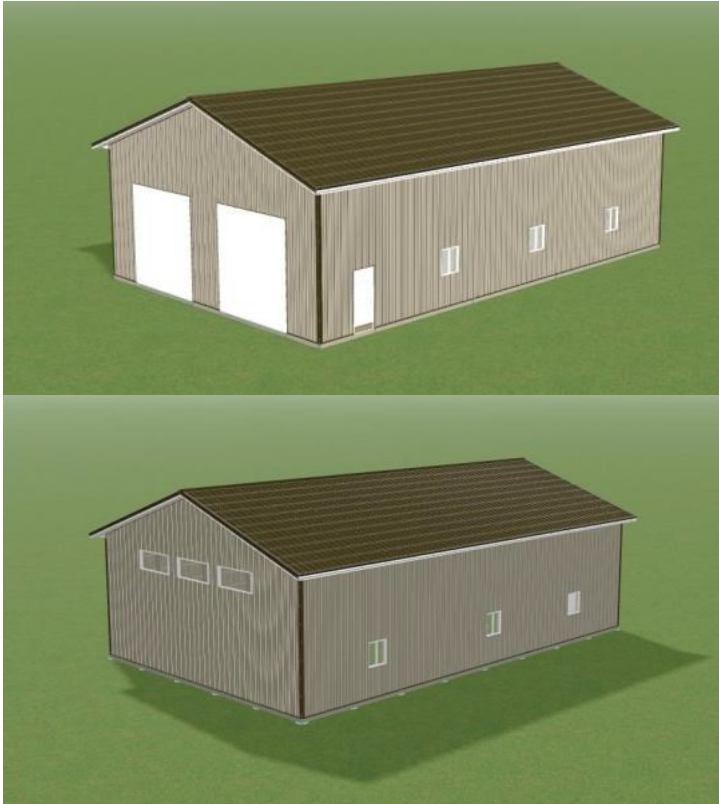

Pre Designed Kit 2000 Series

2560 SF - 40' X 64' X 16'

FEBRUARY 2025 PRICING

MATERIALS SHIPPED AND YOU BUILD**\$38,057
MUST HAVE DOWN PAYMENT BY 02/15/25

2000 Series: 2560 SF - 40' X 64' X 16'

THIS PACKAGE INCLUDES THE FOLLOWING

- Size: 40' Wide X 64' Deep X 16' Tall Pole Barn
- Framing for Two 12x12 Overhead Doors (Doors Not Included)
- One six-panel composite door 36"
- 6 Silverline Sliding 3 x 3 Windows
- 3 Silverline Fixed "Transom" Picture Windows

Building Frame Specifications:

- Pre-Engineered Wood Trusses 4 / 12 Pitch 4' O/C Standard Bottom Chord
- 3 Ply 2x6 Green Post (Lifetime warranty on all posts)
(Eaves 8' O.C.) (Gables 8' O.C.)
- Post Hole 3' 6"D X 1' 6"W With Composite Pads
- Pine SYP #1 2x12 Double Truss Carrier
- Flat SPF 2x4 2' O.C. Roof Purlins and SPF 2x4 2' O.C. Wall Girts
- Treated YP #1 T&G EZV 2x8 Skirt Board (2 Rows)


Roofing, Siding and Trim Specifications:

- Roof with Factory Attached Dripstop Moisture Wicking Material
(roof color shown - Burnished Slate)
- Parallel Rib Wall with Housewrap (wall color shown - Taupe)
- Burnished Slate Siding Trim (trim color shown - Burnished Slate)
- 18" Overhang With T-4 Center Vent Aluminum Soffit 12"* - BW

Door, Window and Acc. Specifications:

- 2 - 4300 12X12 Clopay Garage Door (Insulated door R-6.5) (Doors Not Included)
- 1 - 3/0 x 6/8 RH FGS 6 PANEL INSWING MAN DOOR
- 6 - 4/0 x 3/0 Silverline Slider Window
- 3 - 80" x 30" Silverline Fixed/Picture Window

**TOTAL COST INCLUDES: ALL MATERIAL / FASTENERS / TAXES / DELIVERY
ASSEMBLAGE, GROUND EXCAVATION & CONCRETE NOT INCLUDED IN COST**

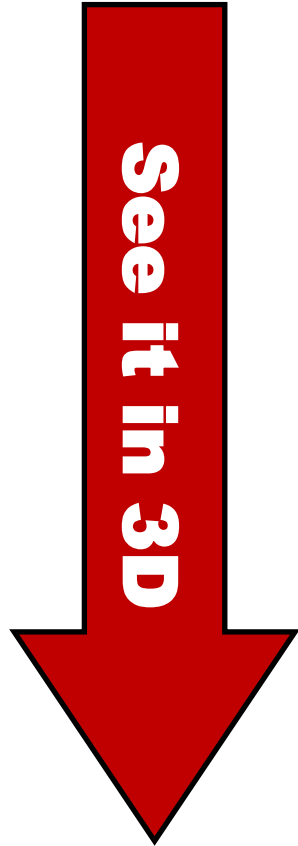

Home Owner to provide necessary permitting.

**can ship to all counties in Ohio - most of Indiana - northern Kentucky - western Pennsylvania - northern West Virginia - southern Michigan - CALL OUR OFFICE FOR VERIFICATION ON DELIVERY.