

5400 SERIES

FEDERAL OFFICE WALL



Workplace Wellness

At Federal Office Wall, we believe that your office should be a reflection of your business. The 5400 Series Framing is striking and highlights the hallways of your office. These frames combined with our hydraulic barrel hinges, and low profile door stops create the a striking visual, while maintaining functionality and stability. With Federal Office Wall, you can create a workspace that not only looks great but also enhances your productivity.




5400 SERIES FRAMING




PRODUCT DESCRIPTION:

- DRY GLAZED NON THERMAL ALUMINUM FRAMING.
- 4 ½" X 1 ¾" PROFILE DIMENSIONS.
- ACCEPTS GLASS THICKNESS OF 3/8" & 1/2"
- FINISH OPTIONS:
- CLEAR ANODIZED
- BLACK ANODIZED
- CUSTOM COLORED POWDER COATING AVAILABLE
- TYPICAL APPLICATIONS INCLUDE:
- STOREFRONT
- VESTIBULES
- OFFICE OPENINGS
- SPACE SEPARATION
- STC RANGE: 30 45 DEPENDING ON SYSTEM CONFIGURATION AND SURROUNDING CONSTRUCT

HIGHLIGHT YOUR HALLWAYS WITH THE 5400 SERIES ARCHITECTURAL FRAMING SYSTEM!



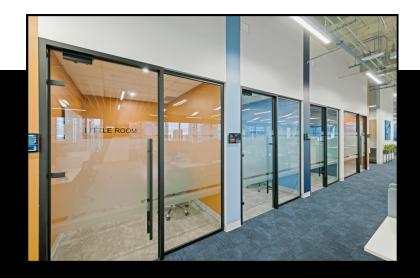





FOSTERING CREATIVITY AND LIMITLESS POSSIBILITIES

Speed

- Fastest lead times in the Architectural Partition industry with a standard 2–3 week lead time.
- Single trade install fully trained installation experts produce fast and clean installations so clients can get into or back into their spaces faster!

Flexibility

- Reversible doors and door frames.
- Reuse of materials to reconfigure and accommodate most design layouts.
- Easily integrates with existing and new construction.
- Integrates with less then ideal building conditions such as non-level floors and out-of-plumb columns.





Barrel Hinge

FOW - FEDERAL OFFICE WALL

Affordability

- Options available to provide new partitions at a lower cost then traditional drywall construction.
- Reduced renovation costs and instead reconfigure the glass partitions to accommodate changing business needs.


Performance

- Standard Barrel Hinges have multiple adjustments to control the swing speed and back pressure to ensure proper seal on closing function.
- Ability to accommodate custom hardware and electric strikes.



ADAPT TO CHANGING BUSINESS REQUIREMENTS



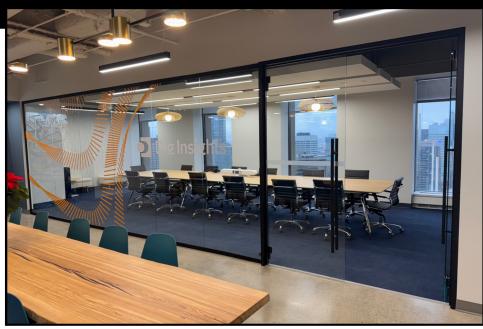



5400 FRAME

FOW - FEDERAL OFFICE WALL

Project Initiation

 Tender/Awarding Phase - reviewing scop of work, hold job site meeting and confirm schedules.

Preliminary Set-up

 Review details of specifications, customizations, and schedules. Provide Pricing to the Client followed by shop drawings

Procurement and Fabrication

 Once we have a PO we start by site measuring each opening followed by the mobilization of materials. Finally, the installation begins! (most of our materials are kept in-stock, significantly reducing lead-times.

Monitoring & Controlling

The project installation is tracked, any necessary adjustments are made. Full site review completed at end of the install to ensure no issues and a smooth hand-off.

Closure

• All project tasks are completed, final site review, deliverables are finalized and the project is formally handed off.