



Digital Migration Radio MD61X

➤ Analog & Digital Dual Modes ➤ Clear Voice





PROFESSIONAL AND SIMPLE TO USE



A&D Auto Detect

Compatible with analog conventional and digital conventional modes. Allow MD61X to simultaneously monitor analog and digital modes and automatically respond in each mode. It is an easy way for migration to digital from analog.



PSEUDO TRUNK

Several talk groups share the same frequency, and each one of them can dynamically chose to use one of the slots to talk. This is a two-slot-trunked mode. While time-slot 1 is busy, MD61X will use time-slot 2 to transmit.



ENLARGE TALKING RANGE

With a high RF power output up to 50W, MD61X can dramatically enlarge your communication range.



SUPPLEMENTARY FEATURES (Optional)

MD61X supports radio Enable/Disable, Remoter Monitor and Priority Interrupt.



ANALOG SIGNALING

Support DTMF and HDC1200 signaling in analog mode.



EMERGENCY ALARM/CALL

Use the orange emergency button to initiate an emergency alarm and call to other radios.



RELIABLE AND DURABLE

MD61X is compliant with MIL-STD-810 G and IP54.



PRIVACY

Basic end-to-end Encryption secures your voice and data transmission.



ROAMING (Optional)

It allows MD61X to be used in a large multi-site network.

TARGET MARKETS




Taxi



Agriculture



Truck

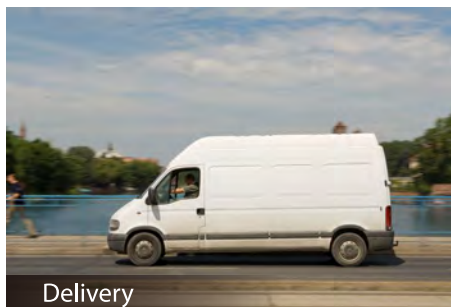

Delivery



School Bus




Ambulance

ACCESSORIES

Diverse accessories
for specific tasks

STANDARD



Power Cord



Programming Cable



Antenna



Mounting Bracket




Foot Switch
(external PTT)



Palm Microphone




Fuse



Ignition Cable

OPTIONAL



DB26 plug
data cable
(USB to Serial Port)



External Speaker



Power Supply

Pictures above are for reference only
and may vary from actual products.

SPECIFICATIONS

GENERAL			
Frequency Range		UHF:400-470MHz*; VHF: 136-174MHz	
Channel Capacity		48 (16 channels per zone)	
Zone Capacity		3	
Channel spacing		12.5 / 25 KHz	
Operating Voltage		13.6 V ±15%	
Current Drain	Standby	around 0.3A	
	Receive	< 1 A	
	Transmit	1W	<3A
		25W	<8A
		5W	<5A
45W		<12A	
Weight		1100g	
Dimensions		164 X 43 X 150 mm	
Frequency Stability		±0.5 ppm	
Antenna Impedance		50Ω	
RECEIVER			
Sensitivity	Analog	0.3μV (12dB SINAD); 0.22μV (Typical) (12dB SINAD); 0.4μV (20dB SINAD)	
	Digital	0.3μV /BER5%	
Selectivity	TIA-603	60dB @ 12.5KHz / 70dB @ 25KHz [†]	
	ETSI	60dB @ 12.5KHz / 70dB @ 25KHz [†]	
Intermodulation	TIA-603	70dB @ 12.5/25KHz [†]	
	ETSI	65dB @ 12.5/25KHz [†]	
Spurious Response Rejection	TIA-603	70dB @ 12.5/25KHz [†]	
	ETSI	70dB @ 12.5/25KHz	
Blocking	TIA-603	90dB	
	ETSI	84dB	
Hum and Noise		40dB @ 12.5KHz 45dB @ 25KHz [†]	
Rated Audio Power Output		Internal (@16 ohm load)	4W
		External (@8 ohm load)	8W
Max Audio Power Output		Internal (@16 ohm load)	6W
		External (@8 ohm load)	12W
Rated Audio Distortion		≤3%	
Audio Response		+1 ~ -3dB	
Conducted Spurious Emission		<-57dBm	

TRANSMITTER	
RF Power Output	Low power version: 1-25W (UHF/VHF) High power version: 5-45W(UHF) / 5-50W(VHF)
FM Modulation	11K0F3E @ 12.5KHz; 16K0F3E @ 25KHz [†]
4FSK Digital Modulation	12.5KHz Data Only: 7K60FXD 12.5KHz Data & Voice: 7K60FXW
Conducted/Radiated Emission	-36dBm<1GHz; -30dBm>1GHz
Modulation Limiting	±2.5KHz @ 12.5KHz ±5.0KHz @ 25KHz [†]
FM Hum & Noise	40dB @ 12.5KHz 45dB @ 25KHz [†]
Adjacent Channel Power	60dB @ 12.5KHz; 70dB @ 25KHz [†]
Audio Response	+1 ~ -3dB
Audio Distortion	≤3%
Digital Vocoder Type	AMBE+2™ or SELP
Digital Protocol	ETSI-TS102 361-1,-2,-3

ENVIRONMENTAL	
Operating Temperature	-30°C~ +60°C
Storage Temperature	-40°C~ +85°C
ESD	IEC 61000-4-2 (Level 4) ±8kV (Contact) ±15kV (Air)
American Military Standard	MIL-STD-810 G
Dustproof & Waterproof	IP54 Standard
Humidity	MIL-STD-810 G Standard
Shock & Vibration	MIL-STD-810 G Standard

* 400-470MHz is not available currently, and will come soon.

[†]20KHz/25KHz will not be available on new equipment in the U.S. after 2011-01-01.

All specifications are subject to change without notice due to continuous development.

MD61X, X=0, 2, 5, 6 or 8, model number varies geographically. For details, please contact our regional sales representatives.



Hytera Communications Corporation Limited
Stock Code: 002583.SZ

Address: Hytera Tower, Shenzhen Hi-Tech Industrial Park North,
Beihuan RD.9108#, Nanshan District, Shenzhen, P.R.C.

Tel: +86-755-2697 2999 **Fax:** +86-755-8613 7139 **Post:** 518057

Http: //www.hytera.com **marketing@hytera.com**



Hytera retains right to change the product design and specification. Should any printing mistake occur, Hytera doesn't bear relevant responsibility. Little difference between real product and product indicated by printing materials will occur by printing reason.

Hytera, SEDURA, teltronic, Norsat, SIELAIR, HYT are registered trademarks of Hytera