

sanwa

Electric Test Tools GENERAL CATALOG 2025-2026

*Your Reliable Electrical Measurement Partner
Sanwa since 1941*

Sugarfech



JAPAN QUALITY

Actual size

Sanwa’s mission

Sanwa sees its mission as contributing to global environmental conservation and energy management through continuous advances in electrical and on-site measuring instruments, while “putting the trust and satisfaction of customers first”.

Contents

Digital Multimeter



- PC7000.....P10
- PC710.....P10
- PC700.....P11
- PC720M.....P11
- PC773.....P12
- PC20.....P12
- CD732.....P12
- RD700.....P13
- RD701.....P13
- CD800a3.....P13
- CD800a2.....P13
- CD800a.....P13
- CD772.....P14
- CD771.....P14
- CD770.....P14
- CD5002.....P15
- CD5001.....P15
- PM33a (Hybrid DMM).....P15
- PM3.....P16
- PM11.....P16
- PM7a.....P16
- KP1 (Volt Tester).....P16

Analog Multitester



- EM7000.....P19
- CX506a.....P19
- YX-361TR.....P19
- YX360TRF.....P20
- SP21.....P20
- SP20.....P20
- SP-18D.....P21
- TA55.....P21

Insulation Resistance Tester



- MG5000.....P24
- MG1000.....P25
- MG500.....P25
- MG102.....P25
- HG561H.....P26
- PDM1529S.....P26
- PDM5219S.....P26
- DM1009S.....P27
- DM509S.....P27
- PDM509S.....P27

Clamp Meter



- DCL11R.....P31
- DCM60R.....P31
- DCM301.....P31
- DCM660R.....P32
- DCL1200R.....P32
- DCL3000R (Flexible CT).....P32
- DCM400.....P33
- DCL1000.....P33
- DCM600DR.....P33
- DCL31DR.....P34
- DCM2000DR.....P34
- DCM400AD.....P34
- DLC470 (Leak Current).....P35

Various Instruments



- KD3 (Voltage Detector).....P35
- KS1 (3 phase Detector).....P35
- KS3 (3 phase Detector).....P35
- KDP10 (Voltage Detector Supporter).....P36
- LX20 (Illuminance Meter).....P36
- LP10 (Laser Power Meter).....P37
- LCR701 (LCR Meter).....P37
- SE300 (Tachometer).....P38
- SE9100 (Speedometer).....P38
- PDR302 (Earth Tester).....P39
- PDR4000 (Earth Tester).....P39
- KIT-8D (Assembly Training Kit).....P40
- PC20TK (Assembly Training Kit).....P40

Function marks and terminology used in **sanwa** General Catalog

Function marks



True RMS (True root-mean-square value)
True RMS value. AC current and voltage of a non-sine wave can be measured by true RMS values.



Continuity buzzer
The buzzer sounds when the measuring object is electrically conducting.



Inrush
Inrush current can be measured



Range hold
The range is fixed in the measurement of varying voltage and current which is difficult to read in the auto range.



Dual Display
Allows simultaneous reading.



Battery check
Battery voltage is measured and assessed by running a given current.



Zero-center meter (NULL)
Moves the indicator of the analog tester to the center of the scale (meter graduations) to make measurement of positive and negative voltage.



Measurement of relative value
A certain measured value is assumed as 0 and measured values after that are expressed by positive or negative values relative to the value fixed as 0.



Drop shock proof
The meter element is furnished with a taut band and impact-resistant design enough to withstand a shock of drop.



Temperature measurement
Temperature can be measured using the optional probe.



Automatic Measurement for DCV/ACV/Ω
Measurement function of DCV/ACV/Ω can be automatically selected.



MAX / MIN / AVG
The maximum value, the minimum value and the average value are displayed or recorded. The recorded value can be seen later on the display.



DC / AC measurable
Both ACA and DCA are measurable.



4-20mA%
4-20mA for sending instrumentation signals. Expresses the current loop of 4mA as 0% and 20mA as 100%



Logging
The reading can be stored in the meter itself.



Low power ohm
Resistance is measured by applying voltage of approximately 0.4V or less on a measuring object. It is characterized by the fact that the semiconductor does not conduct at approximately 0.4V or less even in forward direction.



Leakage current
A clamp meter that can make the measurement of leakage current have a range to allow measurements in milliamp.



dBm
Scaling of voltage values is performed according to the reference impedance into dBm. Convenient for use with audio equipment.



Polarity switch
The positive and negative polarity of the measuring terminal can be changed by this switch.



Backlight
Allows indicator reading in a dark place.



Frequency
Expressed in the unit of Hz (hertz). Commercial frequency of 50Hz/60Hz can be measured.



hFE
Provided with graduations for measuring the DC current amplification factor (hFE) of a transistor.



Output terminal
Cancels the DC current portion of voltage mixed with DC and AC to measure the AC portion alone. It is used for the measurement of audio signals.



Automatic live circuit detection
Live circuit detection prevents insulation test if the measured object is a live circuit.



Capacitor
Capacitor capacity (electrostatic capacity) is measured and expressed in the unit of F (farad), μF, etc.



EF function
Non contact AC voltage detection function



Auto power off
Power is automatically turned off when a certain time has elapsed after power-up. Some models have a function to cancel this function.



Auto discharge
When the measurement of insulating resistance is complete, voltage charged in the measuring object is discharged.



Duty cycle
The duty cycle of repeating waveform is indicated on a percentage basis (%). It can be used for the analysis of control signals.



Capture (peak hold)
The peak value like in-rush current is indicated. The minimum pulse width capturable differs according to models.



Auto power save
The display disappears to bring the device into the power-save state when a certain time has passed after power-up. Some models have a function to cancel this function.



USB connection
Data can be outputted by connection to the USB port of a PC.



Continuity check
The LED lights up when the measuring object is electrically conducting.



Low-pass filter
Low-pass filter cuts current value of high frequency.



Data hold
A value indicated on the display is fixed. It is fixed even after the test lead is removed, and can be used as a record for reference purposes.



Temperature measurement with PC Link
Temperature can be measured using the optional probe and PC Link software. (T-300PC is necessary.)

Glossary

■Accuracy / Tolerance

Correctness. JIS defines the term "accuracy" to be used for digital testers and "tolerance" for analog testers. The accuracy / tolerance differs depending on the range.

■Auto range

The range is automatically increased or decreased in steps such as 2V/20V/200V and moves to the optimum range for measuring voltage.

■Bandwidth(Frequency characteristic)

Frequency range of measurable signals in the measurement of AC voltage and current.

■Clamp conductor size

Size of a maximum conductor shape.

■Clamp diameter

It gives a guide for the thickness of a clampable wire.

■Display digit

Maximum number of display digits of the digital display. 1999 is expressed as 2000. Three and a half digits and four and a half digits are also used.

■Full scale (fs)

It is the indication of tolerance expressed by percentage values relative to the full-scale value of the range.

■Function

Function for measuring voltage, current, resistance, electrostatic capacity and frequency.

■Input resistance (Impedance)

Internal resistance between measuring terminals. For instance, it is expressed as "MΩ" with the DMM and as "KΩ/V" with the AMT.

■Live circuit detection

When a test lead is set at an insulating resistance measuring point on a measuring object, the ACV measuring status starts to check whether voltage is being supplied.

■Range

The measuring range of a function is sub-divided and expressed as 2V/20V/200V, etc.

■Resolution

Displayable minimum value of the last digit. For instance, the resolution of the 1.999V range is 0.001V.

■Scale length

The tolerance in resistance measurement is expressed with reference to the scale length of the range.

■Withstand voltage


It refers to insulating withstand voltage of the measuring instrument itself.

■± (□%+□) = ± (□%rdg+□dgt)
rdg is an abbreviation of "Reading" meaning a read value on digital display. "dgt" is an abbreviation of "Digit" meaning the least unit of digital display. For instance, "±2dgt" refers to error of ±2 counts.

Top class quality popular in 74 countries around the world.

Measurements become valid only when people place confidence in the quality of measuring instruments. Sanwa has supported the work of professionals for 80 years and has produced a myriad of different solutions through the utilization of high levels of quality.

This quality control includes not only “products”, but also each and every operation, maintenance services, and sales and marketing activities, and is thoroughly implemented utilizing reliable systems and the intangible awareness of each of our employees. **sanwa** is a Japanese name brand that lives up to the trust of engineers around the world through the provision of high quality measuring instruments.

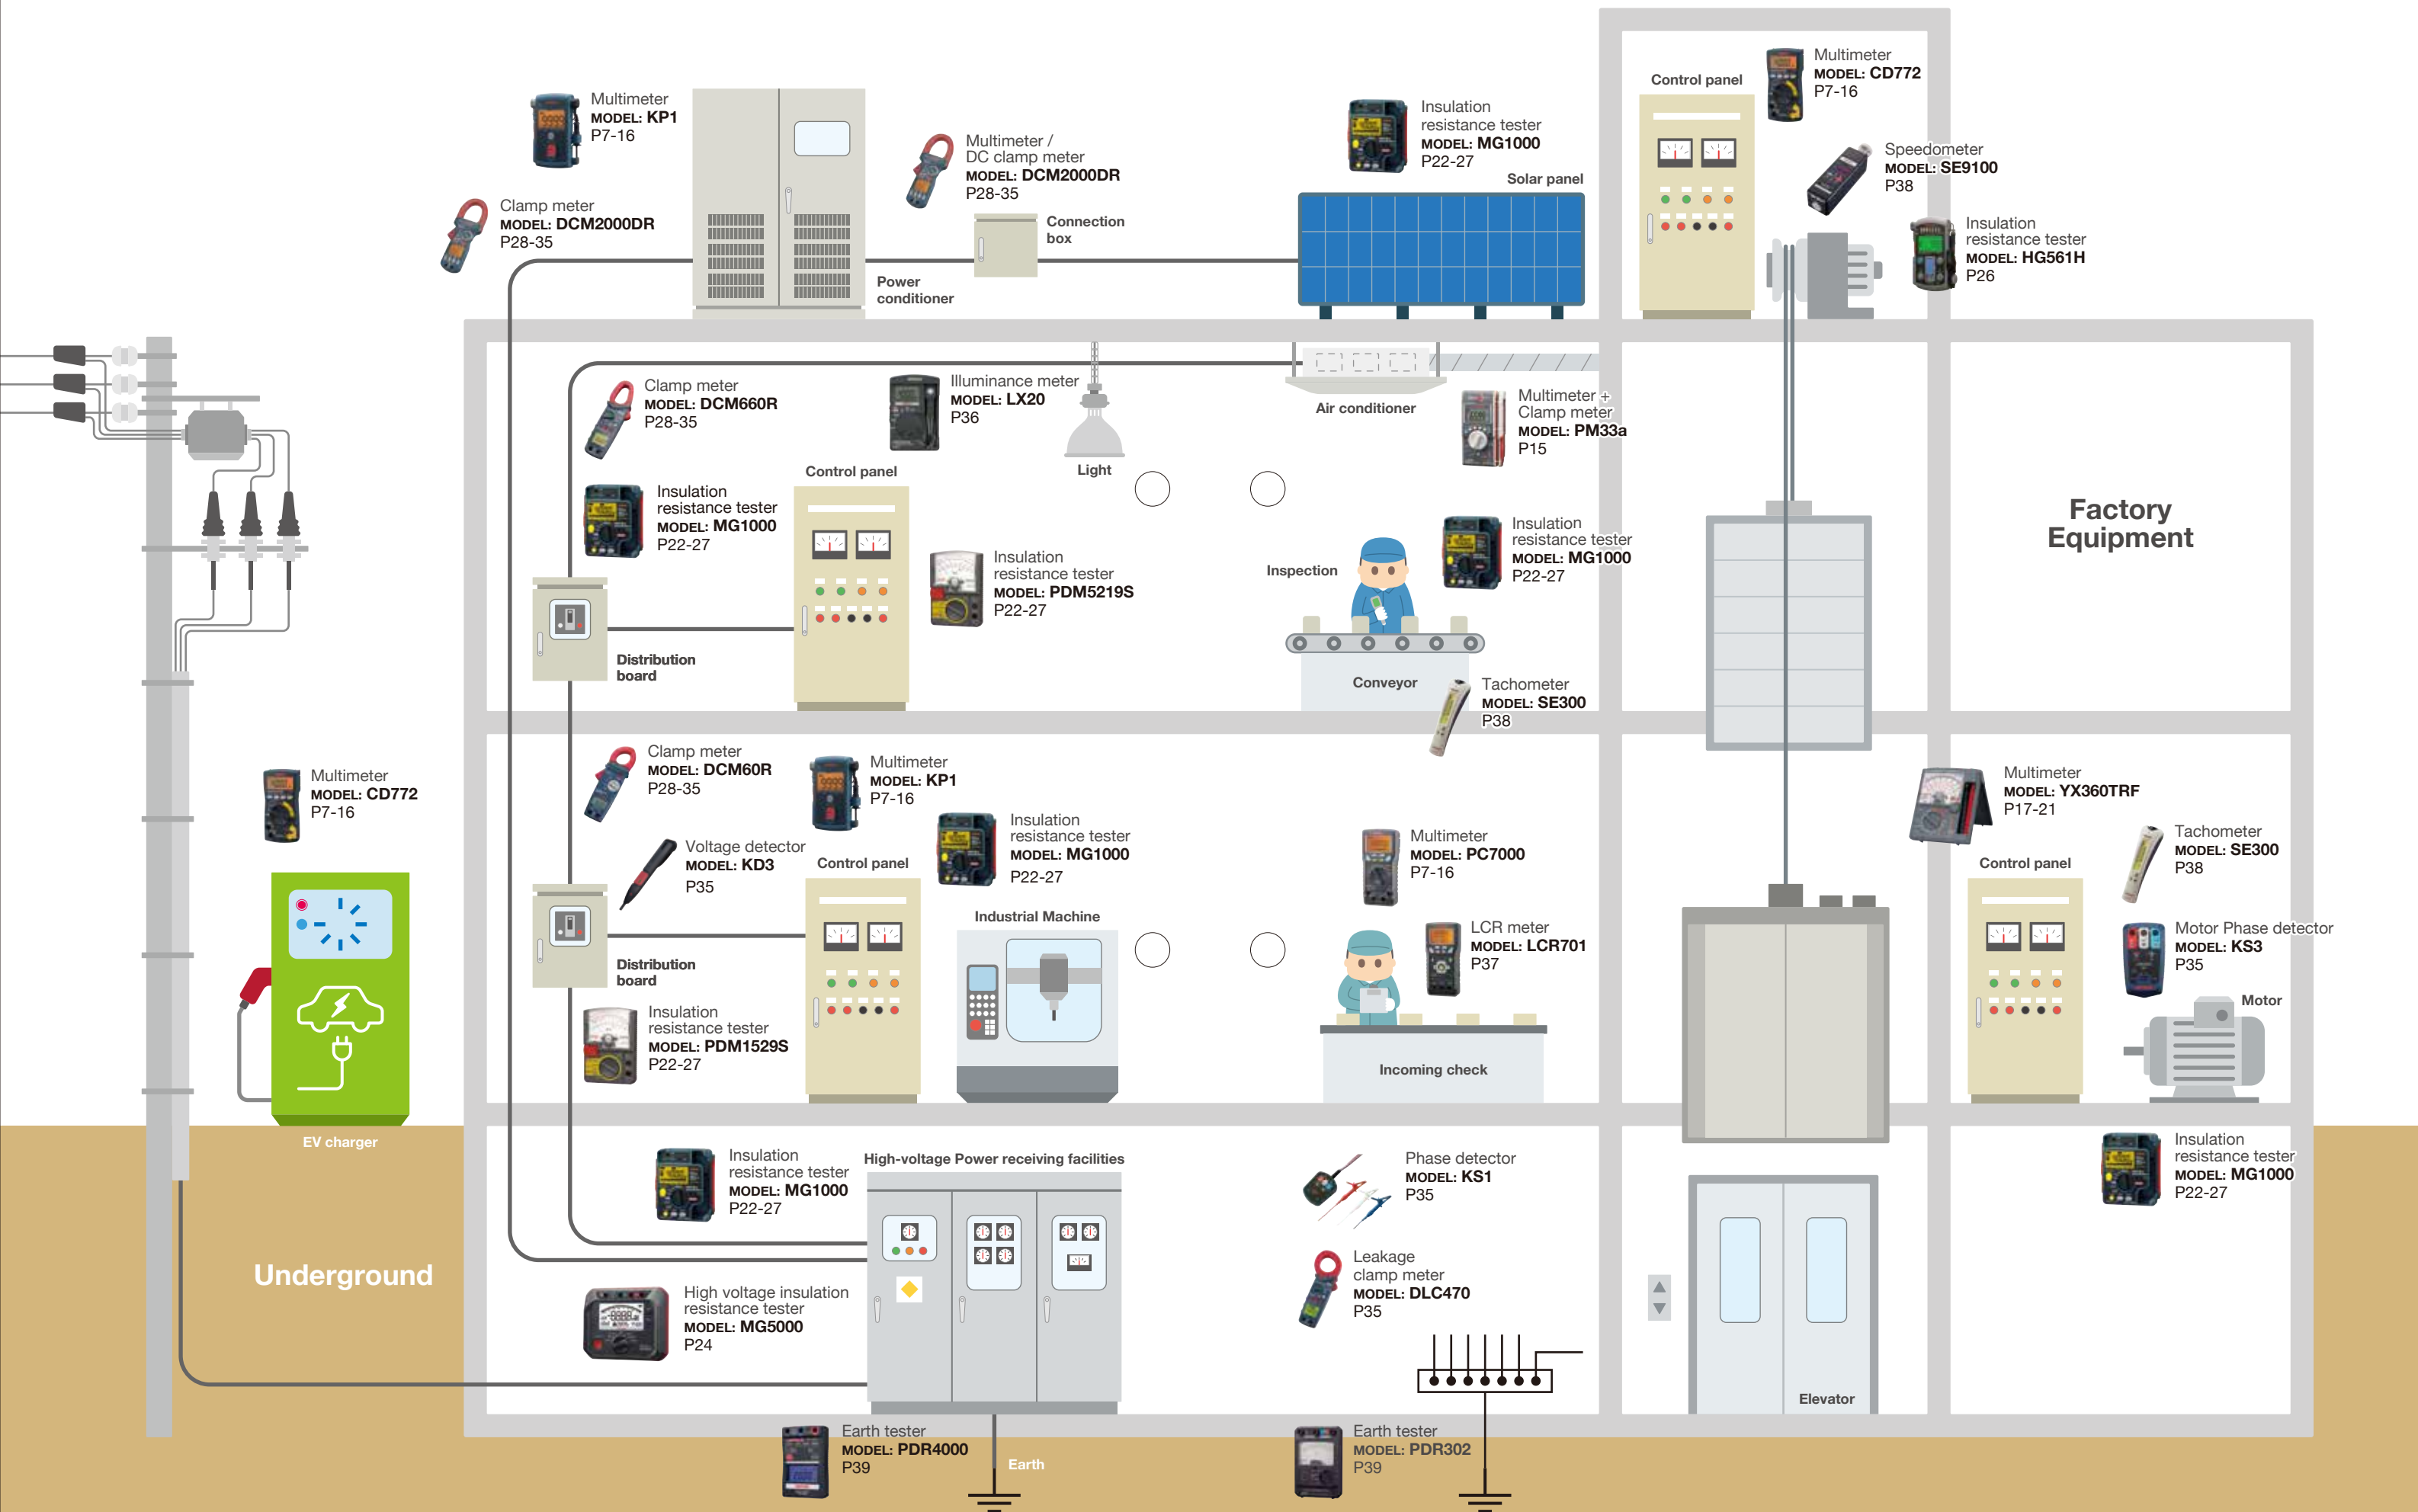

PC Link System

Enhanced operational efficiency by means of data retrieval software, PC Link 7, which can handle measurements for up to a maximum of 8 channels.

The PC Link system is the software dedicated to a PC for retrieving data outputted from a SANWA digital multimeter (PC series). The operation screen displays graphs in real time to allow you to check changes in measured values (voltage, current, etc.) with ease. Measured data can be saved on a CSV file, so it is easily processed on Excel. The ease of use in a variety of applications from data retrieval, processing and analysis results in its extensive acceptance for business, education and personal use.


PC Link 7 Max 8 Channels



Applicable Model

PC7000, PC720M, PC710
PC700, PC773, PC20, PC20TK

Data acquisition screen

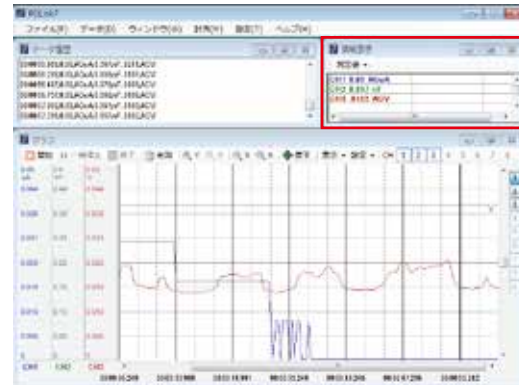


Alert indication




Highly visible alert
Send alert information by e-mails
Save them into files

Multi-window flexible screen layout (Flexible size and position of each window)

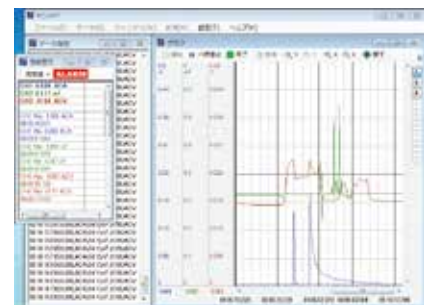


Customizable screen

Traditional overlapped graphs and separated graphs by each channel. Also, easily switchable display/hide.

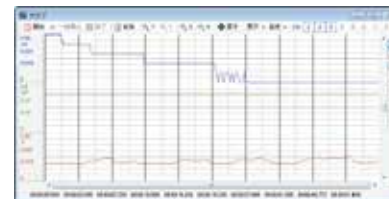

Separated graphs

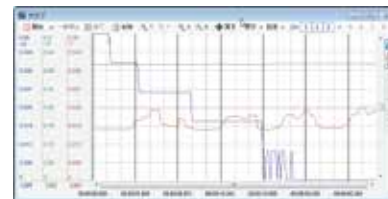

Overlapped graphs

Major features :

- Automatically detects a port connected with a digital multimeter
- No additional driver installation required with Windows standard USB drivers
- The retrieval interval can be set by seconds. The shortest reading interval of 0.2 – 0.3 seconds depending on the digital multimeter measuring function.
- Allows setting for vertical/horizontal zoom, reading at the cursor position, and Y axis split while retrieving data.
- Allows automatic retrieval by schedule setting.
- Allows data saving into CSV files and sending e-mails of alert information with alarm setting.
- Allows data saving into CSV files with the date and time appended.
- Multi-window, separated graphs by each channel
- Allows automatic e-mail of measurement data.
- Allows limited operations depending on the user with usage restriction function.
- Allows conditional recording by event function.

PC Link 7 operating environment

OS: Windows XP (32bit) / 7 (32bit / 64bit) / 8 (32bit / 64bit) / 10 (64bit) CPU: Pentium IV 1.6GHz or better Memory: 1GB or better Resolution: 800×600 or above

Optional accessories for PC Link products

KB-USB773
Optical link USB



For PC773

KB-USB7
Optical link USB



For PC7 series

KB-USB20
Optical link USB



For PC20, PC20TK

Digital Multimeters

What is Digital Multimeter?

A digital multimeter is a convenient measuring instrument that allows by itself the measurement of DC voltage, AC voltage, DC current, AC current and resistance (Pocket type DMM normally cannot be used for the measurement of current for safety reasons). In addition to these basic measuring functions, most models are provided with features such as a diode test function and continuity buzzer. Some of recent products feature the measurement of frequency and capacitor capacity. Some have added functions of maximum and minimum value hold and relative value measurement as well as data hold and range hold functions. The PC series DMMs connect to a PC making it possible to let a PC assume the function of expensive recording meters and recorders.

Advantages of digital multimeters (DMMs)

1. Highly accurate measurement. Higher accuracy (1% or less) compared with an analog multimeter (approximately 3%).
2. Reduced measuring loss due to high internal impedance (low voltage drop between terminals).
3. No parallax reading error occurs as with an analog multimeter.

Four key points in choosing a suitable model

1. What are the necessary measuring functions?

Choose the necessary functions, except voltage and resistance measurement. (including need for the measurement of current (400mA, 10A, 12A, 20A), capacitor, frequency, temperature and measurement of 4-20mA, etc.)

2. Other necessary functions

Functions required differ depending on where the measurement is taken.

- 1) To record measured values concurrently with the process of measurement
 - To fix data by the data hold function.
 - To secure the test lead in the holster.
- 2) To check changes in measured values
 - Measurement of maximum values, minimum values, and relative values.

3. For measurements of waveforms of non-sine waves, choose a model supporting measurements by RMS values.

In measuring distorted sine and non-sine waves (square wave, triangular wave, pulse), significant errors occur in measurement by models making measurements by mean values.

There are two types of RMS values.


AC-Coupled true RMS value: Adapted to measurements of distorted sine and non-sine waves of the AC
AC + DC-coupled true RMS value: Adapted to measurements of waveform containing a DC component.

4. Other functions

There are other types including a function to transfer data during measurement to a PC in real time and a function to record measured data in a built-in memory. To transfer data to a PC, optional connecting cables and data retrieval software (PC Link or PC Link Plus) are required in addition to a DMM of PC series.


Measurement

Voltage, Resistance measurement

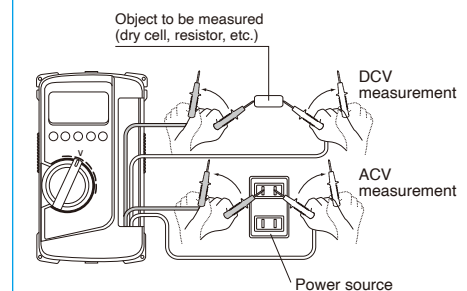


In making measurements, connect your DMM in parallel with an object to be measured. Do not apply signals exceeding the maximum rated input voltage.

Current measurement

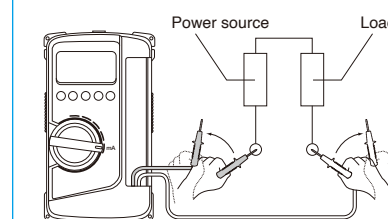

In making measurements, connect your DMM in series with an object to be measured. Do not apply signals exceeding the maximum rated input current.

Diode test

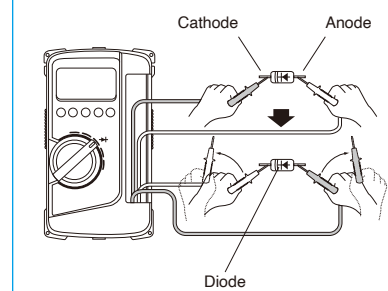

When the black test lead is connected to the cathode side of the diode and the red test lead to the anode side, the forward voltage can be measured. In contrast, if the black test lead is connected to the anode side of the diode and the red test lead to the cathode side, the reverse voltage can be measured and "OL" display appears.

Digital Multimeter Comparative Chart

	PC Connection						Multifunction		All-in-one	
Model	PC7000	PC710	PC700	PC720M	PC773	PC20	CD732	RD700/701	CD800a2/3	CD800a
										
Page	P10	P10	P11	P11	P12	P12	P12	P13	P13	P13
Count	50000	9999	9999	9999	11000	4000	6000	4000	6000	4000
	500000	6000	6000	6000					9999	
Category	CATIII 600V	CATIII 600V	CATIII 600V	CATIII 600V	-	-	-	-	CAT IV600V	-
	-	-	-	-	-	-	-	-	-	-
CE	●	●	●	●	-	-	-	-	●	-
True RMS (AC)	●	●	-	●	●	-	-	RD701 only	●	-
Range	A/M	A/M	A/M	A/M	A/M	A/M	A/M	A/M	A/M	A/M
DCV(V) max	600	600	600	600	1000	1000	1000	1000	600	600
ACV(V) max	600	600	600	600	1000	750	750	1000	600	600
DCA(A) max	10	10	10	10	11	10	15	10	600m	400m
ACA(A) max	10	10	10	10	11	10	15	10	600m	400m
Resistance(Ω) max	50M	60M	60M	60M	110M	40M	60M	40M	60M	40M
MΩ test voltage	-	-	-	-	-	-	-	-	-	-
Capacitance (F) max	25m	25m	25m	25m	110m	100 μ	4000 μ	3000 μ	6m	100 μ
Temperature(°C) min	-50	-50	▲	-50	▲	▲	-	-20	-	-
Temperature(°C) max	1000	1000	▲	1000	▲	▲	-	300	-	-
Frequency (Hz) min	10	15	15	15	110	-	5	50	9.999	5
Frequency (Hz) max	200k	50k	50k	50k	1.1M	-	99.99k	1M	99.99k	100k
Logic freq. (Hz) min	5	5	5	5	-	-	-	-	-	-
Logic freq. (Hz) max	2M	1M	1M	1M	-	-	-	-	-	-
Continuity	Buzzer	Buzzer	Buzzer	Buzzer	Buzzer	Buzzer	Buzzer	Buzzer	Buzzer	Buzzer
					LED		LED			
Diode test	●	●	●	●	●	●	●	●	●	●
Duty cycle	●	●	●	●	-	-	●	-	●	●
d B m	●	-	-	-	-	-	-	-	-	-
Conductance	●	●	-	●	-	-	-	-	-	-
EF detection	-	●	-	-	-	-	-	-	CD800a3 only	-
Auto power off/save	Save	Save	Save	Save	Off	-	Save	Off	Off	Off
Battery check	-	-	-	-	-	-	-	-	-	-
Data hold	●	●	●	●	●	●	●	●	●	●
Range hold	●	●	●	●	●	●	●	●	●	●
Peak hold	●	●	-	●	-	-	-	-	-	-
Relative value	●	●	●	●	●	-	-	●	●	●
4-20mA%	●	-	-	-	-	-	-	-	-	-
AC+DC	●	-	-	●	-	-	-	-	-	-
Data logging	-	-	-	●	-	-	-	-	-	-
Bar graph	●	●	●	●	-	-	●	-	-	-
Max/Min	●	●	-	●	-	-	-	MAX	●	-
PC link	●	●	●	●	●	●	-	-	-	-
Optional AC adapter	-	-	-	-	-	●	-	-	-	-
Dimension H (mm)	184	184	184	184	166	167	167	179	176	176
Dimension W (mm)	86	86	86	86	82	90	90	87	104	104
Dimension D (mm)	52	52	52	52	44	48	48	55	48	46
Mass (g)	430	430	430	430	360	330	320	460	360	340

▲ Optional accessories are necessary.

Digital Multimeter Comparative Chart

	Standard					DMM+Clamp	Pocket-size			Safe
Model	CD772	CD771	CD770	CD5002	CD5001	PM33a	PM3	PM11	PM7a	KP1
										
Page	P14	P14	P14	P15	P15	P15	P16	P16	P16	P16
Count	4000	4000	4000	9999	9999	6600	4000	4000	4000	9999
Category	-	-	-	CAT IV 600V	CAT IV 600V	-	CAT III 300V	-	-	CAT IV 600V
	-	-	-	CAT III 1000V	CAT III 1000V	-	-	-	-	CAT III 1000V
CE	-	-	-	●	●	-	●	-	-	●
True RMS (AC)	●	-	-	●	●	-	-	-	-	●
Range	A/M	A/M	A/M	A/M	A/M	A/M	A	A	A/M	A
DCV(V) max	1000	1000	600	999.9	999.9	600	300	500	500	999.9
ACV(V) max	1000	1000	600	999.9	999.9	600	300	500	500	999.9
DCA(A) max	15	10	400m	9.999	-	100(CT)	-	-	-	-
ACA(A) max	15	10	400m	9.999	-	100(CT)	-	-	-	-
Resistance(Ω) max	40M	40M	40M	99.99M	99.99M	66M	40M	40M	40M	-
MΩ test voltage	-	-	-	-	-	-	-	-	-	-
Capacitance (F) max	100 μ	100 μ	100 μ	99.99m	99.99m	66m	200 μ	-	-	-
Temperature(°C) min	-20	-	-	-40	-	-	-	-	-	-
Temperature(°C) max	300	-	-	800	-	-	-	-	-	-
Frequency (Hz) min	5	5	5	9.999	9.999	20	1	-	-	-
Frequency (Hz) max	100k	100k	100k	99.99k	99.99k	66k	60k	-	-	-
Logic freq. (Hz) min	-	-	-	-	-	-	-	-	-	-
Logic freq. (Hz) max	-	-	-	-	-	-	-	-	-	-
Continuity	Buzzer	Buzzer	Buzzer	Buzzer	Buzzer	Buzzer	Buzzer	Buzzer	Buzzer	Buzzer
	LED	LED								LED
Diode test	●	●	●	●	-	●	●	●	●	-
Duty cycle	-	-	-	-	-	●	●	-	-	-
d B m	-	-	-	-	-	-	-	-	-	-
Conductance	-	-	-	-	-	-	-	-	-	-
EF detection	-	-	-	-	●	-	-	-	-	●
Auto power off/save	Save	Off	Off	Off	Off	Off	Off	Off	Off	Off
Battery check	-	1.5V	-	-	-	-	-	-	-	-
Data hold	●	●	●	●	●	●	●	-	-	●
Range hold	●	●	●	●	●	●	-	-	●	-
Peak hold	-	-	-	-	-	-	-	-	-	-
Relative value	●	●	●	●	●	●	●	-	-	-
4-20mA%	-	-	-	-	-	-	-	-	-	-
AC+DC	-	-	-	-	-	-	-	-	-	-
Data logging	-	-	-	-	-	-	-	-	-	-
Bar graph	-	-	-	-	-	-	-	●	-	-
Max/Min	-	-	-	-	-	●	-	-	-	-
PC link	-	-	-	-	-	-	-	-	-	-
Optional AC adapter	-	-	-	-	-	-	-	-	-	-
Dimension H (mm)	166	166	166	149	149	130	108	117	115	130
Dimension W (mm)	82	82	82	72	72	75	56	76	57	90
Dimension D (mm)	44	44	44	37	37	19.9	11.5	18	18	30
Mass (g)	360	360	340	250	232	160	50	117	85	205

www.sanwa-meter.co.jp

High accuracy & high resolution (PC Link)

PC7000



500000 Count for DCV, Dual Display

- 4-4 / 5digits 50000 count (Selectable 5-4 / 5 digits 500000 count for DCV)
- Dual Display shows voltage/current and its frequency, and AC components and DC components of voltage/current
- AC True RMS
- Low-pass filter for variable frequency drive(VFD) circuit
- Current (mA / μ A) %4-20mA measurement
- Capture (peak hold) 0.8ms in duration
- MAX, MIN, AVG recording mode
- K type temperature -50°C ~1000°C
*Optional accessory K-AD is necessary.
*K type temp. sensor K-250PC is included as a standard accessory.
- Frequency measurement (AC sine wave only)
- Logic frequency measurement, duty cycle measurement
- Conductance measurement
- Dual display with backlight
- Data hold, Range hold
- Relative value
- Auto power saving mode (17min.) (cancelable)
- Optical Link USB interface (optional)

Display : numeral display 50000 & 500000 selectable, bar graph 41 segments
Sampling rate : 5 times/sec. for 50000 count, 1.25 times/sec. for 500000 count, 60 times/sec. for bar graph
Safety : IEC61010 CAT.III 600V
Battery life : Approx. 100h (alkaline battery) at DCV range



PC7000	Measuring range	Best accuracy	Resolution	Input impedance
DCV	500m/5/50/500/600V	$\pm (0.03\%+2)$	0.01mV	10M Ω
ACV	500m/5/50/500/600V	$\pm (0.5\%+40)$	0.01mV	
DCA	500 μ /5000 μ /50m/500m/5/10A	$\pm (0.1\%+20)$	0.01 μ A	
ACA	500 μ /5000 μ /50m/500m/5/10A	$\pm (0.6\%+40)$	0.01 μ A	
Resistance	500 Ω /50k/500 Ω /5M/50M Ω /99.99nS *1	$\pm (0.2\%+6)$	0.01 Ω	
Capacitance	50n/500n/5 μ /50 μ /500 μ /5m/25mF	$\pm (0.8\%+3)^*2$	0.01nF	
Temperature	-50~1000°C (thermocouple K type)	$\pm (0.3\%+2)$	0.1°C	
Frequency	10Hz~200kHz	$\pm (0.02\%+4)$	0.001Hz	
Logic frequency	5Hz~2MHz	$\pm (0.002\%+4)$	0.001Hz	
Duty cycle	0.1%~99.99%	$\pm (3d / kHz+2)$	0.01%	
dBm	-29.83dBm~54.25dBm	$\pm (0.25dB+2)$	0.01dB	
Continuity	Buzzer sounds at between 20 Ω and 200 Ω Open voltage : below 3V			
Diode test	Open voltage : approx. 3V			
Bandwidth	V : 45Hz~1kHz, 1kHz~20kHz(below 500V), A : 40Hz~1kHz			
Fuse / Battery	11A/1000V IR20kA ϕ 10 $\times$ 38 0.4A/1000V IR30kA ϕ 6.3 $\times$ 32	6LR61(9V) $\times$ 1		
Size / Mass	H184 $\times$ W86 $\times$ D52mm/430g (including holster)			
Standard accessories included	Test Lead (TL-23a), Holster (H-700), Thermocouple K type (K-250PC), Instruction manual			

*1 nS(Conductance): High-value resistance of Giga-Ohms for leakage measurements.
Conductance is the inverse of Resistance, that is S=1/ Ω or nS=1/G Ω
*2 Accuracy of film capacitor or equivalent with low leakage.

Optional accessories

Software : PC Link7
Optical PC link cable : KB-USB7
Clamp probe : ACS101
Temperature probe : T-300PC (PC Link software is necessary.)
K type adapter : K-AD
Test lead : TLF-120
Carrying case : C-PC7
Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC, TL-A4, TL-A7M2



PC710	Measuring range	Best accuracy	Resolution	Input impedance
DCV	60m/600m/9.999/99.99/600V	$\pm (0.06\%+2)$	0.01mV	10M Ω
ACV	60m/600m/9.999/99.99/600V	$\pm (0.5\%+3)$	0.01mV	
DCA	600 μ /6000 μ /60m/600m/6/10A	$\pm (0.2\%+4)$	0.1 μ A	
ACA	600 μ /6000 μ /60m/600m/6/10A	$\pm (0.6\%+3)$	0.1 μ A	
Resistance	600 Ω /60k/600 Ω /6M/60M Ω /99.99nS *1	$\pm (0.1\%+3)$	0.1 Ω	
Capacitance	60n/600n/6 μ /60 μ /600 μ /6m/25mF	$\pm (0.8\%+3)^*2$	0.01nF	
Temperature	-50~1000°C (thermocouple K type)	$\pm (0.3\%+2)$	1°C	
Frequency	15Hz~50kHz	$\pm (0.04\%+4)$	0.01Hz	
Logic frequency	5Hz~1MHz	$\pm (0.03\%+4)$	0.001Hz	
Duty cycle	0%~100%	$\pm (3d / kHz+2)$	0.01%	
Continuity	Buzzer sounds at between 20 Ω and 300 Ω Open voltage : below 1.2V			
Diode test	Open voltage : approx. 3.5V			
Bandwidth	V : 40Hz~3kHz, 3kHz~20kHz(below 99.99V), A : 40Hz~1kHz			
Fuse / Battery	11A/1000V IR20kA ϕ 10 $\times$ 38 0.4A/1000V IR30kA ϕ 6.3 $\times$ 32	6F22(9V) $\times$ 1		
Size / Mass	H184 $\times$ W86 $\times$ D52mm/430g (including holster)			
Standard accessories included	Test Lead (TL-23a), Holster (H-700), Thermocouple K type (K-250PC), Instruction manual			

*1 nS(Conductance): High-value resistance of Giga-Ohms for leakage measurements.
Conductance is the inverse of Resistance, that is S=1/ Ω or nS=1/G Ω
*2 Accuracy of film capacitor or equivalent with low leakage.

Optional accessories

Software : PC Link7
Optical PC link cable : KB-USB7
Clamp probe : ACS101
Temperature probe : T-300PC (PC Link software is necessary.)
K type adapter : K-AD
Test lead : TLF-120
Carrying case : C-PC7
Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC, TL-A4, TL-A7M2



High accuracy & high resolution (PC Link)

PC700



Dual Display, Best Accuracy 0.06%

- 4 digits 9999 count & 3-5/6 digits 6000 count
- Maximum DC/AC voltage measurement resolution 0.01mV
- Dual Display shows voltage/current and its frequency, and AC components and DC components of voltage/current
- High speed bar graph
- Frequency measurement (AC sine wave only)
- Logic frequency measurement, duty cycle measurement
- Data hold, Range hold
- Relative value
- Auto power saving mode (30min.) (cancelable)
- Optical Link USB interface (optional)

Display : numeral display 9999 & 6000, bar graph 41 segments
Sampling rate : 5 times/sec., 60 times/sec. for bar graph
Safety : IEC61010 CAT.III 600V
Battery life : Approx. 60h (manganese battery) at DCV range



High accuracy & built-in memory (PC Link)

PC720M



87,328 points data logging in built-in memory

- 4 digits 9999 count & 3-5/6 digits 6000 count
- AC True RMS
- Dual display with backlight
- Automatic measurement for ACV/DCV/ Ω under low impedance
- High speed bar graph
- Capacitance measurement
*Not suitable for measurement of condensers with large leak current.
- K type temperature -50°C ~1000°C
*Optional accessory K-AD is necessary.
*K type temp. sensor K-250PC is included as a standard accessory.
- Frequency measurement (AC sine wave only)
- Logic frequency measurement, duty cycle measurement
- Conductance measurement
- MAX, MIN, MAX-MIN recording mode
- Capture (peak hold) 1ms in duration
- Data hold, Range hold
- Relative value
- Auto power saving mode (30min.) (cancelable)
- Optical Link USB interface (optional)

Data Logging Mode

- 87,328 data points in built-in memory (single display)
- 43,664 data points in built-in memory (dual display)
- Selection of measurement interval
0.05s/0.1s/0.5s/1s/2s/3s/4s/5s/10s/15s/30s/60s/120s/180s/300s/600s
- Auto-standby mode when a sampling speed of 30s or longer is selected
- Export logged data to PC
*Optional accessory KB-USB7 and PC Link7 are necessary.

Display : numeral display 9999 & 6000, bar graph 41 segments
Sampling rate : 5 times/sec., 60 times/sec. for bar graph
Safety : IEC61010 CAT.III 600V
Battery life : Approx. 100h (alkaline battery) at DCV range




PC700	Measuring range	Best accuracy	Resolution	Input impedance
DCV	60m/600m/9.999/99.99/600V	$\pm (0.06\%+2)$	0.01mV	10M Ω
ACV	60m/600m/9.999/99.99/600V	$\pm (0.5\%+3)$	0.01mV	
DCA	600 μ /6000 μ /60m/600m/6/10A	$\pm (0.2\%+4)$	0.1 μ A	
ACA	600 μ /6000 μ /60m/600m/6/10A	$\pm (0.6\%+3)$	0.1 μ A	
Resistance	600 Ω /6k/60k/600 Ω /6M/60M Ω	$\pm (0.1\%+3)$	0.1 Ω	
Capacitance	60n/600n/6 μ /60 μ /600 μ /6m/25mF	$\pm (0.8\%+3)^*$	0.01nF	
Frequency	15Hz~50kHz	$\pm (0.04\%+4)$	0.001Hz	
Logic frequency	5Hz~1MHz	$\pm (0.03\%+4)$	0.001Hz	
Duty cycle	0%~100%	$\pm (3d / kHz+2)$	0.01%	
Continuity	Buzzer sounds at between 20 Ω and 300 Ω Open voltage : below 1.2V			
Diode test	Open voltage : approx. 3.5V			
Bandwidth	V : 40Hz~3kHz, 3kHz~20kHz(below 99.99V), A : 40Hz~1kHz			
Fuse / Battery	11A/1000V IR20kA ϕ 10 $\times$ 38 0.4A/1000V IR30kA ϕ 6.3 $\times$ 32	6F22(9V) $\times$ 1		
Size / Mass	H184 $\times$ W86 $\times$ D52mm/430g (including holster)			
Standard accessories included	Test Lead (TL-23a), Holster (H-700), Instruction manual			

*Accuracy of film capacitor or equivalent with low leakage.

Optional accessories

Software : PC Link7
Optical PC link cable : KB-USB7
Clamp probe : ACS101
Temperature probe : T-300PC (PC Link software is necessary.)
K type adapter : K-AD
Test lead : TLF-120
Carrying case : C-PC7
Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC, TL-A4, TL-A7M2

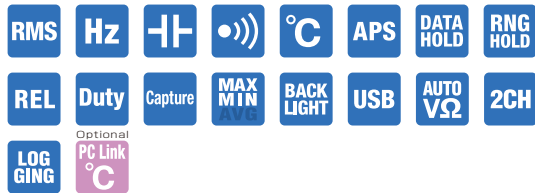

PC720M	Measuring range	Best accuracy	Resolution	Input impedance
DCV	60m/600m/9.999/99.99/600V	$\pm (0.06\%+2)$	0.01mV	10M Ω
ACV	60m/600m/9.999/99.99/600V	$\pm (0.5\%+3)$	0.01mV	
DCA	600 μ /6000 μ /60m/600m/6/10A	$\pm (0.2\%+4)$	0.1 μ A	
ACA	600 μ /6000 μ /60m/600m/6/10A	$\pm (0.6\%+3)$	0.1 μ A	
Resistance	600 Ω /6k/60k/600 Ω /6M/60M Ω /99.99nS *1	$\pm (0.1\%+3)$	0.1 Ω	
Capacitance	60n/600n/6 μ /60 μ /600 μ /6m/25mF	$\pm (0.8\%+3)^*2$	0.01nF	
Temperature	-50~1000°C (thermocouple K type)	$\pm (0.3\%+2)$	1°C	
Frequency	15Hz~50kHz	$\pm (0.04\%+4)$	0.01Hz	
Logic frequency	5Hz~1MHz	$\pm (0.03\%+4)$	0.001Hz	
Duty cycle	0%~100%	$\pm (3d / kHz+2)$	0.01%	
Continuity	Buzzer sounds at between 20 Ω and 300 Ω Open voltage : below 1.2V			
Diode test	Open voltage : approx. 3.5V			
Bandwidth	V : 40Hz~3kHz, 3kHz~20kHz (below 99.99V), A : 40~1kHz			
Fuse / Battery	11A/1000V IR20kA ϕ 10 $\times$ 38 0.4A/1000V IR30kA ϕ 6.3 $\times$ 32	6LR61(9V) $\times$ 1		
Size / Mass	H184 $\times$ W86 $\times$ D52mm/430g (including holster)			
Standard accessories included	Test Lead (TL-23a), Holster (H-700), Thermocouple K type (K-250PC), Instruction manual			

*1 nS(Conductance): High-value resistance of Giga-Ohms for leakage measurements.
Conductance is the inverse of Resistance, that is S=1/ Ω or nS=1/G Ω
*2 Accuracy of film capacitor or equivalent with low leakage.

Optional accessories

Software : PC Link7
Optical PC link cable : KB-USB7
Clamp probe : ACS101
Temperature probe : T-300PC (PC Link software is necessary.)
K type adapter : K-AD
Test lead : TLF-120
Carrying case : C-PC7
Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC, TL-A4, TL-A7M2

Data processing (PC Link)



A fuse of large breaking capacity (30kA) is used to further improve the safety.



PC773

- 11000 Count
- Minimum resolution 0.01mV, 0.01Ω
- 4-1/2 digits 11000 count
- 0.28% best accuracy
- AC True RMS
- Thermo plastic elastomer, high resistance against drop shock
- Maximum DC/AC 11A can be measured
- Continuity buzzer and LED
- Data hold, Range hold, Relative function
- Auto power off function (30 min.)
- Optical link USB interface (optional)

Display : numeral display 11000
Sampling rate : 4 times / sec.
AC frequency bandwidth : 45~100Hz(110mV range), 45~500Hz(1.1V range), 45~1kHz(11V range and above, ACA)



PC773	Measuring range	Best accuracy	Resolution	Input impedance
DCV	110m/1.1/11/110/1000V	± (0.28%+2)	0.01mV	10M~100MΩ
ACV	110m/1.1/11/110/1000V	± (0.7%+50)	0.01mV	
DCA	110 μ/1100 μ/11m/110m/11A	± (0.5%+4)	0.01 μA	
ACA	110 μ/1100 μ/11m/110m/11A	± (0.9%+20)	0.01 μA	
Resistance	110/1.1k/11k/110k/1.1M/11M/110MΩ	± (0.3%+6)	0.01 Ω	
Capacitance	11n/110n/1.1 μ/110 μ/1.1m/11m/110mF	± (2.0%+20)	0.001nF	
Frequency	110Hz/1.1kHz/11kHz/110kHz/1.1MHz	± (0.01%+2)	0.1Hz	
Continuity	Buzzer sounds and LED lights up at less than 30Ω Open Voltage: approx. 0.2V			
Diode test	Open Voltage: approx. 0.2V			

Bandwidth	45Hz~100Hz(110mV range), 45Hz~500Hz(1.1V range), 45Hz~1kHz(11V range and above, ACA)
Fuse / Battery	315mA/1000V, breaking capacity 30kA 12A/1000V, breaking capacity 30kA R6X2
Size / Mass	H166×W82×D44mm/360g
Standard accessories included	Test lead (TL-25a), Instruction manual

Optional accessories

Software : PC Link 7 (This model works with PC Link 7 only.)
 Clamp probe : ACS101
 Temperature probe : T-300PC (PC Link software is necessary.)
 Optical PC link cable : KB-USB773
 Test lead : TLF-120
 Carrying case : C-77, C-77H
 Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC, TL-A4, TL-A7M2

Multifunction



RD700

RD700 RD701

High input impedance 1000MΩ

- 3-3 / 4 digits 4000 count
- 0.3% best accuracy
- AC True RMS ※RD701 only
- Capacitance measurement
- ※Not suitable for measurement of condensers with large leak current.
- K type temperature
- ※Optional accessory K-AD is necessary.
- ※K type temp. sensor K-250PC is included as a standard accessory
- Frequency measurement
- ※Input voltage : 20VACrms and under
- ※Input signal : sign wave or square wave with 40%-70% duty
- ※Input sensitivity : 10Hz~20kHz/0.9Vrms and above : 20kHz~500kHz/2.6Vp or 1.9Vrms and above : 500kHz~1MHz/4.2Vp or 3Vrms and above
- ADP function (for current sensor)
- Max recording measurement
- Data hold / Range hold
- Relative value
- Auto power off (30min.) (cancelable)
- Alarm for improper test lead insertion to current terminal
- Protective holster with wall hanger and lead holder
- Tilt stand

Display : numeral display 4000 (Hz : 9999, capacitance : 5000)

Sampling rate : 3 times / sec. (Hz : 2 times / sec.)

AC frequency bandwidth : 50~500Hz

All-in-one



CD800a2 CD800a3

CAT.IV 600V, Tough body cover

- 6000 count
- True RMS
- 0.7 best accuracy (DCmV)
- Max/Min value hold
- Data hold, Range hold, Relative function
- EF (Electric Field) sensing ※CD800a3 only
- Auto power off (30min.)(cancelable)
- Body cover for protection and as a tilt stand
- Back light ※CD800a3 only
- Chip holder behind the body cover

Display : numeral display 6000 (Hz: 9999)

Sampling rate : approx.3 times/sec.

Safety : IEC61010 CAT. IV 600V

Using cover as a tilt stand ▶



CD800a

Tough body cover

- 3-3 / 4 digits 4000 count
- 0.7% best accuracy
- Capacitance measurement
- ※Not suitable for measurement of condensers with large leak current.
- Frequency measurement (AC sine wave only)
- Data hold / Range hold
- Relative value
- Auto power off (30min.) (cancelable)
- Low power ohm (input voltage 0.4V) at continuity range
- Solid & protective body cover that can also be used as a tilt stand
- Chip holder behind the body cover

Display : numeral display 4000

Sampling rate : 3 times / sec.

AC frequency bandwidth : 40~400Hz



RD701 only



RD700 / 701	Measuring range	Best accuracy	Resolution	Input impedance
DCV	400m/4/40/400/1000V	± (0.3%+4)	0.1mV	10M~1000MΩ
ACV	400m/4/40/400/1000V	± (1.5%+5)	0.1mV	
DCA	400 μ/4000 μ/40m/400m/4/10A	± (1.2%+3)	0.1 μA	
ACA	400 μ/4000 μ/40m/400m/4/10A	± (1.5%+4)	0.1 μA	
Resistance	400/4k/40k/400k/4M/40MΩ	± (0.6%+4)	0.1 Ω	
Capacitance	500n/5 μ/50 μ/500 μ/3000 μF	± (2.5%+6)	0.1nF	
Temperature	-20℃~300℃	± (2%+3)	1℃	
Frequency	50/500/5k/50k/500k/1MHz	± (0.5%+4)	0.01Hz	
Continuity	Buzzer sounds at between 20Ω and 120Ω. Open voltage : approx. 0.4V			
Diode Test	Open voltage : approx. 1.6V			

Bandwidth	50~500Hz
Fuse / Battery	12.5A/500V IR50kA φ 6.3×32mm 6LF22 (9V)×1 0.63A/500V IR20kA φ 6.3×32mm
Size / Mass	H179×W87×D55mm/460g (including holster)
Standard accessories included	Test Lead (TL-23a), Thermocouple K type (K-250PC), Holster (H-50), Instruction manual

Optional accessories

Clamp probe : ACS101
 HV probe : HV-60
 K type adapter : K-AD
 Test lead : TLF-120
 Carrying case : C-CD
 Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC, TL-A4, TL-A7M2



CD800a2/3	Measuring range	Best accuracy	Resolution	Input impedance
DCV	600m/6/60/600V	± (0.7%+3)	0.1mV	10MΩ
ACV	6/60/600V	± (1.6%+5)	0.001V	
DCA	60m/600mA	± (2.2%+5)	0.01mA	
ACA	60m/600mA	± (2.8%+5)	0.01mA	
Resistance	600/6k/60k/600k/6M/60MΩ	± (1.2%+5)	0.1 Ω	
Capacitance	6n/60n/600n/6μ/60μ/600μ/6mF	± (5%+10)	0.001nF	
Frequency	9.999/99.99/999.9/9.999k/99.99kHz	± (0.5%+3)	0.001Hz	
Duty Cycle	20%~80%	± (0.5%+5)	0.1%	
Continuity	Buzzer sounds at less than 39~60Ω Open voltage: approx. 0.4V			
Diode test	Open voltage: approx. 3V			

Bandwidth	40~400Hz
Fuse / Battery	0.6A/600V 10kA φ 6.3X32mm ceramic R6X2
Size / Mass	H176XW104XD48mm / approx. 360g
Standard accessories included	Hand strap , Instruction manual

Optional accessories

Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC, TL-A4, TL-A7M2

Multifunction



CD732

High-speed bar graph & Cont. buzzer with LED

- 6000 count
- Using fire-retarding materials for holster and circuit board
- Wide-range capacitance measurement (0.01nF to 3999 μF)
- Data hold / Range hold
- Safety cap on 6 · 15A terminal
- Protective holster with wall hanger and lead holder
- Auto Power Save (16min.) (cancelable)

Display : numeral display 6000, bar graph 61 segments
Sampling rate : 3 times/sec., 30 times/sec., for bar graph



CD732	Measuring range	Best accuracy	Resolution	Input impedance
DCV	600m/6/60/600/1000V	± (0.5%+2)	0.1mV	DCV: 10M~100MΩ
ACV	6/60/600/750V	± (1.2%+5)	0.001V	ACV: 10M~100MΩ
DCA	600 μ/6000 μ/60m/600m/6/15A	± (1.5%+3)	0.1 μA	
ACA	600 μ/6000 μ/60m/600m/6/15A	± (1.8%+5)	0.1 μA	
Resistance	600/6k/60k/600k/6M/60MΩ	± (1.2%+4)	0.1 Ω	10M~11MΩ
Capacitance	40n/400n/4 μ/40 μ/400 μ/4000 μF	± (5.0%+6)	0.01nF	
Frequency	9.999/99.99/999.9/9.999k/99.99kHz	± (0.5%+3)		
Duty cycle	20~80%	± (0.5%+5)		
Continuity	Buzzer sounds and LED lights up at between 10~60Ω Open voltage : approx. 0.63V			
Diode test	Open voltage : approx. 2.7V			

Bandwidth	45~500Hz
Fuse / Battery	0.4A/1000V 30kA φ 6.3X32mm R6(1.5V) X 2 16A/1000V 30kA φ 10X38mm
Size / Mass	H167×W90×D48mm/320g (including holster)
Standard accessories included	Test lead(TL-25a), Holster(H-70), Instruction manual

Optional accessories

Clamp probe : ACS101
 HV probe : HV-60
 Carrying case : C-77
 Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC, TL-A4, TL-A7M2



Disponible para entrega inmediata en Sugartech

www.sanwa-meter.co.jp

True RMS new standard



CD772

Backlight & Temperature measurement

- 3-3/4 digits 4000 count
- AC True RMS
- Easy to read large LCD with Backlight
- Large breaking capacity fuse 30kA
- K-type thermocouple temperature measurement -20°C ~ 300°C
- Thermo plastic elastomer, high resistance against drop shock
- Safety cap on current terminal
- Data hold, Range hold, Relative function
- Continuity check, Diode test
- Auto power off function (30min.)
- Maximum 20A can be measured if the measurement time is less than 10 seconds. (Take 10 minutes or longer intervals between measurements)

Display : numeral display 4000

Sampling rate : 3 times / sec.

AC frequency bandwidth : 45~500Hz (4V range), 45~1KHz (40V range and above)

A fuse of large breaking capacity (30kA) is used to further improve the safety.



Multifunctional new standard



CD771

Backlight & Cont. buzzer with LED

- 3-3/4 digits 4000 count
- Easy to read large LCD with Backlight
- Large breaking capacity fuse 30kA
- 1.5V battery check function
- Thermo plastic elastomer, high resistance against drop shock
- Safety cap on current terminal
- Data hold, Range hold, Relative function
- Continuity check, Diode test
- Auto power off function (30min.)
- Maximum 20A can be measured if the measurement time is less than 10 seconds. (Take 10 minutes or longer intervals between measurements)

Display : numeral display 4000

Sampling rate : 3 times / sec.

AC frequency bandwidth : 40~400Hz (sine wave)

A fuse of large breaking capacity (30kA) is used to further improve the safety.



Standard type



CD770

New Standard

- 3-3/4 digits 4000 count
- Easy to read large LCD
- Thermo plastic elastomer, high resistance against drop shock
- Safety cap on current terminal
- Data hold, Range hold, Relative function
- Continuity check, Diode test
- Auto power off function (30min.)

Display : numeral display 4000

Sampling rate : 3 times / sec.

AC frequency bandwidth : 40~400Hz (sine wave)



CD772	Measuring range	Best accuracy	Resolution	Input impedance
DCV	400m/4/40/400/1000V	± (0.5%+2)	0.1mV	DCV: 10M~100MΩ
ACV	4/40/400/1000V	± (1.2%+8)	1mV	ACV: 10M~11MΩ
DCA	400 μ/4000 μ/40m/400m/4/15A	± (1.4%+3)	0.1 μA	
ACA	400 μ/4000 μ/40m/400m/4/15A	± (1.8%+6)	0.1 μA	
Resistance	400/4k/40k/400k/4M/40M Ω	± (1.2%+5)	0.1 Ω	
Capacitance	50n/500n/5 μ/50 μ/100 μ F	± (5%+10)	0.01nF	
Frequency	5/50/500/5 k /50k/100kHz	± (0.3%+3)	0.001Hz	
Temperature	-20°C ~ 300°C	± (3%+30)	0.1°C	
Continuity	Buzzer sounds and LED lights up at between 0Ω and 85Ω (±45Ω). Open voltage: approx. 0.4V			
Diode test	Open voltage: approx. 1.5V			

Bandwidth 45~500Hz (4V range), 45~1KHz (40V range and above)

Fuse / Battery 0.5A/1000V 30kA Φ6.35×32mm R6P×2

Size / Mass H166×W82×D44mm/360g

Standard accessories included Test lead (TL-25a), Thermocouple K type (K-250CD) Instruction manual

Optional accessories

Clamp probe : ACS101

HV probe : HV-60

K type adapter : K-AD

Carrying case : C-77, C-77H

Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC, TL-A4, TL-A7M2

Test lead : TLF-120



CD771	Measuring range	Best accuracy	Resolution	Input impedance
DCV	400m/4/40/400/1000V	± (0.5%+2)	0.1mV	DCV: 10M~100MΩ
ACV	4/40/400/1000V	± (1.2%+7)	1mV	ACV: 10M~11MΩ
DCA	400 μ/4000 μ/40m/400m/4/10A	± (1.4%+3)	0.1 μA	
ACA	400 μ/4000 μ/40m/400m/4/10A	± (1.8%+5)	0.1 μA	
Resistance	400/4k/40k/400k/4M/40M Ω	± (1.2%+5)	0.1 Ω	
Capacitance	50n/500n/5 μ/50 μ/100 μ F	± (5%+10)	0.01nF	
Frequency	5/50/500/5 k /50k/100kHz	± (0.3%+3)	0.001Hz	
Continuity	Buzzer sounds and LED lights up at between 0Ω and 85Ω (±45Ω). Open voltage: approx. 0.4V			
Diode test	Open voltage: approx. 1.5V			
Battery check	Approximate value (30Ω load) 1.5V battery only			

Bandwidth 40~400Hz (sine wave)

Fuse / Battery 0.5A/1000V 30kA Φ6.35×32mm R6P×2

Size / Mass H166×W82×D44mm/360g

Standard accessories included Test lead (TL-23a), Instruction manual

Optional accessories

Clamp probe : ACS101

Carrying case : C-77, C-77H

Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC, TL-A4, TL-A7M2

Test lead : TLF-120



CD770	Measuring range	Best accuracy	Resolution	Input impedance
DCV	400m/4/40/400/600V	± (0.5%+2)	0.1mV	DCV: 10M~100MΩ
ACV	4/40/400/600V	± (1.2%+7)	1mV	ACV: 10M~11MΩ
DCA	400 μ/4000 μ/40m/400mA	± (1.4%+3)	0.1 μA	
ACA	400 μ/4000 μ/40m/400mA	± (1.8%+5)	0.1 μA	
Resistance	400/4k/40k/400k/4M/40M Ω	± (1.2%+5)	0.1 Ω	
Capacitance	50n/500n/5 μ/50 μ/100 μ F	± (5%+10)	0.01nF	
Frequency	5/50/500/5k/50k/100kHz	± (0.3%+3)	0.001Hz	
Continuity	Buzzer sounds at between 0Ω and 85Ω (±45Ω). Open voltage: approx. 0.4V			
Diode test	Open voltage: approx. 1.5V			

Bandwidth 40~400Hz (sine wave)

Fuse / Battery 0.5A/250V 1.5kA Φ5×20mm R6P×2

Size / Mass H166×W82×D44mm/340g

Standard accessories included Test lead (TL-21a), Instruction manual

Optional accessories

Clamp probe : ACS101

Carrying case : C-77, C-77H

Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC, TL-A4, TL-A7M2

Test lead : TLF-120

Compact standard



CD5002

CAT. IV 600V, Full 4-digit 9999 count

- True RMS
- Temperature measurement (optional)
- Auto Hold function automatically holds the measurement value once it stabilizes.
- Large, easy-to-see display
- Bright backlight
- Compact, lightweight, easy-to-hold design
- Auto power off (approx. 30min./cancelable)

Display : numeral display 9999

Sampling rate : approx. 5 times/sec.

Safety : IEC61010 CAT. IV 600V/CAT. III 1000V



CD5001

CAT. IV 600V, Full 4-digit 9999 count

- True RMS
- EF (Electric Field) sensing
- AUTO V function automatically distinguishes between DC and AC voltage.
- Auto Hold function automatically holds the measurement value once it stabilizes.
- Large, easy-to-see display
- Compact, lightweight, easy-to-hold design
- Auto power off (approx. 30min./cancelable)
- Bright backlight

Display : numeral display 9999

Sampling rate : approx. 5 times/sec.

Safety : IEC61010 CAT. IV 600V/CAT. III 1000V



Hybrid Digital Multimeter

Multimeter + Clamp meter



PM33a

Hybrid pocket size DMM + Clamp meter

- Lightweight approx. 160g
- Maximum / Minimum value hold
- Current measurement with thin U-shaped current sensor(7mm) at angles of 0 and 180 degrees
- AC and DC currents measurable up to 100A
- Data hold
- Measurement of relative value
- Auto power off



CD5002	Measuring range	Best accuracy	Resolution	Input impedance
DCV	999.9m/9.999/99.99/999.9V	± (0.5%+2)	0.1mV	10M~11MΩ
ACV	999.9m/9.999/99.99/999.9V	± (1.0%+5)	0.1mV	
DCA	999.9m/9.999A	± (1.0%+5)	0.1mA	0.01Ω
ACA	999.9m/9.999A	± (1.0%+5)	0.1mA	
Resistance	999.9Ω/9.999k/99.99k/999.9k/9.999M/99.99MΩ	± (0.5%+5)	0.1Ω	
Capacitance	999.9n/9.999μ/99.99μ/999.9μ/9.999m/99.99mF	± (5%+5)	0.1nF	
Frequency	9.999/99.999/999.9/9.999k/99.99kHz	± (0.1%+5)	0.001Hz	
Temperature	-40~800°C	± (3%+3)	1°C	
Continuity	Buzzer sounds at 30 to 70Ω or less. Open voltage: approx. 0.6V			
Diode test	Open voltage : approx. 3.2V DC			

Bandwidth 40~400Hz

Battery LR03 X 2

Size / Mass H149XW72XD37mm/approx. 250g

Standard accessories included Test lead (ATL101), Instruction manual

Optional accessories

Clamp probe: ACS101

Hanger Magnet: HM-1

K type temp sensor/adapter: K-250PC/K-AD

Carrying case : C101, C-DG3a

Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC, TL-A4, TL-A7M2



CD5001	Measuring range	Best accuracy	Resolution	Input impedance
DCV	999.9m/9.999/99.99/999.9V	± (0.5%+2)	0.1mV	10M~11MΩ
ACV	999.9m/9.999/99.99/999.9V	± (1.0%+5)	0.1mV	
Resistance	999.9Ω/9.999k/99.99k/999.9k/9.999M/99.99MΩ	± (0.5%+5)	0.1Ω	
Capacitance	999.9n/9.999μ/99.99μ/999.9μ/9.999m/99.99mF	± (5%+5)	0.1nF	
Frequency	9.999/99.999/999.9/9.999k/99.99kHz	± (0.1%+5)	0.001Hz	
Continuity	Buzzer sounds at 30 to 70Ω or less. Open voltage: approx. 0.6V			
EF detection	Detects ACV and EF of approx. 80V or more			

Bandwidth 40~400Hz

Battery LR03 X 2

Size / Mass H149XW72XD37mm/approx. 232g

Standard accessories included Test lead (ATL101), Instruction manual


Optional accessories

Clamp probe: ACS101

Hanger Magnet: HM-1

Carrying case : C101, C-DG3a

Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC, TL-A4, TL-A7M2

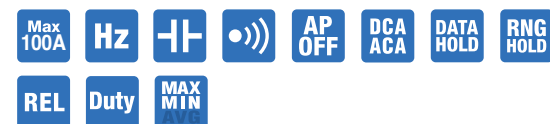

PM33a	Measuring range	Best accuracy	Resolution
DCV	660m / 6.6 / 66 / 600V	± (0.7%+3)	0.1mV
ACV	660m / 6.6 / 66 / 600V	± (1.4%+6)	0.1mV
DCA	100A	± (2.0%+5)	0.1A
ACA	100A	± (2.0%+5)	0.1A
Resistance	660 / 6.6k / 66k / 660k / 6.6M / 66M Ω	± (0.9%+3)	0.1Ω
Capacitance	6.6n / 66n / 660n / 6.6μ / 66μ / 660μ / 6.6m / 66mF	± (5.0%+10)	0.001nF
Frequency	660 / 6.6k / 66kHz	± (0.5%+3)	0.1Hz
Duty cycle	20%~80%	± (0.5%+5)	
Continuity	Buzzer sounds at below 30Ω. Open voltage : approx. 1.2V		
Diode test	Open voltage : approx. 3V		

Battery LR03 x 2

Size / Mass H130×W75×D19.9mm / approx160g (including Battery)

Clamp diameter φ 10mm

Standard accessories included Instruction manual

Optional accessories

Carrying case : C-DG3a

Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC

Analog Multitesters (circuit testers)

What is Analog Multitester?

Analog multitesters basically make measurements of DC voltage, AC voltage, DC current and resistance. Except some special products, they have no function to measure the AC current. Characteristics of recent analog multitesters include the extended measuring range function (particularly for fine voltage and current) with an amplifier installed, the function to allow the measurement of capacitor capacity, and the zero-center meter function. To enhance operability and usability, some products include the auto range function, automatic polarity switching function, and a structure integrating a case to allow the storage of a test lead. There are some testers that allow the measurement of hFE (DC current amplification factor) of a transistor and temperature measurement using a temperature sensor, which is offered as an optional accessory.

Advantages of analog multimeters

1. Easy to read the mean value of values changing in short cycles.
* A digital tester does not give stable value determination.
2. No need for the operating power supply except for resistance range (excluding Model EM7000 integrating an amplifier, and CX506a integrating an oscillator) and zero-center function.
3. Suited for judgment based by intuition (in continuity test etc.).

Four key points in choosing a suitable model

1. What are the necessary measuring functions?

Choose the necessary measuring functions in addition to voltage and resistance.

- Need for the measurement of current (0.25A, 0.3A, 30A), DC only.
- Measurements for remaining dry battery capacity, capacitor, and frequency.
- Measurement of DC high voltage with the use of an optional accessory.

2. Other necessary functions

- 1) The needle occasionally swings to the opposite direction in DC voltage measurement.
→ Check the polarity by the zero-center meter function.
- 2) Hard to check for continuity.
→ Use an LED light-up type in noisy places
→ Use a buzzer type to verify with sounds.

3. Graduation of scale

There are two general types of graduation of the measuring range:

- ① 2.5, 5, 10, 50, 250, 500V
- ② 3, 12, 30, 120, 600V

For measurement of a car battery (24V), measurement in the 30V range of ② is suitable. Choose a type suitable for your intended application.

4. Other functions

Other types are furnished with an auto range function allowing the automatic optimal setting of voltage and resistance. There are also types integrating a transistor transmitter and others integrating a current-limiting fuse with breaking capacity of 100kA for enhanced safe operation.

Pocket-size



PM3

8.5mm thick body with multi-function

- 3-3 / 4 digits 4000 count
- 0.7% best accuracy
- Capacitance measurement
* Not suitable for measurement of condensers with large leak current.
- Frequency measurement (AC sine wave only)
- Duty cycle
- Data hold
- Relative value
- Auto power off (15min.) (cancelable)

Display : numeral display 4000
Sampling rate : 3 times / sec.
AC frequency bandwidth : 40~400Hz
Safety : IEC61010 CAT.III 300V



PM11

Tough but compact DMM

- 3-3 / 4 digits 4000 count
- 0.8% best accuracy
- Analog bar graph
- Compact storage of test leads
- Test lead can be snapped into a fixed position atop the case.

Display : numeral display 4000, bar graph 40 segments
Sampling rate : 1.3 times / sec., 13 times / sec.
for bar graph
AC frequency bandwidth : 45~1kHz



PM7a

Updated longtime seller

- 3-3 / 4 digits 4000 count
- 0.7% best accuracy
- Range hold
- Auto power off (15min.)
- Low power ohm (input voltage 0.4V) at continuity range
- Power saving design

Display : numeral display 4000
Sampling rate : 3 times / sec.
AC frequency bandwidth : 40~400Hz



Volt Tester



KP1

CAT.IV Volt tester

- AC True RMS
- Self test - checking failures of LCD, disconnection of a lead wire
- EF (Electric Field) detection
- LCD with backlight & LED light for dark place
- Auto data hold
- Auto power off (1min.)

Display : numeral display 9999
Sampling rate : 6 times / sec. (ACV), 5 times / sec. (DCV)
Safety : IEC61010 CAT.IV 600V/CAT.III 300V



PM3	Measuring range	Best accuracy	Resolution	Input impedance
DCV	400m/4/40/300V	± (0.7%+3)	0.1mV	DCV: 10M~100MΩ
ACV	4/40/300V	± (2.3%+5)	0.001V	ACV: 10M~100MΩ
Resistance	400/4k/40k/400k/4M/40MΩ	± (2.0%+5)	0.1Ω	
Capacitance	5n/50n/500n/5μ/50μ/200μF	± (5.0%+10)	0.001nF	
Frequency	9.999/99.99/999.9/9.99k/60.00kHz	± (0.7%+5)	0.001Hz	
Duty Cycle	0.1~99%			
Continuity	Buzzer sounds at less than 10~120Ω. Open voltage : approx. 0.4V			
Diode Test	Open voltage : approx. 1.5V			
Bandwidth	40~400Hz			
Battery	Coin type lithium battery CR2032 (3V)×1			
Size / Mass	H108×W56×D11.5mm/approx. 85g			
Standard accessories included	Case holder (C-PM3), Instruction manual			

Optional accessories

Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC, TL-A4, TL-A7M2



PM11	Measuring range	Best accuracy	Resolution	Input impedance
DCV	400m/4/40/400/500V	± (0.8%+4)	0.1mV	DCV: 10M~100MΩ
ACV	4/40/400/500V	± (2.3%+8)	0.001V	ACV: 10M~100MΩ
Resistance	400/4k/40k/400k/4M/40MΩ	± (2.0%+4)	0.1Ω	
Continuity	Buzzer sounds at less than 35Ω. Open voltage : approx. 1.2V			
Diode test	Open voltage : approx. 3V			
Bandwidth	45~1kHz			
Battery	Button battery LR-44×2			
Size / Mass	H117×W76×D18mm/approx. 117g			
Standard accessories included	Instruction manual			

Optional accessories

Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC, TL-A4, TL-A7M2



PM7a	Measuring range	Best accuracy	Resolution	Input impedance
DCV	400m/4/40/400/500V	± (0.7%+3)	0.1mV	DCV: 10M~100MΩ
ACV	4/40/400/500V	± (2.3%+5)	0.001V	ACV: 10M~100MΩ
Resistance	400/4k/40k/400k/4M/40MΩ	± (2.0%+5)	0.1Ω	
Continuity	Buzzer sounds at less than 10~120Ω. Open voltage : 0.4V			
Diode test	Open voltage : approx. 1.5V			
Bandwidth	40~400Hz			
Battery	Button battery LR-44×2			
Size / Mass	H115×W57×D18mm/approx. 85g			
Standard accessories included	Instruction manual			




KP1	Measuring range	Best accuracy	Resolution
DCV	5~999.9V	± (0.7%+5)	0.1V
ACV	5~999.9V	± (1.7%+5)	0.1V
Continuity	Buzzer sounds at between 20kΩ and 500kΩ. Open voltage: approx. 0.6V		
EF Detection	A voltage or electric field of about 60V or more is detected. The bar graph and intermittent buzzer beeps change in five steps		
Bandwidth	45~400Hz		
Battery	LR03 X 2		
Size / Mass	H130XW90XD30mm/approx. 205g		
Standard accessories included	Test leads (TL-35 : Test probe (red), TL-36 : Test lead (black), TL-A01 : Test probe (black), Instruction manual		

Optional accessories


Test lead : TL-26, TL-37
Adapter : CL-26, TL-A18a
Carrying case : C-DG3a

Examples

AC100V plug outlet

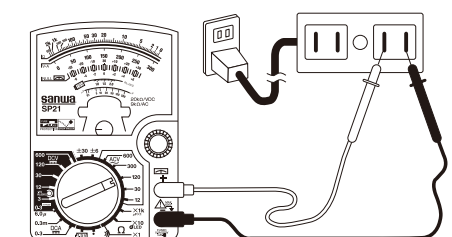

Battery voltage

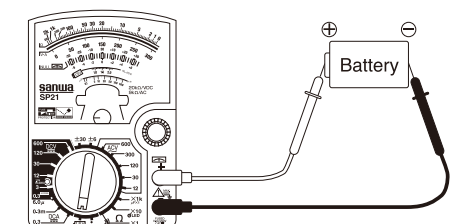

Analog Multitester Comparative Chart

	FET Tester	Multifunction			Drop Shock Proof Meter			
Model	EM7000	CX506a	YX-361TR	YX360TRF	SP20	SP21	SP-18D	TA55
								
								
Page	P19	P19	P19	P20	P20	P20	P21	P21
DCV (V)	0.3	120m	0.1	0.1	0.25	0.3	0.3	0.3
	1.2	3	0.5	0.25	2.5	3	3	3
	3	12	2.5	2.5	5	12	12	16
	12	30	10	10	10	30	30	30
	30	120	50	50	50	120	120	60
	120	300	250	250	100	600	600	-
	300	1000	1000	1000	500	-	-	-
	1000	-	-	-	-	-	-	-
ACV (V)	3	3	2.5	10	10	12	12	30
	12	12	10	50	50	30	30	120
	30	30	50	250	250	120	120	300
	120	120	250	750	500	300	300	-
	300	300	1000	-	-	600	600	-
	750	750	-	-	-	-	-	-
DCA (A)	0.12 μ	30 μ	50 μ	50 μ	50 μ	60 μ	60 μ	0.5
	0.3m	0.3m	2.5m	2.5m	2.5m	30m	30m	3
	3m	3m	25m	25m	25m	0.3	0.3	30
	30m	30m	0.25	0.25	0.25	-	-	-
	300m	0.3	-	-	-	-	-	-
	6	-	-	-	-	-	-	-
ACA (A)	6	-	-	-	-	-	-	-
Resistance (Ω)	2k	5k	2k	2k	2k	2k	2k	2k
	20k	50k	20k	20k	20k	20k	20k	20k
	200k	500k	200k	200k	200k	2M	2M	200k
	2M	5M	2M	2M	2M	-	200M	2M
	20M	50M	20M	200M	-	-	-	-
	200M	-	-	-	-	-	-	-
Capacitance (F)	-	0.2 μ	-	10 μ	500 μ	500 μ	1000 μ	-
	-	20 μ	-	-	-	-	-	-
	-	2000 μ	-	-	-	-	-	-
Low frequency output measurement	●	-	●	●	-	-	-	-
Continuity	-	-	LED	-	-	Buzzer	-	Buzzer
Battery check	-	-	1.5V	-	1.5V	1.5V	1.5V	12V
Meter structure	Band	Band	Band	Band	Band	Band	Band	Band
Drop shock proof meter	-	-	-	●	●	●	●	●
Zero center meter	●	-	●	●	-	●	-	-
Temperature measurement	-	-	-	-	○	-	-	-
hFE	-	●	○	○	-	-	-	-
Dimension H (mm)	165	165	150	159.5	144	144	159.5	142
Dimension W (mm)	106	106	100	129	99	99	129	97
Dimension D (mm)	46	46	37	41.5	41	41	41.5	38
Mass (g)	375	370	290	320	270	270	320	300

FET Tester



EM7000

High sensitivity for measurement of lower capacitance

- High input impedance (DCV2.5~12MΩ/V), and 0.12 μA range (DCA)
- Bandwidth 40Hz~1Mhz AC sign wave
- Rectangular pulse P-P (Peak to Peak) measurement (duty cycle 20% and above)
- Wide ohm range 0.2Ω~200MΩ

Bandwidth : 40Hz~1Mhz (12V range and below)

Optional accessories

HV probe : HV-60
Carrying case : C-CA
Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC
TL-A4, TL-A7M2
Test lead : TLF-120



EM7000	Measuring range	Accuracy
DCV	0.3/1.2/3/12/30/120/300/1000V	±3% of full scale
±DCV	±0.15/0.6/1.5/6/15/60/150/600V	±7% of full scale
ACV rms (50 / 60Hz)	3V (approx. 2.5MΩ/V)/12V (approx. 1.1MΩ/V) 30V (approx. 800kΩ/V)/120/300V (approx. 800kΩ/V) 750V (approx. 10MΩ/V)	±3% of full scale
ACV P-P	Sine wave: 8.4V (approx. 2.5MΩ/V)/ 33V (approx. 1.1MΩ/V) 84V (approx. 800MΩ/V)/330/840V (approx. 800kΩ/V)	±5% of full scale
	Square symmetric wave: 8.4V (2.5MΩ/V)	±6% of full scale
	Triangular symmetric wave: 8.4V (2.5MΩ/V)	±6% of full scale
DCA (NULL)	0.12 μA/0.3m/3m/30m/300m/6A	±3% of full scale
DCA (NULL)	±0.06 μA/±0.15m/1.5m/15m/150mA	±7% of full scale
ACA	6A	±3% of full scale
Resistance	2k/20k/200k/2M/20M/200M Ω	±3% of scale length
dB	-10~+51dB	±3% of scale length

Bandwidth	40Hz~1MHz (below 12V range)
Battery	R6P 1.5V×2, 6F22 9V×1
Fuse	φ 5.0×20mm ceramic (250V / 0.5A) φ 5.0×20mm ceramic (250V / 6.3A)
Size / Mass	H165×W106×D46mm / approx. 375g
Standard accessories included	Test lead (TL-21a), Spare fuse, Instruction manual
The value in () at DCV and ACV is input resistance.	

Multifunctional model



CX506a

Capacitor & Transistor checker (built-in-oscillator)

- 26ch switch, wide range measurement
- Capacitance measurement 50pF~2000 μF
- High input impedance 50kΩ / V (DC3~300Vrange)
- Switchable DC polarity

Bandwidth : 40Hz~30kHz (3V and 12V),
40Hz~10kHz (30V range)

Optional accessories

HV probe : HV-60
Carrying case : C-CA
Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC
TL-A4, TL-A7M2
Test lead : TLF-120



CX506a	Measuring range	Accuracy
DCV	120m (4kΩ)/3/12/30/120 300 (50kΩ/V)/1000V (15kΩ)	120m : ±4% ±2.5% of full scale ±3% of full scale (3/12V : ±4%)
ACV	3/12/30/120/300/750V (8kΩ/V)	
DCA	30 μA/0.3m/3m/30m/0.3A	±2.5% of full scale (30 μA/0.3m : ±3%)
Resistance	5k/50k/500k/5M/50M Ω	±3% of scale length
Capacitance	C1 : 50p~0.2 μF C2 : 0.01 μ~20 μF C3 : 1~2000 μF	C1/C2 ±6% of scale length

hFE (DC Current Amplification Factor)	Transistor hFE: 0~1000	-
Bandwidth	40~30kHz (12V: 40Hz~30kHz 30V~ : 40Hz~10kHz)	
Battery	R6P×2, 6F22×1	
Fuse	φ 5.0×20mm (250V/0.5A) arc-extinguishing material in ceramic tube	
Size / Mass	H165×W106×D46mm/approx. 370g	
Standard accessories included	Test lead (TL-21a), Clip lead (CL-506b) Instruction manual, Spare fuse	
The value in () at DCV and ACV is input resistance.		

YX-361TR

Wide measurement range

- Total 33 wide ranges (24ch sw + additional functions)
- ±DCV zero center meter
- LED for continuity check
- OUTPUT terminal (series capacitor terminal)
- Battery check

Optional accessories

Carrying case : C-YS
Adapter : CL-15a, CL-14, CL-DG3a, TL-9IC
hFE probe : HFE-6T
Test lead : TL-91



YX-361TR	Measuring range	Accuracy
DCV (NULL)	0.1/0.5/2.5/10/50/250/1000V (20kΩ/V) ±5/25V (40kΩ/V)	±2.5% of full scale ±5% of full scale
ACV	2.5/10/50/250/1000V (9kΩ/V)	±3% of full scale (2.5/10V : ±4%)
DCA	50 μA/2.5m/25m/0.25A	±2.5% of full scale
Resistance	2k/20k/200k/2M/20M Ω	±3% of scale length
dB	-10~+62dB	±3% of full scale (2.5/10V : ±4%)
Continuity	LED : emitting light at 10Ω or less. Open voltage : 3V	
Battery check	1.5V	
hFE	1000 at X10 range (optional probe "HFE-6T" is necessary)	-
Bandwidth	40~20kHz (less than 50V : ±3%)	
Battery	R6P×2, 6F22×1	
Fuse	φ 5.2×20mm (250V / 0.5A)	
Size / Mass	H150×W100×D37mm / approx. 290g	
Standard accessories included	Test lead (TL-61), Instruction manual	
The value in () at DCV and ACV is input resistance.		

Drop shock proof meter



YX360TRF


Best seller drop shock proof meter

- Drop shock proof meter
- Null (zero center) meter ± 5 / ± 25 in DCV
- High resistance up to 200M Ω with low voltage
- Protective body cover
- Capacitance, dB, Li measurement

Bandwidth : 30~100kHz (AC10V)

Optional accessories

hFE probe : HFE-6T
Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC
High voltage probe : HV-10T



SP21

Continuity check buzzer

- Drop shock proof taut-band meter
- $\pm$ DCV zero center meter
- Fuse and diode protection
- Battery check
- Tilt stand

Bandwidth : 40~100kHz (AC12V)

Optional accessories

Carrying case : C-SPH
Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC
TL-A4, TL-A7M2
Test lead : TLF-120



SP20

DC high voltage & temperature measurable

- 20ch measurement ranges
- Capacitance measurement 500 μ F
- Tilt stand
- DC high voltage and temperature measurement (with optional accessories)

Bandwidth : 40~100kHz (AC10V)

Optional accessories

Temperature probe : T-THP
Carrying case : C-SPH
Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC
Test lead : TLF-120



YX360TRF	Measuring range	Accuracy
DCV (NULL)	0.1V (20k Ω / V) 0.25 / 2.5 / 10 / 50 (20k Ω / V) / 250 / 1000V(9k Ω / V) ± 5 / 25V (40k Ω / V)	$\pm 5\%$ of full scale $\pm 3\%$ of full scale $\pm 5\%$ of full scale
ACV	10 / 50 / 250 / 750V (9k Ω / V)	$\pm 4\%$ of full scale
DCA	50 μ / 2.5m / 25m / 0.25A	$\pm 3\%$ of full scale
Resistance	2k / 20k / 200k / 2M Ω (X1 / X10 / X100 / X1k) 200M Ω (X100k)	$\pm 3\%$ of scale length $\pm 5\%$ of scale length
Load current (LI)	0~150m / 15m / 1.5m / 150 μ / 1.5 μ A	
Capacitance	10 μ F	*1
dB	-10dB~+22dB (for 10VAC) ~+62dB	—
DC high voltage	DC25kV (optional probe "HV-10T" is necessary)	—
hFE	1000 at X10 range (optional probe "HFE-6T" is necessary)	—

Battery	R6 (IEC) or UM-3(1.5V)×2
Fuse	ϕ 5.2×20mm (250V / 0.5A)
Size / Mass	H159.5×W129×D41.5mm / approx. 320g
Standard accessories included	Instruction manual, Hand strap

The value in bracket at DCV and ACV is input resistance.
*1 Pointer indication of the maximum move by charged current in the capacitor.



SP21	Measuring range	Accuracy
DCV (NULL)	0.3 (5k Ω)/3/12/30/120/600V (20k Ω /V) ± 6 /30V (20k Ω /V)	$\pm 3\%$ of full scale $\pm 5\%$ of full scale
ACV	12/30/120/300/600V	$\pm 3\%$ of full scale
DCA	60 μ /30m/0.3A	$\pm 3\%$ of full scale
Resistance	2k/20k/2M Ω	$\pm 3\%$ of scale length
Capacitance	500 μ F	*1
Continuity	Buzzer sounds at less than approx. 10 Ω . Open voltage: 3V	

Bandwidth	40~100kHz (AC12V)
Battery	R6P×2
Fuse	ϕ 5×20mm (250V/0.5A)
Size / Mass	H144×W99×D41mm/approx. 270g
Standard accessories included	Test lead (TL-21a), Instruction manual

The value in () at DCV and ACV is input resistance.
*1 Pointer indication of the maximum move by charged current in the capacitor.



SP20	Measuring range	Accuracy
DCV	0.25/2.5/10/50/100V (20k Ω /V)/500V (9k Ω /V)	$\pm 3\%$ of full scale
ACV	10/50/250/500V (9k Ω /V)	$\pm 3\%$ of full scale
DCA	50 μ /2.5m/25m/0.25A	$\pm 3\%$ of full scale
Resistance	2k/20k/200k/2M Ω	$\pm 3\%$ of scale length
Capacitance	500 μ F	*1
DC high voltage	DC25kV (Optional probe "HV-10" is necessary)	—
Temperature	-20 ~ +200 $^{\circ}$ C (Optional probe "T-THP" is necessary)	$\pm 3\%$ (T-THP)

Bandwidth	40~100kHz (AC10V)
Battery	R6P×2
Fuse	ϕ 6.3×30mm (250V/0.5A)
Size / Mass	H144×W99×D41mm/approx. 270g
Standard accessories included	Test lead (TL-61), Instruction manual

The value in () at DCV and ACV is input resistance.
*1 Pointer indication of the maximum move by charged current in the capacitor.

Drop shock proof meter



SP-18D

Protective body cover

- Low power ohm (3V) measurement up to 200M Ω
- Capacitance measurement 0.01 μ F~1000 μ F
- LED check by 3V terminal voltage at resistance range
- Battery check
- Protective body cover

Bandwidth : 30~80kHz (AC12V), 30~20kHz (AC30V)

Optional accessories

Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC



TA55

30A range for automotive

- High level panel visibility
- Continuity check buzzer
- Tilt-stand
- Measurable up to DC30A / DC300A with optional clamp probe

Bandwidth : 40~5kHz

Optional accessories

Carrying case : C-SPH
Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC
Test lead : TLF-120



SP-18D	Measuring range	Accuracy
DCV	0.3/3/12/30/120/600V (20k Ω /V)	$\pm 3\%$ of full scale
ACV	12/30/120/300/600V (9k Ω /V)	$\pm 3\%$ of full scale
DCA	60 μ /30m/0.3A	$\pm 3\%$ of full scale
Resistance	2k/20k/2M/200M Ω	$\pm 3\%$ of scale length (200M Ω : $\pm 5\%$)
Battery check	1.5V/1.5V Coin battery	—
Capacitance	1000 μ F	*1

Bandwidth	30~70kHz (AC 12V) 30~20kHz (AC 30V)
Battery	R6P×2
Fuse	ϕ 5.2×20mm (250V/0.5A)
Size / Mass	H159.5×W129×D41.5mm / approx. 320g
Standard accessories included	Instruction manual

The value in () at DCV and ACV is input resistance.
*1 Pointer indication of the maximum move by charged current in the capacitor.



TA55	Measuring range	Accuracy
DCV	0.3/3/16/30/60V (20k Ω /V)	$\pm 3\%$ of full scale
ACV	30/120/300V (9k Ω /V)	$\pm 4\%$ of full scale
DCA	0.5/3/30A	$\pm 5\%$ of full scale
Resistance	2k/20k/200k/2M Ω	$\pm 3\%$ of scale length
Continuity	Buzzer sounds at less than approx. 70 Ω . Open voltage : 3V	

Bandwidth	40~5kHz
Battery	R6P×2
Fuse	ϕ 6.4×30mm (250V/3A)
Size / Mass	H142×W97×D38mm/approx. 300g
Standard accessories included	Test lead (TL-91), Instruction manual

The value in () at DCV and ACV is input resistance.



Disponible para entrega inmediata en Sugartech

Insulation Resistance Testers

What is Insulation Resistance Tester?

The measurement of insulation resistance is performed to check the insulation status of electric equipments and circuits, which constitutes one of the important measuring items for safety control. The measurement of the insulation of electric equipments and circuits is made using an insulation resistance tester by stopping the operation of the electric equipments and circuits (by stopping power distribution). Voltage of several megohms to tens of megohms is measured in case of the measurement of insulation resistance of electronic parts and electric equipments, and voltage of 1MΩ or less is measured in case of electric works for interior wiring and others.

Is not the resistance range of a multimeter adequate for the measurement of insulation resistance?

The resistance of a digital multimeter or multitester covers the applied voltage (measured voltage) of approx. 0.3V up to 12V. An insulation resistance tester needs to make measurements at voltage higher than the working voltage of a circuit and electric and electronic equipment to be measured. The table on the right lists examples of rated voltage and uses of the insulation resistance tester.

Examples of major applications of insulation resistance tester

Rated measurement voltage	General electric equipments	Electric equipments and circuits
	Insulation measurement at safe voltage	
25V 50V	Insulation measurement of telephone circuit equipments and explosion-proof equipments	Insulation measurement of telephone circuits
100V 125V	Insulation measurement of control equipments	Insulation measurement for maintaining and controlling low-voltage distribution wiring and equipments of 100V or less Insulation measurement for maintaining and controlling low-voltage wiring and equipments of 200V class or lower
250V	Insulation measurement of low-voltage distribution circuits and equipments	Insulation measurement for maintaining and controlling low-voltage wiring and equipments of 400V class or lower Insulation measurement of 100V, 200V and 440V classes at the time of new installation
500V	Insulation measurement of newly installed distribution circuits, and circuits and equipments of 600V or less (General)	Insulation measurement for maintaining and controlling low-voltage wiring and equipments of lower than 600V Insulation measurement of 100V, 200V and 400V distribution wiring at the time of new installation
1000V	Insulation measurement of circuits, equipments, and facilities of higher than 600V (General)	Insulation measurement of equipments normally operating at high working voltage (e.g. high-voltage cable, high-voltage electric equipment, and communications equipment using high voltage)

Three key points in choosing a suitable model

1. Analog type or digital type?

Analog type is suitable for visually checking the measurement.
Digital type is suitable for verifying the measurement by precise values.

2. What do you like to measure by your insulation resistance tester?

For measurement of electronic circuits and the like (See Figure ① below)
→ For easy reading of higher resistance : DM series / Digital type
For use in measurement in electric works and the like (See Figure ② below)
→ For easy reading of lower resistance : PDM series / Digital type

3. Required rated voltage

A wide voltage range is available from 15V (optimum for maintaining and controlling elevators) up to 1000V / 4000MΩ
There are types allowing two to seven ranges by one unit.

Measuring method of low-voltage circuit

In order to measure the insulation resistance of a low-voltage circuit, use an insulation resistance tester with the rated voltage of 500V. Open switches in the distribution board, shut off the power distribution and measure the insulation resistance between wires on the circuit and between wire and ground. If the measured value is below the reference value, open all branch switches and make measurements separately for each branch line of the mains line. The insulation resistance value of the low-voltage circuit is stipulated according to the Electrical Equipment Standard.

Use voltage class of circuit	Insulation resistance value
300V or less When voltage to ground is 150V or less (Voltage to ground: Voltage between wire and the earth in case of a ground type circuit, and voltage between wires in case of a non-ground type circuit. The same applies hereinafter.)	0.1MΩ
Other cases	0.2MΩ
More than 300V	0.4MΩ

Scale-division method of the 1st and 2nd effective measurement range

① Scale of DM series



② Scale of PDM series



Insulation Resistance Tester Comparative Chart

Digital Type					
Model	MG5000	MG102	MG1000	MG500	HG561H
					
Page	P24	P.25	P25	P25	P26
Category	CAT.IV 600V	CAT.IV 300V	CAT.III 600V	CAT.III 600V	-
C E	●	●	●	●	-
Test voltage	5000V	1000GΩ	-	-	-
	2500V	100GΩ	-	-	-
	1000V	2000MΩ	4000MΩ	4000MΩ	-
	500V	1000MΩ	4000MΩ	4000MΩ	110MΩ
	250V	100MΩ	500MΩ	4000MΩ	110MΩ
	125V	-	250MΩ	-	110MΩ
	100V	-	250MΩ	-	110MΩ
	50V/25V	-	100MΩ	-	21MΩ
15V	-	-	-	-	21MΩ
ACV(V)/DCV(V)	1000/1000	600/600	600/600	600/600	600/600
Resistance (Ω)	-	999.9k	40/4000	40/4000	999.9/99.99k 999.9k
Discharge	●	●	●	●	●
Inner battery check	●	●	●	●	●
Backlight	●	●	●	●	●
Live circuit detection	●	●	●	●	●
Dimension H (mm)	188	147	170	170	139
Dimension W (mm)	225	68	142	142	91
Dimension D (mm)	97	33	57	57	29
Mass (g)	1750	336	600	600	230

Analog Type					
Model	PDM1529S	PDM5219S	DM1009S	DM509S	PDM509S
					
Page	P26	P26	P27	P27	P27
Category	-	-	-	-	-
C E	●	●	●	●	●
Test voltage	1000V	2000MΩ	-	2000MΩ	-
	500V	100MΩ	100MΩ	-	100MΩ
	250V	100MΩ	100MΩ	-	-
	125V	-	100MΩ	-	-
ACV(V)/DCV(V)	600/60	600/60	600/60	600/60	600/60
Resistance (Ω)	-	-	-	-	-
Discharge	●	●	●	●	●
Inner battery check	●	●	●	●	●
Backlight	-	-	-	-	-
Live circuit detection	-	-	-	-	-
Dimension H (mm)	144	144	144	144	144
Dimension W (mm)	99	99	99	99	99
Dimension D (mm)	43	43	43	43	43
Mass (g)	310	310	310	310	310

High voltage Type



MG5000

This instrument is a high voltage insulation resistance tester for use in measurement of Insulation Resistance of a power line and power equipment within the range of 600V under CAT.IV.

- Test voltage DC5000V/2500V/1000V/500V/250V
- Insulation Resistance up to 1T Ω
- Short circuit current up to 4mA
- Dielectric Absorption Ratio (DAR)
- Polarisation Index (PI)
- Auto discharge function
- Data hold(Auto)
- Auto power save:
Power save about 10 minutes after the last operation

Display : numeral display 1200
Sampling rate : 3 times / sec.
Safety : IEC61010 CAT.IV 600V



5000V 1000G Ω	2500V 100G Ω	1000V 2000M Ω	500V 1000M Ω	250V 100M Ω
-------------------------	------------------------	-------------------------	------------------------	-----------------------

Measuring range							
Test Voltage(DC) Range	250V 0.0~104.9MΩ	500V 0.0~99.9MΩ 80~1049MΩ	1000V 0.0~99.9MΩ 80~999MΩ 0.80~2.09GΩ	2500V 0.0~99.9MΩ 80~999MΩ 0.80~9.99GΩ 8.0~104.9GΩ	5000V 0.0~99.9MΩ 80~1000GΩ		1001~1199GΩ
Accuracy	±5%+3	±5%+3	±5%+3	±5%+3	±5%+3		-
Open circuit voltage	DC250V 0%~+20%	DC500V 0%~+20%	DC1000V 0%~+20%	DC2500V 0%~+20%	DC5000V 0%~+20%		
Rated test current					3mA±0.5mA		
Short circuit current					3mA~4mA		
Voltage measurement	AC : 30~1000V(50/60Hz)、DC : 30~1000V、Accuracy : ±(2%+3dgt)						
LCD		Bar graph : 36 points DAR/PI value : 9.99 Timer : 99:59(min : sec)					
Overload indication		V function : “OL” displayed with buzzer beep Insulation function : “OL” displayed					
Max. power consumption		Approx. 18 VA (measurement at 5000 V/approx. 1.8 MΩ)					
Battery Monitor		4-step indication					
IP rate		IP54					
Battery		LR14 x 8					
Size / Mass		H188 x W225 x D97mm / 1750g(Batteries included)					
Standard accessories included		Test lead(TL-5K) LINE lead(TL-5K-R:Red,3m), EARTH lead (TL-5K-B:Black,3m), GUARD lead (TL-5K-G:Green,3m), Alligator clip (TL-5K-A), Test probe (TL-5K-P), Hook probe (TL-5K-H) Carrying case(C-MG5K), Instruction manual, Battery(LR14 x 8)					

Optional accessories

LINE lead : TL-5K-15 (Red,15m)



C-MG5K



TL-5K



TL-5K-15



Digital Type



MG102

Pocket-sized 1000V Insulation Resistance Tester

- Safety design compliant with IEC61010 CAT. IV 300V
- Automatic data hold function
- LED-illuminated buttons for clear indication of Test voltage.
- Comparator function for insulation resistance value.
- Test voltage selection mode allows enabling or disabling the test voltage button (power-on option).
- Large, easy-to-read LCD with backlight.

Display : numeral display 4000,
9999 (AC/DCV, Resistance, Continuity)
Sampling rate : approx.32 times/sec.
Safety : IEC61010 CAT. IV 300V CAT.III 600V

Optional accessories

Hanger magnet: HM-1
Carrying case: C-DG3a
AAA (LR03) battery holder: BH2



MG1000
MG500

Allows you to measure insulation resistance more safely by avoiding operation mistakes.

- Hot-line state (30V minimum) detection
- Large volt mark with the buzzer sound
- Automatic data hold function
- Bar graph just like analog meter
- Large display with backlight
- Easy to use & tough body
- IP54

Display : numeral display 4000 **Sampling rate** : 2 times / sec.
Safety : IEC61010 CAT.III 600V

Optional accessories

Test lead : TLF-120 (MG500 Only), TL-BP



Front cover image ▶



50V 100M Ω	100V 250M Ω	125V 250M Ω	250V 500M Ω
----------------------	-----------------------	-----------------------	-----------------------

500V 4000M Ω	1000V 4000M Ω
------------------------	-------------------------

MG102	Measuring range	Best accuracy	Resolution
M Ω	50V 100/125V 250V 500/1000V	0.999/9.99/99.9M Ω 0.999/9.99/99.9/250M Ω 0.999/9.99/99.9/500M Ω 0.999/9.99/99.9/999/4000M Ω	$\pm (2\%+6)$ 0.001M Ω
Test voltage	50/100/125/250/500/1000V		
ACV/DCV	600V (AC/DC Automatic detection)	$\pm (1.2\%+5)$	0.1V
Resistance	999.9/9.999k/99.99k/999.9k Ω	$\pm (1.5\%+7)$	0.1 Ω
Frequency	1999Hz (Displayed during ACV measurement.)	$\pm (0.5\%+5)$	0.001Hz
Continuity	999.9 Ω (Buzzer sounds at 30 Ω or less.)	$\pm (1.5\%+7)$	0.1 Ω
Rated current	1.0 ~ 1.2mA		
Battery	LR6X4		
Size/Mass	H147XW68XD33mm/approx. 336g		
Standard accessories included	Test Lead (ATL102), Alligator clip (AAL301), Breaker pin (ABP301), Instruction manual		



1000V 4000M Ω	500V 4000M Ω	250V 4000M Ω
-------------------------	------------------------	------------------------

MG1000	Measuring range	Best accuracy	Resolution
M Ω	4M/40M/400M/4000M Ω	$\pm (3\%+4)$	0.001M Ω
Test voltage	1000/500/250V		
ACV/DCV	600V(AC/DC Automatic detection)	$\pm (3\%+2)$	1V
Continuity	4000 Ω (Buzzer and ALARM indicator)	$\pm (3\%+3)$	1 Ω
Continuity (200mA)	40 Ω	$\pm (3\%+10)$	0.01 Ω
Open circuit voltage	1 to 1.3 times of nominal test voltage		
Rated current	1.0~1.2mA		
Short-circuit current	2mA or less		
Live circuit detection	At ≥ 30 V AC/DC or more, inhibits test, buzzer sounds and ALARM indicator lights up.		
Battery	LR6 $\times 6$		
Size / Mass	H170 $\times$ W142 $\times$ D57mm/approx. 600g		
Standard accessories included	Test Lead (TL-112a), Strap (ST-50), Instruction Manual		



500V 4000M Ω	250V 4000M Ω	125V 4000M Ω
------------------------	------------------------	------------------------

MG500	Measuring range	Best accuracy	Resolution
M Ω	400k/4M/40M/400M/4000M Ω	$\pm (3\%+4)$	0.001M Ω
Test voltage	500/250/125V		
ACV/DCV	600V(AC/DC Automatic detection)	$\pm (3\%+2)$	1V
Continuity	4000 Ω (Buzzer and ALARM indicator)	$\pm (3\%+3)$	1 Ω
Continuity (200mA)	40 Ω	$\pm (3\%+10)$	0.01 Ω
Open circuit voltage	1 to 1.3 times of nominal test voltage		
Rated current	1.0~1.2mA		
Short-circuit current	2mA or less		
Live circuit detection	At ≥ 30 V AC/DC or more, inhibits test, buzzer sounds and ALARM indicator lights up.		
Battery	R6 $\times 6$		
Size / Mass	H170 $\times$ W142 $\times$ D57mm/approx. 600g		
Standard accessories included	Test Lead (TL-112a), Strap (ST-50), Instruction Manual		



Disponibile para entrega inmediata en Sugartech

Digital Type



HG561H

Pocket size, 7 test voltage ranges

- Test voltage selection mode
- LED level meter shows MΩ
- Easy-to-read LCD with fixed decimal point
- Automatic data hold function
- LCD with backlight & LED light for dark place


Sampling rate : approx. 2 times / sec.

Optional accessories

Test lead : TL-28, TL-BP

Adapter : TL-27, TL-A51

(Test lead TL-28 is necessary)

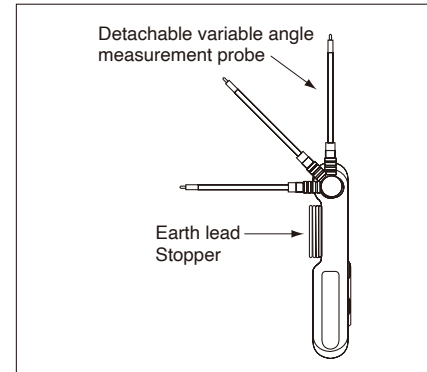

	15V 21M Ω	25V 21M Ω	50V 21M Ω	
	100V 110M Ω	125V 110M Ω	250V 110M Ω	500V 110M Ω
HG561H	Measuring range			Best accuracy Resolution
MΩ	15/25/50V 9.99M/21.0MΩ 100/125/250/500V 9.99M/99.9M/110MΩ			±(2%+5) 0.1MΩ
Test voltage	15/25/50/100/125/250/500V			
ACV/DCV	600V (AC/DC Automatic Detection)			±(1.6%+7) 0.1V
Ω	999.9/99.99k/999.9kΩ			±(1.5%+7) 0.1Ω
Insulation Resistance (Level meter)	15/25/50V 5 Levels(LED light up/blinking) 100/125/250/500V 7 Levels(LED light up/blinking)			
Continuity	Buzzer sounds at 30Ω or less			
Rated current	1.0~1.2mA			
Battery	LR03×4			
Size / Mass	H139×W91×D29mm/approx. 230g			
Standard accessories included	Measurement probe (TL-561), Alligator clip (CL-561), Carrying case (C-DG3a), Instruction manual			

Optional accessory

TL-BP

IEC61010

CAT.III600V

Test lead:TL-28

Probe adapter:TL-A51(Red)

Alligator clip:CL-27(Black)



Analog Type



DM1009S

Single test voltage range

- Test voltage DC1000V · 2000MΩ
- One-shot or continuous measurement push switch
- DCV measurement range (DC60V)
- Auto discharge function
- Inner battery check range
- ACV measurement range
- Shoulder Strap

Safety : IEC61010 CAT.III 600V

Optional accessories

Test lead : TLF-120, TL-BP

Adapter : TL-A51

AD	1000V 2000MΩ
DM1009S	
Insulation resistance (MΩ)	1~2~1000~2000MΩ
Accuracy	±5% of reading (1st effective measurement range: written in thick print above) ±10% of reading (2nd effective measurement range: written in small type above)
ACV	600V
Accuracy	±5% of full scale (50~60Hz sine wave)
DCV	60V
Accuracy	±5% of full scale
Rated current	1.0~1.2mA
Battery	6LR61 (9V)×1
Size / Mass	H144×W99×D43mm/approx. 310g
Standard accessories included	Test lead (TL-509S), Carrying case (C-09S), Instruction manual



DM509S

Single test voltage range

- Test voltage DC500V · 1000MΩ
- One-shot or continuous measurement push switch
- DCV measurement range (DC60V)
- Auto discharge function
- Inner battery check range
- Shoulder Strap

Safety : IEC61010 CAT.III 600V

Optional accessories

Test lead : TLF-120, TL-BP

Adapter : TL-A51

AD	500V 1000MΩ
DM509S	
Insulation resistance (MΩ)	0.5~1~500~1000MΩ
Accuracy	±5% of reading (1st effective measurement range: written in thick print above) ±10% of reading (2nd effective measurement range: written in small type above)
ACV	600V
Accuracy	±5% of full scale (50~60Hz sine wave)
DCV	60V
Accuracy	±5% of full scale
Rated current	1.0~1.2mA
Battery	6LR61 (9V)×1
Size / Mass	H144×W99×D43mm/approx. 310g
Standard accessories included	Test lead (TL-509S), Carrying case (C-09S), Instruction manual



PDM509S

Single test voltage range

- Test voltage DC500V · 100MΩ
- One-shot or continuous measurement push switch
- DCV measurement range (DC60V)
- Auto discharge function
- Inner battery check range
- ACV measurement range
- Shoulder Strap

Safety : IEC61010 CAT.III 600V

Optional accessories

Test lead : TLF-120, TL-BP

Adapter : TL-A51

AD	500V 100MΩ
PDM509S	
Insulation resistance (MΩ)	0.05~0.1~50~100MΩ
Accuracy	±5% of reading (1st effective measurement range: written in thick print above) ±10% of reading (2nd effective measurement range: written in small type above)
ACV	600V
Accuracy	±5% of full scale (50~60Hz sine wave)
DCV	60V
Accuracy	±5% of full scale
Rated current	1.0~1.2mA
Battery	6LR61 (9V)×1
Size / Mass	H144×W99×D43mm/approx. 310g
Standard accessories included	Test lead (TL-509S), Carrying case (C-09S), Instruction manual

Analog Type



PDM1529S

3 test voltage ranges

- Test voltage DC1000V / 500V/ 250V
- Easy viewing and readable scale graduations
- One-shot or continuous measurement push switch
- DCV measurement range (DC60V)
- Auto discharge function
- Inner battery check range
- Shoulder Strap

Safety : IEC61010-1 CAT.III 600V

Optional accessories

Test lead : TLF-120, TL-BP

Adapter : TL-A51

AD	1000V 2000MΩ	500V 100MΩ	250V 100MΩ
PDM1529S			
Insulation resistance (MΩ)	0.5~2~1000~2000MΩ 1000V	0.02~0.1~50~100MΩ 500/250V	
Accuracy	±5% of reading (1st effective measurement range: written in thick print above) ±10% of reading (2nd effective measurement range: written in small type above)		
ACV	600V		
Accuracy	±5% of full scale (50~60Hz sine wave)		
DCV	60V		
Accuracy	±5% of full scale		
Rated current	1.0~1.2mA		
Battery	6LR61 (9V)×1		
Size / Mass	H144×W99×D43mm/approx. 310g		
Standard accessories included	Test lead (TL-509S), Carrying case (C-09S), Instruction manual		



PDM5219S

3 test voltage ranges

- Test voltage DC500V/ 250V / 125V
- Easy viewing and readable scale graduations
- One-shot or continuous measurement push switch
- DCV measurement range (DC60V)
- Auto discharge function
- Inner battery check range
- Shoulder Strap

Safety : IEC61010-1 CAT.III 600V

Optional accessories

Test lead : TLF-120, TL-BP

Adapter : TL-A51

AD	500V 100MΩ	250V 100MΩ	125V 100MΩ
PDM5219S			
Insulation resistance (MΩ)	0.02~0.1~50~100MΩ 500/250/125V		
Accuracy	±5% of reading (1st effective measurement range: written in thick print above) ±10% of reading (2nd effective measurement range: written in small type above)		
ACV	600V		
Accuracy	±5% of full scale (50~60Hz sine wave)		
DCV	60V		
Accuracy	±5% of full scale		
Rated current	1.0~1.2mA		
Battery	6LR61 (9V)×1		
Size / Mass	H144×W99×D43mm/approx. 310g		
Standard accessories included	Test lead (TL-509S), Carrying case (C-09S), Instruction manual		



Standard accessory



IEC61010
CAT.III600V

Optional accessory



IEC61010
CAT.III600V
Length 110mm
φ 3.7mm

Clamp Meters


What is Clamp Meter?

Clamp meters are convenient measuring instruments that allow the measurement of current simply by clamping a wire while being energized without cutting a circuit. In cases of measurement by a multimeter and digital multimeter, the circuit must be cut to measure current. In contrast, with a clamp meter, current can be measured simply by clamping a live wire over its sheath. In addition to its simple operation, it allows safe measurement of a higher current since it is not directly connected to the circuit.

Like a multimeter and insulation resistance tester, there are analog and digital types of clamp meters. The measuring range is typically about 20A to 200A or 400A both for DC and AC. As a special type, there are products allowing for the measurement of a higher current of 2,000A. Some types are also available to allow measurements of fine current of few milliamps for the purpose of detecting leakage current. Others allow the measurement by true RMS values for measurement of current of distorted AC waveforms other than of sine waves, for inverter power supply and switching power supply.


Measurement by multimeter

Cut the wiring on the circuit and connect a multimeter in series with the circuit.

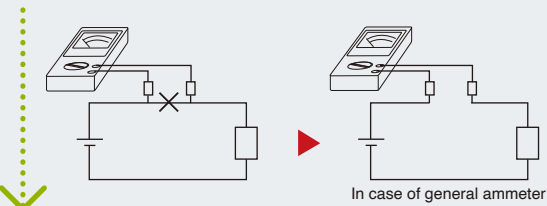

Measurement by clamp meter

Simply clamp the wiring, and current can be measured in safety since it is not directly connected to the circuit.

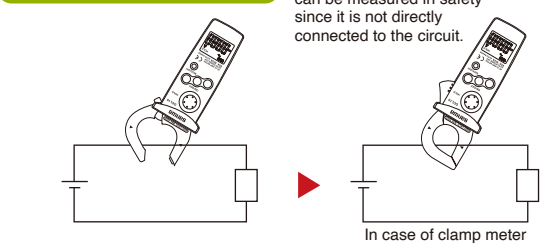

Four key points in choosing a suitable model

1. What are objects to be measured?

Models to be chosen differ depending on what you intend to measure, AC current, DC current or leakage current.

2. Measurable conductor sizes

A wide range of sizes are available from 21mm to 150mm in diameter according to measurable conductor sizes and measuring places.

3. Is true RMS measurement required?


A clamp meter of the mean-value type cannot provide accurate results in the measurement of an inverter circuit and a motor circuit having many distortions. To make measurements for such circuits, a clamp meter of the true RMS type is required.

4. Other functions

Other types are available featuring a tester function and recorder output function in addition to current measurement.

Measuring method by clamp meter

For measuring current using a clamp meter, clamp one conductor (wire) to be measured. If two wires (parallel lines) are clamped, current measurement cannot be made. Take a measurement at the center of the clamped portion to minimize measuring errors. A line separator is conveniently used in measuring the consumption current of home electric appliances. There are line separators that can amplify measured current 10 times to allow measurement by amplifying current lower than 1A. When DC current (DCA) is measured using a clamp meter for DC current, the current is indicated in a negative value (–) when the direction of the current is reversed. By using this function, you can know whether your car battery is at the state of charge or discharge.

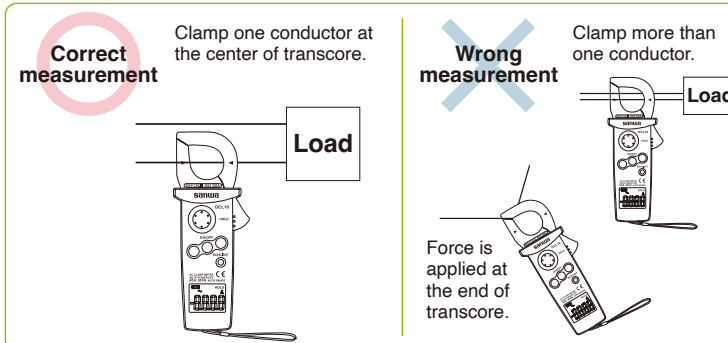


True RMS measurement

A clamp meter of the mean value type detects the mean value of sine waves in AC measurement, multiplies the value 1.11 times (sine wave AC) and indicates it as the effective value. It even indicates the waveform of a distorted wave and the non-sine wave with different form factors in values multiplied 1.11 times, so indication errors occur as a result. For these measurements, use a clamp meter of the true RMS type that detects and indicates the true RMS value itself.

Measurement of leakage current

Unlike ordinary current measurement, it is required to clamp all two wires (two-wire single-phase) or three wires (three-wire single-phase or three-wire three-phase) for measuring leakage current. The earthing wire also can be measured.

Measurement by clamp meter

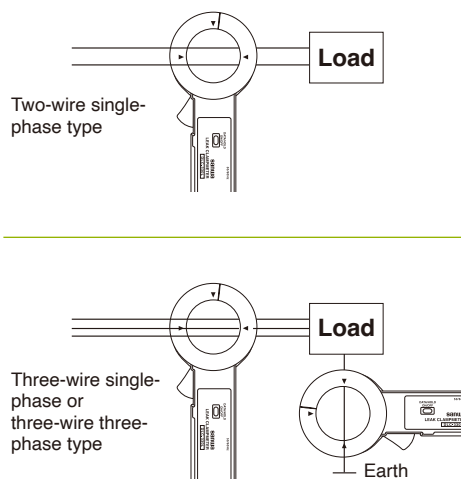

Clamp Meter Comparative Chart

AC+True RMS						
Model	DCL11R	DCM60R	DCM301	DCM660R	DCL1200R	DCL3000R
Page	P31	P31	P31	P32	P32	P32
Count	6000	1999	6000/9999	6600	6000	3150
Category	CAT III 300V	CAT III 300V	CAT IV 600V CAT III 1000V	CAT III 600V	-	CAT IV 600V
CE	●	●	●	●	-	●
True RMS (AC)	●	●	●	●	●	●
Clamp diameter (mm)	22	25	34	30	42	150
Range	A	A	A/M	A	A/M	A
DCA(A) max	-	-	-	-	-	-
ACA(A) max	300	600	1000	660	1200	3000
Resolution (A)	0.01	0.1	0.01	0.01	0.1	0.01
DCV(V) max	-	-	1000	600	600	-
ACV(V) max	-	600	1000	600	600	-
Resistance (Ω) max	-	199.9	60M	660	600	-
Capacitance (F) max	-	-	60m	-	2000 μ	-
Frequency	-	-	●	●	●	-
Continuity	-	Buzzer	Buzzer	Buzzer	Buzzer	-
Diode test	-	-	-	-	●	-
AutoVΩ	-	-	-	-	●	-
EF detection	-	-	●	-	●	-
LPF/BPF	-	-	-	-	-	-
Backlight	●	-	●	●	●	●
Auto power off/save	Off	-	Off	Save	Off	Off
Data hold	●	●	●	●	●	●
Range hold	-	-	●	-	●	-
Peak hold	-	-	-	-	-	-
Inrush	-	-	-	●	-	-
Relative value	-	-	●	-	-	-
Bar graph	-	-	-	-	-	-
Dimension H (mm)	145	187	252	208	238	120
Dimension W (mm)	54	50	85	69	95	70
Dimension D (mm)	31	29	40	38	45	26
Mass (g)	120	210	360	265	290	300

Disponible para entrega inmediata en Sugartech

Clamp Meter Comparative Chart


Model	AC		DC/AC+True RMS	DC/AC/DC+AC, True RMS		DC/AC	Leak Current
	DCM400	DCL1000	DCM600DR	DCL31DR	DCM2000DR	DCM400AD	DLC470
Page	P33	P33	P33	P34	P34	P34	P35
Count	4000	4000	6000	6000	6000	4000	6000/9999
Category	CAT III 300V	-	CAT III 600V	CAT III 300V	CAT IV 1000V	CAT III 300V	CAT III 600V
CE	●	-	●	●	●	●	●
True RMS (AC)	-	-	●	●	●	-	-
Clamp diameter (mm)	25	42	30	25	55	25	35
Range	A	A/M	A	A	A/M	A/M	A
DCA(A) max	-	-	600	400	2000	400	-
ACA(A) max	400	1000	600	400	2000	400	400
Resolution (A)	0.01	0.1	0.01	0.01	0.1	0.01	0.01m
DCV(V) max	600	600	600	-	1000	600	600
ACV(V) max	600	600	600	-	1000	600	600
Resistance (Ω) max	400	40M	999.9	-	40M	400	999.9
Capacitance (F) max	-	-	-	-	2000 μ	-	-
Frequency	●	-	-	-	●	-	-
Continuity	Buzzer	Buzzer	Buzzer	-	Buzzer	Buzzer	Buzzer
Diode test	-	●	-	-	●	-	-
AutoVΩ	-	-	-	-	●	-	-
EF detection	-	-	-	-	●	-	-
LPF/BPF	-	-	-	-	LPF	-	BPF
Backlight	-	-	●	●	●	-	●
Auto power off/save	Off	Off	Save	Off	Save	Off	Off
Data hold	●	●	●	●	●	●	●
Range hold	-	●	-	-	●	●	-
Peak hold	-	-	●	●	●	-	-
Inrush	-	-	-	-	-	-	-
Relative value	-	●	●	-	●	●	-
Bar graph	●	-	-	-	-	●	-
Dimension H (mm)	193	238	208	145	264	193	206
Dimension W (mm)	50	95	69	54	97	50	83
Dimension D (mm)	28	45	38	31	43	28	38
Mass (g)	230	290	260	120	640	230	320



Disponibile para entrega inmediata en Sugartech

AC+True RMS

CE



DCL11R (with case)

RMS mini clamp meter with backlight

- True RMS
- Compact pocket size
- Data hold
- Backlight
- Auto power off (approx.15min.) (cancelable)


Sampling rate : approx. 2 times / sec.

Safety : IEC61010-1, IEC61010-2-030 CAT.III300V
IEC61010-2-32



DCL11R	Measuring range	Best accuracy	Resolution
ACA	60/300A	±(2%+5)	0.01A
Bandwidth	45~400Hz		
Display	6000		
Clamp diameter/ Conductor size	22mm/10X25mm		
Battery	LR03X2		
Size / Mass	H145XW54XD31mm/approx. 120g		
Standard accessories included	Carrying case (C-DCL10), Instruction manual		

CE



DCM60R (with case)

Low cost & DMM functions

- True RMS
- Measurable AC 0.1A~600A
- ACV & Resistance measurement
- Small design & easy to carry
- Data hold
- Continuity check buzzer

Sampling rate : approx.2 times / sec.

AC frequency bandwidth : 50~400Hz

Safety : IEC61010 CAT.III300V

Optional accessories


Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC
TL-A4, TL-A7M2

Test lead : TLF-120



DCM60R	Measuring range	Best accuracy	Resolution
ACA	199.9/600A	±(2%+5)(50~60Hz) ±(2.9%+5)(60~400Hz)	0.1A
ACV	199.9/600V	±(1.5%+5)(50~400Hz)	0.1V
Resistance	199.9 Ω	±(1.0%+8)	0.1 Ω
Continuity	Buzzer sounds at less than approx. 100 Ω. Open voltage : approx.1.0V		
Bandwidth	50~400Hz		
Display	1999		
Clamp diameter/ Conductor size	25mm / 10 x 30mm		
Battery	R03 x 2		
Size / Mass	H187 x W50 x D29mm / approx. 210g		
Standard accessories included	Test lead(TL-21a), Carrying case(C-DCM60L), Instruction manual		

CE



DCM301 (with case)

CAT. IV 600V, Measurable max. 1000V

- The CT shape makes it easier to clamp cable in crowded.
- True RMS
- EF (Electric Field) sensing
- Jaw opening up to a max. of 34mm
- Equipped with LCD backlight and LED light
- Auto power off (approx. 10min./cancelable)
- Large, easy-to-press data hold button

Sampling rate : approx.3 times/sec.

Safety : IEC61010 CAT. IV 600V/CAT. III 1000V

Optional accessories

Adapter: CL-14, CL-15a, TL-9IC, TL-A4, TL-A7M2



DCM301	Measuring range	Best accuracy	Resolution
ACA	60/600/1000A	±(2.5%+5)	0.01A
ACV	6/60/600/1000V	±(1.5%+3)	0.001V
DCV	6/60/600/1000V	±(1%+3)	0.001V
Resistance	6k/60k/600k/6M/60M Ω	±(2%+5)	0.001kΩ
Frequency	ACV:10Hz~10kHz ACA:10Hz~2kHz	±(1%+5)	0.1Hz
Capacitance	60n/600n/6μ/60μ/600μ/6m/60mF	±(4%+3)	0.01nF
Continuity	Buzzer sounds below 30 Ω. Open voltage: approx. 1V or less.		
EF detection	Detects ACV and EF of approx. 90V or more		
Bandwidth	ACA: 45~65Hz ±(1.5%+5), 66~400Hz ±(2%+5) ACV: 45Hz~1kHz ±(1.5%+3)		
Display	6000/9999(Hz function)		
Clamp diameter/ Conductor size	34mm/10X64mm		
Battery	LR03X3		
Size / Mass	H252XW85XD40mm/approx. 360g		
Standard accessories included	Test lead (ATL101), Carrying case (C202), Instruction manual		

AC+True RMS

CE



DCM660R (with case)

Suitable for Electric work and air conditioning & DMM functions

- AC current measurable max. 660A
- True RMS
- Inrush current measurement
- Max/Min value hold
- Frequency measurement by clamping and using test lead
- Data hold, Auto power save
- LCD with back light

Sampling rate : 3 times / sec. for numeral display
Safety : IEC61010-1 CAT.III600V, IEC61010-2-032, IEC61010-031

Optional accessories

Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC
TL-A4, TL-A7M2
Test lead : TLF-120



DCM660R	Measuring range	Best accuracy	Resolution
ACA	66/660A	± (2%+5)	0.01A
ACV	600V	± (1.2%+5)	0.1V
DCV	600V	± (1%+2)	0.1V
Resistance	660 Ω	± (1%+7)	0.1 Ω
Frequency (A)	660/6.6k/30k	± (0.2%+1)	0.1Hz
Frequency (V)	660/6.6k/66k/100k	± (0.2%+1)	0.1Hz
Continuity	Buzzer sounds at less than 30Ω . Open voltage: approx. 1.2V		
Bandwidth	50~500Hz		
Display	6600		
Clamp diameter/Conductor size	30mm/10×50mm		
Battery	LR03×2		
Size / Mass	H208×W69×D38mm/approx. 265g		
Standard accessories included	Test lead (TL-23a), Carrying case (C-DCM660), Instruction manual		

DCL1200R (with case)


RMS lightweight & DMM functions

- Lightweight approx. 290g
- True RMS
- Large LCD with Backlight
- Easy to use large size data hold button
- AC voltage detection function (EF)
- Auto V / Ω detection
- MAX. 1200A measurable

Display : numeral display 6000
Sampling rate : 5 times / sec.
AC frequency bandwidth : 50 / 60Hz

Optional accessories

Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC
TL-A4, TL-A7M2
Test lead : TLF-120



DCL1200R	Measuring range	Best accuracy	Resolution
ACA	400/1200A	± (1.7%+5)	0.1A
DCV	6/60/600V	± (0.7%+3)	1mV
ACV	6/60/600V	± (1.7%+5)	1mV
Auto resistance	6k/60k/600k/6M Ω	± (1.2%+4)	1 Ω
Resistance	600 Ω	± (2.2%+8)	0.1 Ω
Frequency	9.999/99.99/999.9/9.999k/30kHz	± (0.6%+4)	0.001Hz
Capacitance	100n/1000n/10μ/100μ/2000μF	± (3.7%+5)	0.1nF
Continuity	Buzzer sounds at between 0 Ω and 155 Ω (±145 Ω) . Open voltage: approx. 0.4V		
Diode test	Open voltage: approx. 1.6V		
Voltage detection	Buzzer sounds and EF mark displays on LCD. Detection range: 20V or over, 50/60Hz		
Bandwidth	ACA: 50/60Hz, ACV: 50~500Hz		
Display	4000		
Withstand voltage	5550VAC		
Battery	R03×2		
Clamp diameter/Conductor size	42mm/20×54mm		
Size / Mass	H238×W95×D45mm/290g		
Standard accessories included	Test lead (TL-23a), Carrying case, Instruction manual		

DCL3000R (with case)

ACA Clamp meter with flexible CT

- Flexibility facilitating conductor clamping even in narrow space
- AC current measurable max. 3000A
- True RMS
- Data hold, Max/Min value hold
- Backlight

Sampling rate : approx. 2 times / sec.
Safety : IEC61010 CAT.IV 600V



Disponible para entrega inmediata en Sugartech



DCL3000R	Measuring range	Best accuracy	Resolution
ACA	30/300/3000A	± (3%+5)	0.01A
Bandwidth	45~500Hz		
Display	3150		
Clamp diameter/Conductor size	approx. φ 150mm max.		
Battery	LR03×2		
Size / Mass	H120×W70×D26mm/approx. 300g		
Standard accessories included	Carrying case (C-CL3000), Instruction manual		

AC

CE



DCM400 (with case)


Low cost & DMM functions

- 4000 count / 42 segment analog bar graph
- Frequency measurement by clamping and using test lead
- Data hold
- Continuity check buzzer
- Auto power off (30min.)
- Low battery power indication

Sampling rate : 2 times / sec. for numeral display
AC frequency bandwidth : 50~60Hz (ACA : 1.9%±5), 60~500Hz (ACA : 2.5%±5), 50~500Hz (ACV)
Safety : IEC61010 CAT. III 300V

Optional accessories

Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC
TL-A4, TL-A7M2
Test lead : TLF-120



DCL1000 (with case)


Lower cost lightweight & DMM functions

- Lightweight approx. 290g
- Large LCD
- Easy to use large size data hold button

Sampling rate : 3 times / sec.
AC frequency bandwidth : 50~500Hz

Optional accessories

Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC
TL-A4, TL-A7M2
Test lead : TLF-120



DCM400	Measuring range	Best accuracy	Resolution
ACA	40/400A	± (1.9%+5)	0.01A
ACV	400/600V	± (1.5%+5)	0.1V
DCV	400/600V	± (1%+2)	0.1V
Resistance	400 Ω	± (1%+2)	0.1 Ω
Frequency (A)	20~4k/10kHz	± (0.1%+1)	1Hz
Frequency (V)	4k/40k/400k/1MHz	± (0.1%+1)	0.01kHz
Continuity	Buzzer sounds at less than approx. 40 Ω . Open voltage : approx. 1.5V		
Bandwidth	50~60Hz (ACA : 1.9%±5) 60~500Hz (ACA:2.5%±5), 50~500Hz (ACV : 1.5%±5)		
Display	4000		
Clamp diameter/Conductor size	25mm/10×34mm		
Withstand voltage	Less than 3700Vrms		
Battery	R03×2		
Size / Mass	H193×W50×D28mm/approx. 230g		
Standard accessories included	Test lead (TL-23a), Carrying case (C-DCM400), Instruction manual		



DCL1000	Measuring range	Best accuracy	Resolution
ACA	400/1000A	± (1.7%+5)	0.1A
DCV	400m/4/40/400/600V	± (1.2%+3)	0.1mA
ACV	400m/4/40/400/600V	± (2.2%+5)	0.1mV
Resistance	400/4k/40k/400k/4M/40M Ω	± (1.2%+4)	0.1 Ω
Continuity	Buzzer sounds at between 0 Ω and 65 Ω (±55 Ω) . Open voltage: approx. 0.4V		
Diode test	Open voltage: approx. 1.6V		
Bandwidth	ACA: 50/60Hz (sine wave), ACV: 50~500Hz (sine wave)		
Display	4000		
Withstand voltage	5550VAC		
Battery	R03X2		
Clamp diameter/Conductor size	42mm/20×54mm		
Size / Mass	H238×W95×D45mm/290g		
Standard accessories included	Test lead (TL-23a), Carrying case, Instruction manual		

DC/AC+True RMS

CE



DCM600DR (with case)

Suitable for maintenance of vehicle, hybrid vehicle, electric vehicle & DMM functions

- AC / DC current measurable max. 600A
- True RMS
- Peak hold (1ms)
- Relative value measurement
- Data hold, Auto power save
- LCD with back light

Sampling rate : 3 times / sec. for numeral display,
Safety : IEC61010-1 CAT.III600V, IEC61010-2-032, IEC61010-031

Optional accessories

Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC
TL-A4, TL-A7M2
Test lead : TLF-120



DCM600DR	Measuring range	Best accuracy	Resolution
ACA	60/600A	± (2%+5)	0.01A
DCA	60/600A	± (2%+5)	0.01A
ACV	600V	± (1.2%+5)	0.1V
DCV	600V	± (1%+2)	0.1V
Resistance	999.9 Ω	± (1%+7)	0.1 Ω
Continuity	Buzzer sounds at less than 40 Ω . Open voltage: approx. 2.9V		
Bandwidth	50~500Hz		
Display	6000		
Clamp diameter/Conductor size	30mm/10×50mm		
Battery	LR03×2		
Size / Mass	H208×W69×D38mm/approx. 260g		
Standard accessories included	Test lead (TL-23a), Carrying case (C-DCM660), Instruction manual		

DC/AC/DC+AC, True RMS

CE




DCL31DR (with case)

DC/AC RMS mini clamp meter with peak hold function

- True RMS
- Compact pocket size
- Peak hold
- Data hold
- Backlight
- Auto power off (approx. 15min.) (cancelable)

Sampling rate : 2 times / sec.
Safety : IEC61010-1, IEC61010-2-030 CAT.III300V
IEC61010-2-32



Max 400A	RMS	DCA ACA	PEAK
AP OFF	DATA HOLD	BACK LIGHT	


DCL31DR	Measuring range	Best accuracy	Resolution
ACA	60/400A	± (2.0%+5)	0.01A
DCA	60/400A	± (2.0%+5)	0.01A
Bandwidth	45~400Hz		
Display	6000		
Clamp diameter/Conductor size	25mm/10X26mm		
Battery	LR03×2		
Size / Mass	H145×W54×D31mm/approx. 120g		
Standard accessories included	Carrying case (C-DCL10), Instruction manual		

DCM2000DR (with case)

DC / AC current measurable max. 2000A & DMM functions

- Dual display shows voltage/current and its frequency
- True RMS
- EF (Electric Field) sensing
- VFD (Variable Frequency Drive) frequency measurement
- Low input impedance voltage measurement capable of attenuating the effects of ghost voltage
- Data hold, Range hold
- Relative value
- Peak hold (5ms)
- Auto Power Save (30min.) (cancelable)

Sampling rate : approx. 5 times / sec
Safety : IEC61010 CAT.IV 1000V



Max 2000A	RMS	DCA ACA	Hz	EF (NCV)	PEAK
LPF	AUTO VΩ	AP OFF	DATA HOLD	RNG HOLD	REL
			BACK LIGHT		

DCM2000DR	Measuring range	Best accuracy	Resolution
ACA	200/2000A	± (2.0%+5)	0.1A
DCA	200/2000A	± (2.0%+5)	0.1A
ACV	6/60/600/1000V	± (1.2%+5)	0.001V
DCV	6/60/600/1000V	± (0.5%+5)	0.001V
Resistance	600/6k/60k/600k/6M/40MΩ	± (0.5%+5)	0.1Ω
Frequency	10~1999Hz	± (0.1%+4)	0.01Hz
Capacitance	60n/600n/6μ/60μ/600μ/2000μF	± (2.0%+5)	0.01nF
Continuity	Buzzer beeps at below the threshold (10 to 200Ω) Open voltage: approx. 0.5V		
Diode test	Open voltage: approx. 1.8V		
Bandwidth	50~400Hz		
Display	6000		
Clamp diameter/Conductor size	55mm/20×66mm		
Battery	R6×2		
Size / Mass	H264×W97×D43mm/approx. 640g		
Standard accessories included	Test lead (TL-29), Carrying case (C-DCM2000DR), Instruction manual		

DC/AC

CE



DCM400AD (with case)


Suitable for automotive maintenance & DMM functions

- 4000 count / 42 segment analog bar graph
- DC / AC current 40A/400A
- Data hold / Range hold
- Relative value
- Continuity check buzzer
- Auto power off (30min.)
- Low battery power indication

Display : numeral display 3999, bar graph 42 segments
Sampling rate : 2 times / sec. 20 times / sec. for bar graph
AC frequency bandwidth : 50~500Hz
Safety : IEC61010 CAT. III 300V

Optional accessories

Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC
TL-A4, TL-A7M2
Test lead : TLF-120



Max 400A	DCA ACA	AP OFF
DATA HOLD	RNG HOLD	REL

DCM400AD	Measuring range	Best accuracy	Resolution
ACA	40/400A	± (2%+10)	0.01A
DCA	40/400A	± (2.5%+10)	0.01A
ACV	400/600V	± (1.5%+5)	0.1V
DCV	400/600V	± (1%+2)	0.1V
Resistance	400Ω	± (1%+2)	0.1Ω
Continuity	Buzzer sounds at less than approx. 40Ω. Open voltage : approx. 1.5V		
Bandwidth	50~500Hz		
Display	4000		
Clamp diameter/Conductor size	25mm/10×34mm		
Withstand voltage	Less than 3700Vrms		
Battery	LR03×2		
Size / Mass	H193×W50×D28mm/approx. 230g		
Standard accessories included	Test lead (TL-23a), Carrying case (C-DCM400), Instruction manual		

Leak current

CE



DLC470 (with case)


Multifunctional Leakage Clamp Meter

- Extract frequency range of mainly ACmA 50Hz/60Hz and ACA, with band-pass filter (*BPF) function.*
- Max/Min value hold, Data hold
- Backlight
- Auto power off (30min.)

Sampling rate : 2 times / sec.
Safety : IEC61010-1 CAT.III600V

Optional accessories

Adapter : CL-14, CL-15a, CL-DG3a, TL-9IC
TL-A4, TL-A7M2



Max 400A	LEAK	BPF	AP OFF	DATA HOLD	MAX MIN	BACK LIGHT
----------	------	-----	--------	-----------	---------	------------

DLC470	Measuring range	Best accuracy	Resolution
ACmA	60m/600mA	± (1.2%+5)	0.01mA
ACA	60/400A	± (1.2%+5)	0.01A
ACV	600V	± (1.2%+5)	0.1V
DCV	600V	± (1.0%+2)	0.1V
Resistance	999.9Ω	± (1.0%+8)	0.1Ω
Bandwidth	40~400Hz		
Display	6000 (V/A), 9999 (Ω)		
Clamp diameter/Conductor size	35mm/10×40mm		
Battery	LR03×2		
Size / Mass	H206×W83×D38mm/approx. 320g		
Standard accessories included	Test lead (TL-21a), Carrying case (C-DCM660), Instruction manual		

Detectors

Voltage Detector



KD3

Detection with a loud beep and blinking LED

- Slim, easy-to-hold pen-shaped design
- Sensitivity switchable between HIGH and LOW
- Safety design equipped with a power LED

KD3	
Detectable voltage range	80 to 600V AC, 50/60Hz HIGH: Works with 1/2 mm jacketed electrical wire or equivalent LOW: Works with bare live part
Detection indicator	Red and green LEDs blinks; beep sound
Volume	50dB or more at 50cm distance from beep emitter
Light intensity	Visible at 50cm distance from light emitting section with light intensity of 8,000lux
Dielectric strength	1 min. At 2000V AC, from sensor to grip
Low battery warning	Beep sounds for 2 sec. when voltage falls below approx. 2.4V and then power is turned OFF
Operating temperature /humidity	Temperature: -10°C to 45°C; humidity: 80% RH or less (no condensation)
Battery	LR44 (1.5V) X 2
Size/Mass	H134XW20XD18/approx. 20g
Standard accessories included	LR44 (alkaline button battery) X 2, Instruction manual

3phase Detector



KS1

- Phase sequence and open phase check
- Large size alligator clips

Safety : IEC61010 CAT. III 500V



KS1	
Measurement	Open phase and phase sequence
Voltage range	3 phase AC 100V - 500V
Frequency	45Hz~70Hz
Time limit	AC110V: Continuous, AC220V: 3 hours, AC480V: 12 minutes
Fuse	Φ5×20mm, 0.5A/500V
Environment condition	Altitude 2000m or below, pollution degree II
Operating temperature /humidity	0°C~40°C, 80%RH max. no condensation
Size	Main unit H102×W78×D32.5mm Alligator clips Approx. 0.8m (Red, White and Blue)
Mass	Approx. 212g (Alligator clips included)
Standard accessories included	Carrying case (C-KS)×1, Instruction manual

CE



KS3

Motor rotation direction testable

- Phase sequence and open phase checking of three-phase lines
- Rotation direction check by turning three-phase motor shaft manually
- Bright LED indication

Safety : IEC61010-1 CAT.III 500V, IEC61557-1,7,
IEC61010-2-030, IEC61010-031 ,
IEC61326-1

KS3	
Measurement	Motor rotation direction, open phase and phase sequence
Voltage range	3 phase, line voltage: AC75~500V (sine wave, continuous)
Frequency	40Hz~400Hz
Motor rotation direction	Determined at rotation speeds from 2Hz (2 rotations/sec.) to 400Hz
Battery	6LR61(9V)×1
Size / Mass	H128×W72×D38mm/approx. 210g
Standard accessories included	Alligator clips (CL-KS), Test lead (TL-KS), Instruction manual, Carrying case (C-KS2)

CE

Voltage Detector Supporter



KDP10

Alarm device to prevent erroneous cutting of live wire, which can be attached to the cable cutting tool afterwards

- Attachable to your manual cable cutter
- Warns the live-wire status of a cable with a buzz and LED
- Detectable with gloves on
- Approx. 5 months of battery life in standby mode

KDP10	
Detectable voltage level (representative value)	Approx.AC60V to 600V 50Hz/60Hz (attached on 7/8" cutting tool grip part)
Indication method	Intermittent buzzer/LED illumination
Target cable	Sheathed cable (unshielded cable)
Battery	LR44 (1.5V) X 2
Size/Mass	H23XW77XD13mm Approx.13g (without batteries)
Standard accessories included	Rubber ring (M) X2, (S) X2, Sensitivity control volume cover X2 (spares), LR44 (coin batteries) X2, Instruction manual

Optional accessories

KDP10 repair set
(rubber ring (M) X2, (S) X2,sensitivity control volume cover X2, battery holder)

Illuminance Meter

Various environments need appropriate illumination, whether it be ordinary homes, offices, or factories. Inadequate illumination or too much illumination can lead to false recognition, reduced work efficiency, and loss of vision caused by fatigue. Since appropriate illumination helps to improve work efficiency and assure work safety, the control

of illumination is regarded as a very important element. The illuminance meter indicates, by values in the unit of LUX, how much light shines on each place. It is used for the purpose of assuring appropriate illumination suitable for every environment. JIS (Japanese Industrial Standards) has a standard given below as recommended values for each environment.

Type	LUX	1500	700	300	150	70	30	15	-LUX-
Housing		* Sewing (Dark material)	* Studying, Sewing * Reading (Long time or small letters)	* Reading * Makeup * Eating meal	Living room, child room, reception room, dining room, kitchen	Hall, stairway, corridor, escape stairway, garage			
School		* Precision drawing * Machine-sewing * Precision experiment	Drafting room * Blackboard * Sewing * Library reading room * Precision machining	Ordinary classroom, special classroom, library reading room	Auditorium, meeting room, hallway, stairway	Escape stairway			
Office		* Designing * Drawing * Typing * Calculation * Key-punching	Office, drafting room, gage board, telephone exchange room, distribution board	Executive room, conference room, reception room, hall, elevator	Work room, change room, stairway, warehouse	Escape stairway			
Road, park					Tunnel of expressway (illumination at the entrance and exit should be higher than this value.)	70~15 Tunnel	15~3 Road with busy traffic	1.5~0.3 Road with scarce traffic, road in residential areas, park, other open spaces	
Hospital	Surgical table 10,000 over	* Autopsy * First-aid treatment * Drug formulation	Surgical room, first-aid station, ocular inspection, drug preparation * Technological research * Injection	Clinic, examination room, dispensary, waiting room, medical office	Doctor's room, hospital room, X-ray room, medicine room				
Theater, movie theater				* Ticket counter, doorway, back stage	Projection booth, corridor, stairway	Spectators' seat (during a break), escape stairway, garden		3~1.5 Spectators' seats (while showing)	
Inn, hotel			Accounting office	Front desk, dining room	Guest room, amusement hall, corridor, lobby				
Diner, restaurant			* Sample case	* Register, kitchen, * dining table	Guest room, waiting room hallway				
Beauty parlor, barber			* Hairdo * Hair setting * Makeup	* Hairdo, * dressing	In shop				
Shop		* Highlighted display in show window * Highlighted show case	* Highlighted display in shop * Show window, ordinary show case	Ordinary display of shop Overall shop					
Department store		* Show window, main part on the 1st floor * Highlighted show case	Ordinary display Ordinary show case	Atmospheric display					

The combined use of local illumination is allowed in places marked with *. In these cases, it is desirable that the overall illumination should be 1 / 10 or more of the illumination by the local illumination.
* Reference: Illumination level JIS Z9110
· Each country has it's own standard. Please check the standards for your own country.

Pocket Size



LX20

Wide measuring range 0.1lx to 403.9klx

- Separate, stick-shaped light sensor
- 4039 full-scale count with bar graph
- Silicon photodiode
- Data hold
- Auto power save (15min.)
- Sensor cord length 0.9m

APS DATA HOLD	
LX20	
Light sensor element	Si photodiode(φ 9mm) with approximated relative luminous efficiency
Measuring range	400.0/4000/40.00k/400.0klx
Display	numeral display 4039,bar graph41 segments
Sampling rate	3 times/sec., 30 times/sec. for bar graph
Accuracy	±(5%+1) at 3000lx or less ±(7.5%+1) at 3000lx or more Compatible JIS standard A Class, 23°C±2°C ±(Specified %+20) below 100lx
Temperature drift	±5% at 23°C within 0°C~40°C
Relative spectral sensitivity	Approximating the standard luminous efficiency
Battery	LR44 (1.5V) X 2
Size / Mass	Main body: H177XW76XD18mm/approx.120g Sensor probe: H84XW16XD10mm
Standard accessories included	Instruction manual

Laser Power Meter

Laser power meters

Laser power meters are measuring instruments that let a laser beam emitted from a laser light source enter the sensor light receiver and indicate the value by converting light energy into electric signals. The unit used for this purpose is W (watt). The laser power meter is used for checking the light power of and maintaining laser-operating equipment. Since silicon photo diode used at the receiver of the laser power meter has different photoelectric conversion ratios according to the wavelength of the light received, it needs to be calibrated by the measuring wavelength.

* It is possible to obtain approximate value for the measuring wavelength based on a spectral sensitivity characteristic graph of the silicon photo diode.

Reference: Main laser wavelength

- 830nm Infrared semiconductor laser
- 780nm Infrared semiconductor laser (e.g. Used for CD player, MD recorder, etc.)
- 670nm Visible semiconductor laser
- 633nm He-Ne laser, red semiconductor laser (e.g. Used for DVD player, bar-code reader, etc.)
- 532nm Green laser
- 488nm Argon ion laser
- 405nm Purple-blue laser

Laser Power Meter (Pocket Size)



LP10

**Optical power up to max. 40.39mW measurable
Direct reading wavelength customization**

- Wide measuring range from 0.01 μW to 40.39mW
- Silicon photodiode with diffusion sheet
- Sensor can be stored in the main body
- Max / Min hold
- Auto power save (15min.)
- Sensor cord length 0.5m when extended

Wavelength customization
The standard LP10 is calibrated at 633 nm but can also read any other wavelength in the 400~1100 nm range using a chart inside the case cover.
We can calibrate directly to any other 400~1100 nm wavelength for special orders, with one month lead time, so please contact our authorized agent if necessary.

APS MAX MIN AVG	
LP10	
Light sensor element	Si photodiode(φ 9mm) with diffusion sheet
Measurable wavelength range	400nm~1100nm
Directly-readable wavelength	633nm (He-Ne laser)
Other wavelengths should be converted using typical correction factor	
Measuring range	40.00 μ/400.0 μ/4.000m/40.00mW
Display	numeral display 4039, bar graph 41 segments
Sampling rate	3 times/sec.,30 times/sec. for bar graph
Accuracy	±5% (in the 4mW range, at the reference wavelength of 633nm and 1mW) 23°C±2°C
Battery	LR44 (1.5V) X 2
Size / Mass	H177XW76XD18mm/approx.120g
Standard accessories included	Instruction manual

LCR Meter

LCR Meter



LCR701

High-performance handheld LCR meter

- 5 different measuring frequencies (100/120/1k/10k/100kHz)
- Ls/Lp/Cs/Cp measurement with sub parameters(D/Q/ θ /ESR)
- Automatically selectable L/C/R measurement
- Device sorting mode
- Optical link USB interface (optional)
- Data hold, Back light

Sampling rate : 1.2 times / sec. (LCR mode)
0.5 times / sec. (DCR mode)

AP OFF DATA HOLD REL BACK LIGHT USB		
LCR701		
Measuring range	Best accuracy	
Ls/Lp	20.000 μ/200.00 μ/2000.0 μ/20.000m/200.00mH 2000.0m/20.000/200.00/2000.0/20.000kH	±(0.3%+3)
Cs/Cp	200.00p/2000.0p/20.000n/200.00n/2000.0nF 20.000 μ/200.00 μ/2000.0 μ/20.00mF	±(0.3%+3)
Rs/Rp	20.000/200.00/2.0000k/20.000k Ω 200.00k/2.0000M/20.000M/200.0M Ω	±(0.3%+3)
Ω	200.00/2.0000k/20.000k/200.00k Ω 2.0000M/20.000M/200.0M Ω	±(0.3%+3)
Battery	6LF22 (9V) X1	
Size / Mass	H184XW87XD45/approx. 400g	
Standard accessories included	Clip lead (CL-700a), Holster (H-701), Shorting plate, Instruction manual	

Optional accessories

Optical link cable unit: LCR-USB2
SMD clip lead: CL-700SMD
AD adapter: AD-30-3
Carrying case: C-PC7

Tachometer/Speedometer

Tachometer

SE300

Non-contact type digital tachometer



CE

- Designed for ease of holding to enable stable measurement
- Max/Min value hold
- Auto power off (2min.) (cancelable)
- Fixed installation possible using a commercially available camera tripod
- Contact measurement (optional ENC-3)

DATA HOLD AP OFF MAX MIN AVG BACK LIGHT

SE300	Non-contact	Contact (optional ENC-3)	Best accuracy
rpm	30.0~99999	30.0~19999	±(0.03%+1)
rps	0.50~1600.0	0.50~333.00	
rps	0.600~1999.0	3.000~1999.0	
count	0~99999	0~99999	
m/min	-	3.0~1999.0	
m/s	-	0.05~33.00	
Detection distance	Approx. 50~500mm		
Battery	R6P/LR6X2		
Size / Mass	H210XW60XD55mm/approx. 218g		
Standard	Reflective sticker(SE-T3), Carrying case(C-SE300), accessories included		
accessories included	Instruction manual		

Optional accessories

Reflective sticker(50stickersX2sheets) : SE-T3
Contact measurement attachment : ENC-3
(contact adapter, contact marker and rim speed ring)
Contact marker : SE-A30
Rim speed ring : SE-A31



Speedometer

SE9100


For elevator maintenance, 2ch display

- Suitable for elevator speed measurement of high building
- 2 independent displays
- Analog output terminal to record measuring data
- 2 external hold terminals for remote control
- Memory function (max.10sets data)
- Averaging count function
- Easy to read LED displays
- Auto power off (3min.) (extendable to 1hr.)
- Low battery power alarm

AP OFF DATA HOLD MAX MIN AVG

SE9100	
Measuring range	Linear velocity: 0.1 ~ 2000.0 (m/min) Rotation speed: 1 ~ 20000 (r/min) Distance: 0 ~ 999 (mm)
Accuracy	±2dgt
Sampling time	0.2 sec.
Measuring time	0.01 sec.
Analog output	DC0 ~ 2V Analog output accuracy: ±(0.8%+2mV)
Data hold	CH1/CH2/Max. value Independent functions CH1/CH2: Hold by main unit panel or external triggering
Battery	LR6X4
Size / Mass	H174XW50XD50mm/approx.510g
Standard accessories included	Speed ring thickness 10mm (SE-10)X1 Speed ring thickness 0.9mm (SE-0.9)X1 Hold input cable (SE-L-H)X2 Analog output cable (SE-L-O)X1 Hex wrenchX1, Carrying case (C-SE)X1 Instruction manual

Remote control by SE9100

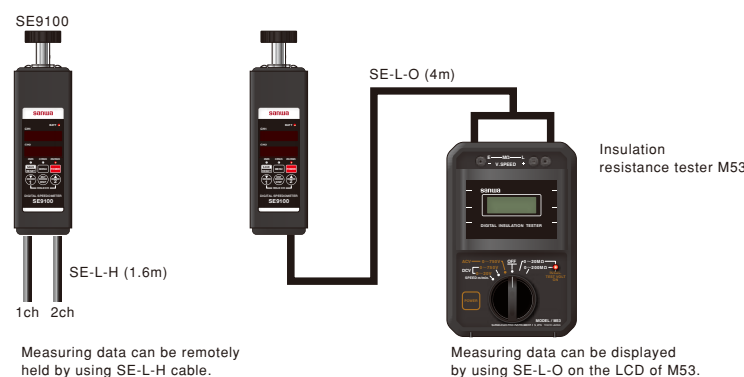

Measuring data can be remotely held by using SE-L-H cable.

Measuring data can be displayed by using SE-L-O on the LCD of M53.


Earth Testers

Purpose of earth resistance

When some extraordinary cases occur, fault current and overcurrent may cause damages to equipment or a risk to humans because the equipment is not grounded. To prevent such risks, grounding plays an important role to assure safety. Grounding provides an escape way to electricity from an electric appliance through metal rod driven into the ground. After grounding works are performed to prevent hazards and assure safety, the earth resistance is measured. To measure the earth resistance, two grounding rods are stuck into the ground. Assuming that two rods are E and C, AC current I is applied between E and C. The earth resistance can be measured from the voltage generated between E and C. The relation between the current I and voltage V is expressed as follows. From this the earth resistance can be obtained. However, the earth resistance R

obtained this way includes not only the earth resistance at the grounding electrode E but also the earth resistance at the grounding electrode C. If a third grounding electrode P is provided between the grounding electrodes E and C, the earth resistance RE at the grounding electrode E alone can be obtained from the current I and voltage Vp between E and C.

* Although the grounding electrode P, too, has a resistance zone, it hardly affects the measurement because the impedance of the power supply of AC constant current is high.

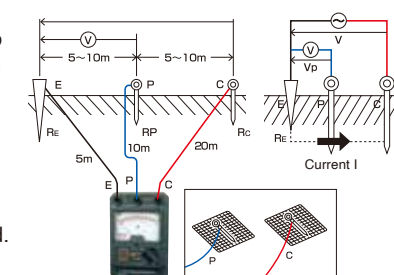

Arrangement of grounding rods

Three-electrode method

Arrange the earth E and auxiliary grounding rods P and C in a straight line at intervals of about 5 to 10m.

* If they cannot be arranged in a straight line because of the presence of an obstacle, arrange E-P and E-C at angles of about 30 degrees or less.

Two-electrode method

If an earth E whose grounding resistance is known is present nearby, the unknown grounding resistance can be measured by using it. Connect the terminal E of the earth resistance meter and the earth E by a cord. Measurements are taken between E and P / C assuming P and C terminals as one terminal.

* The indicated value includes the known resistance value of the earth E. Subtract the grounding resistance of E to obtain the true value.

- △ Sand, gravel and frozen soil → Expose soil.
- △ Concrete → Use a net. Flush enough water on the net to let it have a close contact with the ground.
- × Asphalt → Cannot be measured.

Analog Type



PDR302

- Phase detection system circuit for stable measurement
- Easy self calibration
- AC 30V range to avoid indication errors caused by leak current
- Power saving design with push switch
- Auxiliary grounding value excess indicator lamp



PDR302	
Earth resistance measuring range	10/100/1000Ω Accuracy : X1 range ±5% of full scale : X10, X100 range ±2.5% of full scale
ACV(leakage voltage) measuring range	0~30V Accuracy ±2.5% of full scale
Display	Analog
Operation	Constant current system (tripolar or bipolar)
Battery	R6P(1.5V) × 6
Size / Mass	H175XW118XD55mm/Approx. 500g
Standard accessories included	Measurement cord (TL-66), Clip adapter (CL-302), Earth bars (CL-ER), Carrying case (C-PDR302), Storage case (C-302CB), Instruction manual

Digital Type



PDR4000

- Three measurement ranges: 40Ω, 400Ω, 4000Ω
- 3-pole/2-pole earth resistance measurement
- * Optional accessory TL-68 is necessary for 2-pole measurement.
- Data hold
- Backlight
- Relative value
- Auto power off (10min.) (cancelable)
- Capable of measuring interference voltage

Display : numeral display 4000
Sampling rate : 2times/sec.
Safety : IEC61010-1 CAT.III 300V

AP OFF DATA HOLD REL BACK LIGHT

PDR4000	Measuring range	Accuracy
Earth resistance measuring range	40Ω	0.00~10.00Ω ±(2%+10)
	400Ω	10.01~40.00Ω ±(2%+3)
	4000Ω	0.0~400.0Ω ±(2%+3)
ACV	0~400V	±(2%+3)
Display	Digital	
Measuring system	Constant current inverter 820Hz, approx.2mA	
Battery	R6P(1.5V) × 6	
Size / Mass	H163XW102XD50/Approx.440g	
Standard accessories included	Test lead set(TL-67), Auxiliary earth electrode X 2(CL-ER4000), Carrying case(C-PDR4000), Instruction manual	

Optional accessories

Test lead : TL-68



Disponible para entrega inmediata en Sugartech

Assembly Training Kits



Sanwa assembly training kits have been developed for educational uses. These assembly training kits are available for purchase from our agents only.

Analog type

KIT-8D

Learning kit designed for measurement of small capacity electric circuits

- Drop shock proof taut-band meter
- Battery check
- Meter zero adjuster
- Zero Ω adjuster
- Protective body cover



Complete image



KIT-8D	Measuring range	Accuracy
DCV	0.3/3/12/30/120/300/600V (20k Ω /V)	$\pm 3\%$ of full scale
ACV	12/30/120/300/600V (9k Ω /V)	$\pm 4\%$ of full scale
DCA	60 μ /3m/30m/0.3A	$\pm 3\%$ of full scale
Resistance	20/200/20k Ω	$\pm 3\%$ of arc
Battery check	1.5V	
Bandwidth	50 or 60Hz (sine wave)	
Battery	UM-3(1.5V) $\times 2$	
Fuse	$\phi 5.2 \times 20$ mm (250V/0.5A)	
Size / Mass	H159.5 $\times$ W129 $\times$ D41.5mm/approx.320g	



Digital type

PC20TK

General-purpose DMM kit

- 3-3/4 digits 4000 count
- Capacitance measurement (40nF $\sim$ 100 μ F)
- Data hold / Range hold
- Safety cover for the μ A $\cdot$ mA
- Tilt stand
- Optical link RS232C / USB interface(optional)

Display : numeral display 4000
Sampling rate : 3 times / sec.



Complete image
※Holster is optional accessory.



PC20TK	Measuring range	Best accuracy	Resolution	Input impedance
DCV	400m/4/40/400/750V	$\pm (1.0\%rdg + 2dgt)$	0.1mV	DCV:
ACV	4/40/400/750V	$\pm (1.5\%rdg + 5dgt)$	0.001V	10M $\sim$
DCA	400 μ /4000 μ /40m/400m	$\pm (1.5\%rdg + 2dgt)$	0.1 μ A	100M Ω
ACA	400 μ /4000 μ /40m/400m	$\pm (2.0\%rdg + 5dgt)$	0.1 μ A	ACV:10M
Resistance	400/4k/40k/400k/4M/40M	$\pm (1.5\%rdg + 5dgt)$	0.1 Ω	
Capacitance	50n/500n/5 μ /50 μ /100 μ F	$\pm (7\%rdg + 6dgt)$	0.01nF	
Continuity	Buzzer sounds at between 10 Ω and 120 Ω . Open voltage: approx. 0.4V			
Diode test	Open voltage: approx. 1.5V			
Bandwidth	40 $\sim$ 400Hz (sine wave)			
Fuse / Battery	0.5A/250V IR300A $\phi 6.3 \times 30$ mm R6 $\times 2$			
Size / Mass	H158 $\times$ W70 $\times$ D41mm/230g			

Standard accessories included
Test lead (TL-21a), Instruction manual

Optional accessories

Software : PC Link7 Optical PC Link cable : KB-USB20
Clamp probe : CL-20D, CL-22AD, CL33DC
Temperature probe : T-300PC(PC Link software is necessary.)
Clip adapter : CL-11, CL-13a, CL-15a, CL-DG3a, TL-8IC
Holster : H-70



Accessory mapping


Model		TEST LEAD														
Model		ATL101	TL-11Ta	TL-21a	TL-23a	TL-25a	TL-29	TL-61	TL-61T	TL-91	TL-112a	TL-509S	TL-M54	TL-PM3	TLF-120	
Digital Multimeter	CD5001	○	-	-	-	-	-	-	-	-	-	-	-	-	-	
	CD731a	-	-	○	-	-	-	-	-	-	-	-	-	-	●	
	CD732	-	-	●	●	○	-	-	-	-	-	-	-	-	-	
	CD770	-	-	○	●	●	-	-	-	-	-	-	-	-	●	
	CD771	-	-	●	○	●	-	-	-	-	-	-	-	-	●	
	CD772	-	-	-	-	○	-	-	-	-	-	-	-	-	●	
	CD800a	-	-	-	-	-	-	TL-61Ta		-	-	-	-	-	-	
	DA-50C	-	-	-	-	-	-	○	-	●	-	-	-	-	-	
	PC20	-	-	○	●	●	-	-	-	-	-	-	-	-	-	●
	PC500a	-	-	●	○	●	-	-	-	-	-	-	-	-	-	●
	PC5000a	-	-	●	○	●	-	-	-	-	-	-	-	-	-	●
	PC510a	-	-	●	○	●	-	-	-	-	-	-	-	-	-	●
	PC520M	-	-	●	●	●	-	-	-	-	-	-	-	-	-	●
	PC700	-	-	●	○	●	-	-	-	-	-	-	-	-	-	●
	PC7000	-	-	●	○	●	-	-	-	-	-	-	-	-	-	●
	PC710	-	-	●	○	●	-	-	-	-	-	-	-	-	-	●
	PC720M	-	-	●	○	●	-	-	-	-	-	-	-	-	-	●
	PC773	-	-	●	●	○	-	-	-	-	-	-	-	-	-	●
	PM3	-	-	-	-	-	-	-	-	-	-	-	-	-	○	-
	PM33a	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	PM11	-	○	-	-	-	-	-	-	-	-	-	-	-	-	-
RD700/701	-	-	●	○	●	-	-	-	-	-	-	-	-	-	●	
Clamp Meter	CAM600S	-	-	○	●	●	-	-	-	-	-	-	-	-	-	●
	DCL11R/30DR	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	DCL1000/1200R	-	-	●	○	●	-	-	-	-	-	-	-	-	-	●
	DCL3000R	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	DCM-22AD	-	-	-	-	-	-	○	-	●	-	-	-	-	-	-
	DCM2000	-	-	●	●	●	-	-	-	-	-	-	-	-	-	●
	DCM2000AD	-	-	○	●	●	-	-	-	-	-	-	-	-	-	●
	DCM2000R	-	-	-	-	-	○	-	-	-	-	-	-	-	-	-
	DCM2000DR	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	DCM301	○	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	DCM400/AD	-	-	●	○	●	-	-	-	-	-	-	-	-	-	●
	DCM60L	-	-	●	○	●	-	-	-	-	-	-	-	-	-	●
	DCM60R	-	-	○	●	●	-	-	-	-	-	-	-	-	-	●
	DCM600DR	-	-	●	○	●	-	-	-	-	-	-	-	-	-	●
	DCM660R	-	-	●	○	●	-	-	-	-	-	-	-	-	-	●
	DLC-400A	-	-	●	●	●	-	○	-	●	-	-	-	-	-	-
DLC460F	-	-	●	○	●	-	-	-	-	-	-	-	-	-	-	
DLC470	-	-	○	●	●	-	-	-	-	-	-	-	-	-	-	
Insulation Resistance Tester	DG6/7/8/9/10	-	○	-	-	-	-	-	-	-	-	-	-	-	-	-
	DM1008S	-	-	-	-	-	-	-	-	-	-	●	-	-	-	-
	DM1009S	-	-	-	-	-	-	-	-	-	-	○	-	-	-	●
	DM1528S	-	-	-	-	-	-	-	-	-	-	●	-	-	-	-
	DM5218S	-	-	-	-	-	-	-	-	-	-	●	-	-	-	●
	DM508S/ PDM508S	-	-	-	-	-	-	-	-	-	-	●	-	-	-	●
	DM509S/PDM509S	-	-	-	-	-	-	-	-	-	-	○	-	-	-	●
	PDM1529S	-	-	-	-	-	-	-	-	-	-	○	-	-	-	●
	PDM5219S	-	-	-	-	-	-	-	-	-	-	○	-	-	-	●
	HG561H	-	-	-	-	-	-	-	-	-	-	●	-	-	-	-
	M53	-	-	-	-	-	-	-	-	-	-	-	○	-	-	-
	MG1000	-	-	-	-	-	-	-	-	-	○	-	-	-	-	-
MG500/125	-	-	-	-	-	-	-	-	-	○	-	-	-	-	●	
AP33	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Analog Multitester	AU-31/32	-	-	-	-	-	-	○	-	●	-	-	-	-	-	-
	CP-7D	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	CX506a	-	-	○	●	●	-	-	-	-	-	-	-	-	-	●
	EM7000	-	-	○	●	●	-	-	-	-	-	-	-	-	-	●
	SH-88TR	-	-	-	-	-	-	○	-	●	-	-	-	-	-	-
	SP-18D	-	-	-	-	-	-	-	TL-61Tc		-	-	-	-	-	-
	SP20	-	-	-	-	-	-	○	-	●	-	-	-	-	-	●
	SP21	-	-	○	●	●	-	-	-	-	-	-	-	-	-	●
	TA55	-	-	-	-	-	-	-	-	○	-	-	-	-	-	●
	YX360TRF	-	-	-	-	-	-	-	TL-61Tb		-	-	-	-	-	-
YX-361TR	-	-	-	-	-	-	○	-	●	-	-	-	-	-	-	

● Optional ○ Standard

Accessory mapping


	Model	CLIP ADAPTER						CLAMP SENSOR	HFE CONNECTOR	HIGH VOLTAGE PROBE	TEMPERATURE SENSOR				
Model		CL-14	CL-15a	CL-DG3a	TL-9IC	TL-A4	TL-A7M2	ACS101	HFE-6T		T-THP	T-300PC	K-250CD	K-250PC	
Digital Multimeter	CD5001	●	●	-	●	●	●	●	-	-	-	-	-	-	
	CD731a	●	●	●	●	●	●	-	-	HV-60	-	-	-	-	
	CD732	●	●	●	●	●	●	●	-	HV-60	-	-	-	-	
	CD770	●	●	●	●	●	●	●	-	-	-	-	-	-	
	CD771	●	●	●	●	●	●	●	-	-	-	-	-	-	
	CD772	●	●	●	●	●	●	●	-	HV-60	-	-	○	-	
	CD800a	●	●	●	●	●	●	-	-	-	-	-	-	-	
	DA-50C	●	●	●	●	-	-	-	-	-	-	-	-	-	
	PC20	●	●	●	●	●	●	●	-	-	-	-	●	-	-
	PC500a	●	●	●	●	●	●	-	-	-	-	-	●	-	-
	PC5000a	●	●	●	●	●	●	-	-	-	-	-	●	-	-
	PC510a	●	●	●	●	●	●	-	-	-	-	-	●	-	○
	PC520M	△	△	△	△	△	△	-	-	-	-	-	●	-	○
	PC700	●	●	●	●	●	●	●	-	-	-	-	●	-	-
	PC7000	●	●	●	●	●	●	●	-	-	-	-	●	-	○
	PC710	●	●	●	●	●	●	●	-	-	-	-	●	-	○
	PC720M	●	●	●	●	●	●	●	-	-	-	-	●	-	○
	PC773	●	●	●	●	●	●	●	-	-	-	-	●	-	-
	PM3	●	●	●	●	●	●	●	-	-	-	-	-	-	-
	PM33a	●	●	●	●	-	●	-	-	-	-	-	-	-	-
	PM11	●	●	●	●	●	●	●	-	-	-	-	-	-	-
	RD700/701	●	●	●	●	●	●	●	-	-	HV-60	-	-	-	○
Clamp Meter	CAM600S	●	●	●	●	●	●	-	-	-	●	-	-	-	
	DCL11R/30DR	-	-	-	-	-	-	-	-	-	-	-	-	-	
	DCL1000/1200R	●	●	●	●	●	●	-	-	-	-	-	-	-	
	DCL3000R	-	-	-	-	-	-	-	-	-	-	-	-	-	
	DCM-22AD	●	●	-	●	-	-	-	-	-	-	-	-	-	
	DCM2000	●	●	●	●	-	-	-	-	-	-	-	-	-	
	DCM2000AD	●	●	●	●	-	-	-	-	-	-	-	-	-	
	DCM2000R	-	-	-	-	-	-	-	-	-	-	-	-	-	
	DCM2000DR	-	-	-	-	-	-	-	-	-	-	-	-	-	
	DCM301	●	●	-	●	●	●	-	-	-	-	-	-	-	
	DCM400/AD	●	●	●	●	●	●	-	-	-	-	-	-	-	
	DCM60L	●	●	●	●	●	●	-	-	-	-	-	-	-	
	DCM60R	●	●	●	●	●	●	-	-	-	-	-	-	-	
	DCM600DR	●	●	●	●	●	●	-	-	-	-	-	-	-	
	DCM660R	●	●	●	●	●	●	-	-	-	-	-	-	-	
	DLC-400A	●	●	●	●	-	-	-	-	-	-	-	-	-	
	DLC460F	●	●	●	●	●	●	-	-	-	-	-	-	-	
DLC470	●	●	●	●	●	●	-	-	-	-	-	-	-		
Insulation Resistance Tester	DG6/7/8/9/10	-	○	●	-	-	-	-	-	-	-	-	-	-	
	DM1008S	-	-	-	-	-	-	-	-	-	-	-	-	-	
	DM1009S	-	-	-	-	-	-	-	-	-	-	-	-	-	
	DM1528S	-	-	-	-	-	-	-	-	-	-	-	-	-	
	DM5218S	-	-	-	-	-	-	-	-	-	-	-	-	-	
	DM508S/ PDM508S	-	-	-	-	-	-	-	-	-	-	-	-	-	
	DM509S/PDM509S	-	-	-	-	-	-	-	-	-	-	-	-	-	
	PDM1529S	-	-	-	-	-	-	-	-	-	-	-	-	-	
	PDM5219S	-	-	-	-	-	-	-	-	-	-	-	-	-	
	HG561H	-	-	-	-	-	-	-	-	-	-	-	-	-	
	M53	-	-	-	-	-	-	-	-	-	-	-	-	-	
	MG1000	-	-	-	-	-	-	-	-	-	-	-	-	-	
	MG500/125	-	-	-	-	-	-	-	-	-	-	-	-	-	
AP33	-	-	-	-	-	-	-	-	-	-	-	-	-		
Analog Multitester	AU-31/32	●	●	●	●	-	-	-	-	-	-	-	-	-	
	CP-7D	●	●	●	●	-	-	-	-	-	-	-	-	-	
	CX506a	●	●	●	●	●	●	-	-	HV-60	-	-	-	-	
	EM7000	●	●	●	●	●	●	-	-	HV-60	-	-	-	-	
	SH-88TR	●	●	●	●	-	-	-	●	-	-	-	-	-	
	SP-18D	●	●	●	●	-	-	-	-	-	-	-	-	-	
	SP20	●	●	●	●	-	-	-	-	-	●	-	-	-	
	SP21	●	●	●	●	●	●	-	-	-	-	-	-	-	
	TA55	●	●	●	●	-	-	-	-	-	-	-	-	-	
	YX360TRF	●	●	●	●	-	-	-	●	HV-10T	-	-	-	-	
YX-361TR	●	●	●	●	-	-	-	●	-	-	-	-	-		

Test lead  ATL-101  IEC61010 CAT.III1000V CAT.IV600V Length 1.15m Applicable model See P.42 Adapter CL-14, CL-15a, TL-9IC TL-A4, TL-A7M2	Test lead  TL-11Ta  Length0.56m Applicable model See P.42	Test lead  TL-21a  IEC61010 CAT.II1000V CAT.III 600V Length 1m Applicable model See P.42 Adapter CL-14, CL-15a, CL-DG3a TL-9IC, TL-A4, TL-A7M2
TL-23a   IEC61010 CAT.II1000V CAT.III600V 10A Length 1m Applicable model See P.42 Adapter CL-14, CL-15a, CL-DG3a TL-9IC, TL-A4, TL-A7M2	TL-25a   IEC61010 CAT.II1000V CAT.III600V 20A Length 1m Applicable model See P.42 Adapter CL-14, CL-15a, CL-DG3a TL-9IC, TL-A4, TL-A7M2	TL-29   IEC61010 CAT.IV1000V Length 1m Applicable model See P.42
TL-61 TL-91  Length 0.9m Applicable model See P.42 Adapter CL-14, CL-15a, CL-DG3a,TL-9IC	TL-61Ta TL-61Tb TL-61Tc   Length0.85m Applicable model See P.42	TL-112a   IEC61010 CAT.III1000V CAT.IV600V 10A Length 1m Applicable model See P.42
TL-509S   IEC61010 CAT.III600V Length 1m Applicable model See P.42	TLF-120   IEC61010 CAT.III600V Built-in fuse 500mA/1000V 30kA φ 6.35X32mm Length1.4m Applicable model See P.42	TL-PM3   Length0.55m Applicable model See P.42
TL-26   IEC61010 CAT.IV600V CAT.III1000V Length 1.2m Applicable model HG561H, KP1	TL-28   IEC61010 CAT.III600V CAT.II1000V Length 1.2m Applicable model HG561H	TL-27(Extension lead set)   IEC61010 CAT.IV600V CAT.III1000V Length 3m Applicable test lead TL-26, TL-28

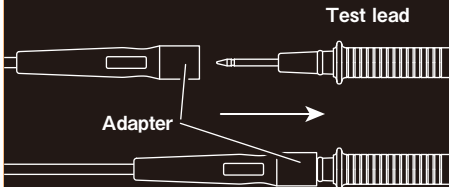Test lead TL-37  IEC61010 CAT.IV600V Length 1m Applicable model KP1 CE	HV-60  1000MΩ resistor measurement for 0~30kV or 25kV Length 1.2m Applicable model See P.43	Clip lead CL-506b  Length 0.3m Applicable model CX506a CE
CL-700a  Length 0.16m Applicable model LCR700 CE	CL-700SMD  Length 0.55m Applicable model LCR700	Test probe TL-35  IEC61010 CAT.IV600V φ 3.5mm test pin Length 0.11m Applicable model KP1 CE
TL-561  φ 4mm test pin Length 0.11m Applicable model HG561H	Adapter How to use:  Test lead Adapter	CL-14  Alligator clip Length 0.23m Applicable model See P.43
CL-15a  IEC61010 CAT.III1000V Alligator clip Length 0.2m Applicable model See P.43 CE	CL-DG3a  IEC61010 CAT.III600V Alligator clip Length 0.33m Applicable model See P.43 CE	TL-9IC  IC clip Length 0.2m Applicable model See P.43
TL-A4  φ 4banana jack Length 0.2m Applicable model See P.43	TL-A7M2  φ 0.7mm shape-memory alloy test pin Length 57mm Applicable model See P.43	HFE-6T  hFE connector hFE 0 ~ 1000 Length 0.3m Applicable model See P.43

Adapter

How to use:

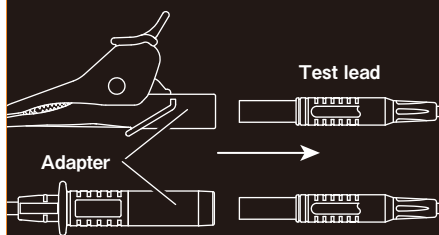

CL-26



Alligator clip
IEC61010 CAT.IV600V
Length 95mm
Applicable test lead
TL-26, TL-27, TL-28,
TL-36, TL-37

CE

CL-27



Alligator clip
IEC61010 CAT.III600V
Length 70mm
Applicable test lead
TL-26, TL-27, TL-28,
TL-36, TL-37

CE

Optical link

LCR-USB2

(with LCR Link Software)



Optical link USB
PC connection cable
Length 1.3m
Applicable model
LCR701

CE

PC Link

PC Link 7



CD-ROM
Applicable model
PC7000, PC720M,
PC710, PC700, PC773
PC20, PC20TK

PC Communication Set

G: KB-USB773+PC Link7

Applicable model

PC773

H: KB-USB7+PC Link7

Applicable model

PC7000, PC720M, PC710, PC700

I: KB-USB20+PC Link7

Applicable model

PC20, PC20TK

CL-561



Alligator clip
IEC61010 CAT.III600V
Length 80mm
Applicable model
HG561H

TL-A18a



φ 2mm test pin
IEC61010 CAT.IV600V
Length 80mm
Applicable test lead
TL-26, TL-27, TL-28,
TL-36, TL-37, TL-66

CE

TL-A51



φ 3.7mm test pin
IEC61010 CAT.III 600V
Length 110mm
Applicable test lead
TL-26, TL-27, TL-28,
TL-36, TL-37, TL-66

CE

Temperature sensor

T-THP



-20°C~200°C
Thermistor probe
Sensor : φ 2.5 × 31mm
Length 0.9m
Applicable model
See P.43

T-300PC



-50°C~300°C
Platinic thin film
Sensor : φ 3.2 × 135mm
Length 2.2m
Accuracy : ± 1.9°C
Applicable model
See P.43

K-250CD

K-250PC



-50°C~250°C
Linear thermocouple K type
Length 1m
Applicable model
See P.43

AMC201



Magnet contact
IEC61010 CAT.IV 1000V
Length 60mm
Applicable test lead
TL-26, TL-27, TL-28,
TL-36, TL-37, TL-66

CE

ASJ201



Safety jaw clip
IEC61010 CAT.IV1000V
Length 130mm
Applicable test lead
TL-26, TL-27, TL-28,
TL-36, TL-37, TL-66

CE

Clamp sensor

ACS101



DC/AC current measurable
Applicable model:
PC7000 PC720M RD700 CD770
PC710 PC773 CD772 PC20
PC700 RD701 CD771 CD732

Range	Output voltage	Tolerance
ACA 60A	10mV/A	±(1.5%+1.0mV)
ACA 600A	1mV/A	±(1.5%+1.0mV)
DCA 60A	10mV/A	±(1.5%+1.0mV)
DCA 600A	1mV/A	±(1.5%+1.0mV)
Battery	LR03/R03x2	
Battery life	LR03: approx. 100 hrs. R03: approx. 45 hrs.	
Clamp diameter/	30mm/10x35mm	
Conductor size		
Size/Mass	H190xW71xD37mm/approx. 260g	
Cable length	1.5m	

K-AD



Thermocouple K type adaptor
Length 50mm
Applicable model
PC7000, PC720M, PC710, PC20, CD772,
RD700, RD701

Hanger magnet

HM-1



77 × 26 × 17mm
Applicable model
CD5002, CD5001, MG102

Carrying case

C-09S



185 × 160 × 55mm
Applicable model
PDM1529S, PDM5219S,
DM1009S, DM509S, PDM509S
SP20, SP21, TA55

AC adapter

AD-71AC-2 (100V)

AD-72AC (220V)



Length 1.9m
Applicable model
PC20

AD-72AC

AD-30-3



Length 2.1m
Applicable model
LCR700

CE

Optical link

KB-USB20



Optical link USB
PC connection cable
Length 1.3m
Applicable model
PC20, PC20TK

CE

KB-USB7



Optical link USB
PC connection cable
Length 1.3m
Applicable model
PC7000, PC710, PC700, PC720M

CE

KB-USB773



Optical link USB
PC connection cable
Length 1.3m
Applicable model
PC773

CE

C-CD



190 × 145 × 70mm
Applicable model
RD700, RD701

C-CL3000



220 × 180 × 65mm
Applicable model
DCL3000R, CL3000

C-DCM2000DR



Soft case
Applicable model
DCM2000DR

Carrying case

C-DCM400



Soft case
Applicable model
DCM400, DCM400AD

C-DCM60L



Soft case
Applicable model
DCM60R

C-DCM660



Soft case
Applicable model
DCM660R, DCM600,
DLC470

C-DG3a



Soft case
with magnet sheets
150 × 90 × 45mm
Applicable model
HG561H, KP1, PM33a

C-KS



Soft case
Applicable model
KS1, KS3

C-M53



Soft case
130 × 190 × 70mm
Applicable model
M53

C-PC7



205 × 140 × 80mm
Applicable model
PC7000, PC720M,
PC710, PC700,
LCR700

C-PM3



119 × 78 × 16mm
Applicable model
PM3

C-SPH



160 × 150 × 55mm
Applicable model
SP21, SP20, TA55

C-YS



160 × 140 × 40mm
Applicable model
YX-361TR

Holster

H-50



Applicable model
RD700, RD701

H-70



Applicable model
PC20, CD732

H-700



Applicable model
PC7000, PC720M,
PC710, PC700

ISO 9001

ISO 14001

Traceability

Repairs and servicing

Quality Management System

The manufacturing plant of Sanwa Tesmex Co., Ltd. obtained ISO9002 certification from the foundation "Japan Quality Assurance Organization (JQA)" in 1996. In October 2002, Sanwa Electric Instrument Co., Ltd. was organized as one company incorporating the manufacturing division and sales division. In November 2002, the company obtained ISO9001:2000 certification (JQA-1453). The scope of the registration covers the design, development, production and servicing of multi-meters, clamp meters, insulating-resistance testers, standard generators, light power meters, and laser power meters.



Environmental Management System ISO 14001

We implemented activities aimed at acquiring certification under the ISO 14001 standard for environmental management systems, and were granted the certification by the Japan Quality Assurance Association in November 2007. (JQA-EM5956)




Environmental Philosophy

We involve all employees in environmentally balanced activities throughout every stage of the process of delivering products and services to customers in order to achieve sound environmental management as a community and customer-oriented company. (Established on April 2nd, 2007)

Traceability to prove the compliance with national and international standards is an essential factor for measuring instruments used as test instruments associated with quality assurance. Products of Sanwa are calibrated by reference samples which is periodically checked for its compliance with national standards. A calibration certificate and test data report are available on your request (a fee applies).

Traceability Flow Chart

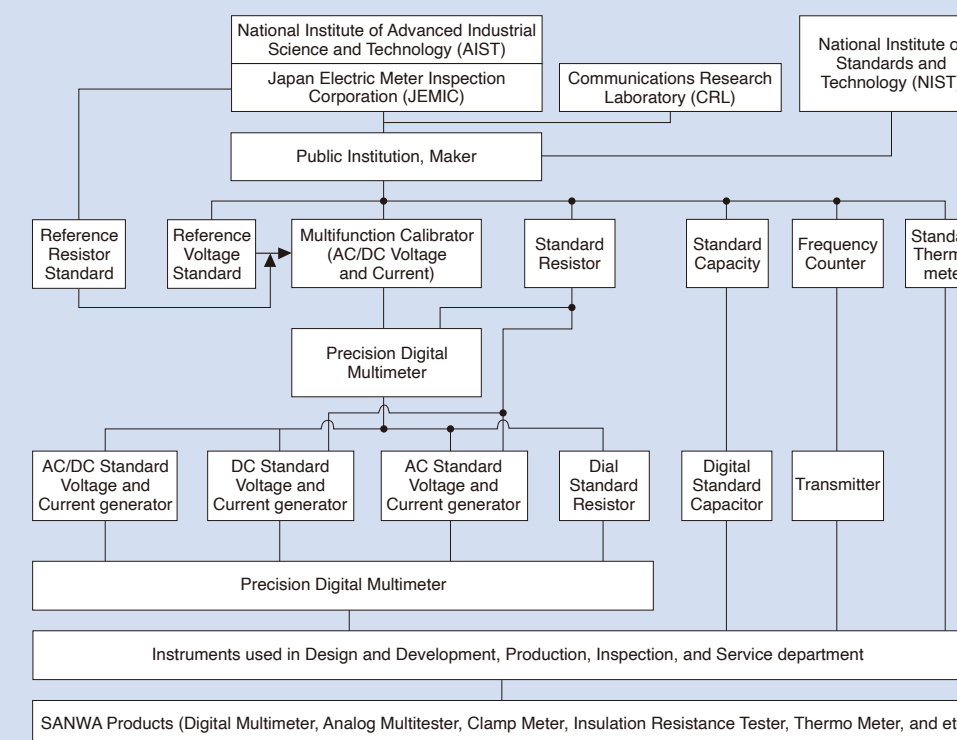

The International Safety Standard IEC61010

This Safety Standard which is established for protecting operators and environment stipulates safety requirements for measuring instruments and electric equipment. The IEC standard defines the degree of pollution, measurement classification, barrier, material, spatial distance and creepage distance to assure safety. The impulse withstand voltage as transitional energy is estimated from the measurement category and main power supply voltage to conduct tests for measuring instruments.

Test voltage (impulse withstand voltage)

Nominal AC or DC line of main power supply and neutral voltage	CAT. II	CAT. III	CAT. IV
300V	2500V	4000V	6000V
600V	4000V	6000V	8000V
1000V	6000V	8000V	12000V

The output impedance of an impulse generator is 12 Ω in the measurement category II, and 2 Ω in measurement categories III and IV.

CE marking

CE CE marking is a safety mark which can be attached only on a product meeting the safety requirements of the Directive of Council of the European Union (EC Directive). A product attached with the CE mark is designed so as to meet the requirements of the "Low Voltage Directive" and "EMC Directive" of the EC Directive. Low Voltage Directive: This Directive covers products of power supply voltage of 50V-1000V (AC) and 75V-1500V (DC), and it defines electric safety requirements against shocks, burns, etc. The applicable standard is EN61010 corresponding to IEC1010 give on the left. EMC Directive: This Directive stipulates conditions so as not to give out strong electromagnetic waves from equipment to the outer environment and to protect equipment from the effect of electromagnetic waves from the

Measurement category (overvoltage category)

The IEC standard classifies measuring circuits according to measurement categories for the safe use of a measuring instrument in low voltage facilities. The measurement categories are classified into II to IV. A larger number of the category denotes a spot involving higher transient energy. For safe measurement, wear protective gears such as insulated gloves and dust-proof glasses in an environment of CAT. III.

Measurement category IV (CAT. IV):


Equipment used for measurement in low voltage facilities. Temporary overcurrent preventer, and electric measurement on ripple control unit, etc.

Measurement category III (CAT. III):

Equipment used for measurement in building facilities. Distribution board, circuit breaker, wiring including cables, busbar, junction box, switch, receptacle, and industrial equipment located in fixed facilities, and other equipment such as a fixed motor connected to fixed facilities in a permanent manner.

Measurement category II (CAT. II):

Equipment used for measurement performed on a circuit directly connected to low voltage facilities. Measurement on electric household appliances, portable tools and similar tools

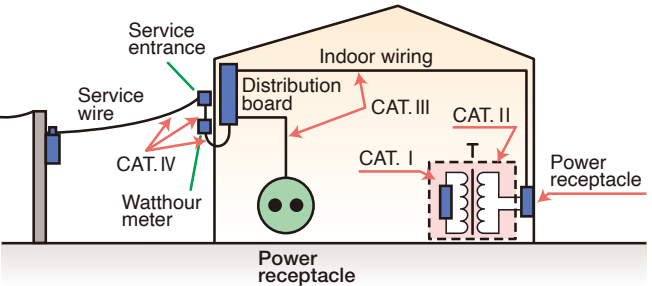

For safe measurement

◆ Method for safe use of measuring instrument ◆

Multimeter

Voltage measurement

Never use a measuring instrument for a measurement category higher than specified. A tester not conforming to the international safety standard is for use with weak current. Never use these testers on a high power circuit of 250V or more (excluding VS-100). Referring to measurement categories defined in the IEC standard, use a measuring instrument of equivalent or higher category. For instance, when a measuring instrument is used on a motor of facility of 200V main power supply, which corresponds to Category III, use a measuring instrument of CAT. III or higher.

Current measurement

Use special caution not to input voltage to the current measuring terminal in measurement. In current measurement, a meter is connected in series with the measuring circuit. For this reason, impedance inside the meter is low, thereby possibly causing a short-circuit fault. To prevent such a short-circuit fault and assure safe operation, fuses are installed for protection. Check the protection capability of the fuses. RD700 uses a quick-breaking ceramic fuse of rated voltage 250V and breaking current 1.5kA for the milliamp measuring circuit, which causes the fuse to blow out to prevent short-circuit when the main power supply is 250V or less and short circuit current is 1.5kA or less.

Clamp meter

- Use all clamp meters for measurement of low voltage circuit.
- In choosing an appropriate model, special attention should be paid to the current measurement range and diameter of a conductor to be clamped.

Insulation resistance tester

- The insulation resistance tester cannot be used on an measuring object in live-wire status.
- If the measuring voltage is specified, choose a model of the specified voltage. It is a general practice to choose the measuring voltage equivalent to or a little higher than voltage usually applied to the measuring object.
- Since the insulating-resistance tester measures resistance values by applying DC high voltage on a measuring object, the measurement may damage the measuring object if voltage is directly applied on the electronic circuit including the IC and LSI.
- The insulating-resistance tester generates DC high voltage during measurement. If an electric shock occurs, a falling accident from a high altitude may follow. Use special caution in operation at a high altitude.
- If your measuring instrument is provided with a voltage measuring function, use it at no higher than the maximum measuring voltage.

Thermo Meter (Temperature Probe)

- The temperature sensor cannot be used for measurement in direct contact with a live part.
- Use caution in handling a sharp-edged probe to avoid an injury.
- The grip is heated in high temperature measurement. Use an appropriate jig to secure the probe in high temperature measurement.

Tachometer · Speedometer

- In measurement on a rotating motor (measurement of speed for elevator in operation), risks are involved due to the strong force of the measuring object. Use special caution in measurement to assure safety. Never touch the rotating part during measurement.

Laser Power Meter

- Infrared semiconductor laser light is invisible to the naked eye. It may occasionally emit high power of 30mW or more, which may threaten vision if eyes are exposed to the light. Use special caution to avoid gazing at the light directly or exposing eyes to reflected light.

A

ACS101.....P46
AD-30-3.....P46
AD-71AC-2.....P46
AD-72AC.....P46
AMC201.....P46
ASJ201.....P46
ATL101.....P42

C

C-09S.....P47
C-77.....P47
C-77H.....P47
C-CA.....P47
C-CD.....P47
C-CL.....P47
C-CL3000.....P47
C-DCM2000DR.....P47
C-DCM400.....P48
C-DCM60L.....P48
C-DG3a.....P48
CD5001.....P15
CD5002.....P15
CD732.....P12
CD770.....P14
CD771.....P14
CD772.....P14
CD800a.....P13
CD800a2.....P13
CD800a3.....P13
C-KS.....P48
CL-14.....P45
CL-15a.....P45
CL-26.....P46
CL-27.....P46
CL-506b.....P45
CL-561.....P45
CL-700a.....P45
CL-700SMD.....P45
CL-DG3a.....P45
C-M53.....P48
C-PC7.....P48
C-PM3.....P48
C-SPH.....P48
CX506a.....P19
C-YS.....P48

D

DCL1000.....P33
DCL11R.....P31
DCL1200R.....P32
DCL31DR.....P34
DCL3000R.....P32
DCM301.....P31
DCM60R.....P31
DCM600DR.....P33
DCM660R.....P32
DCM400.....P33
DCM400AD.....P34
DCM2000DR.....P34
DLC470.....P35
DM1009S.....P27
DM509S.....P27

E

EM7000.....P19

H

H-50.....P48
H-70.....P48
H-700.....P48
HFE-6T.....P45
HG561H.....P26
HM-1.....P47
HV-60.....P45

K

K-250CD.....P47
K-250PC.....P47
K-AD.....P47
KB-USB20.....P46
KB-USB7.....P46
KB-USB773.....P46
KD3.....P35
KDP10.....P36
KIT-8D.....P40
KP1.....P16
KS1.....P35
KS3.....P35

L

LCR701.....P37
LCR-USB2.....P47
LP10.....P37
LX20.....P36

M

MG102.....P25
MG500.....P25
MG1000.....P25
MG5000.....P24

P

PC20.....P12
PC20TK.....P40
PC700.....P11
PC7000.....P10
PC710.....P10
PC720M.....P11
PC773.....P12
PC Link 7.....P6,47
PDM1529S.....P26
PDM509S.....P27
PDM5219S.....P26
PDR302.....P39
PDR4000.....P39
PM3.....P16
PM33a.....P15
PM7a.....P16
PM11.....P16

R

RD700.....P13
RD701.....P13

S

SE300.....P38
SE9100.....P38
SP-18D.....P21
SP20.....P20
SP21.....P20

T

TA55.....P21
TL-11Ta.....P44
TL-112a.....P44
TL-21a.....P44
TL-23a.....P44
TL-25a.....P44
TL-26.....P44
TL-27.....P44
TL-28.....P44
TL-29.....P44
TL-35.....P45
TL-36.....P45
TL-37.....P45
TL-509S.....P26, P44
TL-561.....P45
TL-61.....P44
TL-61Ta.....P44
TL-61Tb.....P44
TL-61Tc.....P44
TL-9IC.....P45
TL-91.....P44
TL-A18a.....P46
TL-A4.....P45
TL-A51.....P26, P46
TL-A7M2.....P45
TL-BP.....P25
TL-PM3.....P44
TLF-120.....P44
T-300PC.....P47
T-THP.....P47

Y

YX360TRF.....P20
YX-361TR.....P19



<https://www.sanwa-meter.co.jp>

sanwa

SANWA ELECTRIC INSTRUMENT CO., LTD.

Dempa Bldg., 4-4 Sotokanda 2-Chome, Chiyoda-ku, Tokyo, 101-0021 Japan
Tel: +81-3-3251-0941 Fax: +81-3-3256-9740

- The specifications and design listed on this catalog are subject to change without notice.
- Printed photos may appear a little different from the actual color of products.
- Read the operation manual thoroughly and use equipment properly.
- The size of photos of products are not same as of actual product size.

2025-1

Distributed by



Sugartech s.a.
ventas@sugartech.de

Tel: +506 8894-1927

Esquina entre avenida 1 y calle 5
Paraíso Cartago, Costa Rica