QUIETBOARD™

Premium Acoustical & Insulating Fiber Board

ENHANCED PERFORMANCE FOR PAD ATTACHED FLOORING

Integrated film adds moisture protection and thermal reflective properties

Acoustical and impact noise barrier

Adds insulation and energy efficiency

Made in the U.S.A. with recycled material

Makes floors solid & comfortable underfoot

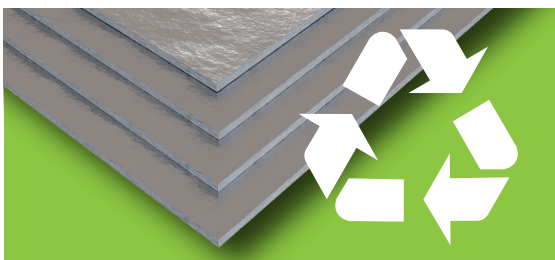Closes the gap between trim and floors

Lightweight construction that's easy to work with & cuts with a utility knife

Maintains structural integrity

PROUDLY Made in the U.S.A.
Patent Pending

APPROVED FLOOR COVERINGS

All Vinyl Planks & Tiles, Laminate, Floating & Glue Down Wood, Cork, Bamboo, Carpet & Carpet Tile

---

GREENGUARD PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL.COM/GG UL 2818 GOLD

Extremely Dense Panels Of Recycled Fiber Board

QuietBoard's dense, recycled, construction reduces impact noise while increasing floor stability and minimizing flex between planks to make floors solid and comfortable underfoot.

QUIETBOARD™

Premium Acoustical & Insulating Fiber Board

ACOUSTICAL AND IMPACT NOISE BARRIER

The dense, recycled fiber structure of QuietBoard has the brawn to absorb high levels of both impact and ambient sound, minimizing unwanted walking and room noises aiding in harmonious living spaces.

Sound numbers (without ceiling assembly)			
IIC	STC	HIIC	ΔIIC
56	52	65	25

Makes floor comfortable

Solid cushion reduces foot fatigue

Adds insulating value and energy efficiency.

With an impressive R-Value, QuietBoard helps to insulate your home, keeping your rooms the temperature you want with lower cost.
Approved with radiant heat systems.

Closes the gap between trim and floors.

QuietBoard helps raise the subfloor when replacing a thick floor covering with a thinner plank to save time and money in replacing door frames as well as reduce trip hazards.

Trip hazard

Trim gap

Maintains Shape & Functionality.

QuietBoard can hold up to 5 times its weight in moisture while maintaining its shape and functionality while it dries. Its durable design doesn't rip, tear or crumble which reduces waste and ensures your floor has complete, long lasting, coverage.

SPECIFICATIONS	
Density 22.608lbs/ft3	**Thickness** 1/4" (6mm)
Materials: Recycled fibers	**Size:** 2'x3' & 4'x6' panels

Installation Guide:
Can be floated, stapled, or glued. See full installation guide for complete instructions.

Packaging:
- (4'x6') 23 Pallets per truck / 150 panels per pallet / 3,450 total panels per truck (82,800 sqft)
- (2'x3') Inner pallet pack out - 44 pallets per truck / 80 panels per box / 4 boxes per pallet / 14,080 total panels per truck (84,480 sqft)
- (2'x3') Retail pack out - 60 pallets per truck / 15 panels per box / 16 boxes per pallet / 14,400 total panels per truck (86,400 sqft)

REV4 0822

MPglobal™

2500 Old Hadar Road, PO Box 2283 Norfolk, Nebraska 68702-2283
(888) 379-9695 - Toll Free · info@MPGlobalProducts.com

PROUDLY
Made in the U.S.A.