


## Performance Series Wall Mount Enclosure

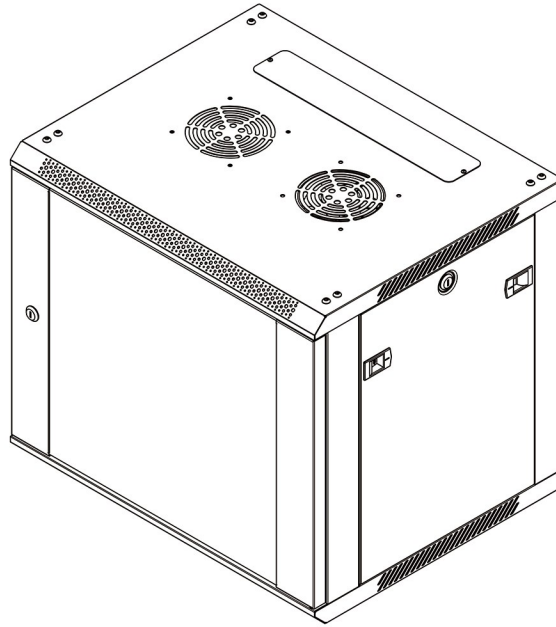

### THIS MANUAL APPLIES TO THE FOLLOWING SKUs:

<b>00600100</b>	<b>00600101</b>	<b>00600102</b>
-----------------	-----------------	-----------------

Thank you for purchasing the Performance Series Wall Mount Cabinet from RackPath. Every effort has been made to ensure the accuracy of the information in this product manual.

## Important Safety Instructions

Keep the enclosure free from moisture, extremes of temperature, combustible substances and gases, conductive pollutants, dust, and direct sunlight in a controlled indoor environment. Allow sufficient room for appropriate ventilation at the front and back of the enclosure. The enclosure's external ventilation openings must not be blocked, covered, or inserted with items.

Please call or email us if you have any concerns about the installation or use of your product. Please inspect the product for any missing or defective components. Ask RackPath for help if any component is broken or missing. If the product has been affected, do not try to install or use it. To prevent harm during assembly, place the product contents on cardboard or another safe surface. Improper installation or use of this product can result in product damage, other damage to equipment, or personal injury.


It is advised that the installation be performed by a professional installer. RackPath cannot be held liable for equipment damage or physical injuries resulting from inappropriate product usage or installation. Please ensure that the equipment stored/mounted should not exceed the stated weight capacity.

### Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to RackPath. These references are provided for informational purposes only and do not represent an endorsement of a product or service by RackPath, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, RackPath hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related document are the property of their respective holders.

**Limitations of Liability:** RackPath Network Equipment (Yunnan) Co. Ltd will not be responsible for any injury or damage, whether direct or indirect, special, punitive, incidental, or consequential damages (including, but not limited to, lost profits or revenue, loss of use, lost business opportunities, or loss of goodwill), or the costs of procuring substitute products, arising out of or in connection with the use of the product. In no case can seller's gross accumulated liability, arising from all causes of action and theories of liability, exceed the total sums actually charged by customer to seller under the order giving rise to any liability hereunder.


# 1.Parts Identification

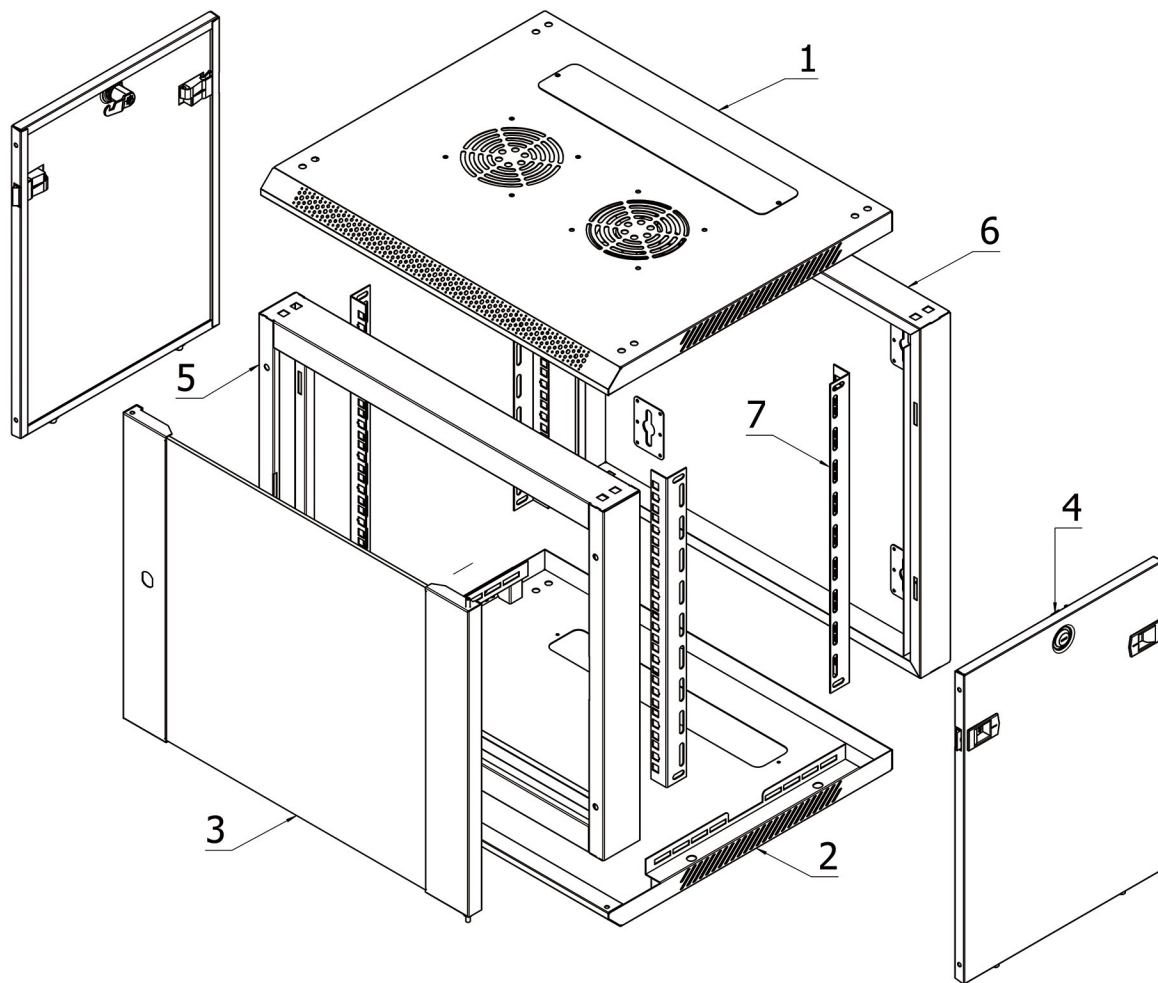

## Accessories List


1. Top Panel	x1	A: M6 Mounting Screws	x10 (6U); x14 (9U); x18 (12U)
2. Bottom Panel	x1	M6 Cage Nuts	x10 (6U); x14 (9U); x18 (12U)
3. Front Door	x1	M6 Plastic Washers	x10 (6U); x14 (9U); x18 (12U)
4. Side Panels	x2	Hex Wrench	x1
5. Front Frame	x1	B: M6 Hex Head Screws	x16
6. Back Frame	x1	C: M5 Screws	x8
7. Vertical Mounting Rails	x4	D: M5 Flange Nuts	x8
		E: Side Panel Lock Kit	x2
		F: Side Panel Latches	x4
		G: Front Door Lock Kit	x1
		H: M6 Wall Mounting Screws	x6
		M6 Metal Washers	x6

## 2.Enclosure Installation

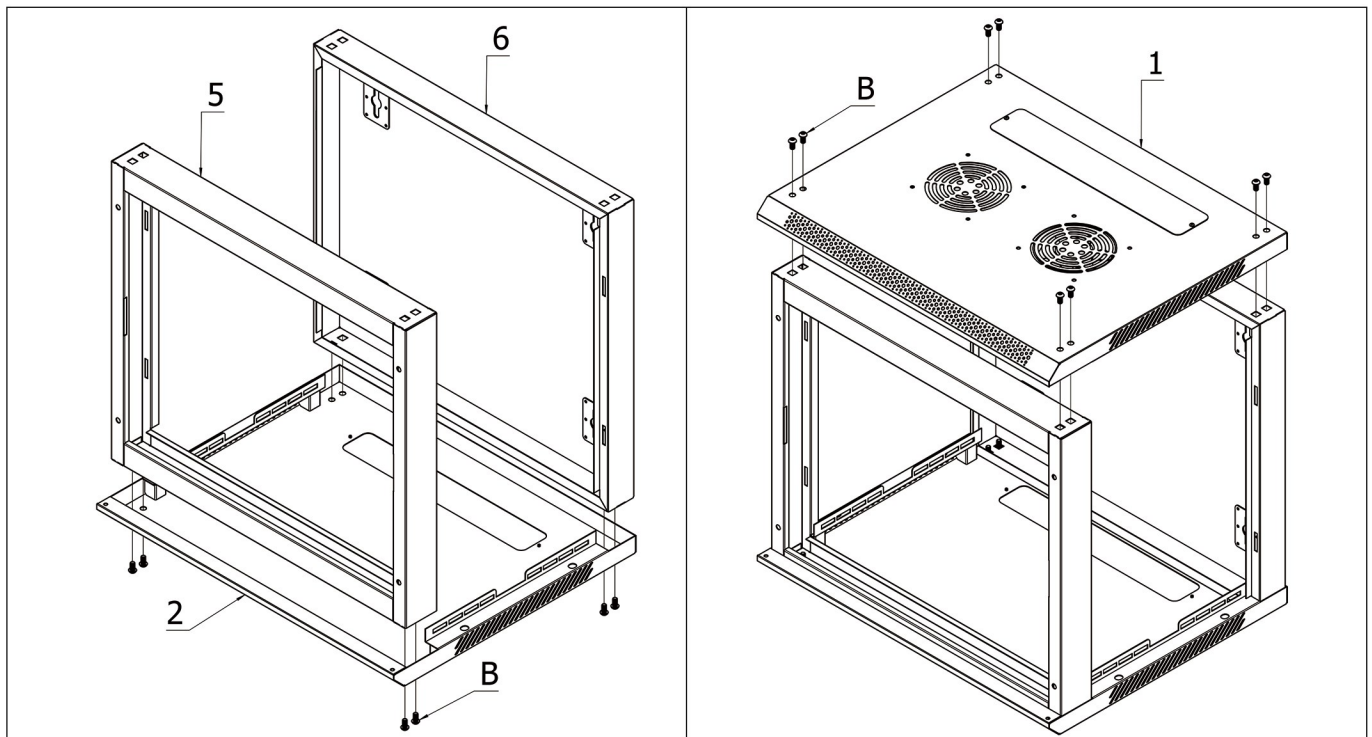

**1:** Insert the Front Frame (#5) and the Back Frame (#6) into the Bottom Panel (#2). Secure with 8 M6 Hex Head Screws (Bag B) using the Hex Wrench (Bag A).

**2:** Place the Top Panel (#1) onto the Front Frame (#5) and the Back Frame (#6). Secure with 8 M6 Hex Head Screws (Bag B) using the Hex Wrench (Bag A).

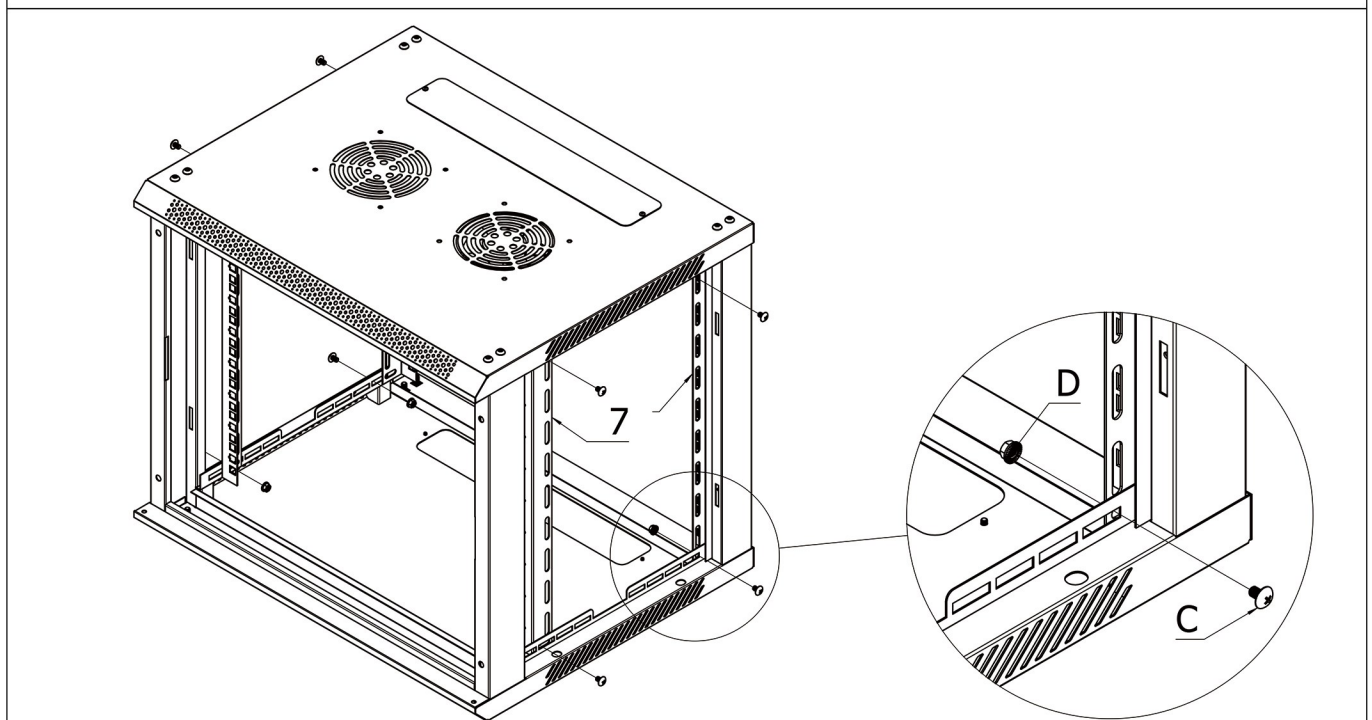


**3:** Install the 4 Vertical Mounting Rails (#7) into place at the desired depth using 2 M5 Screws (Bag C) and 2 black M5 Nuts (Bag D) for each Vertical Mounting Rails (#7).

**Note:** Please consider the equipment you plan to install within the enclosure while deciding the appropriate mounting depth. Make sure the rail depth on both sides of the cabinet is the same.




# Enclosure Installation

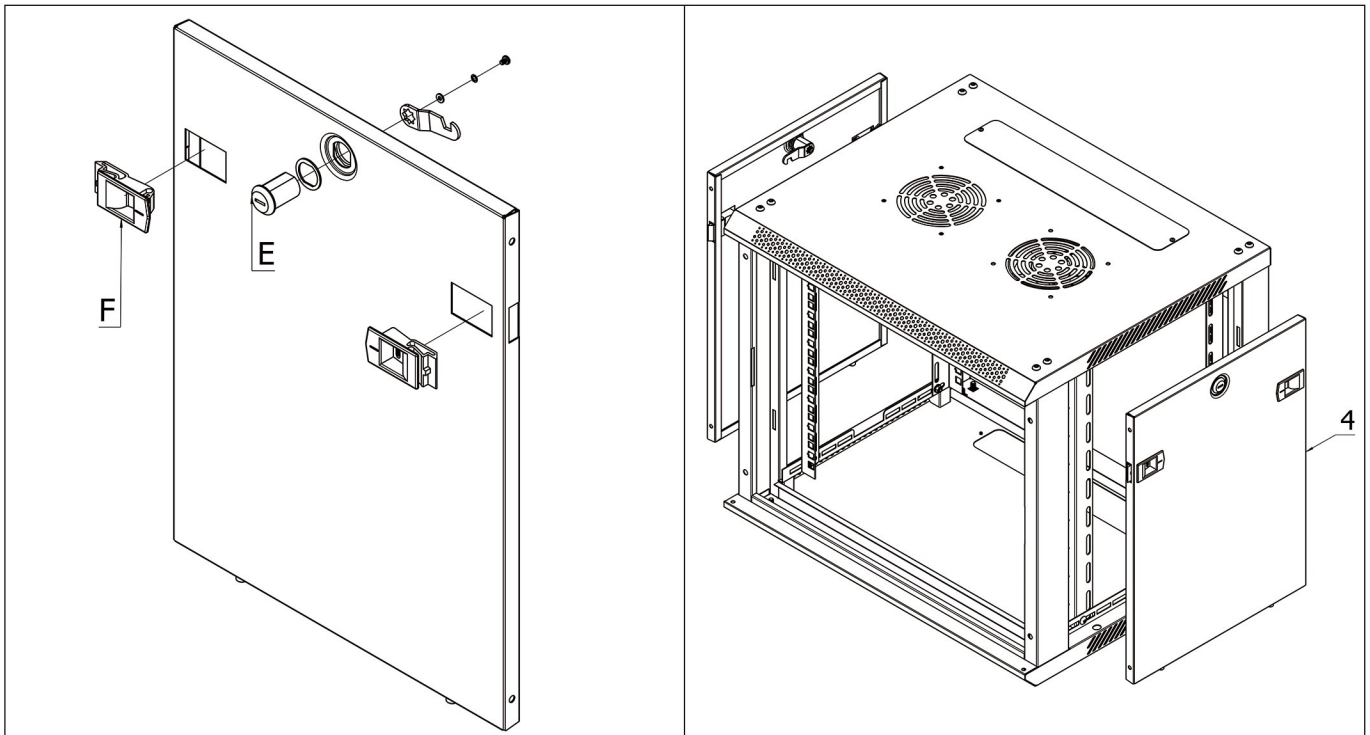

**4:** Install the Side Panel Latches (Bag F) and the Side Panel Locks (Bag E) on the two Side Panels (#4).


**5:** Install the two Side Panels (#4) into place using the Side Panel Latches. Once each Side Panel (#4) is in place, check to see whether the Side Panel Lock locks properly.

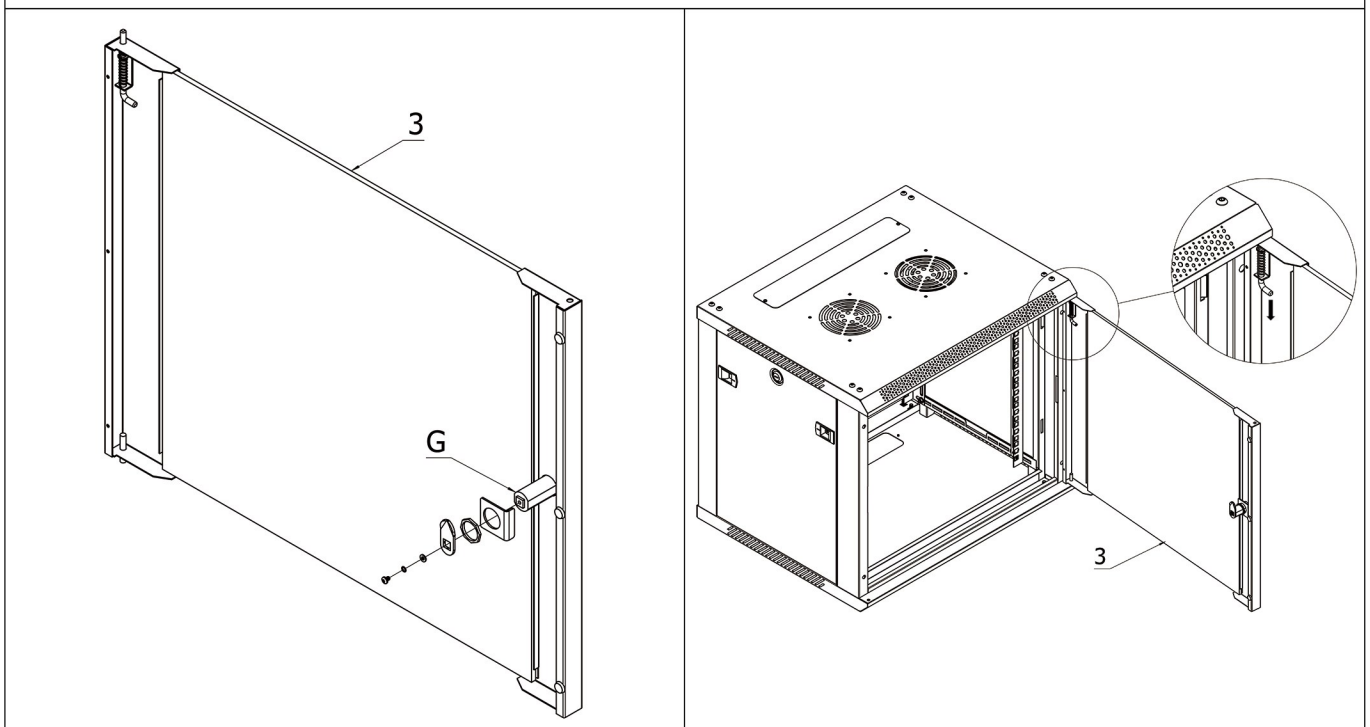

**6:** Install the Front Door Lock (Bag G) on the Front Door (#3).

**7:** Position the Front Door (#3) so that the top and bottom pins are aligned with the hinge hole located in the enclosure. Insert the bottom fixed pin into the bottom hinge hole. Pull the top spring pin down into the hole in the top corner and release it.

### 3.Wall Mounting the Enclosure

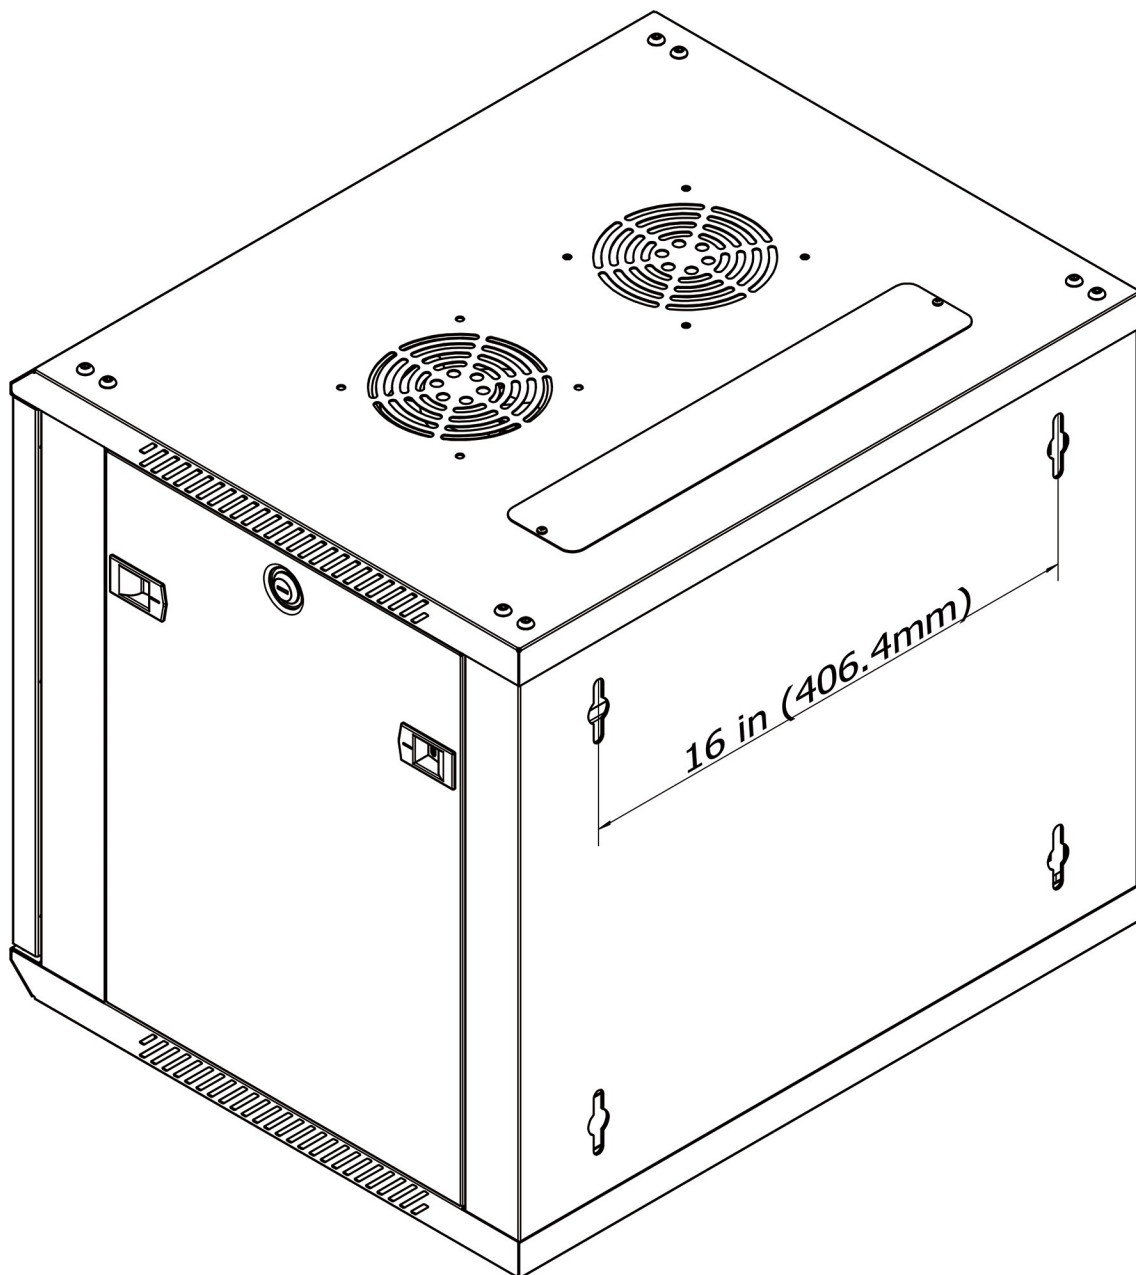

**1:** Attach the rack to a wall or other suitable mounting surface using M6 Wall Mounting Screws and M6 Metal Washers (Bag H). Mounting holes are spaced 16" (406.4mm) apart to accommodate standard stud placement as reflected in the diagram.

**Warning:** Do not attempt to mount to wall when equipment is mounted inside the enclosure. The enclosure has a weight capacity of 110 pounds. Make sure the type of wall structure and mounting hardware that you are using will properly support the weight of the enclosure and equipment.