

SHARP®

ELECTRONIC CASH REGISTER

MODEL

ER-A411 ER-A421

FULL DETAILED INSTRUCTION MANUAL



CAUTION:

- The cash register should be securely fitted to the supporting platforms to avoid instability when the drawer is open.
- The socket-outlet shall be installed near the equipment and shall be easily accessible.
- For a complete electrical disconnection pull out the mains plug.

SD card**ADDITIONAL INFORMATION:**

We would like to point out that the time for the SD card storage depends on the size of the already used memory on SD card.

Measurements have shown that backing up data is approximately 6 minutes, unless there are already up to 3000 backups / directories on the SD card.

In order to obtain a realistic compromise between the required time and the to be stored data volume, storage of data is limited to a maximum of 5000 entries.

But also under this condition a period over 13 years can be stored on SD card even so, daily data storage is done.

Since SD cards have a specified lifetime we recommend to create regularly backups to ensure the availability of critical data in the event of a faulty SD card.

INTRODUCTION

Thank you very much for your purchase of the SHARP Electronic Cash Register, Model ER-A411/ER-A421. Please read this manual carefully before operating your machine in order to gain full understanding of functions and features.

Please keep this manual for future reference. It will help you if you encounter any operational problems.

IMPORTANT

- Install the cash register in a location not subject to direct sunlight, unusual temperature changes, high humidity or splashing water.
Installation in such locations could cause damage to the cabinet and the electronic components.
- Never install the register in saline areas (e.g.: close to the sea).
Installing the register in such locations could cause component failure with the corrosion.
- Never operate the register with wet hands.
The water could seep into the interior of the register and cause component failure.
- When cleaning your register, use a dry, soft cloth. Never use solvents, such as benzine and/or thinner.
The use of such chemicals will lead to discoloration or deterioration of the cabinet.
- The register plugs into any standard wall outlet (official (nominal) voltage).
Other electrical devices on the same electrical circuit could cause the register to malfunction.
- If the register malfunctions, call your authorized SHARP dealer for service - do not try to repair the register yourself.
- For complete electrical disconnection, disconnect the main plug.

PRECAUTION

This register has a built-in memory protection circuit which is operated by a rechargeable battery pack. It should be known that all batteries will, in time, dissipate their charge even if not used. Therefore to insure an adequate initial charge in the protection circuit and to prevent any possible loss of memory upon installation, it is recommended that each unit be allowed to be recharged for a period of 24 to 48 hours prior to use by the customer.

In order to charge the battery pack, the machine must be plugged in. This recharging precaution can prevent unnecessary initial service calls.

The battery pack is a consumable part, and its operating time will get shorter gradually each time it is recharged for memory backup.

When the battery pack cannot be charged enough to perform memory backup, it means that the service life of the battery pack has expired.

If this is the case, consult your authorized SHARP dealer.

Caution Scanner connection

In order to allow a plug & play connection of the optional scanner the Pin 9 of the D-Sub connector 1 (Channel 1) uses +5V.






Be very careful of this +5V in case connection of a different device should be done so that a damage of the register or device is avoided.

CONTENTS

INTRODUCTION	3
IMPORTANT	3
PRECAUTION	3
1 Part Names and Functions	9
External View	9
Front view	9
Rear view	9
Printer	10
Keyboard (ER-A411)	11
Standard keyboard layout	11
Function key list	11
Optional key list	12
Keyboard (ER-A421)	13
Standard keyboard layout	13
Function key list	13
Optional key list	14
Inserting the keyboard sheet	15
RS232 Connector/SD Card Slot	16
RS232 connector	16
SD card slot	16
Displays	17
Operator display	17
Customer display	18
Screen save mode	18
2 Selecting an Operating Mode	19
Operating Modes	19
Mode Selection	20
3 Prior to Making Entries	21
Preparations for Entries	21
Receipt paper roll	21
Receipt ON/OFF function	21
Clerk assignment	21
Error Warning	22
Item Selection from the Menu	23
Starting Cash Memory Entry	24
4 Entries	25
Item Entries	25
Single item entries	25
Repeat entries	28
Multiplication entries	29
Split-pricing entries	31
Successive multiplication entries	33
Single item cash sale (SICS)/single item finalize (SIF) entries	35
Special Entries for PLU/EAN	36
Promotion function	36
PLU/EAN link entries	39
EAN learning function	40
PLU/EAN information inquiry (view) function	41
EAN price change function	42
Set PLU/EAN entries	43
PLU level shift (for direct PLUs)	44

Price level shift	46
Condiment entries (for PLU).....	48
Display of Subtotals	50
Subtotal	50
Difference subtotal (Differ ST)	50
Finalization of Transaction	51
Cash tendering	51
Cash sale that does not need any tender entry.....	51
Check tendering	52
Check sale that does not need any tender entry	52
Mixed tendering (check + cash).....	53
Credit sale	53
Mixed-tender sale (cash or check tendering + credit tendering).....	54
Computation of VAT (Value Added Tax)/Tax	55
VAT/tax system	55
VAT shift entries.....	57
Guest Check (GLU)	58
Guest look up (GLU) system	58
Deposit entries.....	60
Bill printing	61
Transferring guest checks out or in (Transfer-in/out).....	61
Intermediate GLU reading	62
Bill totalizing/bill transfer	63
Bill separating	64
Tip-in entries	67
Tip Paid Entries	67
Auxiliary Entries	68
Percent calculations (premium or discount)	68
Discount entries	69
Refund entries	70
Printing of non-add code numbers	70
Payment Treatment	71
Currency exchange	71
Received-on-account entries.....	72
Paid-out entries	73
No-sale (exchange)	74
Cash payment transfer	75
Cashing a check	76
Age Verification.....	77
Electronic Journal View	77
TRAINING Mode.....	78
Overlapped Clerk Entry	79
5 Correction.....	80
Correction of the Last Entry (Direct Void)	80
Correction of the Next-to-Last or Earlier Entries (Indirect Void).....	81
Subtotal Void.....	82
Correction after Finalizing a Transaction	82
6 Special Printing Function	83
After Transaction Receipt / Copy Receipt Printing.....	83
Guest Check Copy.....	84
Receipt for Remote Printers (KP#1 and KP#2)	85
Type of receipts	85
Sorted Receipt Function	86

7 Manager Mode	89
Entering the Manager Mode	89
Override Entries	89
8 Reading (X) and Resetting (Z) of Sales Totals	90
How to take a report	90
Flash report	90
Daily Sales Totals	93
General report	93
Department report	96
Individual group total report on departments	97
Full group total report on departments	97
PLU/EAN report (by specified range/pickup)	98
PLU/EAN report by associated department	99
Individual PLU/EAN group report	100
PLU/EAN group total report	101
PLU/EAN stock report (by specified range/pickup)	101
PLU top 20 sales report (by sales amount/by sales quantity)	102
PLU/EAN zero sales report (full)	103
PLU/EAN zero sales report (by dept.)	103
PLU/EAN category report	104
Transaction report	105
Total in drawer report	105
Commission sales report	105
Individual clerk report	106
Individual cashier report	108
All clerk report	110
Hourly report	110
All cashier report	110
GLU report by specified range	111
GLU report by clerk	111
Balance report	111
Periodic Report Sample	112
General information	112
Daily net report	112
Compulsory Cash/Check Declaration	113
Display sample	114
Report sample	114
9 Non-accessed EAN Deletion	115
Non-accessed EAN report	115
10 Prior to Programming	116
Programming Keyboard Layout	116
ER-A411	116
ER-A421	116
How to Program Alphanumeric Characters	118
Mobile phone method (ER-A411)/Text keyboard method (ER-A421)	118
Entering character codes	119
11 Programming	120
Basic Instructions	120
Programming screen	120
Programming example	121
Article Programming	123
Department	124
PLU/EAN	126
PLU range	128

Set PLU table	129
Link PLU table (for PLU/EAN link)	129
PLU condiment table	130
Promotion table	132
EAN Non-PLU code format	134
Press code (for EAN)	135
PLU/EAN stock	136
EAN delete	136
PLU group text	136
Direct Key Programming	137
Direct key	137
Functional Programming	139
Discount key ( and  through )	140
Percent key ( through )	140
Commission	141
Miscellaneous functions	141
Deposit	141
RA/RA2	142
PO/PO2	142
Cash tip/Non-cash tip	142
Cash in drawer	143
Check change	143
Media Key Programming	144
Cash key (Cash and Cash2 through 5)	145
Check key (Check and Check2 through Check5)	146
Credit key (Credit1 through Credit9)	147
Check cashing (Check1 through Check5)	148
Foreign currency (Foreign1 through Foreign4)	148
Training Clerk/Cashier Programming	149
Function Text Programming	150
Personnel Programming	152
Clerk	153
Cashier	155
Manager	156
Contactless key	157
Prohibition of the contactless key	158
Terminal Programming	159
Date/Time Setting	160
Optional Feature Selection	161
Function prohibition	162
Function selection	164
Print selection	166
EURO change	168
Report Programming	169
Zero skip	170
Hourly report	170
Z1 General report	171
Stacked report	173
Message Programming	175
Receipt logo	175
Entertainment bill message	176
Scrolling message for customer display	176
Device Configuration Programming	177
Built-in printer	178

Remote printer (KP#1 and KP#2).....	179
Scanner	180
Online	180
Clerk key.....	180
EFT.....	180
GLU Code Programming	181
Tax Programming.....	182
Tax 1 through 6.....	182
On-line Configuration Programming	183
VMP Configuration Programming	184
Automatic Sequencing Key Programming.....	185
Basic Preset	185
Key Sequence	186
Function key list.....	187
Reading of Stored Programs	189
Program reading sequence	189
Sample printouts.....	190
SD CARD Mode.....	203
Inserting and removing an SD memory card	203
SD card formatting.....	203
Folder creating.....	203
Folder name selecting	204
Data saving	204
Data loading	205
iSDC Mode	206
Host preset	206
Send item	207
Report.....	208
Terminating the communication.....	209
12 Electronic Journal	210
Electronic journal	210
13 European Article Number (EAN) or Universal Product Code (UPC)	211
EAN or UPC code.....	211
Add-on code	212
14 EURO Migration Function	213
15 Operator Maintenance	215
In Case of Power Failure	215
In Case of Printer Error.....	215
Cautions in Handling the Printer and Recording Paper	215
Cautions in handling the printer.....	215
Cautions in handling the recording paper (thermal paper)	215
Replacing the Paper Rolls	216
Recording paper specifications	216
Removing the paper rolls.....	216
Installing the paper rolls.....	217
Removing a Paper Jam.....	218
Cleaning the Printer (Printer Head/Sensor/Roller).....	219
Removing the Till and the Drawer.....	220
Opening the Drawer by Hand	220
Drawer Lock Key	220
Installing the Fixing Angle Bracket.....	221
Before Calling for Service	222
16 Specifications	223


1

Part Names and Functions


External View

■ Front view


ER-A411

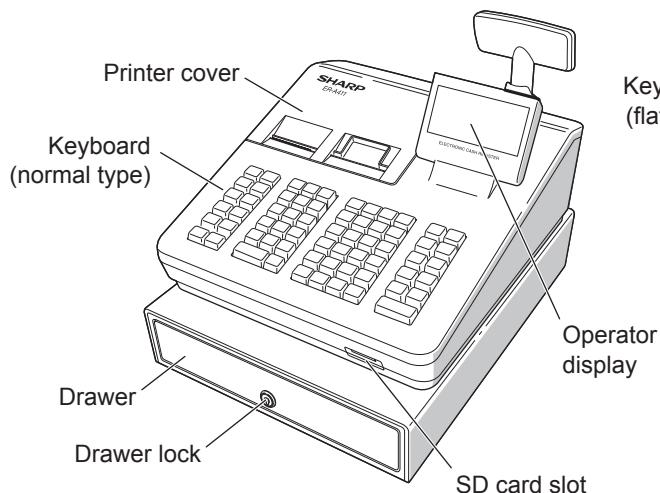

ER-A421

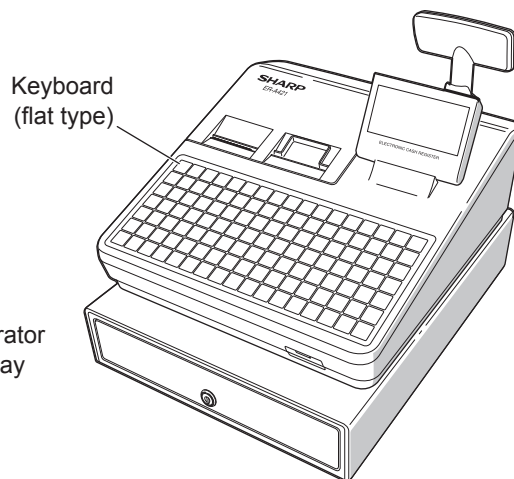

■ Rear view

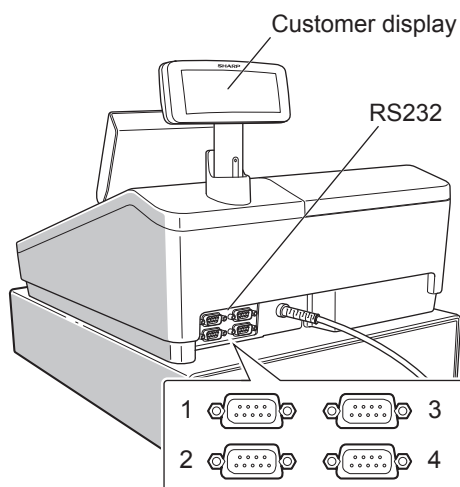


Printer

The printer is a receipt/journal dual station type thermal printer, and therefore it does not require any type of ink ribbon or cartridge. The average life of the printer is approximately 6 million lines.

When removing the printer cover, lift up its rear.


When installing the printer cover, hook it on the pawls on the cabinet and shut it.

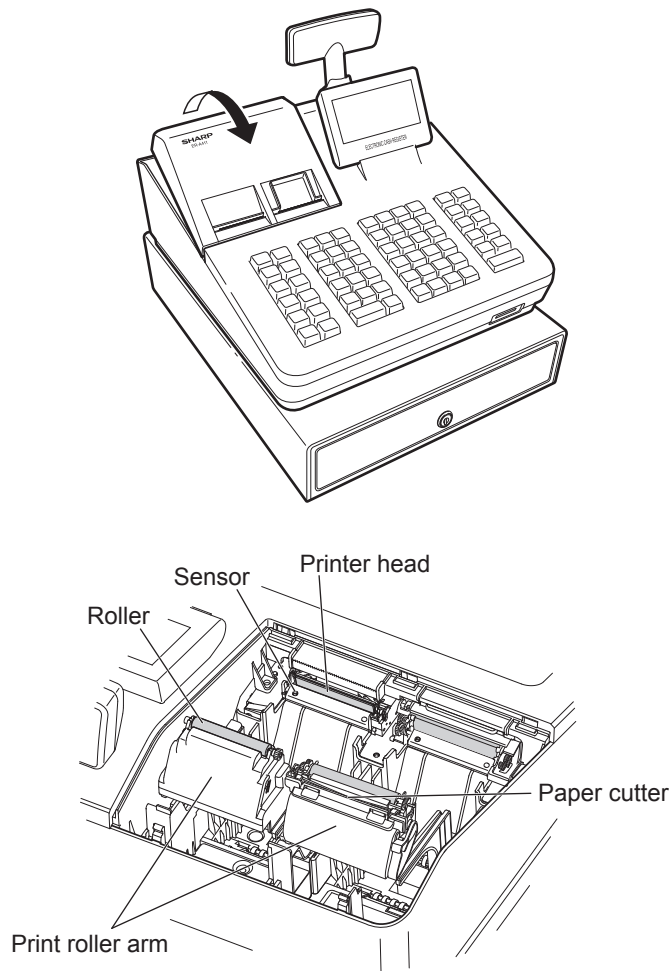

NOTE Do not attempt to remove the paper with the print roller arm in the hold position. This may result in damage to the printer and printer head.

Keyboard (ER-A411)

■ Standard keyboard layout

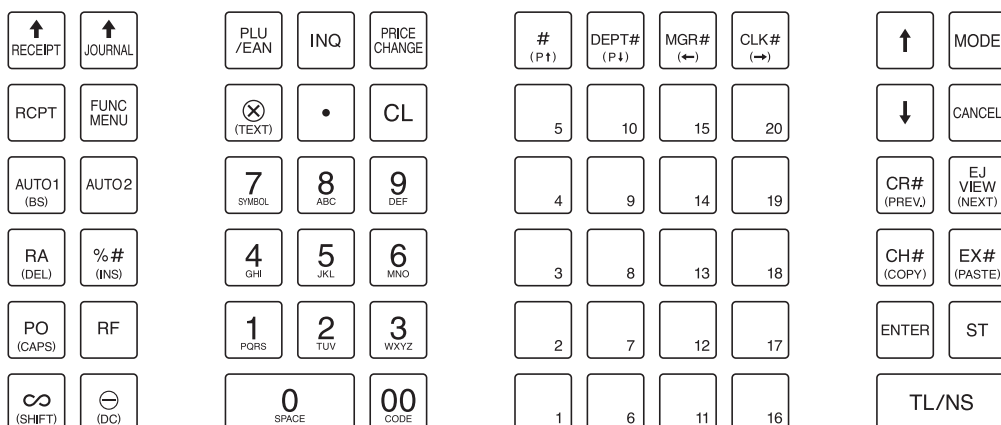

■ Function key list

	Receipt paper feed key	~	Numeric keys
	Journal paper feed key		Non-add code key
	Receipt print key		Dept. number key
	Function menu key		Manager number key
	Automatic sequencing 1 and 2 keys		Clerk number key
	Received-on-account key	~	Department keys
	Percent menu key		Cursor (up/down) keys
	Paid-out key		Mode key
	Refund key		Cancel key
	Void key		Credit menu key
	Discount key		Electronic journal view key
	Price lookup/EAN key		Check menu key
	Inquiry key		Exchange menu key
	EAN price change key		Enter key
	Multiplication key		Subtotal key
	Decimal point key		Total (cash total) key, or No-sale key
	Clear key		

* In this manual, each department key is represented like in order to distinguish it from direct PLU keys.

■ Optional key list

000	000 key	VAT SF TRANS	Value-added tax shift by transaction key
PAGE UP PAGE DOWN	Page up/down keys	VAT SF ITEM	Value-added tax shift by item key
⊖ #	Discount menu key	DIFFER ST	Difference subtotal key
PAYMENT MENU	Payment menu key	CSR #	Cashier number key
CA#	Cash menu key	CLK 1 ~ CLK 10	Clerk entry keys
LEVEL #	PLU level shift number key	GLU	Guest lookup key
L1 ~ L3	PLU level shift keys	NBAL	New balance key
PRICE SHIFT#	PLU price shift number key	FINAL	Finalization key
PRICE SHIFT1 ~ PRICE SHIFT3	PLU price shift keys	GUEST #	Guest number entry key
AMT	Amount entry key	DEPO (+)	Deposit key
C.NEXT	Condiments next key	DEPO (-)	Deposit refund key
+	Repeat key	BT	Bill totalize/bill transfer key
%1 ~ %4	Percent keys	BS ITEM	Bill separation by item key
⊖2 ~ ⊖4	Discount keys	BS AMOUNT	Bill separation by amount key
RA2	Received-on-account 2 key	BS PERSON	Bill separation by person key
PO2	Paid-out 2 key	TRANS OUT	Transfer out key
NO SALE	No-sale key	TRANS IN	Transfer in key
G.C. COPY	Guest check copy key	INTER MED.	Intermediate GLU key
VAT	Value-added tax key	G.C. RCPT	Guest check receipt key
AUTO MENU	Auto menu key	E.BILL	Entertainment bill key
AUTO3 ~ AUTO10	Automatic sequencing keys	CASH TIP	Cash tip key
CA2 ~ CA5	Cash keys	NON CASH TIP	Non-cash tip key
CHECK ~ CH5	Check keys	TIP PAID	Tip paid key
CR1 ~ CR9	Credit keys	RCP SW	Receipt switch key
EX1 ~ EX4	Exchange keys	BANK CONSOLE	Bank console key

NOTE To use optional keys on your register, consult your authorized SHARP dealer.

Keyboard (ER-A421)

■ Standard keyboard layout

↑ RECEIPT	↑ JOURNAL	↑	MODE	2	4	6	7	14	21	28	35	42	49	56	63	70
G.C. RCPT	EJ VIEW	↓	CANCEL	1	3	5	6	13	20	27	34	41	48	55	62	69
FUNC MENU	AUTO MENU	⊗	•	CL	ENTER	L3	5	12	19	26	33	40	47	54	61	68
CLK #	PLU /SUB	7	8	9	BS	L2	4	11	18	25	32	39	46	53	60	67
⊖	%#	4	5	6	GLU	L1	3	10	17	24	31	38	45	52	59	66
PO	RF	1	2	3	NBAL	ST	2	9	16	23	30	37	44	51	58	65
∞	VAT SHIFT	0	00	PAYMENT MENU	FINAL	TL/NS	1	8	15	22	29	36	43	50	57	64

■ Function key list

↑ RECEIPT	Receipt paper feed key	CANCEL	Cancel key
↑ JOURNAL	Journal paper feed key	1 ~ 6	Department keys*
G.C. RCPT	Guest check receipt key	⊗	Multiplication key
EJ VIEW	Electronic journal view key	•	Decimal point key
FUNC MENU	Function menu key	CL	Clear key
AUTO MENU	Auto menu key	0 ~ 9 00	Numeric keys
CLK #	Clerk number key	PAYMENT MENU	Payment menu key
PLU /SUB	Price lookup/subdepartment key	ENTER	Enter key
⊖	Discount key	BS	Bill separation key (by item)
%#	Percent menu key	GLU	Guest lookup key
PO	Paid-out key	NBAL	New balance key
RF	Refund key	FINAL	Finalization key
∞	Void key	L1 ~ L3	PLU level shift keys
VAT SHIFT	Value added tax shift key (by item)	ST	Subtotal key
↑ ↓	Cursor (up/down) keys	TL/NS	Total (cash total) key, or No-sale key
MODE	Mode key	1 ~ 70	Direct PLU keys

* In this manual, each department key is represented like 4 in order to distinguish it from direct PLU keys.

■ Optional key list


000	000 key	AUTO1 ~ AUTO10	Automatic sequencing keys
PAGE UP	PAGE DOWN	CA2 ~ CA5	Cash keys
⊖#	Discount menu key	CHECK ~ CH5	Check keys
CA#	Cash menu key	CR1 ~ CR9	Credit keys
CH#	Check menu key	EX1 ~ EX4	Exchange keys
CR#	Credit menu key	VAT SF TRANS	Value-added tax shift by transaction key
EX#	Exchange menu key	DIFFER ST	Difference subtotal key
LEVEL #	PLU level shift number key	CSR #	Cashier number key
PRICE SHIFT#	PLU price shift number key	CLK 1 ~ CLK 10	Clerk entry keys
PRICE SHIFT1 ~ PRICE SHIFT3	PLU price shift keys	MGR#	Manager number key
DEPT#	Dept. number key	GUEST #	Guest number entry key
INQ	Inquiry key	DEPO (+)	Deposit key
PRICE CHANGE	EAN price change key	DEPO (-)	Deposit refund key
AMT	Amount entry key	BT	Bill totalize/bill transfer key
C.NEXT	Condiments next key	BS AMOUNT	Bill separation by amount key
+	Repeat key	BS PERSON	Bill separation by person key
%1 ~ %4	Percent keys	TRANS OUT	Transfer out key
⊖2 ~ ⊖4	Discount keys	TRANS IN	Transfer in key
RA RA2	Received-on-account keys	INTER MED.	Intermediate GLU key
PO2	Paid-out 2 key	E.BILL	Entertainment bill key
#	Non-add code key	CASH TIP	Cash tip key
NO SALE	No-sale key	NON CASH TIP	Non-cash tip key
G.C. COPY	Guest check copy key	TIP PAID	Tip paid key
RCPT	Receipt print key	RCP SW	Receipt switch key
VAT	Value-added tax key	BANK CONSOLE	Bank console key

NOTE

To use optional keys on your register, consult your authorized SHARP dealer.

■ Inserting the keyboard sheet

Insert the keyboard sheet between the keyboard cover and the cabinet as illustrated below.

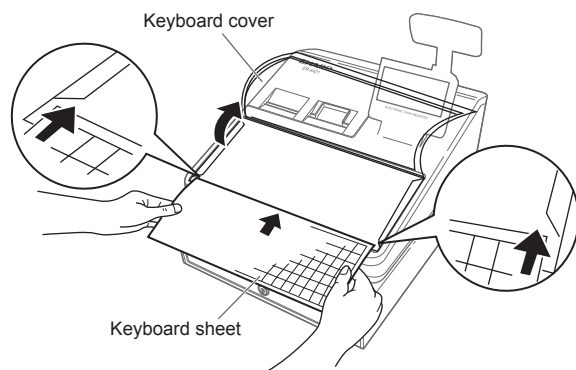


1. Lift up the keyboard cover.
2. Insert the keyboard sheet into the slit.
3. Close the keyboard cover.

NOTE

- Do not spread the keyboard cover too far as it might tear.
- Replace the keyboard sheet with a new one if by chance it gets wet. Use of a wet keyboard sheet may cause problems.
- Be sure to use only SHARP-supplied keyboard sheets. Thick or hard sheets make key operations difficult.
- Smooth the keyboard sheet evenly under the keyboard cover, without any folds or wrinkles, to ensure easier operation.
- If you require a new keyboard sheet, please contact your dealer.
- The keyboard cover will eventually wear out. If your keyboard cover is dirty or broken, replace the cover with a new one. For details, contact your authorized SHARP dealer.


RS232 Connector/SD Card Slot

■ RS232 connector

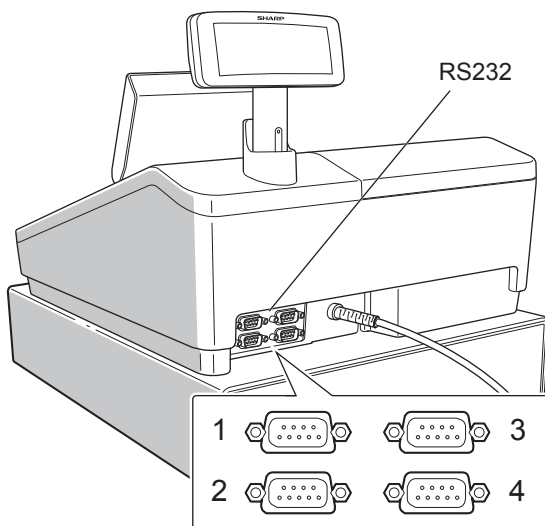

■ SD card slot


Refer to the “SD CARD Mode” section.

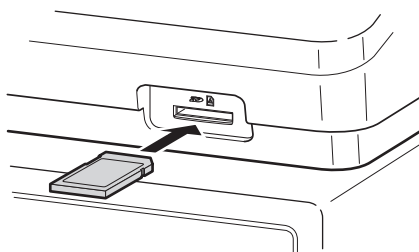

Displays

■ Operator display

• Screen example 1 (REG mode)

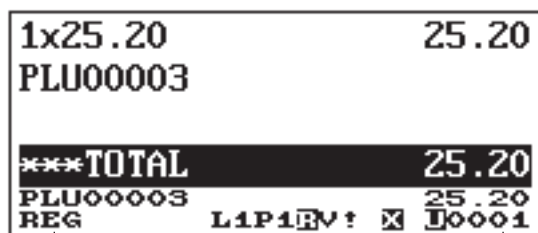

Mode name or
GLU code

Status information

Clerk/cashier code

Sales information area:

When a transaction information occupies more than 3 lines, you can scroll to the direction by using the keys. Sales information you have just entered such as items and prices will appear between 1st line and 3rd line.


Total is always appear at 4th line.

Numeric entry area

Status area


- PLU level shift indicator (L1-L3) : Shows the PLU level currently selected.
- Price level shift indicator (P1-P3) : Shows the PLU/EAN price level currently selected.
- Receipt ON/OFF status indicator () : Appears when the receipt ON-OFF function signs OFF.
- VAT shift status indicator (V) : Appears when the VAT status is shifted.
- Stock alarm indicator (!) : Appears when the stock of the PLU/EAN which you entered is zero, negative or reaches the minimum stock.
- Electronic journal near full indicator () : Appears () when the used memory is 80%.
: Appears () when the used memory is 90%.
: Appears () when the used memory is 95%.
- Sentinel mark (X) : Appears when the cash in drawer exceeds a programmed sentinel amount. The sentinel check is performed for the total cash in drawer.
- VMP file full indicator (1, 2, or 3) : When a VMP file used memory is 90% or more, its file number is indicated.
- Unsent data alarm indicator () : Appears when there is unsent electronic journal data or sales data.

• Screen example 2 (PGM2 mode)

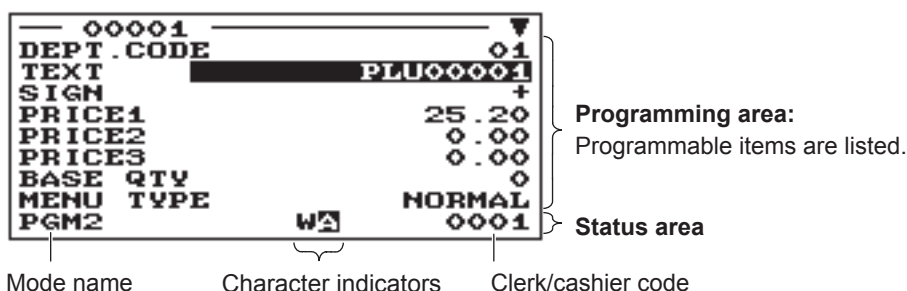

The character indicators consist of the following:

- Case/caps lock indicator (A/a) : The upper-case letter “A” or lower-case letter “a” appears during text programming. When caps lock is on, the character is highlighted.
- Double-size character mode indicator (W) : Appears when the double-size character mode is selected during text programming.

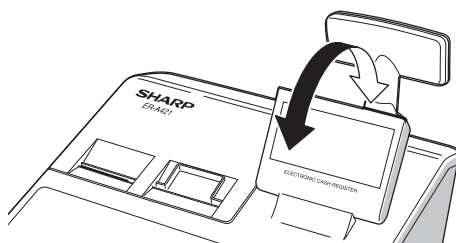

The display can be tilted back and forth to the best operational viewing angle.

NOTE

Do not try to force the display beyond its full position.

■ Customer display



The register can display a programmed scrolling message on the text/message display area.

To use this function, you need to program the following functions in the PGM2 mode:

- Scrolling message text (SCROLL MESSAGE in MESSAGE menu)
- Waiting time (WAITING TIME in TERMINAL menu)

■ Screen save mode

When you want to save the electric power or save the display's life, use the screen save function. This function can turn off the display and the LCD backlight when any clerk does not operate the register for an extended period of time. You can program the time for which your register should keep the normal status (in which the backlight is “ON”) before it goes into the screen save mode.

This machine will enter the screen save mode two minutes later by default.

To go back to the normal mode, press any key.

The backlight in display is a consumable part.

When the LCD display may no longer be adjusted and become darker, you should replace the LCD unit.

Consult your authorized SHARP dealer for further details.

2

Selecting an Operating Mode

When you turn the register on and press the **MODE** key, the mode selection window will appear on the display. For example, when a clerk is signed on, the following window will appear.

Mode selection window



Operating Modes

You can select any mode other than REG from the list in the mode selection window. Your register supports the following operating modes:

REG mode	This mode allows you to enter various sales information. The mode selection window does not list this mode. To select this mode from the mode selection window, press the CANCEL key.
OPXZ mode	This mode allows clerks to take X or Z reports on their sales information.
OFF mode	This mode locks all operations of the register. When you select this mode, the window will disappear. Pressing any key turns the register ON.
X1/Z1 mode	This mode is used to take various daily total reports (X1/Z1 reports).
X2/Z2 mode	This mode is used to take various weekly or monthly reports (X2/Z2 reports).
PGM1 mode	This mode allows you to program those items which need to be changed often such as unit prices and discount percentages.
PGM2 mode	This mode allows you to program all items including date, time, functions, and the items that can be programmed in the PGM1 mode.
AUTO KEY mode	This mode allows you to program AUTO menu keys and automatic sequencing keys.
SD CARD mode	This mode allows you to save and load the data of your register to and from an SD card.
iSDC mode	This mode allows you to save and load the data of your register to and from the server using a WiFi SD card.

Mode Selection

Procedure

Press the **MODE** key. The following mode screen is displayed when a clerk is signed on.



Use one of the following ways:

- Move the cursor to the desired option by using the **↑** or **↓** key, and press the **ENTER** key.
- Enter the desired option number by using a numeric key and press the **ENTER** key.

NOTE When you want to enter the REG mode, simply press the **CANCEL** key.

3

Prior to Making Entries

Preparations for Entries

■ Receipt paper roll

If the receipt paper roll is not set in the machine or it is getting low, install a new one according to section “Replacing the Paper Rolls” under “Operator Maintenance.”

■ Receipt ON/OFF function

You can disable receipt printing in the REG mode to save paper using the receipt function.


Press the **[FUNC MENU]** key. Select “1 RCP SW.” and press the **[ENTER]** key. Select “OFF” to disable receipt printing and press the **[ENTER]** key. When the function is in the OFF status, the receipt off indicator “R” is highlighted.

NOTE Your register will print reports regardless of the receipt state. This means that the receipt roll must be installed even when the receipt state is “OFF”.

■ Clerk assignment

Prior to any item entries, a clerk must enter his/her clerk code into the register.

To sign on:




To sign off:



NOTE Your register can provide the clerk + cashier system instead of current system (clerk only system). If you want to change the system, please consult your authorized SHARP dealer.

Cashier assignment (Clerk + cashier system)

To sign on:



To sign off:




NOTE Your register allows to connect a contactless clerk key system. If you want to use this system, please contact your authorized SHARP dealer.

Error Warning


In the following examples, your register will go into an error state accompanied with a warning beep and the error message on the display. Clear the error state by pressing the **CL** key and then take the proper action to remedy the problem.

- When you exceed a 32-digit number (entry limit overflow):
Cancel the entry and reenter a correct number.
- When you make an error in key operation:
Clear the error and try the entry again.
- When you make an entry beyond a programmed amount entry limit:
Check to see if the entered amount is correct. If it is correct, it can be rung up in the MGR mode.
Contact your manager.
- When an including-tax subtotal exceeds eight digits:
Clear the error message by pressing the **CL** key and then press a media key to finalize the transaction.


Item Selection from the Menu

Your register allows you to select functions from a menu. For example, if you want to enter an item for check 1 sale, select the option "CHECK" from the check menu instead of pressing the  key. Each menu can be opened as follows:


• Cash menu*

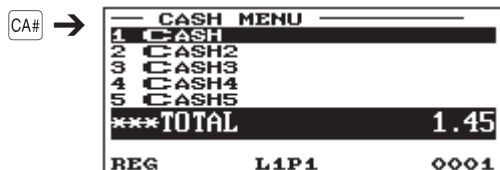


• Percent menu

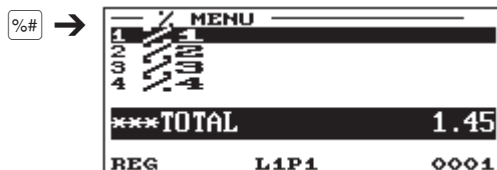

• Check menu*

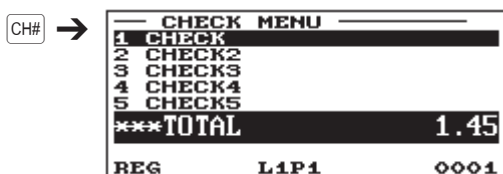

• Discount menu

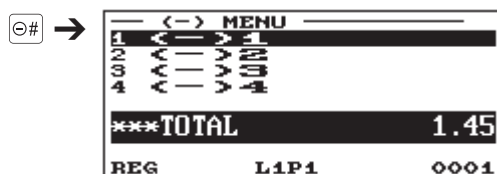


• Credit menu*




CREDIT6 through 9 are also available in this menu.

• Function menu

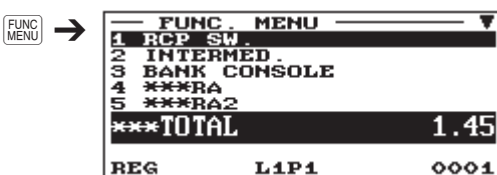

PO, PO2, NO SALE are also available in this menu.

• Exchange menu*

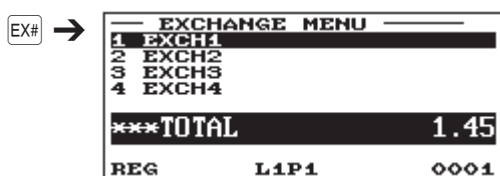


• Payment menu







* These menus can be also opened by selecting the corresponding menu from the payment menu.

Procedure

Press the corresponding menu key (ex. ). The menu list is displayed.

Use one of the following ways:

- Move the cursor to the desired option by using the  or  key, and press the  key.
- Enter the desired option number by using a numeric key and press the  key.

For menus except Function menu and Payment menu, the following procedure can be also used.

Press a menu number key first, and then press a menu key.

Example) To select CREDIT2, press the  key (numeric key) and then press the  key.

Starting Cash Memory Entry

If you enter the amount of currency for the starting amount in the drawer before entry operations, you can separate that amount from the sales amount when reports are generated.

Your register can be programmed to enforce the entry of starting cash into memory.

Procedure

1. Press the **MODE** key.
2. Select "1 OPXZ MODE" and press the **ENTER** key.
3. Select the desired option "3 SCM(+)" or "4 SCM(-)" by using the **↓** key and press the **ENTER** key.

— SCM(+)	
AMOUNT	0.00
OPXZ	0001

Enter the amount for domestic currency by using the numeric keys and press the **ENTER** key.

CLK#0001	CLERK0001	*0.00
SCM(+)		*100.00
SCM TTL		*100.00

4

Entries

For ER-A421, please use the PLU /SUB key instead of the PLU /EAN key.

Some entries described in the following sections require optional keys (AMT key for example). When you need optional keys for these entries, consult your authorized SHARP dealer.

Item Entries


■ Single item entries

Department entries (direct department entries)

Enter a unit price and press a department key. If you use a programmed unit price, press a department key only.

Procedure

When using a programmed unit price



NOTE


When those departments for which the unit price has been programmed as zero (0) are entered, only the sales quantity is added.

Department entries (indirect department entries)

The register provides a maximum of 99 departments for a merchandise classification. Group attributes, such as taxable status, are applied to items when they are entered to the departments.

Procedure

When using a programmed unit price



NOTE

*You can directly enter the code no. of the department using the numeric key.
For the code no. exceeding the figure on the keyboard (21 and above for ER-A411, 7 and above for ER-A421), use this function.*

Example**Key operation****Print**1200 520

1x 12.00 *12.00

DPT.06

1x 7.10 *7.10

DPT.05


1x 5.20 *5.20

DPT.03

1x 6.80 *6.80

DPT.04

CASH *31.10


PLU/Subdepartment (open PLU) entries (indirect PLU entries)Enter a PLU code and press the key.**Procedure**

* Less than the programmed upper limit amounts

NOTE When those PLUs for which the unit price has been programmed as zero (0) are entered, only the sales quantity is added.

PLU/Subdepartment (open PLU) entries (direct PLU entries)Use direct PLU keys such as and for PLU/subdepartment entries.


- NOTE**
- On ER-A411, the direct key programming enables the use of direct PLU keys (see page 137 for details), and the normal method is available as default.
 - On ER-A421, direct PLU keys are included in the standard keyboard, and the FF method is available as default.

Procedure**Normal method**In the normal method, the use of key is not required for unit price entry.

* Less than the programmed upper limit amounts

NOTE To use the normal method on ER-A421, consult your authorized SHARP dealer.

FF method (for speedy entries in the fast food restaurants)



* Less than the programmed upper limit amounts

NOTE

- When a direct PLU key is pressed after a numeric entry (without pressing the **AMT** key), the numeric entry is registered as q'ty for the PLU.
- To use the FF method on ER-A411, consult your authorized SHARP dealer.

Example

Key operation


1200 **AMT** 16 **PLU / EAN**
 8 **PLU / EAN**
TL/NS

Print

1x 5.10	*5.10
PLU00002	
1x 12.00	*12.00
PLU00016	
1x 2.10	*2.10
PLU00008	
CASH	*19.20

EAN entries

Procedure



* After an EAN entry, you may be requested to enter a unit price with the display "UNDEFINED CODE" and beep sound. In this case, follow the steps below (EAN learning function):

1. Enter the unit price and press the **ENTER** key.
2. Enter the department code and press the **ENTER** key.
3. Select the delete type and press the **ENTER** key.

Example

Key operation

5012345678900 **PLU / EAN**
TL/NS

Print

1x 3.10	*3.10
Item-A	
CASH	*3.10

Repeat entries

You can use this function for entering a sale of two or more the same items.

NOTE You can use the **+** key (optional) to repeat entry instead of department, **DEPT#**, direct PLU or **PLU/EAN** key.

Example	Key operation	Print
Repeated department entry (direct)	200 2 2 2	3x 2.00 *6.00 DPT. 02
Repeated department entry (indirect)	680 AMT 4 DEPT# DEPT#	2x 6.80 *13.60 DPT. 04
Repeated PLU entry (indirect)	10 PLU/EAN PLU/EAN PLU/EAN	3x 5.10 *15.30 PLU00010
Repeated PLU entry (direct)	5 5	2x 5.60 *11.20 PLU00005
Repeated EAN entry	5012345678900 PLU/EAN PLU/EAN	2x 3.10 *6.20 Item-A
Repeated department entry (direct) using the repeat key	600 2 + + TL/NS	3x 6.00 *18.00 DPT. 02
		CASH *70.30

■ Multiplication entries


Use this feature when you need to enter two or more the same items.

This feature helps you when you sell a large quantity of items or need to enter quantities that contain decimals.


Procedure

Normal method


- In case of dept. entry

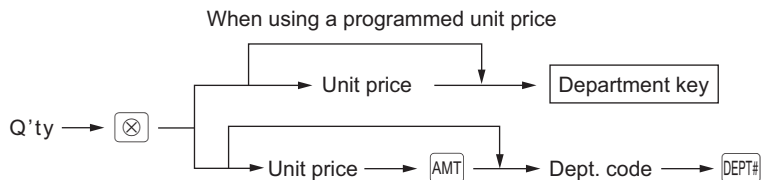

- In case of PLU/subdept. entry

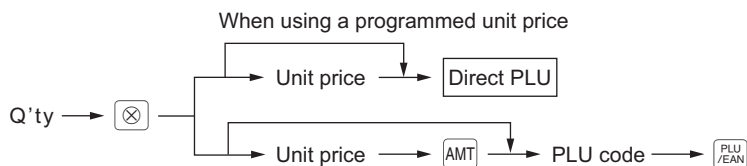


- In case of EAN entry

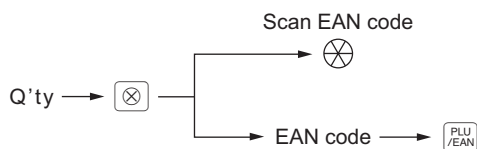

FF method (for direct PLU entries)

- In case of PLU type (preset) or PLU/subdept. type (preset and open)



- In case of subdept. type (open only)



- NOTE**
- After an EAN entry, you may be requested to enter a unit price with the display “UNDEFINED CODE” and beep sound. In this case, enter the unit price and press the **ENTER** key, enter the department code and press the **ENTER** key, and select the delete type with the **ENTER** key (EAN learning function).
 - Q'ty: Up to four-digit integer + three-digit decimal
 - Unit price: Less than a programmed upper limit
 - Q'ty x unit price: Up to eight digits
 - On ER-A421, when the multiplication entry is made for the PLU with preset base q'ty, it is automatically registered as a split-pricing entry.

Example

Key operation	Print
7 . 5 ⊗	7.500x 1.65 *12.38
165 2 ⊗	DPT.02
2 ⊗	2x 2.50 *5.00
250 AMT	DPT.05
5 DEPT#	15x 1.20 *18.00
15 ⊗	PLU00008
8 PLU / EAN	8.250x 5.60 *46.20
8 . 25 ⊗	PLU00005
5	3x 1.00 *3.00
3 ⊗	PLU00060
100 AMT	5x 3.10 *15.50
60 PLU / EAN	Item-A
5 ⊗	
5012345678900 PLU / EAN	CASH *100.08
TL/NS	

■ Split-pricing entries


You will use this function when your customer wants to purchase more or less than the base quantity of a loose item.

NOTE To use this function on ER-A411, consult your authorized SHARP dealer.


Procedure

Normal method


- In case of dept. entry

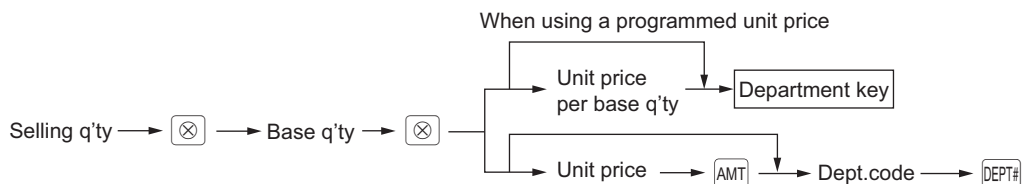

- In case of PLU/subdept. entry

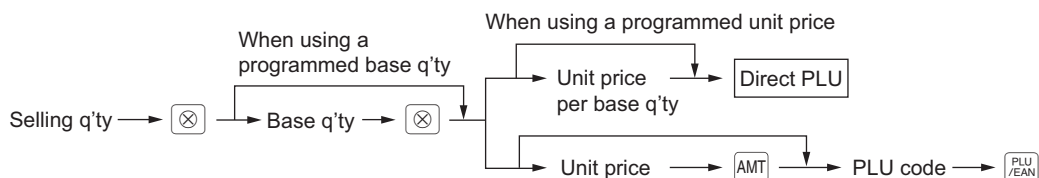


- In case of EAN entry

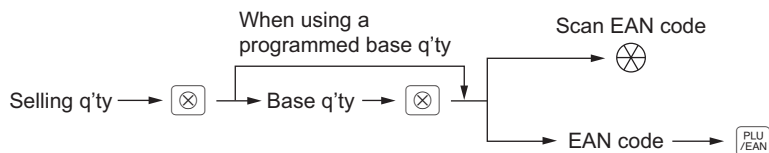


FF method (for direct PLU entries)

- In case of PLU type (preset) or PLU/subdept. type (preset and open)



- In case of subdept. type (open only)



NOTE

- After an EAN entry, you may be requested to enter a unit price with the display “UNDEFINED CODE” and beep sound. In this case, enter the unit price and press the **ENTER** key, enter the department code and press the **ENTER** key, and select the delete type with the **ENTER** key (EAN learning function).
- Selling quantity: Up to four-digit integer + three-digit decimal
- Base quantity: Up to two digits (integer)

Example

Key operation	Print
7 ⊗ 10 ⊗	7x 10/ 6.00 *4.20
600 2	DPT. 02
8 ⊗ 5 ⊗	8x 5/ 1.50 *2.40
35 PLU/EAN	PLU00035
5 ⊗ 6 ⊗	5x 6/ 3.60 *3.00
5045678912304 PLU/EAN	Item-C
TL/NS	CASH *9.60


■ Successive multiplication entries

This function is practical for example when you enter a sale of items sold by area (square meter).


NOTE To use this function on your register, consult your authorized SHARP dealer.

Procedure

- In case of dept. entry

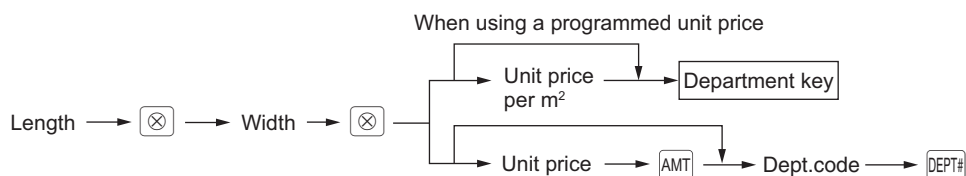

- In case of PLU/subdept. entry

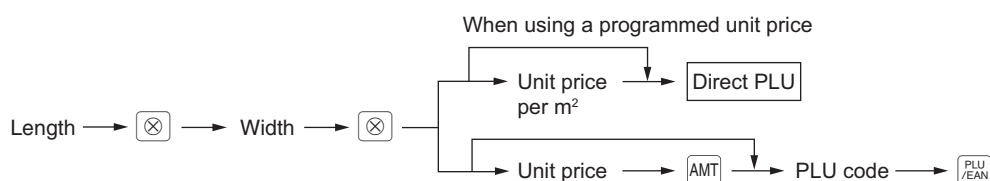



















- In case of EAN entry



- NOTE**
- After an EAN entry, you may be requested to enter a unit price with the display “UNDEFINED CODE” and beep sound. In this case, enter the unit price and press the **ENTER** key, enter the department code and press the **ENTER** key, and select the delete type with the **ENTER** key (EAN learning function).
 - Length or width: up to seven digits (4-digit integer + 3-digit decimal)
 - Unit price: less than a programmed upper limit
 - Length x Width x Unit price: up to eight digits

Example

Key operation		Print	
3		4	
		400	
1		5	
2		5	
		8	
1		75	
1		75	
		600	
		3	
4		5	
5045678912304			
			

3x 4x 4.00	*48.00
DPT.02	
1.500x 2.500x 6.00	*22.50
PLU00008	
1.750x 1.750x 6.00	*18.38
PLU00003	
4x 5x 3.60	*72.00
Item-C	
CASH	*160.88

3x 4x 4.00	*48.00
DPT.02	
1.500x 2.500x 6.00	*22.50
PLU00008	
1.750x 1.750x 6.00	*18.38
PLU00003	
4x 5x 3.60	*72.00
Item-C	
CASH	*160.88

■ Single item cash sale (SICS)/single item finalize (SIF) entries

SICS entries

- This function is useful when a sale is for only one item and is for cash; such as a pack of cigarettes. This function is applicable only to those departments that have been set for SICS or to their associated PLUs, subdepartments or EANs.
- The transaction is finalized and the drawer opens as soon as you press the department key, DEPT# key, direct PLU/EAN key.

Example

Key operation	Print
For finishing 250 the transaction → 3	<div style="border: 1px solid black; padding: 10px;"> <div>1x 2.50 *2.50</div> <div>DPT. 03</div> <div style="margin-top: 10px;">CASH *2. 50</div> </div>

NOTE If an entry to a department, PLU/subdepartment or EAN set for SICS follows the ones to departments, PLUs/subdepartments or EANs not set for SICS, it does not finalize and results in a normal sale.

SIF entries

- If an entry to a department, PLU/subdepartment or EAN set for SIF follows the ones to departments, PLUs/subdepartments or EANs not set for SIF, the transaction is finalized immediately as a cash sale.
- Like the SICS function, this function is available for single-item cash settlement.

Example

Key operation	Print
<div style="margin-left: 100px;">400 2</div> <div style="margin-left: 100px;">600</div> <div>For finishing → 3 the transaction</div>	<div style="border: 1px solid black; padding: 10px;"> <div>1x 4.00 *4.00</div> <div>DPT. 02</div> <div>1x 6.00 *6.00</div> <div>DPT. 03</div> <div style="margin-top: 10px;">CASH *10. 00</div> </div>

Special Entries for PLU/EAN

■ Promotion function

You have a choice of either global or individual type for promotion entry.

You also need to select a promotion type from the following:

- Amount discount: discounts the programmed amount.
- Percent discount: discounts the amount at the programmed percent rate.
- Give free item: offers the programmed objected item for free.

NOTE For EAN item entry, you cannot enter NON-PLU type EAN code and press code.

Global type

This function is convenient for matching several PLU/EAN items and selling them in a lump (e.g. value meal, etc.). Operation is the same as for normal PLU/EAN. The promotion table consists of the text for the table, a maximum of 10 objected items (selected from PLU/EAN), trip level (the number of entries to be satisfied), promotion type and promotion detail. The promotion detail depends on the promotion type. In the example below, amount discount is used as the promotion type.

The programmed promotion entry will be made under the following condition:

- The total quantity of the objected items meet the trip level programmed in the promotion type.

Objected items of table no. 1: Item-A (*2.30), Item-B (*3.10), Item-C (*2.50)

Trip level: 3

Promotion type: Amount discount





Promotion detail: Discount amount (1.00)

<Sale 1>		<Sale 2>	
Item-A	*2.30	Item-C	*2.50
Item-B	*3.10	Item-C	*2.50
Item-C	*2.50	Item-C	*2.50
<hr/>		<hr/>	
Subtotal	*7.90	Subtotal	*7.50
Discount	-1.00	Discount	-1.00
<hr/>		<hr/>	
Total	*6.90	Total	*6.50

Example

In the case of <Sale 1> above

Key operation

Treated as *2.30 item → 40 
 Treated as *3.10 item → 41 
 Treated as *2.50 item → 42 


Print

1x 2.30		*2.30	
PLU00040			
1x 3.10		*3.10	
PLU00041			
1x 2.50		*2.50	
PLU00042			
Promo A	1Q	-1.00	Promotion discount
CASH		*6.90	

Individual type

This function is convenient for matching several PLU/EAN items and selling them in a lump (e.g. value meal etc.). Operation is the same as for normal PLU/EAN. The promotion table consists of the text for the table, a maximum of 10 objected items (selected from PLU/EAN), trip levels (the number of entries to be satisfied) for each item, promotion type and promotion detail. The promotion detail depends on the promotion type. In the example below, percent discount is used as the promotion type.

The programmed promotion entry will be made under the following condition:

- The quantities of each of the objected items meet the corresponding trip levels programmed in the promotion table.

Objected items of table no. 2: Item-A (*3.00), Item-B (*2.50), Item-C (*2.10)

Trip levels for each item: Item-A (1), Item-B (1), Item-C (2)

Promotion type: Percent discount






Promotion detail: Percent rate (40.00%)

<Sale 1>		<Sale 2>		
Item-A	*3.00	Item-A	*3.00	
Item-B	*2.50	Item-A	*3.00	
Item-C	*2.10	Item-B	*2.50	
Item-C	*2.10	Item-C	*2.10	
Subtotal	*9.70	Subtotal	*10.60	Discount is not applied.
Discount	-3.88	Discount	-0.00	(Q'ty of Item-C is less than the trip level.)
Total	*5.82	Total	*10.60	

Example

In the case of <Sale 1> above

Key operation

Treated as *3.00 item → 40 
 Treated as *2.50 item → 41 
 Treated as *2.10 item → 42 
 Treated as *2.10 item → 42 


Print

1x 3.00		*3.00	
PLU00040			
1x 2.50		*2.50	
PLU00041			
2x 2.10		*4.20	
PLU00042			
Promo B	1Q	-3.88	Promotion discount
CASH		*5.82	

Free product item

When the promotion way is programmed as “FREE ITEM”, the programmed free item will be entered automatically.

Objected items of table no. 3: Item-A (*3.00), Item-B (*2.50), Item-C (*2.10)

Trip levels for each item: Item-A (1), Item-B (1), Item-C (2)

Promotion way: Free item

Free item: Item-D (*1.20)

<Sale 1>	
Item-A	*3.00
Item-B	*2.50
Item-C	*2.10
Item-C	*2.10
<hr/>	
Item-D (free item product)	*1.20
Discount	-1.20
<hr/>	
Total	*9.70

Example

In the case of <Sale 1> above

Key operation

Treated as *3.00 item → 40
 Treated as *2.50 item → 41
 Treated as *2.10 item → 42
 Treated as *2.10 item → 42

Print

1x 3.00	*3.00	
PLU00040		
1x 2.50	*2.50	
PLU00041		
2x 2.10	*4.20	
PLU00042		
1x 1.20	*1.20	Free item
PLU00005		
Promo C	1Q	-1.20
<hr/>		
CASH	*9.70	

NOTE

When the payment operation is performed, the confirmation window is displayed for the free product item.

To enter the free item, select “1. YES”. To cancel the free item entry, select “2. NO”.

■ **PLU/EAN link entries**

In case that you register a PLU or EAN that has any PLU linked with the PLU or EAN, the linked PLU(s) are automatically registered together with the leading link PLU or EAN when it is registered. The print format on the receipt depends on the programming (PRINT SELECT in OPTIONAL menu in PGM2 mode) as described below.

Printing detailed information

The description texts and amounts of the leading link PLU/EAN and the linked PLUs are printed individually.

Example

Key operation	Print
21 <div>PLU/EAN</div> <div>TL/NS</div>	<div><div>1x 5.10 *5.10</div><div>PLU00021</div><div>1x 1.10 *1.10</div><div>PLU00022</div><div>1x 1.50 *1.50</div><div>PLU00023</div><div>1x 2.70 *2.70</div><div>PLU00024</div><div>CASH *10.40</div></div> <div>Linked PLUs</div>

Printing leading link PLU/EAN and total sales amount

The description text of the leading link PLU/EAN and the total sales amount of the leading link PLU/EAN and the linked PLUs are printed.

Example

Key operation	Print
21 <div>PLU/EAN</div> <div>TL/NS</div>	<div><div>1x 10.40 *10.40</div><div>PLU00021</div><div>CASH *10.40</div></div>

NOTE If a discount entry is made for a link PLU/EAN entry, the discount amount is calculated based on the total sales amount. The discount itself is given to the leading link PLU/EAN.


■ EAN learning function

When you enter or scan an undefined code, you are required to enter its unit price and the associated department. The code, associated department and unit price entered are stored in the EAN file and used for future EAN sales entries.

NOTE

- When there is no capacity remained in the file, the data is not stored in the file.
- For the text for the EAN code, the text of its associated department is applied.
- You can use the EAN learning function in the training mode. This may be convenient to build up the programming data of EANs by the scanning system.

Procedure

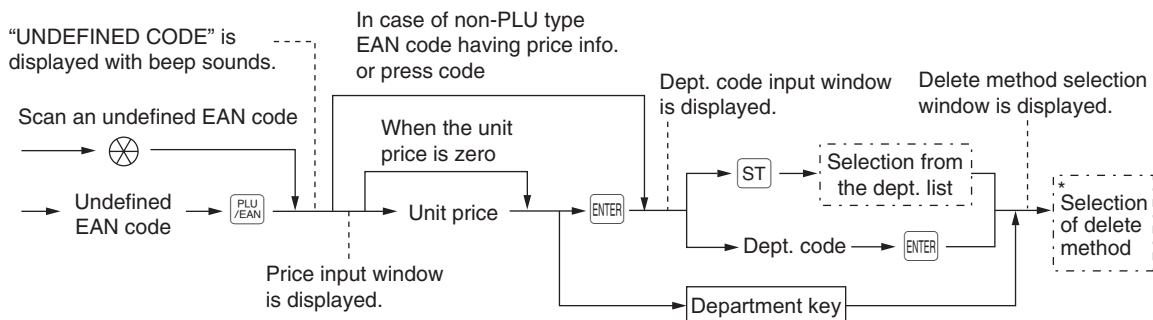

- * Select "1 AUTO DELETE" when you want to exempt the EAN code entered from the non-accessed EAN delete function (deletion by selecting DELETE option from EAN DELETE menu in Z1 mode).

NOTE

- The **TL/NS** key can be used instead of the **ENTER** key.
- To cancel the operation, press the **CANCEL** key. The **CANCEL** key be used at any time during the entry.
- For the repeat entry, use the **PLU / EAN** key or the **+** key (optional).

Example


Key operation	Print
5099887654302 PLU / EAN	<div>1x 7.50 *7.50</div> <div>DPT.05</div> <div>CASH *7.50</div>
750 ENTER	
5 ENTER	
Select "1 AUTO DELETE".	
TL/NS	

■ PLU/EAN information inquiry (view) function

This function displays the information data such as the unit price and food ingredients of a PLU/EAN item (view mode).

NOTE To use this function on ER-A421, consult your authorized SHARP dealer.

Procedure

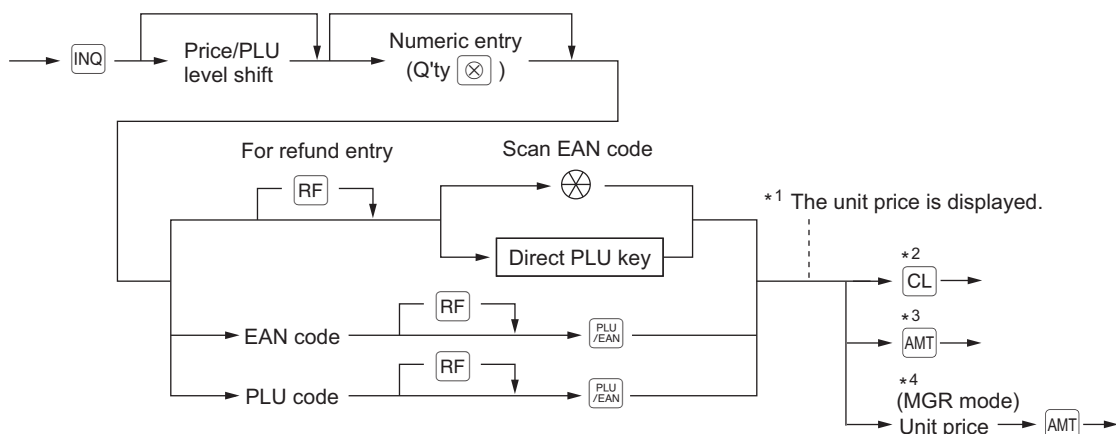

*1: The unit price is displayed when the PLU/EAN code is entered.

*2: Press the **CL** key to cancel the view mode.

*3: Press the **AMT** key to register the displayed PLU/EAN item.

*4: You can change the unit price temporarily in the MGR mode. The unit price programmed in the PGM mode is not changed. You need to make a manager code entry to enter the MGR mode before the transaction.

Example

Key operation	Display
INQ	1x5.10 5.10
20 PLU/EAN	PLU00020
	***TOTAL 0.00
	PRICE INQ.
	REG L1P1 0001

■ EAN price change function

NOTE To use this function, consult your authorized SHARP dealer.

You can use this function when you need to change the unit price or associated department of an EAN item in REG/MGR mode.

There are two methods for change:

- Price change mode

You can change the preset price and/or the associated department of an EAN item without entering PGM mode.


- Changing price during a transaction

When you have found a wrong EAN price and/or associated department upon transaction, you can correct them at the time of transaction. With the entry of new price and/or associated department, the preset price and/or associated department is automatically changed to the new price and/or associated department.


NOTE For the Non-PLU type EAN codes having price info. and press codes, the prices in the codes have the priority over the preset prices. So, for these codes, a changed price is valid only when price change is executed.

Procedure

Price change mode

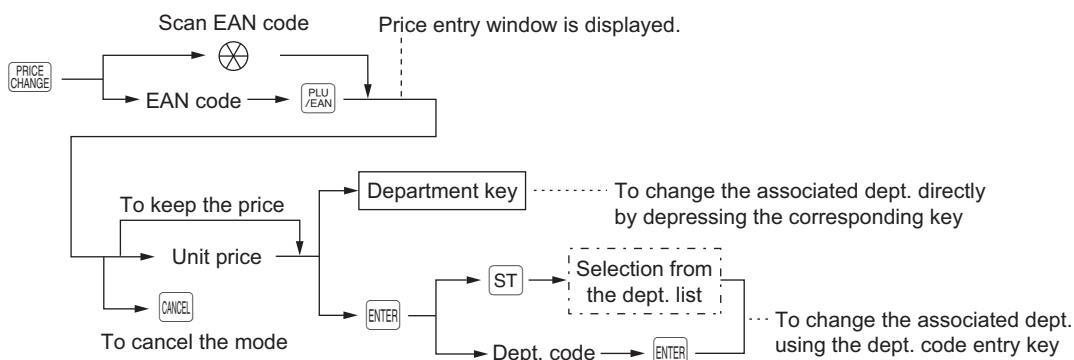

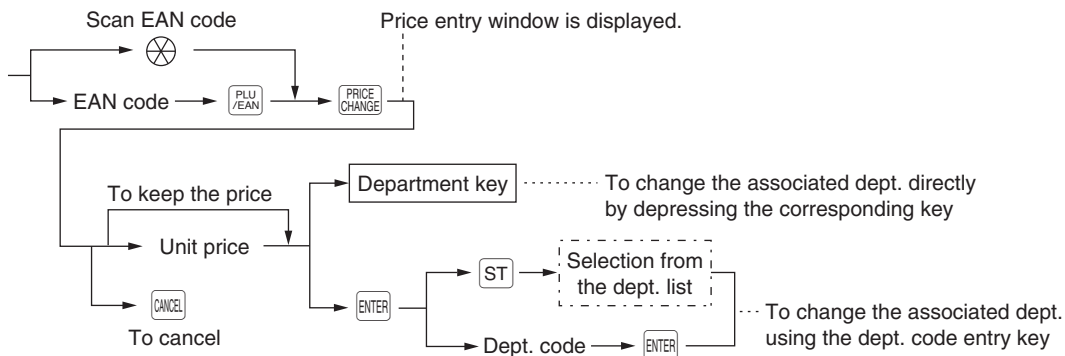


Changing price during a transaction



NOTE The **TL/NS** key can be used instead of the **ENTER** key.





Example**Price change mode****Key operation**

5087654321106 
 600 


Print

PR. CHNG
 DEPT04
 1x 6.00 *6.00
 Item-M




Example**Changing a price during a transaction****Key operation**

5087654321106 

 600 


Print

1x 6.00 *6.00
 Item-M
 CASH *6.00

NOTE

- When an undefined code is entered in the price change mode, the register goes to an error status.
- When you press the  key during a transaction, the EAN entry is voided of the 1st depression of the  key, then you are allowed to enter a correct price and/or associated department.
- When an associated department is changed, the item label for the department will be also changed automatically to the item label of new associated department.
- For the repeat entry, use the  key.

■ Set PLU/EAN entries

Operation is the same as that for normal PLU/EAN entries.

When a set PLU/EAN is entered, the labels of those PLUs tied to the set PLU/EAN are printed automatically.

Example**Key operation**

12 


Print

1x 2.20 *2.20
 PLU00012
 PLU00015
 PLU00016
 CASH *2.20

Tied
PLUs

■ PLU level shift (for direct PLUs)

NOTE To use this function on ER-A411, consult your authorized SHARP dealer.

This shift can double or triple the number of direct PLUs on your register without adding additional direct PLU keys. You can use direct PLUs in three levels by utilizing the **LEVEL #** key or PLU level shift keys **L1** through **L3**. Level key shifts the PLU level from the other two to the required level. (The normal level is the level 1.) You must program your machine in the PGM2 mode to select one of the two PLU level shift modes — automatic return mode* and lock shift mode** — and decide whether to allow PLU level shift in both the REG and MGR modes or in the MGR mode alone.

* The automatic return mode automatically shifts the PLU level back to level 1 after pressing a direct PLU key or finalizing each transaction (either can be selected in the PGM2 mode).


** The lock shift mode holds the current PLU level until depression of a PLU level shift key.

Automatic return mode (for PLU levels)


If your register has been programmed for PLU level in the automatic return mode, press a desired PLU level shift key before a numeric entry.

Procedure

(Returning every item entry) n: PLU shift no. (1 through 3)



(Returning every transaction)




NOTE When you use the FF method, you need not press the **⊗** key for multiplication entries.

Lock shift mode (for PLU levels)

If your register has been programmed for PLU level in the lock shift mode, press a desired PLU level shift key before a numeric entry.

Procedure

n: PLU shift no. (1 through 3)



NOTE When you use the FF method, you need not press the **⊗** key for multiplication entries.

Example

Level 1 : PLU code 1, PLU code 2

Level 2 : PLU code 70, PLU code 65

- When your register has been programmed for the automatic return mode (by one item):

Example

Key operation	Print
<div> <div>1</div> <div>L2<div>1</div></div> <div>2</div> <div>TL/NS</div> </div>	<div> <div>1x 1.20</div> <div>PLU00001</div> <div>1x 5.30</div> <div>PLU00070</div> <div>1x 2.50</div> <div>PLU00002</div> <div>CASH</div> <div>*1.20</div> <div>*5.30</div> <div>*2.50</div> <div>*9.00</div> </div>

- When your register has been programmed for the lock shift mode:

Key operation	Print
<div> <div>L1<div>1</div></div> <div>L2<div>1</div></div> <div>2</div> <div>TL/NS</div> </div>	<div> <div>1x 1.20</div> <div>PLU00001</div> <div>1x 5.30</div> <div>PLU00070</div> <div>1x 6.10</div> <div>PLU00065</div> <div>CASH</div> <div>*1.20</div> <div>*5.30</div> <div>*6.10</div> <div>*12.60</div> </div>

■ Price level shift

Three different price levels can be programmed for each PLU.

The price levels can be changed for PLU registrations.

You can shift the PLU price level (level 1 through 3) by utilizing the price level shift key (or through).

You must program a price level shift mode (i.e. automatic return mode* or lock shift mode**) and the operating mode to be used for the price level shift (i.e. both REG/MGR modes or MGR mode alone).

* The automatic return mode automatically shifts the PLU price level back to level 1 after a PLU shift entry.

You can select whether the price level should return each time you enter one item or each time you finalize one transaction (either can be selected in the PGM2 mode).

** The lock shift mode holds the current PLU price level until pressing the price level shift key.


NOTE To use this function on ER-A411, consult your authorized SHARP dealer.

Automatic return mode (for price level)


If your register has been programmed for the price level shift in the automatic return mode, press the price level shift key before a numeric entry.

Procedure

(each item) n: price level number (1 through 3)

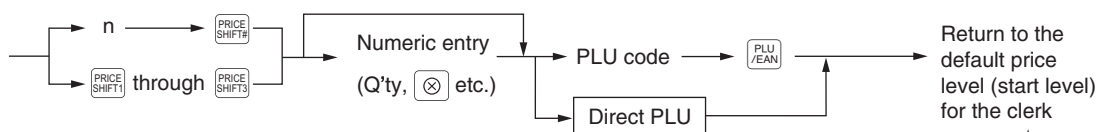

(each transaction) n: price level number (1 through 3)

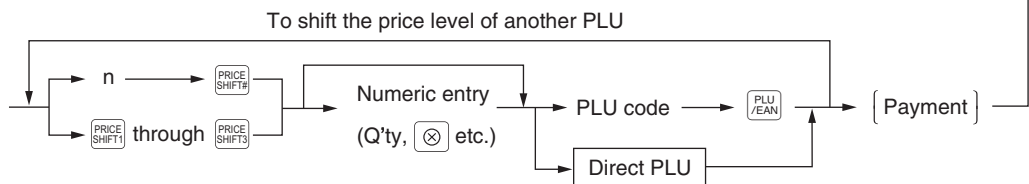


Lock shift mode (for price level)

If your register has been programmed for the price level shift in the lock shift mode, press the price level shift key before a numeric entry.

Procedure

n: price level number (1 through 3)

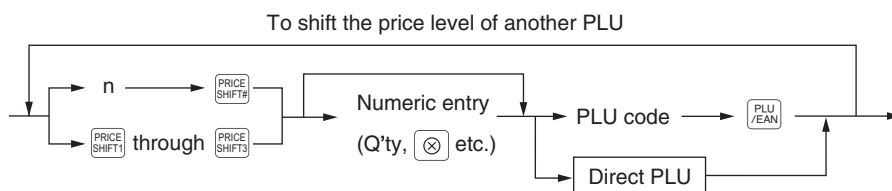






Example






PLU price level 1: PLU code 1 (*1.91), PLU code 2 (*0.79)

PLU price level 2: PLU code 1 (*2.00), PLU code 2 (*0.99)

- When your register has been programmed for the automatic return mode (by one item):

Key operation		Print	
	1 		
2 	1 	1x 1.91	*1.91
		PLU00001	
	2 	1x 2.00	*2.00
		PLU00001	
		1x 0.79	*0.79
		PLU00002	
		CASH	*4.70

- When your register has been programmed for the lock shift mode:

Key operation		Print	
	1 		
2 	1 	1x 1.91	*1.91
		PLU00001	
	2 	1x 2.00	*2.00
		PLU00001	
		1x 0.99	*0.99
		PLU00002	
		CASH	*4.90

■ Condiment entries (for PLU)

Your register may be programmed for prompting condiment and preparatory instructions for a menu-item PLU.

NOTE To use this function on ER-A411, consult your authorized SHARP dealer.

Example:

When you enter a menu-item PLU, a prompting message such as "HOW COOK?" appears with the "Following PLUs" on the operator display. You must specify one of the "Following PLUs" such as "without mustard" to meet a special order of the guest. In an example of the condiment table shown below, it is assumed that the condiment table no.1 is assigned to PLU code 21 (programmed text "STEAK") and table no. 4 is assigned to table no. 1 as the next table no.

When you enter the PLU code 21, the message "HOW COOK?" will appear to prompt you to specify one of "RARE," "MED.RARE," and "WELLDONE." If the guest chooses "RARE," select it.

Then the next message "POTATO?" will appear on the operator display to prompt you to specify one of "P.CHIPS," "MASHED.P," and "BAKED.P." If the guest chooses "MASHED.P", select it.

Then press the **TL/NS** key to end this entry.

Here is an example of how to perform a condiment entry when your condiment table is as shown below.

Table number	PLU codes for condiment entry (programmed text, price)				Next table no.
1	(HOW COOK?)	23 (RARE 0.00)	25 (MED.RARE 0.00)	27 (WELLDONE 0.00)	4
4	(POTATO?)	33 (P. CHIPS 0.60)	37 (MASHED.P 0.60)	38 (BAKED.P 0.50)	—

Example

Key operation

21 **PLU/EAN**
Select "RARE"

Select "MASHED.P"

Display

```

HOW COOK?
1 RARE
2 MED. RARE
3 WELLDONE

***TOTAL 21.00
REG L1P1 0001
  
```

```

POTATO?
1 P. CHIPS
2 MASHED. P
3 BAKED. P

***TOTAL 21.00
REG L1P1 0001
  
```

NOTE

- When the condiment entry is programmed to be compulsory, your register will continue to operate for the condiment entry until you finish the entire condiment entry programmed for the PLU. During the condiment entry, if you enter a normal PLU, which is not in the condiment table, an error message will appear.
- When the condiment entry is programmed to be non-compulsory, entering a normal PLU cancels the condiment entry.
- When the **C.NEXT** key is pressed, the entry skips to the next table which is programmed.
- When you enter a PLU priced at "0.00," only the text will be printed on the receipt.
- No refund entry is possible for any condiment entries. When you perform a refund entry with a menu-item PLU, the condiment PLUs assigned to the menu-item PLU are automatically registered as a refund entry.
- You may omit the compulsory condiment entry by pressing the **CANCEL** key.
- The last entered menu-item PLU or condiment PLU can be voided by the direct (last item) void function.
- The cursor void entry is allowed for those PLUs that are entered as condiments (menu and condiment).
- The multiplication entry can be made for each condiment item independently. However, sum of the entered quantity per condiment table have to be same or below as menu PLU registration. When no multiplication entry is made, the quantity is decided automatically to reach number of menu PLU registration.
- You can press the **PRICE SHIFT#** key to shift a price level during the condiment PLU entry.

Display of Subtotals

Your register provides the following types of subtotals:

■ Subtotal

Press the **ST** key at any point during a transaction. The sales subtotal including tax will appear in the display.

■ Difference subtotal (Differ ST)

NOTE To use this function, consult your authorized SHARP dealer.

Press the **DIFF ST** key at any point during a transaction. When you press it first, the subtotal of all entries which have been made is displayed and printed. If you press it second, you will get the subtotal of entries which have been made after you got the first subtotal. Taxes are calculated each time you press the **DIFF ST** key.

Example

Key operation	Print
1 PLU /EAN	1x 1.91 *1.91
2 PLU /EAN	PLU00001
DIFF ST	1x 0.79 *0.79
3 PLU /EAN	PLU00002
TL/NS	DIFF ST *2.70
	1x 6.20 *6.20
	PLU00003
	DIFF ST *6.20
	CASH *8.90

(In case of this example, the second difference subtotal is printed by the payment operation.)

Finalization of Transaction

■ Cash tendering

Press the **[ST]** key to get an including-tax subtotal, enter the amount tendered by your customer, then press the **[TL/NS]** key or a cash key (**[CA2]** through **[CA5]**) if it is a cash tender. When the amount tendered is greater than the amount of the sale, your register will show the change due amount and the symbol "CHANGE". Otherwise your register will show the symbol "DUE" and a deficit. Make a correct tender entry.

Example

Key operation


1000 **[ST]**
[TL/NS]

Print

1x 1.20	*1.20
PLU00001	
1x 2.50	*2.50
PLU00002	
***TOTAL	*3.70
CASH	*10.00
CHANGE	*6.30

NOTE

You can also enter a cash tender in the following procedure:

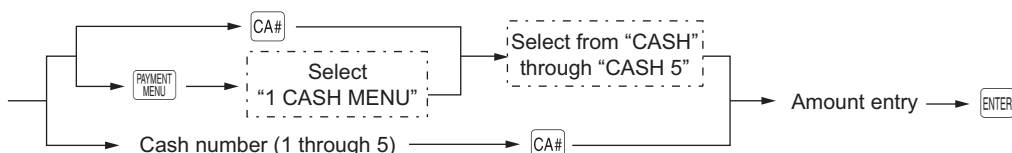

■ Cash sale that does not need any tender entry

Enter items and press the **[TL/NS]** key or a cash key (**[CA2]** through **[CA5]**) if it is a cash sale. Your register will display the total sales amount.

Example

Key operation

6 **[PLU/EAN]**
10 **[PLU/EAN]**
[TL/NS]

Print


1x 3.00	*3.00
PLU00006	
1x 7.15	*7.15
PLU00010	
CASH	*10.15

■ Check tendering

Press the **[ST]** key to get an including-tax subtotal, enter the amount tendered by your customer, then press a check key (**[CHECK]** through **[CH5]**) if it is a check tender. When the amount tendered is greater than the amount of the sale, your register will show the change due amount and the symbol “CHANGE”. Otherwise your register will show the symbol “DUE” and a deficit. Make a correct tender entry.

Example	Key operation	Print
	<div>1000 [ST] [CHECK]</div>	<div>1x 1.20 *1.20 PLU00001 1x 2.50 *2.50 PLU00002 ***TOTAL *3.70 CHECK *10.00 CHANGE *6.30</div>

NOTE You can also enter a check tender in the following procedure:

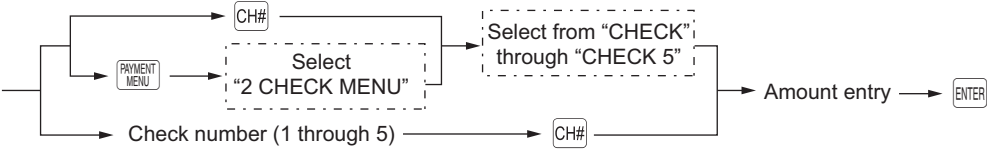

■ Check sale that does not need any tender entry

Enter items and press a check key (**[CHECK]** through **[CH5]**) if it is a check sale. Your register will display the total sales amount.

Example	Key operation	Print
	<div>6 [PLU/EAN] 10 [PLU/EAN] [CHECK]</div>	<div>1x 3.00 *3.00 PLU00006 1x 7.15 *7.15 PLU00010 CHECK *10.15</div>

■ Mixed tendering (check + cash)

Example	Key operation	Print
	<div> <div>ST</div> <div>1000 <div>CHECK</div></div> <div>500 <div>TL/NS</div></div> </div>	<div> <div>1x 5.10 *5.10</div> <div>PLU00010</div> <div>2x 4.80 *9.60</div> <div>PLU00008</div> <div>***TOTAL *14.70</div> <div>CHECK *10.00</div> <div>CASH *5.00</div> <div>CHANGE *0.30</div> </div>

NOTE Press a check key (

CHECK

 through

CH5

) or a credit key (

CR1

 through

CR9

) in place of the

TL/NS

 key when your customer makes payment by checks or by credit account.

■ Credit sale

Enter items and press a credit key (

CR1

 through

CR9

).

Example	Key operation	Print
	<div> <div>6 <div>PLU/EAN</div></div> <div>7 <div>PLU/EAN</div></div> <div>ST</div> <div>CR1</div> </div>	<div> <div>1x 3.00 *3.00</div> <div>PLU00006</div> <div>1x 6.00 *6.00</div> <div>PLU00007</div> <div>CREDIT1 *9.00</div> </div>


- NOTE**
- Amount tendering operations (i.e. change calculations) can be achieved by the credit key (

CR1

 through

CR9

) when a PGM2 mode programming allows them.
 - You can also enter a credit tender in the following procedure:

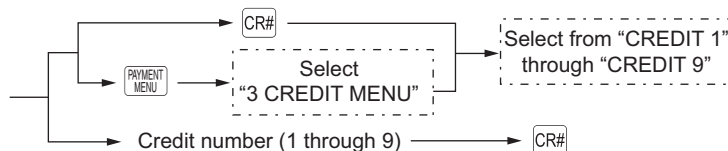

■ Mixed-tender sale (cash or check tendering + credit tendering)

Example	Key operation	Print
	<div> <div>950</div> <div> <div>ST</div> <div>TL/NS</div> <div>CR1</div> </div> </div>	<div> <div>1x 1.20</div> <div>PLU00001</div> <div>1x 2.50</div> <div>PLU00002</div> <div>3x 3.00</div> <div>PLU00003</div> <div>***TOTAL</div> <div>CASH</div> <div>CREDIT1</div> </div> <div> <div>*1.20</div> <div></div> <div>*2.50</div> <div></div> <div>*9.00</div> <div></div> <div>*12.70</div> <div>*9.50</div> <div>*3.20</div> </div>

NOTE Press a check key (☐CHECK through ☐CH5) or a credit key (☐CR1 through ☐CR9) in place of the ☐TL/NS key when your customer makes payment by checks or by credit account.

Computation of VAT (Value Added Tax)/Tax

■ VAT/tax system

The register may be programmed for the following six tax systems by your authorized SHARP dealer.

Automatic VAT 1 through 6 system (Automatic operation method using programmed percentages)

This system, at settlement, calculates VAT for taxable 1, taxable 2, taxable 3, taxable 4, taxable 5, and taxable 6 subtotals by using the corresponding programmed percentages.

Automatic tax 1 through 6 system (Automatic operation method using programmed percentages)

This system, at settlement, calculates taxes for taxable 1, taxable 2, taxable 3, taxable 4, taxable 5, and taxable 6 subtotals by using the corresponding programmed percentages, and also adds the calculated taxes to those subtotals, respectively.

Manual VAT 1 through 6 system (Manual entry method using programmed percentages)

Procedure

→ **ST** → **VAT** →

This system provides the VAT calculation for taxable 1, taxable 2, taxable 3, taxable 4, taxable 5, and taxable 6 subtotals. This calculation is performed using the corresponding programmed percentages when the **VAT** key is pressed just after the **ST** key.

Manual VAT 1 system (Manual entry method for subtotals that uses VAT 1 preset percentages)

Procedure

To use a programmed rate

→ **ST** → VAT rate → **VAT**

This system enables the VAT calculation for the subtotal. This calculation is performed using the VAT 1 preset percentages when “VAT” from the payment menu is selected just after the **ST** key. For this system, the keyed-in tax rate can be used.

Manual tax 1 through 6 system (Manual entry method using programmed percentages)

Procedure

→ **ST** → **VAT** →

This system provides the tax calculation for taxable 1, taxable 2, taxable 3, taxable 4, taxable 5, and taxable 6 subtotals. This calculation is performed using the corresponding programmed percentages when “VAT” from the payment menu is selected just after the **ST** key. After this calculation, you must finalize the transaction.

Automatic VAT 1 through 3 and tax 4 through 6 system

This system enables the calculation in the combination with automatic VAT 1 through 3 and tax 4 through 6. This combination can be any of VAT 1 and tax 2 through 4. The tax amount is calculated automatically with the percentages previously programmed for these taxes.

NOTE To print the VAT/tax assignment on the receipt and bill, consult your authorized SHARP dealer. VAT/tax assignment is printed at the fixed right position of the amount on the receipt and bill as follows:

- VAT1/tax1 —————> A
- VAT2/tax2 —————> B
- VAT3/tax3 —————> C
- VAT4/tax4 —————> D
- VAT5/tax5 —————> E
- VAT6/tax6 —————> F

When the multiple VAT/tax is assigned to a department or a PLU, a smaller number of the VAT/tax will be printed.

Example

Key operation

(When the MANUAL
VAT 1 through 6
system is selected)

8

PLU /EAN

ST

VAT

TL/NS

Print

1x 9.60

PLU00008

SUBTOTAL

TAX1 ST

VAT 1

NET 1

CASH

*9.60 A

*9.60

*9.60

*0.28

*9.32

*9.60

■ VAT shift entries

This feature is intended to shift the tax status of a particular department (or PLU) programmed for taxable 1 or taxable 1 and taxable 3.

- When the VAT shift entry is made for a particular department or PLU programmed for taxable 1, their tax status shifts to taxable 2.
- When this entry is made for a particular department (or PLU) programmed for taxable 1 and taxable 3, the tax status “taxable 1” remains unchanged, but the other, “taxable 3” is ignored.

There are two types of VAT shift entries: VAT shift by transaction and by item.

VAT shift by transaction enables the VAT shift function to be in effect during a transaction. Press the **VAT SF TRANS** key to enter the VAT shift mode at the start of transaction.

VAT shift by item is valid only for one item. Press the **VAT SHIFT** or **VAT SF ITEM** key just before the item entry.

In case of VAT shift by transaction

Example	Key operation	Print
	(When the manual VAT 1 through 6 system is selected) <div> 8 <div> VAT SF TRANS PLU /EAN ST VAT TL/NS </div> </div>	<div> <div> 1x 9.60 PLU00008 SUBTOTAL </div> <div> *9.60 B *9.60 </div> </div> <hr/> <div> <div> TAX2 ST VAT 2 NET 2 </div> <div> *9.60 *0.46 *9.14 </div> </div> <hr/> <div> <div>CASH</div> <div>*9.60</div> </div>

In case of VAT shift by item

Example	Key operation	Print
	(When the automatic VAT 1 through 6 system is selected) <div> 5 <div> PLU /EAN VAT SHIFT PLU /EAN TL/NS </div> </div>	<div> <div> 1x 1.70 PLU00005 1x 1.70 PLU00005 </div> <div> *1.70 A *1.70 B </div> </div> <hr/> <div> <div>CASH</div> <div>*3.40</div> </div>

NOTE

- If you want to achieve the VAT shift at the end of transaction, contact your authorized SHARP dealer.
- You can also perform this function by assigning the clerk to operate in the VAT shift status (PERSONNEL-CLERK programming).

In this case, the entry does not require the use of **VAT SF ITEM** or **VAT SF TRANS** key. VAT shift by transaction will be applied to the entries by the assigned clerks.

Guest Check (GLU)


NOTE To use the functions related to GLU system on ER-A411, consult your authorized SHARP dealer.

■ Guest look up (GLU) system

New guest

Procedure

For automatic GLU code generation

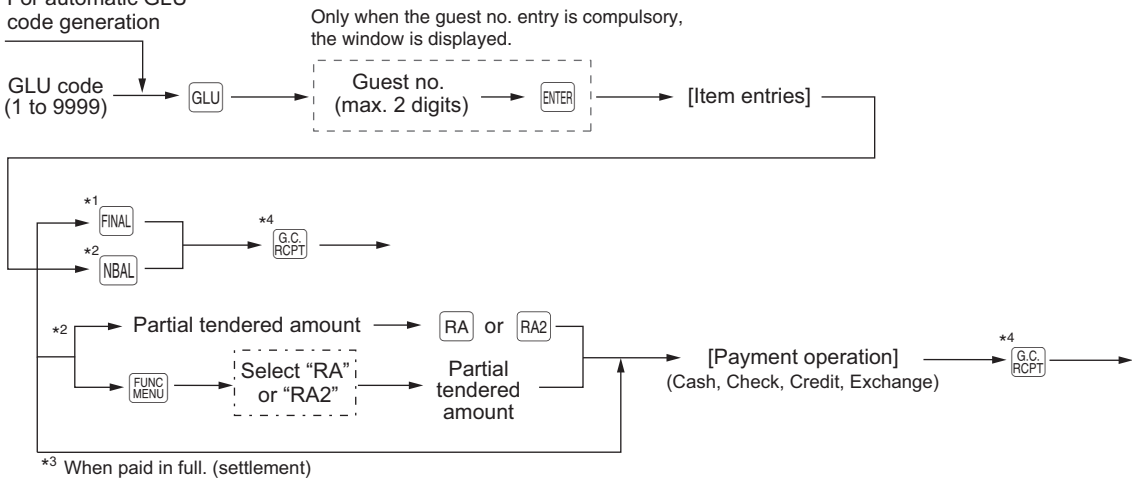

- NOTE**
- A clerk must have been registered before starting GLU entry in case the clerk system or the clerk + cashier system is selected.
 - Your register can be programmed GLU codes in a sequential fashion (automatic GLU code generation). If your register has not been programmed to do so, each GLU code can be entered manually.

*1 You can temporarily finalize a guest check by pressing the **FINAL** key. This prints out a guest check to show the current balance, including tax. The guest check, however, is still "open." This means you can still make additional orders to it. The tax is calculated but is not added to the tax totalizer.

*2 The tax is not calculated.

*3 The tax is calculated and is added to the tax totalizer.

*4 When the **G.C. RCPT** key is pressed for the second time, the guest check will be issued again.

Example

Key operation


1001
 1
 2

Print

GLU#1001	
***PBAL	*0.00
1x 1.91	*1.91
PLU00001	
1x 0.79	*0.79
PLU00002	
***NBAL	*2.70

Additional ordering

Procedure

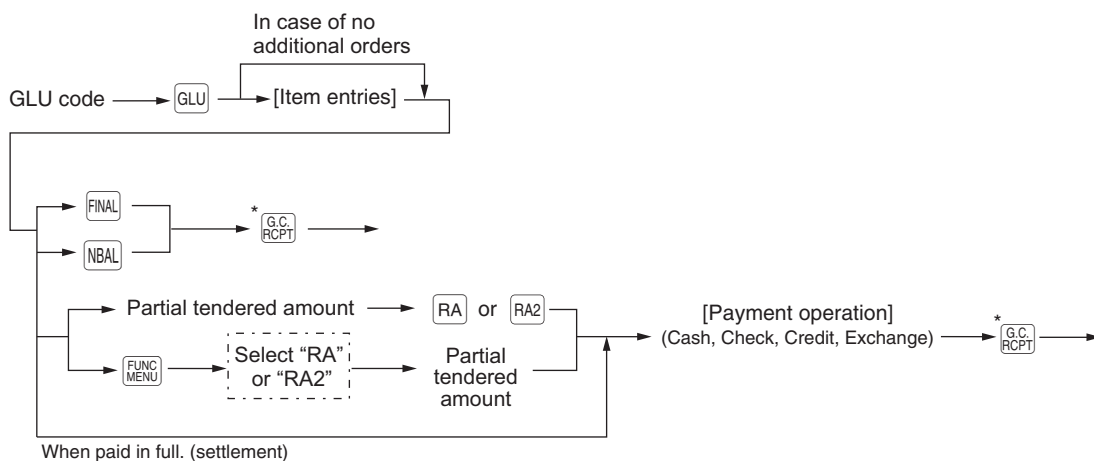

* When the key is pressed for the second time, the guest check will be issued again.

NOTE When the guest no. entry is compulsory, the guest no. can be changed in the following procedure during transaction after the key is pressed.

Guest no. (max. 2 digits) →

Example

Key operation

1001
 7

Print


GLU#1001	
***PBAL	*2.70
1x 2.50	*2.50
PLU00007	
CASH	*5.20

■ Deposit entries

NOTE To use this function, consult your authorized SHARP dealer.

Deposit refers to a prepayment on a guest check. It can be received in cash, by check or credit. You can make a deposit entry only when entering a guest check. It cannot be done during handling of a tendered amount. A received deposit can be refunded by pressing the **DEPO (-)** key. You cannot attempt to refund an amount larger than the deposit balance.

Procedure

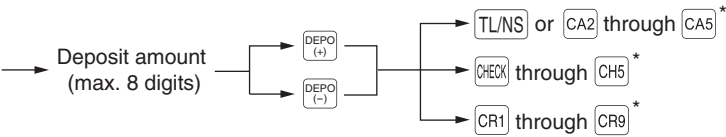

* The entry can also be finalized by using menu keys. For details, see the procedures described on pages 51 through 53.

Example

Key operation	Print
1001 GLU	GLU#1001
5000 DEPO (+)	***PBAL *0.00
TL/NS	CASH
NBAL	DEPOSIT *50.00
	***NBAL -50.00

Key operation	Print
1001 GLU	GLU#1001
5000 DEPO (-)	***PBAL -50.00
TL/NS	CASH
NBAL	DEPO. (-) -50.00
	***NBAL *0.00

■ Bill printing

This function is used for issuing the bill to the guest. Your register can print the bill on the receipt printer.

Procedure



- NOTE**
- This function is available immediately after the finalization of transaction.
 - If the copy function is allowed, you can print the bill copy on receipt only once. If you want to disable the bill copy, contact your authorized SHARP dealer.


Example	Key operation	Print
	<div>G.C. RCPT</div>	<div><div>*BILL*</div><div>1x 10.00 *10.00</div><div>PLU00001</div><div>1x 2.25 *2.25</div><div>PLU00002</div><div>CASH *12.25</div></div>

■ Transferring guest checks out or in (Transfer-in/out)

- NOTE** To use this function, consult your authorized SHARP dealer.

Transferring guest checks out



At the end of a clerk shift or whenever a clerk is relieved, one or more open guest checks can be transferred from the clerk to the open check file until the responsibility for the check(s) is assigned to another clerk. Also, all open guest checks of this clerk can be transferred at one time.

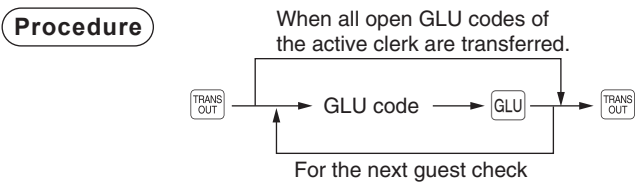

Example	Key operation	Print
	<div>501</div> <div>TRANS OUT</div> <div>GLU</div> <div>TRANS OUT</div>	<div><div>*TRAN. OUT*</div><div>GLU#501</div><div>***PBAL *15.00</div></div>


Transferring guest checks in

When the second clerk is assigned to be responsible for guest checks that have been transferred out:

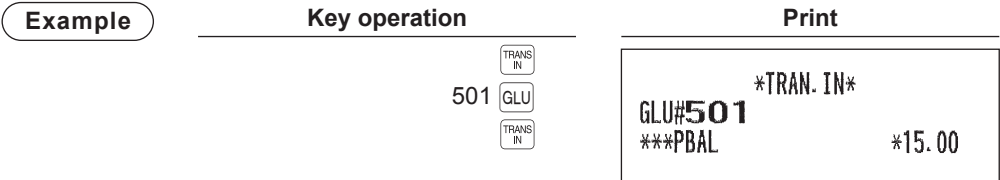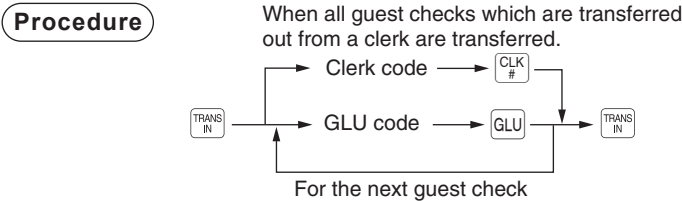


Intermediate GLU reading

This function is used for temporary inspection of the guest check. The details of the guest check can be printed on the receipt.



NOTE This function is available after finishing the guest check entry.

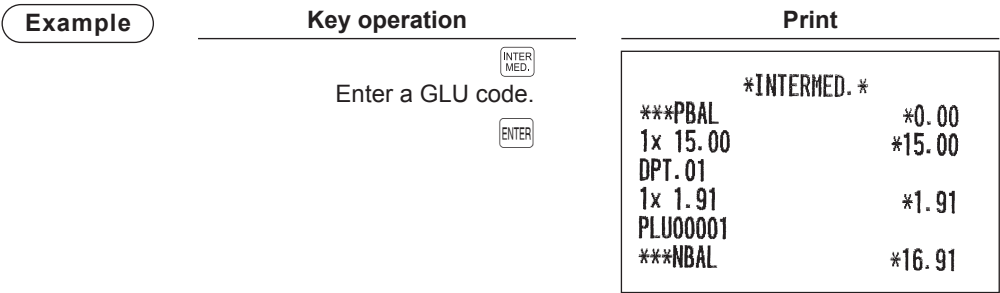


Bill totalizing/bill transfer

NOTE To use this function, consult your authorized SHARP dealer.

Bill totalizing

The bill totalizing function is used to totalize multiple bills when, for example, a particular guest pays not only his or her bill, but also the bills of other guests.

Procedure

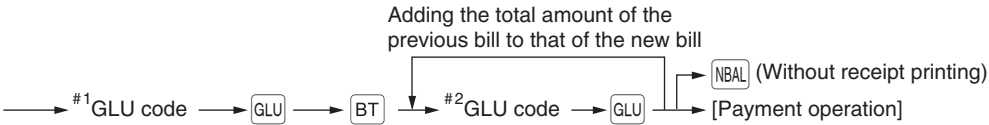

- NOTE**
- #1 bill and #2 bills are merged into one bill. The GLU code on the merged bill is determined by the last entered #2 bill. A maximum of 5 bills is available for #2.
 - The GLU code of #1 must be in use. If the guest check(s) of #1 or #2 has already been handled by another clerk, the guest check(s) must have been made "Transferring out."

Example

Key operation	Print
102 [GLU]	<div> *B. T. * GLU#102 ***PBAL *19.38 GLU#103 ***PBAL *22.57 ----- 1x 15.80 *15.80 DPT. 01 2x 1.79 *3.58 PLU00002 1x 18.70 *18.70 DPT. 01 3x 1.29 *3.87 PLU00003 CASH *41.95 </div>
103 [GLU]	
[TL/NS]	

Bill transfer

This function is used to change the GLU code of a particular bill.

Procedure



- NOTE**
- This function requires that the current GLU code be entered for #1 and a new GLU code be entered for #2.
 - A #1 bill is transferred to a #2 bill. The #1 bill is then cleared and set free.

■ Bill separating


NOTE Bill separating by amount and person is optional functions. To use these functions, consult your authorized SHARP dealer.

This function is used when each guest of a group pays his or her own order. With this function, you can select some items from a guest check and make an entry for the payment. Also, you can transfer the items you have selected to other guest checks.

There are three types of the bill separating functions: bill separating by item, amount and person.

Bill separating by item

Procedure

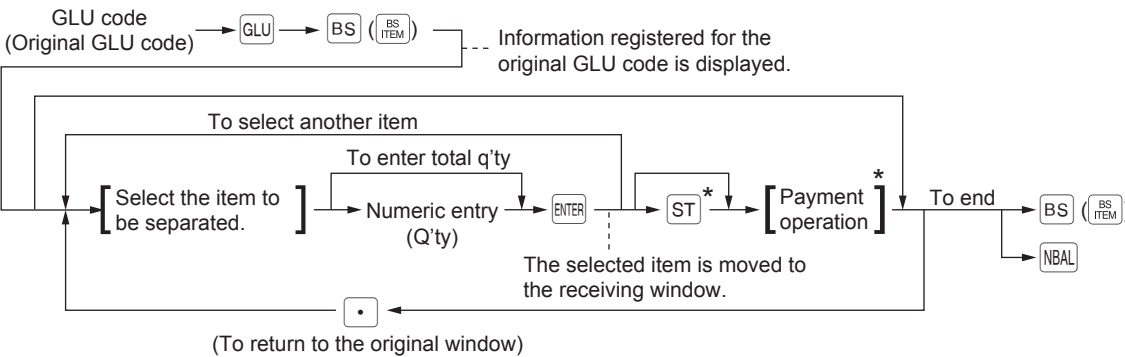

* The payment operation or pressing the **ST** key displays the receiving window.

Example

Key operation

102 **GLU**
BS
 [Select the item.]
ENTER
TL/NS

Display

```

PLU00003
3x1.45      4.35
PLU00001
SELECT or FIN.
BS .ORG#102      0001
  
```

Print


```

GLU#102
      *B. S. *
3x 1.45      *4.35
PLU00001

CASH      *4.35
  
```

Bill separating by amount

Procedure

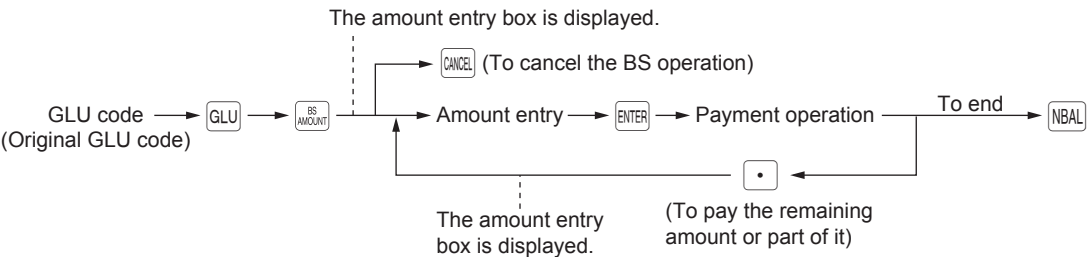


Example

Key operation	Display
103 GLU BS AMOUNT	<div>1x35.00 35.00</div> <div>ENTER AMOUNT</div> <div>PARTIAL PAY</div> <div>***TOTAL 35.00</div> <div>GLU#103 L1P1 0001</div>
2000 ENTER TL/NS	<div>PARTIAL PAY 20.00</div> <div>CASH 20.00</div> <div>***TOTAL 20.00</div> <div>E - 1/NBAL KEY 0001</div>
	<div>Print</div> <div>GLU#103</div> <div>*B. S. *</div> <div>***PBAL *35.00</div> <div>PARTIAL PAY</div> <div>CASH *20.00</div>

Bill separating by person

Procedure

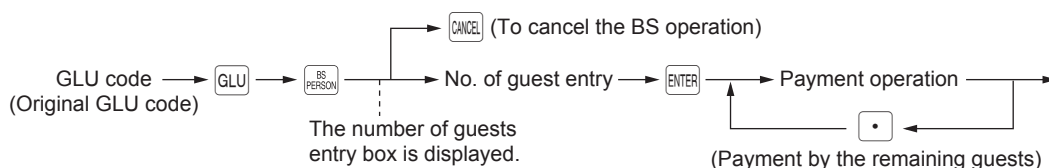

Example

Key operation

104

3

Display

1x75.00	75.00
ENTER # OF GUEST	
PARTIAL PAY	
***TOTAL	75.00
GLU#104	L1P1 0001

PARTIAL PAY	25.00
CASH	25.00
***TOTAL	25.00
Press [.]	0001

Print

GLU#104	*B. S. *
***PBAL	*75.00
PARTIAL PAY	
CASH	*25.00

NOTE

- The items which are refunded or discounted can not be separated.
- You cannot specify the quantity of an item for selection when the stored quantity has decimal fraction.
- When no item is yet selected, the B.S. mode is automatically terminated by pressing the key.
- After performing the BS by amount operation for a bill, you can not execute the BS by item or bill totalizing operation for the bill.

■ Tip-in entries

NOTE To use this function, consult your authorized SHARP dealer.

Your register allows the entry of tips that your guests give to clerks in cash or other media (check or credit). The tip in entry assumes that it is carried out in the following system:

- Tip paid by a guest to a clerk is entered in the register by tip entry, and the restaurant pays the tip amount to the clerk later in cash.
- Tip amount entry to the register is normally performed by a clerk.

The entry is allowed before payment operation is performed. After the tip entry is performed, item entry is not allowed. The transaction operation must be finalized by payment operation. Two types of tip, cash tip and non-cash tip, are not allowed to be mixed in entry during one transaction operation. Tip entry only in either of them is allowed.

Cash tip entry: In a transaction in which cash tip entry is made, when payment operation is started, the process is as follows:

Cash tender (which may be foreign money) is compulsory until total cash tender exceeds or equals to cash tip amount. Then, check (or credit) tender operation is allowed.

Non-cash tip entry: In a transaction in which non-cash tip entry is made, when payment operation is started, the process is as follows:




Check (or credit) tender is compulsory until total check (or credit) tender exceeds or equals to non-cash tip amount. Then, cash tender operation is allowed.

Procedure

Cash tip entry: → Tip amount →  → Payment operation

Non-cash tip entry: → Tip amount →  → Payment operation

Example


Key operation	Print
101 	<div> GLU#101 ***PBAL *82.00 CASH TIP *5.00 CASH *87.00 </div>
500 	
	

■ Tip Paid Entries


This operation is used to distribute tips to respective clerks in cash.

You can make tip paid entries in the MGR mode only. The tips are paid to corresponding clerks according to their portions.

Procedure



Example

Key operation	Print
	<div> 0001 CLERK0001 000000 TIP PAID *8.00 </div>

Auxiliary Entries

■ Percent calculations (premium or discount)

- Your register provides percent calculations for a subtotal or each item entry depending on the programming.
- Percentage: 0.01 to 100.00%

Percent calculation for a subtotal

Example

Key operation		Print	
(When a discount of 10% is programmed for the [%1] key.)			
3	PLU /EAN	1x 3.00	*3.00
2	⊗	PLU00003	
5	PLU /EAN	2x 6.50	*13.00
	ST	PLU00005	
	%1	SUBTOTAL	*16.00
	TL/NS	%1	-10.00% -1.60
		CASH	*14.40


Percent calculation for item entries

Example

Key operation		Print	
(When a premium of 15% is programmed for the [%1] key.)			
6	PLU /EAN	1x 8.00	*8.00
	%1	PLU00006	
30	PLU /EAN	%1	15.00% *1.20
7 • 5	%1	1x 5.00	*5.00
	TL/NS	PLU00030	
		%1	7.50% *0.38
		CASH	*14.58

NOTE

- Availability of item % and/or subtotal % depends on the programming data of %1 through %4.
- You can also enter a percent calculation in the following procedure:

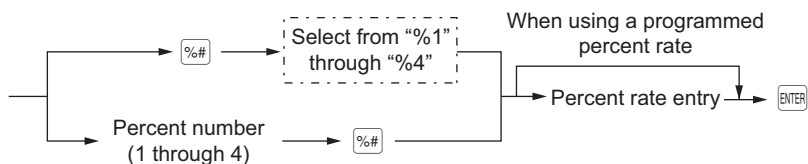

Discount entries

Your register allows you to deduct a certain amount less than a programmed upper limit after the entry of an item or the computation of a subtotal depending on the programming.

Discount for a subtotal

Example


Key operation	Print
6 PLU /EAN	1x 5.75 *5.75
60 PLU /EAN	PLU00006
ST	1x 12.00 *12.00
100 ⊖	PLU00060
TL/NS	(-) 1 -1.00
	CASH *16.75

Discount for item entries

Example

Key operation	Print
7 PLU /EAN	1x 6.00 *6.00
75 ⊖	PLU00007
TL/NS	(-) 1 -0.75
	CASH *5.25

NOTE You can also enter a discount in the following procedure:

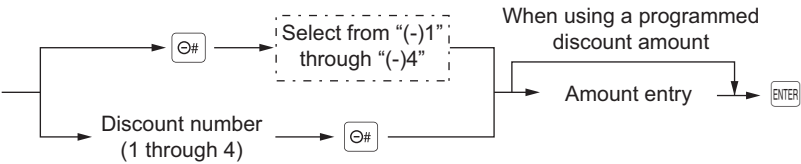

■ Refund entries

For a refund entry, press the **RF** key just before you press a department key, **DEPT#** key, direct PLU key or **PLU/EAN** key or just before you scan an EAN code. The operation before pressing the **RF** key is the same as the one of normal operation. For example, if a refund item is the one entered into a department, enter the amount of the refund, then press the **RF** key and the corresponding department key in this order; if an item entered into a PLU is returned, enter the corresponding PLU code, then press the **RF** and **PLU/EAN** keys; and if a refund item is the one entered into an EAN, press the **RF** key and scan the EAN code.

Example

Key operation	Print
3 RF PLU/EAN	-1x 3.00 R-3.00
7 ⊗	PLU00003
7 RF PLU/EAN	-7x 6.00 R-42.00
TL/NS	PLU00007
	CHANGE *45.00

■ Printing of non-add code numbers

NOTE To use this function on ER-A421, consult your authorized SHARP dealer.

Enter a non-add code number such as a guest code number within a maximum of 16 digits and press the **#** key at any point during the entry of a sale. The non-add code is printed on the receipt.

Example


Key operation	Print
1230 #	#0000000000001230
1 PLU/EAN	1x 10.00 *10.00
CR2	PLU00001
	CREDIT2 *10.00

Payment Treatment

■ Currency exchange

Your register allows payment entries in foreign currency. Press the exchange key (**EX1** through **EX4**) to create a subtotal in foreign currency.

Procedure

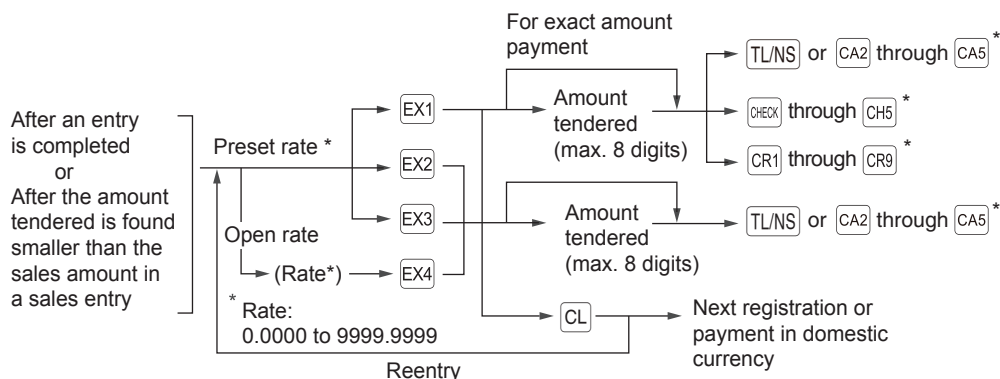

* The entry can also be finalized by using menu keys. For details, see the procedures described on pages 51 through 53.

NOTE

- When the amount tendered is short, its equivalent in deficit is shown in domestic currency.
- Change amount will be displayed in domestic currency.
- Availability of credit and cheque tendering depends on the programming. (Only for the exchange 1)

Example

Preset exchange rate (1.550220) :EX1

Key operation	Print
Currency exchange → EX1	1x 23.00 *23.00 PLU00006
Amount tendered in foreign currency → 12000 TL/NS	1x 46.50 *46.50 PLU00007
	***TOTAL *69.50 EXCH1 1.550220 US \$107.74 CASH US \$120.00 CHANGE *7.90


■ Received-on-account entries

To receive a received-on-account (RA), you can select either of cash only system or mixed tendering system. Select the cash only system when you receive RA by cash only. In the mixed tendering system, you can receive RA by cash, check or credit. In either system, you cannot receive RA in foreign currency. When you want to use the cash only system, contact with your authorized SHARP dealer.


Mixed tendering system

Procedure

Direct key entries

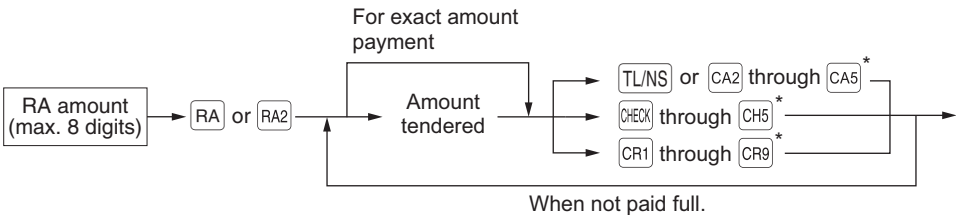

Menu-based entries

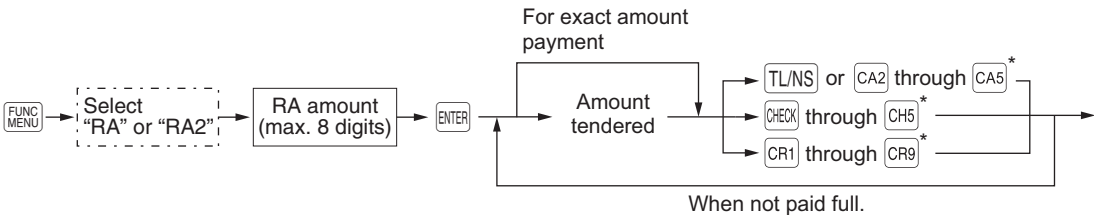

* The entry can also be finalized by using menu keys. For details, see the procedures described on pages 51 through 53.


NOTE Of the CR1 through CR9 keys, you may use only the one that is programmed to be capable of entering amounts tendered.

Example	Key operation	Print
	12345 #	<div>#0000000000012345 ***RA *48.00 CHECK *48.00</div>
	4800 RA	
	CHECK	


Cash only system

Procedure

Direct key entries



Menu-based entries



Example	Key operation	Print
	12345 [#] 4800 [RA]	<div>***RA#00000000000012345 *48.00</div>


■ Paid-out entries

To make a paid-out (PO) entry, you can select either of cash only system or mixed tendering system. Select the cash only system when you make a payment by cash only. In the mixed tendering system, you can make a payment by cash, check or credit. In either system, you must a PO entry only in a transaction. When you want to use the cash only system, contact with your authorized SHARP dealer.


Mixed tendering system

Procedure

Direct key entries

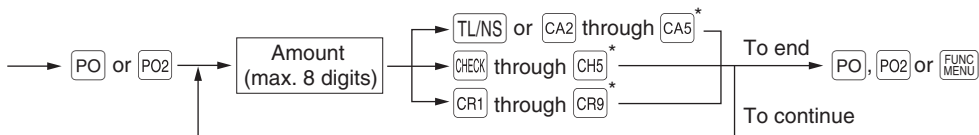

Menu-based entries

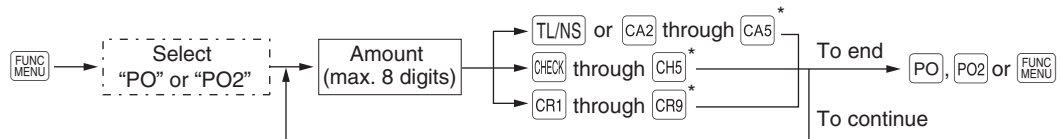

* The entry can also be finalized by using menu keys. For details, see the procedures described on pages 51 through 53.

NOTE Of the [CR1] through [CR9] keys, you may use only the one that is programmed to be capable of entering amounts tendered.

Example	Key operation	Print
	6789 [#] [PO] 3000 [TL/NS] [PO]	<div>***PO#0000000000006789 CASH*30.00 ***PO*30.00</div>

Cash only system

Procedure

Direct key entries



Menu-based entries



Example

Key operation

6789 [#]
3000 [PO]

Print

#0000000000006789
***P0 *30.00

■ No-sale (exchange)

Simply press the [TL/NS] key or the [NO SALE] key (optional) without any entry. The drawer will open and the printer will print "NO SALE" on the receipt. If you let your machine print a non-add code number before pressing the [TL/NS] or [NO SALE] key, a no sale entry is achieved with a non-add code number printed.

Print

NO SALE

NOTE

You can also enter "No-sale" from the function menu. Press the [FUNC MENU] key and select "NO SALE" from the menu.

■ Cash payment transfer

This function is used to change cash sales amount for credit or check sales amount. For example, you can use this function when your guest asks you to credit the payment or to receive payment with check after entering the payment as cash.


Cash payment transfer to check

Procedure

Direct key entries



Menu-based entries

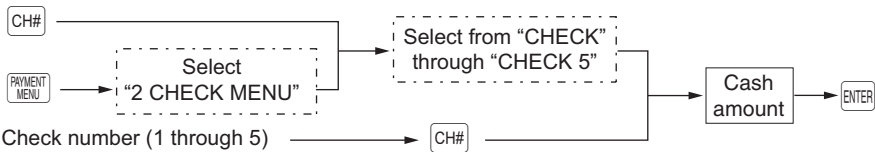

Example	Key operation	Print		
	3000 <input type="button" value="CHECK"/>	<table><tr><td>TRANSFER CHECK</td><td>*30.00</td></tr></table>	TRANSFER CHECK	*30.00
TRANSFER CHECK	*30.00			


Cash payment transfer to credit

Procedure

Direct key entries



Menu-based entries

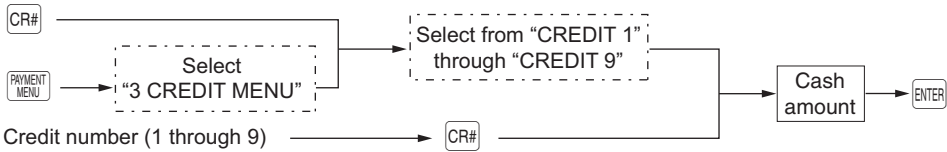

Example	Key operation	Print		
	3000 CR1	<table><tr><td>TRANSFER CREDIT1</td><td>*30.00</td></tr></table>	TRANSFER CREDIT1	*30.00
TRANSFER CREDIT1	*30.00			

Cashing a check


NOTE To use this function, please consult your authorized SHARP dealer, while you cannot use this function together with the cash transferring function.

Procedure

Direct key entries



Menu-based entries

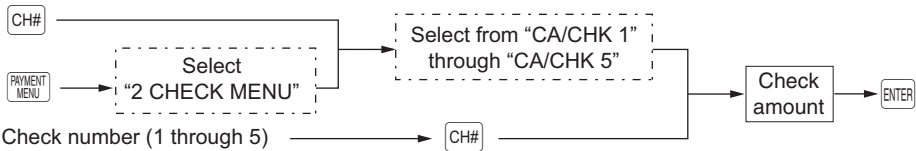

Example

Key operation

6789 [#]
3000 [CHECK]

Print

```

#00000000000006789
CA/CHK1          *30.00
  
```


Age Verification

The age verification function is used for prohibiting the selling of goods (departments, PLUs, or EANs) for certain aged persons.

When a department/PLU/EAN for which the age verification has been programmed as “Yes” is entered, the following confirmation window is displayed. Confirm the customer’s age, and select “1. OK” or “2. NG”.

```

2x10.00                20.00
PLU PLEASE CHECK AGE
  1. OK
  2. NG
***TOTAL                20.00
15
REG      L1P1  0001
    
```

When the age verification item is entered, the message “AGE VERIFIED” is recorded on the journal.

```

— EJ VIEW —
#0760 30/08/14 16:37:49
1x 10.00          *10.00
PLU00001
1x 3.80           *3.80
PLU00015
AGE VERIFIED
***TOTAL  *13.80
CASH      *15.00
PRESS [CANCEL] TO EXIT
    
```

Message for “PLU00015”

Electronic Journal View

The transaction data is kept in the electronic journal memory.

To display the journal data, press the  key, the last transaction data is displayed.

To retract to past transaction data, press the  key repeatedly.

To exit the electronic journal view, press the  key.

Example

Key operation





Display

```

— EJ VIEW —
#0265 13/07/14 13:58:04
ITEMS 5Q
CASH      *21.35

PRESS [CANCEL] TO EXIT
    
```

```

— EJ VIEW —
#0264 13/07/14 13:57:21
ITEMS 4Q
CASH      *7.95

PRESS [CANCEL] TO EXIT
    
```

TRAINING Mode

The training mode is used when the operator or the manager practices register operations.

NOTE In case “clerk and cashier system” is applied to your register, cashiers can enter to the training mode.

When a clerk/cashier set in training is selected, the register automatically enters the training mode, while a clerk/cashier not set in training is selected, the register automatically enters the ordinary REG mode. A training text and a training clerk/cashier can be programmed.

The training operations are valid in all modes.

A mark which is identifying a training receipt is printed on the receipt which is issued in the training mode.

The consecutive number is not updated. The preceding number is repeated in printing.

Training clerk/cashier programming is performed in PGM2 mode. (It allows for 1 Clerk or 1 Cashier.)

The memory in clerk/cashier is updated in the training mode. Other memories are not updated.

The GLU codes which are opened in the training mode are also printed on the GLU report. In this case, those GLU codes are distinguished from others by the character of “T”. The data of training GLU codes are not added to the total.

The reading and resetting of training clerks/cashiers is printed on the clerk/cashier reports. However, the sales total of training clerks/cashiers is not included in the clerk/cashier total on the full clerk/cashier report.

NOTE The following operations are effective even in the training mode:

- Changing programs
- Reading and resetting reports

Example

Key operation

[Selecting the clerk set in training]	5	PLU /EAN
	3	⊗
	3	PLU /EAN
		TL/NS

Print

TRAINING	
1x 2.25	*2.25
PLU00005	
3x 4.20	*12.60
PLU00003	
CASH	*14.85

Overlapped Clerk Entry

This function allows to switch from one clerk to another clerk and to interrupt the first clerk's entry. So the second clerk can do his or her entry in this mode. Interrupt handling is possible only in the overlapped clerk entry.

For actual use of this function, contact your authorized SHARP dealer.

NOTE

- The overlapped clerk entry is not effective while the tendering sale is going on.
- If any clerk is still making an entry (or has not finalized the transaction yet), the register does not run in any mode other than REG and MGR, and no X/Z reports can be printed. The message "CLERK REMAINED" and the related clerk are displayed.

Example

- Clerk 1: Entry started
 Clerk 2: Clerk change (1 to 2), interrupt initiated
 Clerk 2: Transaction finished
 Clerk 1: Clerk change (2 to 1), entry restarted

Key operation	Display
[Clerk 1 is assigned.]	
1	PLU00001
1	2x1.10 2.20
3	PLU00003
	***TOTAL 3.40
	PLU00003 1.10
	REG L1P1 0001
[Clerk 2 is assigned.]	
2	3x6.75 20.25
3	PLU00002
2	***TOTAL 20.25
	PLU00003 20.25
	REG L1P1 0002
[Clerk 1 is assigned.]	
1	PLU00004
4	1x1.25 1.25
5	PLU00005
	***TOTAL 6.90
	PLU00005 1.25
	REG L1P1 0001

5 Correction

Correction of the Last Entry (Direct Void)

If you make an incorrect entry relating to a department, PLU/subdepartment, EAN, percentage ([%1] through [%4]), discount ([⊖] through [⊖4]), or item refund, you can void this entry by pressing the [∞] key immediately.

Example	Key operation	Display
	1250 [1]	1x12.50 12.50 DPT.01
	[∞]	
	2 [PLU/EAN]	***TOTAL 12.50 DPT.01 12.50 REG L1P1 0001
	[∞]	
	5012345678900 [PLU/EAN]	
	[∞]	
	600 [2]	
	[%1]	***TOTAL 0.00 DPT.01 V-12.50 REG L1P1 0001
	[∞]	
	328 [3]	
	28 [⊖]	
	[∞]	
	250 RF [1]	DPT.03 ITEMS 2Q CASH 9.28 ***TOTAL 9.28 REG L1P1 0001
	[∞]	
	TL/NS	

Correction of the Next-to-Last or Earlier Entries (Indirect Void)

If you find an incorrect entry before finalizing the transaction (e.g. before pressing the **TL/NS** key), you can void the entry by the cursor operation or the key sequence operation.

Indirect void by cursor operation

You can void department, PLU/subdepartment, EAN, item refund, amount discount/premium and percent entries.

Move the cursor to the item to be voided, and press the **∞** key.


Indirect void by key sequence operation

You can void department, PLU/subdepartment, EAN and item refund.

Press the **∞** key just before you press a department key, **DEPT#** key, direct PLU key or **PLU/EAN** key or just before you scan an EAN code. For the refund indirect void, press the **∞** key after you press the **RF** key.

Example

(Indirect void by cursor operation)

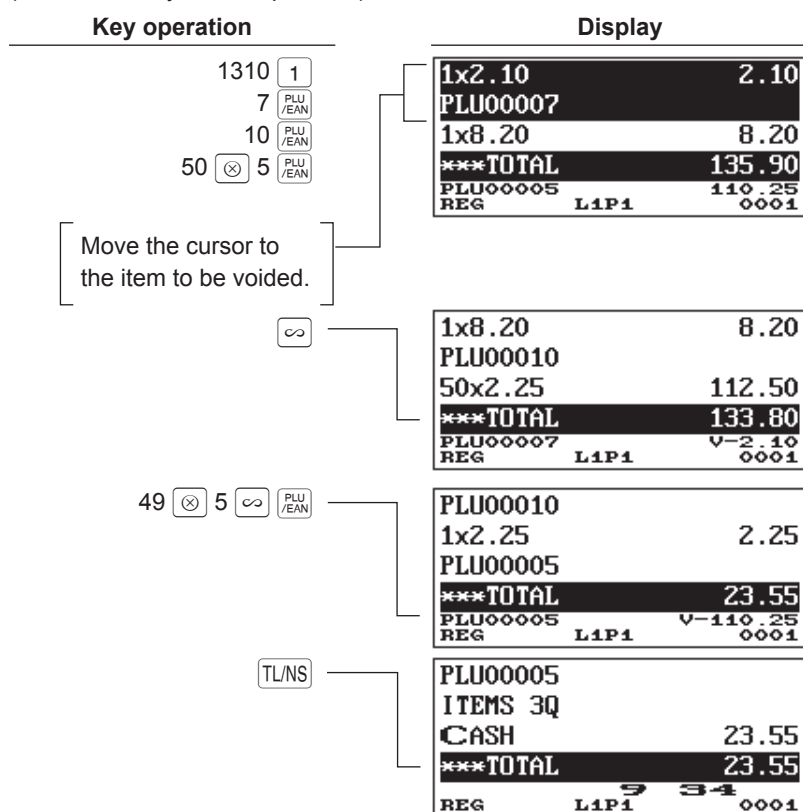

Subtotal Void

You can void an entire transaction. Once subtotal void is executed, the transaction is aborted and the register issues a receipt.

Example

Key operation

1

2

10

Subtotal void {

Display

```

PLU00010
SBTL VOID          -10.45
***TOTAL           0.00
***TOTAL           0.00
REG      L1P1  9 38 0001
    
```

Correction after Finalizing a Transaction

When you need to void incorrect entries that are found after finalizing a transaction or cannot be corrected by direct, indirect or subtotal void, follow this procedure.

1. Enter the manager mode (see page 89 for details), and press the key.
2. Repeat the entries that are recorded on an incorrect receipt. (All data in the incorrect receipt is removed from register memory; the voided amounts are added to the void mode totalizer.)

Incorrect receipt

```

#0085  08/08/2014 16:39:42
0001 CLERK0001      000000

3x 1.20              *3.60
PLU00001
1x 2.50              *2.50
PLU00002

CASH                 *6.10
    
```



Cancellation receipt

```

#0086  08/08/2014 16:41:36
0001 CLERK0001      000000

          *VOID MODE*
3x 1.20              *3.60
PLU00001
1x 2.50              *2.50
PLU00002

CASH                 *6.10
    
```

NOTE

Your register leaves the VOID mode whenever a transaction is canceled (i.e. finalized in the VOID mode). To void additional transactions, repeat steps 1 and 2. above.

6

Special Printing Function

Some functions described in the following sections require optional keys. When you need optional keys for these functions, consult your authorized SHARP dealer.

After Transaction Receipt / Copy Receipt Printing

If your customer wants a receipt after you have finalized a transaction with the receipt ON-OFF function in the OFF status (no receipting), press the **RCPT** key to issue an after transaction receipt.
If the **RCPT** key is pressed when the receipt ON-OFF function is in the “ON” status or after a receipt is issued, a copy receipt will be issued.

NOTE To toggle the receipt ON-OFF status, use one of the following procedures:


- Press the **FUNC MENU** key and select “RCP SW.” from the menu list.
- Press the **RCP SW** key to open the “RCP SW.” window.

Example Printing a receipt after making the entries shown below with the receipt ON-OFF function “OFF” status

Key operation	Print												
2 PLU / EAN													
3 ⊗													
1 PLU / EAN													
TL/NS													
For receipting → RCPT													
	<div>Print on the receipt {<table><tbody><tr><td>1x 2.50</td><td>*2.50</td></tr><tr><td>PLU00002</td><td></td></tr><tr><td>3x 1.20</td><td>*3.60</td></tr><tr><td>PLU00001</td><td></td></tr><tr><td>CASH</td><td>*6.10</td></tr></tbody></table>}</div>	1x 2.50	*2.50	PLU00002		3x 1.20	*3.60	PLU00001		CASH	*6.10		
1x 2.50	*2.50												
PLU00002													
3x 1.20	*3.60												
PLU00001													
CASH	*6.10												
When the receipt ON-OFF function is in the “ON” status or after a receipt is issued, a copy receipt will be issued.	<div><table><tbody><tr><td colspan="2">*COPY*</td></tr><tr><td>1x 2.50</td><td>*2.50</td></tr><tr><td>PLU00002</td><td></td></tr><tr><td>3x 1.20</td><td>*3.60</td></tr><tr><td>PLU00001</td><td></td></tr><tr><td>CASH</td><td>*6.10</td></tr></tbody></table></div>	*COPY*		1x 2.50	*2.50	PLU00002		3x 1.20	*3.60	PLU00001		CASH	*6.10
COPY													
1x 2.50	*2.50												
PLU00002													
3x 1.20	*3.60												
PLU00001													
CASH	*6.10												

Guest Check Copy

You can use this function when you want to take a bill for guest check.

Press the  key and make a desired entry.

Procedure






NOTE

- The guest check copy has nothing to do with the memory.
- The operation is the same as normal entry. But the drawer does not open.

Example

Key operation

10  1 


Print

G.C. COPY	
10x 1.20	*12.00
PLU00001	
CASH	*12.00

Receipt for Remote Printers (KP#1 and KP#2)

■ Type of receipts

You can select one of the following three types of receipts for each remote printer. These types of receipts are available in the REG or MGR mode. By default, the addition receipt type is selected. You can program the receipt type in the PGM2 mode.

- Addition receipt type
- Single/double receipt type
- Addition + single receipt type

• Addition receipt type

The addition receipt is a standard type. Several items can be printed on one receipt.

```
CLERK0001
GLU# 101

1xPLU00001
1xPLU00002
1xPLU00003
```

• Single/double receipt type

When you select this type:

- One receipt is issued and the transaction is finalized each time you enter an item.
- A single receipt or a double receipt is issued depending on the PGM2 programming for the department.
- Each sales transaction is automatically handled as a cash deal.

Double receipt

```
CLERK0001
GLU# 105

1xPLU00001

-----
0001 19:02:52  GLU#105

** DOUBLE **
1xPLU00001
```

← Perforation

Single receipt


```
CLERK0001
GLU# 105

1xPLU00001
```

• **Addition + single receipt type**

When you select this type:

- An addition receipt and each single receipt are issued in series after you finalize the transaction.
- The information on multiplication entry will be printed on a single receipt.

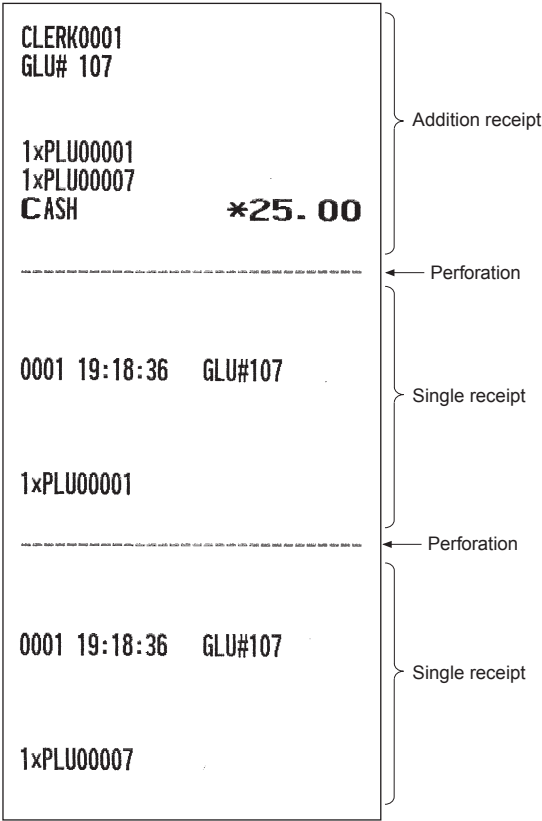



Sorted Receipt Function

When the sorted receipt function is programmed for your register, PLUs are printed in sorted form by PLU group regardless of the order that you entered items.

Example	Key operation
	Group 0 → 1 <div>PLU /EAN</div>
	Group 1 → 2 <div>PLU /EAN</div>
	Group 2 → 3 <div>PLU /EAN</div>
	Group 1 → 4 <div>PLU /EAN</div>
	<div>TL/NS</div>

The print format differs depending on the programmed receipt type as follows:

• Addition receipt type

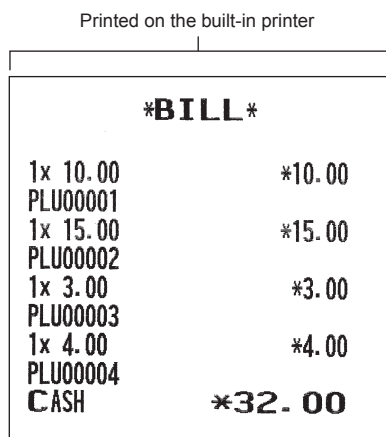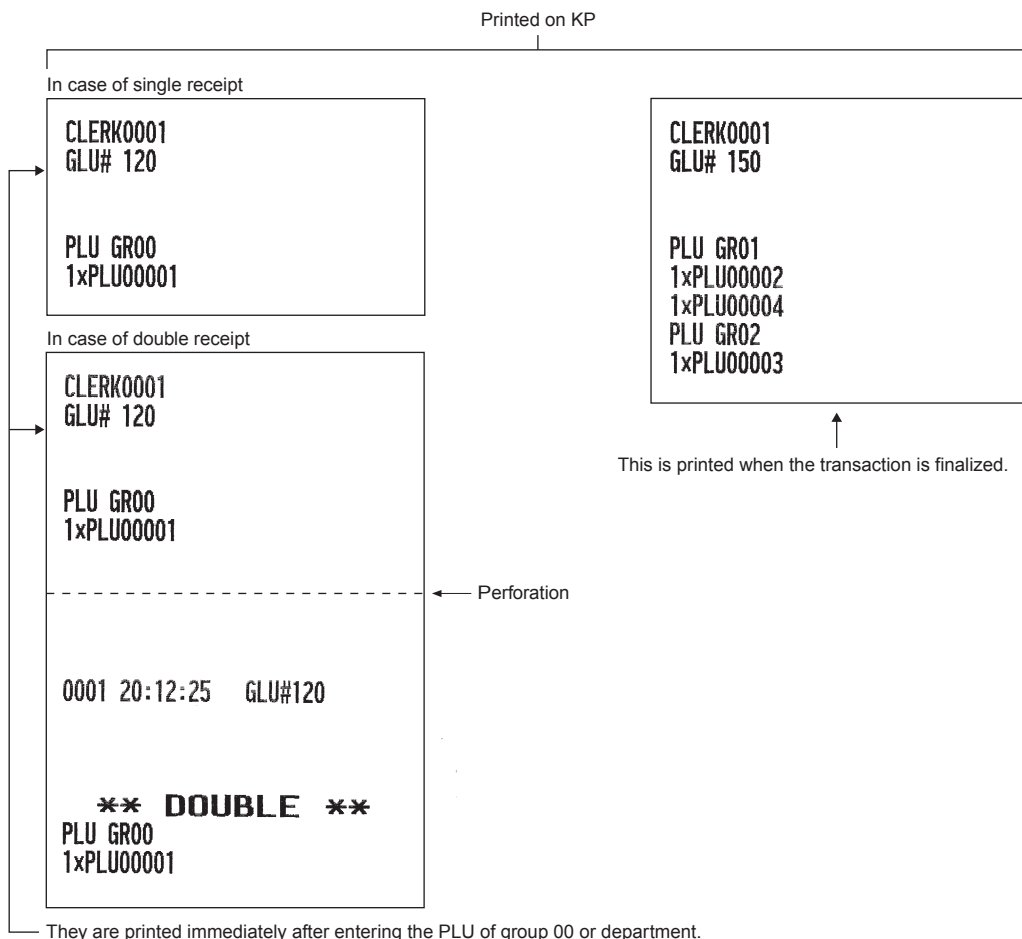

• Addition + single receipt type

Printed on KP

Double receipt


CLERK0001 GLU# 150	
PLU GR00 1xPLU00001	

0001 20:27:26 GLU#150	
** DOUBLE **	
PLU GR00 1xPLU00001	

↑
This is printed immediately after entering the PLU of group 00 or department.

Printed on the built-in printer

BILL	
1x 10.00	*10.00
PLU00001	
1x 15.00	*15.00
PLU00002	
1x 3.00	*3.00
PLU00003	
1x 4.00	*4.00
PLU00004	
CASH	*32.00

↑
This is printed when you press the  key after the transaction.

CLERK0001 GLU# 150	
PLU GR01 1xPLU00002 1xPLU00004 PLU GR02 1xPLU00003	

0001 20:27:26 GLU#150	

PLU GR01 1xPLU00002	

0001 20:27:26 GLU#150	

PLU GR01 1xPLU00004	

0001 20:27:26 GLU#150	

PLU GR02 1xPLU00003	

↑
They are printed when the transaction is finalized.

← Single receipt

7 Manager Mode


The manager mode is used when managerial decisions must be made concerning register entries, for example, for overriding limitations and for other various non-programming managerial tasks.

NOTE Normal register operations may also be performed in this mode.

Some entries described in the following sections require optional keys. When you need optional keys for these entries, consult your authorized SHARP dealer.


Entering the Manager Mode

To enter the manager mode, use the following procedure in the REG mode:

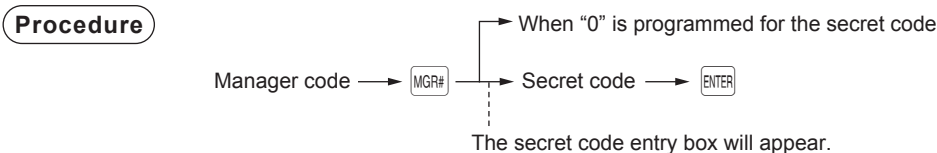

Example

If the code is correct, the register enters the manager mode.

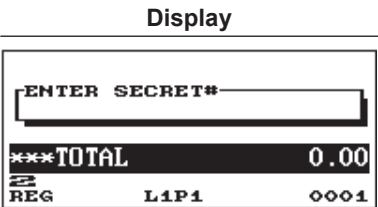

Override Entries

Programmed limits (such as maximum amounts) for functions can be overridden by placing the register in the manager mode.

Example This example presumes that the register has been programmed not to allow coupon entries over 2.00.

	Key operation	Print
REG-mode entries {	3	<div> 1x 3.00 *3.00 PLU00003 (-) -2.50 CASH *0.50 </div>
	250 Error	
	To enter the manager mode — (Manager code)	
	250	
Returns to the REG mode.		

8

Reading (X) and Resetting (Z) of Sales Totals

- Use the reading function (X) when you need to take the reading of sales information entered after the last resetting. You can take this reading any number of times. It does not affect the register's memory.
- Use the resetting function (Z) when you need to clear the register's memory. Resetting prints all sales information and clears the entire memory except for the GT1 through GT3, reset count, and consecutive number.
- X1 and Z1 reports show daily sales information. You can take these reports in the X1/Z1 mode.
- X2 and Z2 reports show periodic (monthly) consolidation information. You can take these reports in the X2/Z2 mode.
- In the OP X/Z mode, a clerk can take his or her report.
- If you want to stop the printing report, press the **CANCEL** key.

NOTE Only when "clerk + cashier system" is applied, you can take both of Clerk and Cashier reports.

■ How to take a report

1. Press the **MODE** key.
2. Select the appropriate mode from the following by using the **↓** key, and press the **ENTER** key.
 - 1 OPXZ MODE
 - 3 X1/Z1 MODE
 - 4 X2/Z2 MODE
3. Select the operation from the following by using the **↓** key, and press the **ENTER** key to display the items list.
 - 1 READING
 - 2 RESETTING
4. Select the appropriate report title.
5. Press the **TL/NS** key.

■ Flash report

You can take flash reports (display only) in the X1/Z1 mode for department sales, cash in drawer (CID) and sales total at the point you take the report.

1. Press the **MODE** key.
2. Select "3 X1/Z1 MODE" by using the **↓** key, and press the **ENTER** key.
3. Select "3 FLASH MODE", and press the **ENTER** key.
4. Select the appropriate report title from the following by using the **↓** key.

1 DEPT. SALES	Department sales
2 CID	Cash in drawer
3 SALES TOTAL	Sales total
5. Press the **TL/NS** key.


NOTE When you select "1 DEPT. SALES" in step 4, select the appropriate department from the departments list.

Report type	Description	Operating modes			Data to be entered
		OP X/Z	X1/Z1	X2/Z2	
GENERAL	General report		X1, Z1	X2, Z2	
<DEPARTMENT MENU>					
DEPT. /GROUP	Department by group report		X1	X2	Department code (The range can be specified by entering start and end codes.)
DEPT. IND. GROUP	Individual department group report		X1	X2	Department group no. (1 to 14)
GROUP TOTAL	Department group total report		X1	X2	
<PLU/EAN MENU>					
PLU/EAN	PLU/EAN sales report by specified range		X1, Z1	X2, Z2	PLU/EAN code (The range can be specified by entering start and end codes.)
PLU/EAN PICKUP	PLU/EAN pickup report		X1, Z1	X2, Z2	*1
PLU/EAN BY DEPT	PLU/EAN report by associated dept.		X1, Z1	X2, Z2	Department code
PLU/EAN IND. GR.	Individual PLU/EAN group report		X1	X2	PLU group no. (0 to 99)
PLU GROUP TOTAL	PLU/EAN group total report		X1	X2	
PLU/EAN STOCK	PLU/EAN stock report		X1		PLU/EAN code (The range can be specified by entering start and end codes.)
PLU/EAN STOCK PICK	PLU/EAN stock pickup report		X1		*1
PLU TOP 20	PLU/EAN top 20 sales report by sales amount		X1	X2	
	PLU/EAN top 20 sales report by sales quantity				
PLU/EAN ZERO SALES	PLU/EAN zero sales report		X1	X2	All PLU/EAN codes
	PLU/EAN zero sales report by associated dept.		X1	X2	Department code
PLU CATEGORY	PLU/EAN sales report by price category		X1	X2	PLU/EAN price category
<TRANSACTION MENU>					
TRANSACTION	Transaction report		X1	X2	
TL-ID	Total-in-drawer report		X1	X2	
COMMISSION	Commission sales report		X1	X2	
<PERSONNEL MENU>					
ALL CLERK	All clerk report		X1, Z1	X2, Z2	
IND. CLERK	Individual clerk report	X, Z	X1, Z1	X2, Z2	
ALL CASHIER	All cashier report		X1, Z1	X2, Z2	Only for the clerk + cashier system
IND. CASHIER	Individual cashier report	X, Z	X1, Z1	X2, Z2	Only for the clerk + cashier system

Report type	Description	Operating modes			Data to be entered
		OP X/Z	X1/Z1	X2/Z2	
<OTHERS MENU>					
HOURLY	Hourly report (by specified range)		X1		For an individual time range
	Hourly report (all)		Z1		
DAILY NET	Daily net report			X2, Z2	
GLU	GLU report		X1, Z1		GLU code (The range can be specified by entering start and end codes.)
GLU BY CLERK	GLU report by clerk		X1, Z1		
BALANCE	Balance report		X1	X2	
E. JOURNAL	Electronic journal	X, Z	X1, Z1		
STACKED REPORT	Stacked report 1		X1, Z1	X2, Z2	
	Stacked report 2				

NOTE

*1: You can pick up PLU/EAN codes for issuing the report. You can pick up new PLU/EAN codes or the codes that were picked up the last time. To pick up new codes, select "1 NEW PICKING", and follow the procedure show below to pick up new codes. To pick up the codes that were picked up last time, select "2 LAST PICKING". Follow the following procedure for picking up PLU/EAN codes.

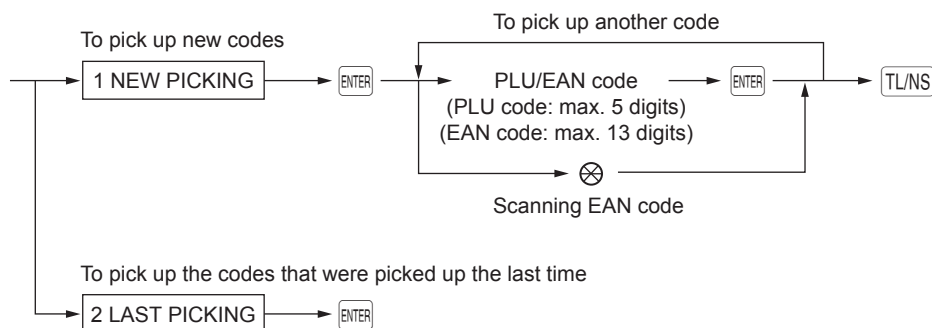

* The following reports relating to PLU/EAN is issued in the sequence of PLUs and EANs.
 PLU/EAN, PLU/EAN BY DEPT and PLU/EAN 0 SALES.
 Also the EAN codes are printed in the sequence shown below.

EAN-13
EAN-8
UPC-A
UPC-E
ITF-14

Daily Sales Totals

■ General report

• Sample X report

X1		Read symbol
TR	*00000000060.30	Grand total of training-mode registrations
DEPT./GROUP		Report title
D01	140.000 Q	Dept. code
DPT.01	*403.83	Sales q'ty
	44.31%	Dept. description and sales amount
D02	57.000 Q	Ratio of dept. 1 sales amount to "+" dept. total
DPT.02	*248.70	
	27.29%	
D03	69.000 Q	
DPT.03	*258.80	
	28.40%	
GROUP01	266.000 Q	Group 1 text
	*911.33	Group 1 total q'ty
	100.00%	Group 1 total amount
*DEPT TL	266.000 Q	Ratio of dept. group 1 sales amount to "+" dept. total
	*911.33	"+" dept. sales q'ty and total
	100.00%	
D04	9.000 Q	
DPT.04	-36.00	
DEPT (-)	9.000 Q	"-" dept. sales q'ty and total
	-36.00	
D05	1.000 Q	
DPT.05	*6.00	
*HASH TL	1.000 Q	Hash "+" dept. sales q'ty and total *
	*6.00	
D06	2.000 Q	
DPT.06	-10.00	
HASH (-)	1.000 Q	Hash "-" dept. sales q'ty and total *
	-10.00	
D07	5.000 Q	
DPT.07	*3.00	
*BTTL TL	5.000 Q	Bottle return "+" dept. sales q'ty and total *
	*3.00	
D08	3.000 Q	
DPT.08	-5.00	
BTTL (-)	3.000 Q	Bottle return "-" dept. sales q'ty and total *
	-5.00	

• Sample Z report

Z1		Reset counter
	Z1 0001	
GT1	*00000018216.37	Net grand total (GT2-GT3)
GT2	*00000018654.58	Grand total of plus registration
GT3	-00000000438.21	Grand total of minus registration
BAL	-00000123409.39	Grand total of balance (Order total - Paid total)
TR	*00000000000.00	Grand total of training-mode registrations
DEPT./GROUP		

↓
The subsequent printout occurs in the same format as in the sample X1 report.

* To use this function on your register or to print this item on reports, consult your authorized SHARP dealer.

TRANSACTION	
(-) 1	4 Q
	-6.12
(-) 2	2 Q
	*3.00
SETPLU-	-11.00
SETEAN-	-7.20
%1	2 Q
	-2.90
%2	3 Q
	*1.48
NET 1	*857.13

TAX1 ST	*500.93
VAT 1	*14.59
TAX2 ST	*209.21
VAT 2	*9.96
TAX3 ST	*40.58

Subtotal (-) counter and total

Set PLU discount amount

Set EAN discount amount

Subtotal % counter and total

Net sales total

Taxable 1 total

VAT 1 total

When the amount is rounded, the following will be printed here:

DIFFER

*0.86 Difference

TAX6 ST	*7.84
VAT 6	*1.31
TTL TAX	*34.40
NET	*822.73
VAT SFT	*25.80
TAX DELE	*0.00
(-) 3	2 Q
	-2.80
(-) 4	2 Q
	*3.80
%3	2 Q
	-1.10
%4	2 Q
	*0.90
DISCOUNT	8 Q
	-9.67
CP PLU	2 Q
	-10.00
REFUND	3 Q
	*42.00
VOID	6 Q
	*39.50
VOID MODE	1 Q
	*7.00
MGR VOID	4 Q
	*10.00
SBTL VOID	4 Q
	*44.10
HASH VOID	1 Q
	*1.00
HASH RF	1 Q
	*2.00

Total tax

NET sales without tax

VAT shift

The net sales with tax (NET2) will be printed in case add-on tax system is included.

Item (-) counter and total

Item % counter and total

Promotion discount counter and total

Coupon PLU counter and total

Refund counter and total

Item void counter and total

Void-mode transaction counter and total

Void mode item counter and total

Subtotal void counter and total

Hash item void counter and total *

Hash item refund counter and total *

* To use this function on your register or to print this item on reports, consult your authorized SHARP dealer.

BILL CNT	4 Q	Bill print counter
NO SALE	12 Q	No-sale (exchange) counter
***PBAL	9 Q	Previous balance counter
G. C. COPY CNT	2 Q	Guest check copy print counter
GUEST	95 Q	Transaction counter
ORDER TL	*851.13	Order total
PAID TL	*783.64	Paid total
AVE.	*8.25	Paid total average per transaction counter
O-P	*67.49	Difference (Order total - Paid total)
TRAN. OUT	6 Q	Transfer-out counter and total
	*81.68	
TRAN. IN	2 Q	Transfer-in counter and total
	*25.19	
BILL BAL	4 Q	Bill balance (Transfer-out - Transfer-in)
	*56.49	
SCM(+)	*250.00	Starting cash memory (+)
SCM(-)	-12.00	Starting cash memory (-)
SCM TTL	*238.00	Starting cash memory total
***RA	1 Q	Received-on-account counter and total
	*48.00	
***RA2	1 Q	
***PO	3 Q	Paid-out counter and total
	*85.00	
***PO2	1 Q	
CA/CHK1	*10.00	Check cashing counter and total *
	1 Q	
DEPOSIT	3 Q	Deposit counter and total
	*102.00	
DEPO. (-)	1 Q	Deposit refund counter and total
	-42.00	
CASH TIP	2 Q	Cash tip counter and total
	*4.00	
NOCASH TIP	4 Q	Non-cash tip counter and total
	*3.50	
TIP PAID	2 Q	Paid tip counter and total
	*7.50	
CASH	59 Q	Cash counter and total
	*324.38	
CASH2	1 Q	
	*36.00	
CASH3	1 Q	
	*3.00	
CASH4	2 Q	Check sale and tendering counter and total
	-13.00	
CASH5	1 Q	
	*9.00	
CHECK	8 Q	
	*89.02	
CHECK2	6 Q	
	*85.00	
CHECK3	1 Q	
	*6.00	
CREDIT1		
	3 Q	Credit sale and tendering counter and total
	*54.70	
CREDIT2		
	3 Q	
EXCH1		
	1 Q	Exchange 1 cash counter and total
	18.61	
DOM. CUR1	*12.00	
EXCH2	1 Q	
	11.84	
DOM. CUR2	*15.00	
EXCH3	1 Q	
	22.22	
DOM. CUR3	*18.00	
EXCH4	1 Q	
	21.36	
DOM. CUR4	*12.00	
***CID	*570.36	Cash in drawer
*CH ID	*248.02	Check in drawer
CA/CHK ID	*818.38	Cash+check in drawer
CHK/CG	*16.52	Change total for check tendering

* This item will be printed on the report when the check cashing function is enabled.

Department report

X1		
DEPT./GROUP		Dept. code
		Dept. description
D01	140.000 Q	Sales q'ty
DPT.01	*403.83	Sales amount
	44.31%	Ratio of dept. 1 sales amount to "+" dept. total
D02	57.000 Q	
DPT.02	*248.70	
	27.29%	
D03	69.000 Q	
DPT.03	*258.80	
	28.40%	Group 1 text
GROUP01	266.000 Q	Group 1 total sales q'ty
	*911.33	Group 1 total sales amount
	100.00%	Ratio of dept. group 1 sales amount to "+" dept. total
*DEPT TL	266.000 Q	} "+" dept. counter and total
	*911.33	
	100.00%	
D04	9.000 Q	} "-" dept. sales q'ty and total
DPT.04	-36.00	
DEPT (-)	9.000 Q	
	-36.00	
D05	1.000 Q	} Hash "+" dept.sales q'ty and total *
DPT.05	*6.00	
*HASH TL	1.000 Q	
	*6.00	
D06	2.000 Q	} Hash "-" dept.sales q'ty and total *
DPT.06	-10.00	
HASH (-)	1.000 Q	
	-10.00	
D07	5.000 Q	} Bottle return "+" dept. sales q'ty and total *
DPT.07	*3.00	
*BTTL TL	5.000 Q	
	*3.00	
D08	3.000 Q	} Bottle return "-" dept. sales q'ty and total *
DPT.08	-5.00	
BTTL (-)	3.000 Q	
	-5.00	
SETPLU-	-11.00	Set PLU discount amount
SETEAN-	-7.20	Set EAN discount amount

* To use this function on your register or to print this item on reports, consult your authorized SHARP dealer.

Individual group total report on departments

X1		
DEPT. IND. GROUP		
D01	471.000 Q	Dept. code
DPT.01	*987.51	Dept.description
D02	247.000 Q	Sales q'ty
DPT.02	*804.42	Sales amount
D03	315.000 Q	
DPT.03	*1371.15	
GROUP01	1033.000 Q	Group 1 text/sales q'ty and total
	*3163.08	

Full group total report on departments

X1		
GROUP TOTAL		
GROUP01	266.000 Q	
	*911.33	
	100.00%	
*DEPT TL	266.000 Q	"+" dept. counter and total
	*911.33	
	100.00%	
DEPT (-)	9.000 Q	"-" dept. sales q'ty and total
	-36.00	
*HASH TL	1.000 Q	Hash "+" dept.sales q'ty and total *
	*6.00	
HASH (-)	2.000 Q	Hash "-" dept.sales q'ty and total *
	-10.00	
*BTTL TL	5.000 Q	Bottle return "+" dept. sales q'ty and total *
	*3.00	
BTTL (-)	3.000 Q	Bottle return "-" dept. sales q'ty and total *
	-5.00	

* To use this function on your register or to print this item on reports, consult your authorized SHARP dealer.

■ PLU/EAN report (by specified range/pickup)

(In case of a report by specified range)

X1		*1
PLU/EAN		
00001-99999999999999		PLU/EAN range *2
PLU		
P00001	28.000 Q	PLU code/ description, sales q'ty and sales amount (level 1 through 3)
PLU00001	*25.54	
L2	0.000 Q	
	*0.00	
L3	0.000 Q	
	*0.00	
P00002	30.000 Q	
PLU00002	*56.86	
L2	0.000 Q	
	*0.00	
L3	0.000 Q	
	*0.00	
***TOTAL	161.000 Q	Total sales q'ty and amount for PLUs
	*296.10	
L2	0.000 Q	
	*0.00	
L3	0.000 Q	
	*0.00	
SETPLU-	-11.00	Set PLU discount amount
SET PLU		Set PLU sales
P00004	11.000 Q	
PLU00004	*53.00	
L2	0.000 Q	
	*0.00	
L3	0.000 Q	
	*0.00	
***TOTAL	11.000 Q	Total for set PLU sales
	*53.00	
L2	0.000 Q	
	*0.00	
L3	0.000 Q	
	*0.00	

EAN		EAN code
5012345678900#	1.000 Q	Description, sales q'ty and sales amount (level 1 through 3)
ITEM-A	*3.20	
L2	0.000 Q	
	*0.00	
L3	0.000 Q	
	*0.00	
5098765432100#	1.000 Q	
ITEM-B	*2.75	
L2	0.000 Q	
	*0.00	
L3	0.000 Q	
	*0.00	
***TOTAL	2.000 Q	Total sales q'ty and amount for EANs
	*5.95	
L2	0.000 Q	
	*0.00	
L3	0.000 Q	
	*0.00	
SETEAN-	-7.20	Set EAN discount amount
SET EAN		Set EAN sales
5074185296300#	10.000 Q	
ITEM-C	*42.63	
L2	0.000 Q	
	*0.00	
L3	0.000 Q	
	*0.00	
***TOTAL	10.000 Q	Total for set EAN sales
	*42.63	
L2	0.000 Q	
	*0.00	
L3	0.000 Q	
	*0.00	

*1 When you take a Z report, "Z1" is printed instead of "X1".

*2 This item will not be printed on a pickup report.

NOTE In case of a PLU/EAN X report only header information is stored in the Electronic Journal file.

■ PLU/EAN report by associated department

X1		*			
PLU/EAN BY DEPT			EAN		EAN code
DPT. 01	D01	Associated dept. code and description	5012345678900#	1.000 Q	Description, sales q'ty and sales amount (level 1 through 3)
PLU			ITEM-A	*3.20	
P00001	37.000 Q	PLU code/ description, sales q'ty and sales amount (level 1 through 3)	L2	0.000 Q	
PLU00001	*34.44		L3	*0.00	
L2	0.000 Q			0.000 Q	
L3	*0.00		5098765432100#	*0.00	
	0.000 Q		ITEM-B	1.000 Q	
	*0.00		L2	*2.75	
P00002	45.000 Q		L3	0.000 Q	
PLU00002	*86.86			*0.00	
L2	0.000 Q		***TOTAL	2.000 Q	Total sales q'ty and amount for EANs
L3	*0.00		L2	*5.95	
	0.000 Q		L3	0.000 Q	
	*0.00			*0.00	
	0.000 Q		SETEAN-	-7.20	Set EAN discount amount
	*0.00		*SET EAN*		Set EAN sales
***TOTAL	161.000 Q	Total sales q'ty and amount for PLUs	5074185296300#	10.000 Q	
L2	*296.10		ITEM-C	*42.63	
L3	0.000 Q		L2	0.000 Q	
	*0.00		L3	*0.00	
	0.000 Q			*0.00	
	*0.00		***TOTAL	10.000 Q	Total for set EAN sales
SETPLU-	-11.00	Set PLU discount amount	L2	*42.63	
SET PLU		Set PLU sales	L3	0.000 Q	
P00004	11.000 Q			*0.00	
PLU00004	*53.00			0.000 Q	
L2	0.000 Q			*0.00	
L3	*0.00			0.000 Q	
	0.000 Q			*0.00	
	*0.00			0.000 Q	
	*0.00			*0.00	
***TOTAL	11.000 Q	Total for set PLU sales		0.000 Q	
L2	*53.00			*0.00	
L3	0.000 Q			0.000 Q	
	*0.00			*0.00	
	0.000 Q			0.000 Q	
	*0.00			*0.00	

* When you take a Z report, "Z1" is printed instead of "X1".

■ Individual PLU/EAN group report

X1			
PLU/EAN IND. GR.			
PLU			
P00001	PLU code		
PLU00001	Description		
L1	448.000 Q		
	*1702.40		
L2	16.000 Q	Sales q'ty and sales amount (level 1 through 3)	
	*80.00		
L3	14.000 Q		
	*84.00		
P00002			
***TOTAL			
L1	2015.000 Q		
	*12149.79	Total sales q'ty and amount for PLUs	
L2	16.000 Q		
	*80.00		
L3	14.000 Q		
	*84.00		
SETPLU-	*89.00	Set PLU discount amount	
SET PLU		Set PLU sales	
P00003			
PLU00003			
L1	214.000 Q		
	*2097.20		
L2	10.000 Q		
	*100.00		
L3	12.000 Q		
	*123.60		
***TOTAL		Total for set PLU sales	
L1	214.000 Q		
	*2097.20		
L2	10.000 Q		
	*100.00		
L3	12.000 Q		
	*123.60		
EAN			
5012345678900#	EAN code		
ITEM-A			
L1	42.000 Q		
	*525.00		
L2	6.000 Q	Sales q'ty and sales amount (level 1 through 3)	
	*77.94		
L3	3.000 Q		
	*40.50		
***TOTAL			
L1	54.000 Q		
	*587.40	Sales q'ty and sales amount (level 1 through 3)	
L2	6.000 Q		
	*77.94		
L3	3.000 Q		
	*40.50		
SETEAN-	*97.00	Set EAN discount amount	
SET EAN		Set EAN sales	
5014725836900#			
SET-A			
L1	3.000 Q		
	*47.25		
L2	2.000 Q		
	*32.00		
L3	4.000 Q		
	*65.00		
***TOTAL		Total for set EAN sales	
L1	3.000 Q		
	*47.25		
L2	2.000 Q		
	*32.00		
L3	4.000 Q		
	*65.00		
PLU GR01	2353.000 Q	PLU group text	
	*15484.68	PLU group sales q'ty and total	
*DEPT TL	165.000 Q	"+" dept. counter and total	
	*812.64		
	100.00%		

■ PLU/EAN group total report

X1			
PLU GROUP TOTAL			
PLU GR01	95.000 Q		PLU group text
	*625.25		PLU group sales q'ty and total
PLU GR02	3.000 Q		
	*29.40		
*DEPT TL			
	174.000 Q		"+" dept. counter and total
	*1138.30		
	100.00%		

■ PLU/EAN stock report (by specified range/pickup)

(In case of a report by specified range)

X1			
PLU/EAN STOCK			
	00001-99999999999999		PLU/EAN range *
PLU			PLU code
P00001			Description
PLU00001	65.000 S		Stock counter
P00002			
PLU00002	25.000 S		
P00003			
PLU00003	49.000 S		
EAN			
5012345678900#			EAN code
ITEM-A	28.000 S		Description
5012369874500#			Stock counter
ITEM-B	18.000 S		
5014725836900#			
SET-A	51.000 S		
5014785236900#			
ITEM-D	39.000 S		
5036985214700#			
ITEM-F	17.000 S		
5074185296300#			
ITEM-G	28.000 S		

* This item will not be printed on a pickup report.

■ PLU top 20 sales report (by sales amount/by sales quantity)

(In case of a report by sales amount)

X1			
PLU TOP 20			
AMOUNT			*
			Ranking
01			
P00019	63.000 Q		
PLU00019	*453.60		PLU code/ description, sales q'ty and sales amount (level 1 through 3)
L2	31.000 Q		
	*254.20		
L3	23.000 Q		
	*211.60		
02			
P00018	51.000 Q		
PLU00018	*433.50		
L2	15.000 Q		
	*132.00		
L3	8.000 Q		
	*72.80		
03			
P00010	39.000 Q		
PLU00010	*195.00		
L2	5.000 Q		
	*35.00		
L3	5.000 Q		
	*45.00		
19			
P00002	3.000 Q		
PLU00002	*3.75		
L2	1.000 Q		
	*2.50		
L3	1.000 Q		
	*3.45		
20			
P00016	3.000 Q		
PLU00016	*2.25		
L2	1.000 Q		
	*0.99		
L3	1.000 Q		
	*1.25		
***TOTAL			
	511.000 Q		
	*2027.03		
L2	69.000 Q		Total sales q'ty and amount for top 20 PLUs
	*474.67		
L3	40.000 Q		
	*345.08		

* When you take a PLU top 20 sales report by sales quantity, "QUANTITY" will be printed instead.

■ **PLU/EAN zero sales report (full)**

X1		
PLU/EAN 0 SALES		
		PLU code
PLU		
P00012	PLU00012	Description
P00014	PLU00014	
P00016	PLU00016	
P00020	PLU00020	
P00032	PLU00032	
AUTOC		
EAN		
5012345678900#		EAN code
	Item-A	Description
5074185296300#		
	Item-B	

■ **PLU/EAN zero sales report (by dept.)**

X1		
PLU/EAN 0 SALES		
		Description of dept.
DPT. 02	D02	Associated dept. code
PLU		
P00014	PLU00014	
P00016	PLU00016	
EAN		
5012345678900#		
	Item-A	

■ PLU/EAN category report

<p>*X1* PLU CATEGORY</p>			
	0.00- 999999.99	Price range	
PLU			
P00001		PLU code	
PLU00001		Description	
L1	448.000 Q *1702.40	Sales q'ty and sales amount (level 1 through 3)	
L2	16.000 Q *80.00		
L3	14.000 Q *84.00		
P00002			
***TOTAL			
L1	2015.000 Q *12149.79	Total sales q'ty and amount for PLUs	
L2	30.000 Q *80.00		
L3	34.000 Q *84.00		
SETPLU-	*89.00	Set PLU discount amount	
SET PLU		Set PLU sales	
P00003			
PLU00003			
L1	214.000 Q *2097.20		
L2	10.000 Q *100.00		
L3	12.000 Q *123.60		
***TOTAL		Total for set PLU sales	
L1	214.000 Q *2097.20		
L2	10.000 Q *100.00		
L3	12.000 Q *123.60		

<p>EAN 5012345678900#</p>		EAN code	
ITEM-A		Description	
L1	42.000 Q *525.00	Sales q'ty and sales amount (level 1 through 3)	
L2	6.000 Q *77.94		
L3	3.000 Q *40.50		
5012369874500#			
ITEM-B			
L1	12.000 Q *62.40		
***TOTAL			
L1	54.000 Q *587.40	Total sales q'ty and amount for EANs	
L2	6.000 Q *77.94		
L3	3.000 Q *40.50		
SETEAN-	*97.00	Set EAN discount amount	
SET EAN		Set EAN sales	
5014725836900#			
SET-A			
L1	3.000 Q *47.25		
L2	2.000 Q *32.00		
L3	4.000 Q *65.00		
***TOTAL			
L1	3.000 Q *47.25	Total for set EAN sales	
L2	2.000 Q *32.00		
L3	4.000 Q *65.00		

Transaction report

X1		
TRANSACTION		
*DEPT TL	266.000 Q	Plus dept. total
	*911.33	
DEPT(-)	9.000 Q	Minus dept. total
	-36.00	
*HASH TL	1.000 Q	Plus hash dept. total
	*9.00	
HASH(-)	2.000 Q	Minus hash dept. total
	-36.00	
*BTTL TL	5.000 Q	Plus bottle return dept. total
	*3.00	
BTTL(-)	3.000 Q	Minus bottle return dept. total
	-5.00	
(-) 1	4 Q	
	-6.12	
(-) 2	2 Q	
	*3.00	
SETPLU-	-11.00	
SETEAN-	-7.20	
%1	2 Q	
	-2.90	
%2	3 Q	
	*1.48	
NET 1	*857.13	



In this report, the same transaction data as those printed in the general report are printed.

Total in drawer report

X1		
TL-ID		
EXCH1	1 Q	Exchange 1 counter
	18.61	Currency exchange 1 total
DOM. CUR1	*12.00	
EXCH2	1 Q	Domestic currency for currency exchange 1 total
	11.84	
DOM. CUR2	*15.00	
EXCH3	1 Q	
	22.22	
DOM. CUR3	*18.00	
EXCH4	1 Q	
	21.36	
DOM. CUR4	*12.00	
***CID	*570.36	Cash in drawer
*CH ID	*248.02	Check in drawer
CA/CHK ID	*818.38	Cash + check in drawer

Commission sales report

X1		
COMMISSION		
COM. SAL1	*114.00	Commission 1 sales
COM. AMT1	*3.42	Commission 1 amount
COM. SAL2	*186.30	
COM. AMT2	*9.32	
COM. SAL9	*108.10	
COM. AMT9	*10.81	Commission sales total amount
COM. TTL	*49.35	
NON COM.	*1401.64	Non-commission sales
NET 1	*2174.14	Net sales total

■ Individual clerk report

X1		*1
IND. CLERK		Clerk code
CLK# 0001	CLERK0001	Clerk name
ORDER TL	*784.14	Order total
COM. SAL1	*0.00	Commission sales
COM. SAL2	*0.00	
COM. SAL3	*0.00	
COM. SAL4	*0.00	
COM. SAL5	*0.00	
COM. SAL6	*0.00	
COM. SAL7	*0.00	
COM. SAL8	*0.00	
COM. SAL9	*0.00	
COM. TTL	*0.00	No-commission sales
NON COM.	*855.67	
		Paid total
PAID TL	*783.64	Paid total average per transaction counter
AVE.	*8.25	
O-P	*0.50	Order total-paid total
TRAN. OUT	6 Q	Transfer-out counter and total
	*81.68	
TRAN. IN	2 Q	Transfer-in counter and total
	*25.19	
BILL BAL	4 Q	Bill balance (Transfer-out - Transfer-in)
	*56.49	
REFUND	4 Q	Refund counter and total
	*44.00	
VOID	7 Q	Item void counter and total
	*40.50	
VOID MODE	1 Q	Void-mode transaction counter and total
	*7.00	
MGR VOID	4 Q	Void mode item counter and total
	*10.00	
SBTL VOID	4 Q	Subtotal void counter and total
	*44.10	
***PBAL	9 Q	Previous balance counter
G. C. COPY CNT	2 Q	Guest check copy print counter
GUEST	95 Q	Transaction counter
SCM(+)	*250.00	Starting cash memory (+)
SCM(-)	-12.00	Starting cash memory (-)
SCM TTL	*238.00	Starting cash memory total
***RA	1 Q	Received-on-account counter and total
	*48.00	
***RA2	1 Q	
	*30.00	
***P0	3 Q	Paid-out counter and total
	*85.00	
***P02	1 Q	
	*10.00	
CA/CHK1	1 Q	Check cashing counter and total *
	*10.00	

* This item will be printed on the report when the check cashing function is enabled.

DEPOSIT	3 Q	Deposit counter and total
	*102.00	
DEPO. (-)	1 Q	Deposit refund counter and total
	-42.00	
CASH	59 Q	Cash counter and total
	*324.38	
CASH2	1 Q	
	*36.00	
CASH3	1 Q	
	*3.00	
CASH4	2 Q	Check sale and tendering counter and total
	-13.00	
CASH5	1 Q	
	*9.00	
CHECK	8 Q	
	*89.02	Credit sale and tendering counter and total
CHECK2	6 Q	
	*85.00	
CHECK3	1 Q	
	*6.00	
CHECK4	1 Q	Exchange 1 cash counter and total
	*10.00	
CHECK5	1 Q	
	*8.00	
CREDIT1	3 Q	
	*54.70	
CREDIT2	3 Q	
	*47.56	

When printing is enabled (*2), the following will be printed here:

CASH TIP	4 Q	Cash tip counter and total
	*20.10	
NOCA TIP	1 Q	Non-cash tip counter and total
	*14.40	
TIP PAID	2 Q	Paid tip counter and total
	*29.30	

EXCH1	1 Q	Exchange 1 cash counter and total
	18.61	
DOM. CUR1	*12.00	
EXCH2	1 Q	
	11.84	
DOM. CUR2	*15.00	
EXCH3	1 Q	
	22.22	
DOM. CUR3	*18.00	
EXCH4	1 Q	
	21.36	
DOM. CUR4	*12.00	
****CID	*570.36	Cash in drawer
*CH ID	*248.02	Check in drawer
CA/CHK ID	*818.38	Cash+check in drawer
CHK/CG	*16.52	Change total for check tendering
GLU#57		

GLU code *3

When programmed to be printed in the programming for the department, the following will be printed here:

D01	32.000 Q	Dept. code
DPT.01	*48.00	Sales q'ty
D02	16.000 Q	Dept. description and sales amount
DPT.02	*68.00	

*1 When you take a Z report, "Z1" is printed instead of "X1."

*2 To use this function on your register or to print this item on reports, consult your authorized SHARP dealer.

*3 The report prints the GLU codes assigned to the guests whose payment is not finished.

■ Individual cashier report

X1		*1
IND. CASHIER		Cashier code
CSR#0001	CASHIER0001	Cashier name
PAID TL	*783.64	Paid total
AVE.	*8.25	Paid total average per transaction counter
O-P	*0.50	Order total-paid total
REFUND	4 Q	Refund counter and total
	*44.00	
VOID	7 Q	Item void counter and total
	*40.50	
VOID MODE	1 Q	Void-mode transaction counter and total
	*7.00	
MGR VOID	4 Q	Void mode item counter and total
	*10.00	
SBTL VOID	4 Q	Subtotal void counter and total
	*44.10	
***PBAL	9 Q	Previous balance counter
G. C. COPY CNT	2 Q	Guest check copy print counter
GUEST	95 Q	Transaction counter
SCM(+)	*250.00	Starting cash memory (+)
SCM(-)	-12.00	Starting cash memory (-)
SCM TTL	*238.00	Starting cash memory total
***RA	1 Q	
	*48.00	
***RA2	1 Q	Received-on-account counter and total
	*30.00	
***P0	3 Q	
	*85.00	
***P02	1 Q	Paid-out counter and total
	*10.00	
CA/CHK1	1 Q	Check cashing counter and total *2
	*10.00	
DEPOSIT	3 Q	Deposit counter and total
	*102.00	
DEPO. (-)	1 Q	Deposit refund counter and total
	-42.00	

*1 When you take a Z report, "Z1" is printed instead of "X1."

*2 This item will be printed on the report when the check cashing function is enabled.

CASH	59 Q	Cash counter and total
	*324.38	
CASH2	1 Q	
	*36.00	
CASH3	1 Q	
	*3.00	Check sale and tendering counter and total
CASH4	2 Q	
	-13.00	
CASH5	1 Q	
	*9.00	
CHECK	8 Q	Credit sale and tendering counter and total
	*89.02	
CHECK2	6 Q	
	*85.00	
CHECK3	1 Q	
	*6.00	Exchange 1 cash counter and total
CHECK4	1 Q	
	*10.00	
CHECK5	1 Q	
	*8.00	
CREDIT1	3 Q	Cash in drawer
	*54.70	
CREDIT2	3 Q	
	*47.56	Check in drawer

EXCH1	1 Q	Cash+check in drawer
	18.61	
DOM. CUR1	*12.00	
EXCH2	1 Q	Change total for check tendering
	11.84	
DOM. CUR2	*15.00	
EXCH3	1 Q	Cash in drawer
	22.22	
DOM. CUR3	*18.00	
EXCH4	1 Q	Check in drawer
	21.36	
DOM. CUR4	*12.00	
****CID	*570.36	Cash+check in drawer
*CH ID	*248.02	
CA/CHK ID	*818.38	
CHK/CG	*16.52	Change total for check tendering

■ All clerk report

```

      *X1*
ALL CLERK
CLK#0001  CLERK0001
  
```

The subsequent printout occurs in the same format as in the individual clerk report from the clerk #1.
In the full clerk report, the total sales of all clerks are also printed.

* When you take a Z report, "Z1" is printed instead of "X1."

■ All cashier report

```

      *X1*
ALL CASHIER
CSR#0001  CASHIER0001
  
```

The subsequent printout occurs in the same format as in the individual cashier report from the cashier #1.
In the full cashier report, the total sales of all cashiers are also printed.

* When you take a Z report, "Z1" is printed instead of "X1."

■ Hourly report

NOTE

The hourly report format can be selected between 30-minute and 60-minute intervals in the programming.

(In case of a report in 30-minute interval format)

X1		*1
HOURLY		
9:00	20 Q	Time
	*215.77	Transaction counter
AVE.	*10.79	Sales total
9:30	9 Q	Average of sales amount
	*72.65	
AVE.	*8.07	
SUBTOTAL	29 Q	Subtotal of transaction counter and sales total for 1 hour *2
	*288.42	
10:00	11 Q	
	*75.50	
AVE.	*6.86	
10:30	13 Q	
	*49.30	
AVE.	*3.79	
SUBTOTAL	24 Q	
	*124.80	
20:00	6 Q	
	*45.73	
AVE.	*7.62	
20:30	14 Q	
	*128.56	
AVE.	*9.18	
SUBTOTAL	20 Q	
	*174.29	

*1 When you take a Z report, "Z1" is printed instead of "X1."

*2 This item will not be printed on a report in 60-minute interval format.

■ GLU report by specified range

X1		
GLU		GLU code
	1-9999	GLU code range
GLU#75	0001	Clerk code
***PBAL	*33.20	Previous balance
DEPOSIT	*0.00	Deposit amount
DEPO. (-)	*0.00	Deposit refund amount
GLU#501	0001	
***PBAL	*15.00	
DEPOSIT	*0.00	
DEPO. (-)	*0.00	
***TOTAL		
***PBAL	*186.84	Total previous balance
DEPOSIT	*52.00	Total deposit amount
DEPO. (-)	-42.00	Total deposit refund amount

■ GLU report by clerk

X1		
GLU BY CLERK		
CLK#0001	CLERK0001	Clerk code and name
GLU#75		GLU code
***PBAL	*33.20	Previous balance
DEPOSIT	*0.00	Deposit amount
DEPO. (-)	*0.00	Deposit refund amount
GLU#501		
***PBAL	*15.00	
DEPOSIT	*0.00	
DEPO. (-)	*0.00	
***TOTAL		
***PBAL	*186.84	Total previous balance
DEPOSIT	*52.00	Total deposit amount
DEPO. (-)	-42.00	Total deposit refund amount

■ Balance report

X1		
BALANCE		
OLD BAL.	*187.34	(1) Balance of the previous day
ORDER TL	*559.60	(2) Order total
PAID TL	*499.20	(3) Paid total
BALANCE	*247.74	(1) + (2) - (3)

Periodic Report Sample

Your register allows you to take consolidation X and Z reports of a chosen period (the period is usually one week or month).

■ General information

The periodic reading or resetting reports are the same in format as those in the X1/Z1 report for daily sales information except mode indication ("X2" or "Z2").

• Sample X report

X2	Read symbol
DEPT. /GROUP	Report title

• Sample Z report

Z2	Reset symbol
Z1 0001	Reset counter of daily total
Z2 0003	Reset counter of periodic consolidation
GT1 *00000018216.37	Grand totals
GT2 *00000018654.58	
GT3 -00000000438.21	
BAL -00000123399.39	
TR *00000000000.00	
DEPT. /GROUP	Report title

The subsequent items are printed out in the same format as in the X/Z report on daily totals.

■ Daily net report

X2	When you take a Z report, "Z2" is printed instead of "X2".	
DAILY NET		
03/07	382 Q	Date
	*3184.72	Transaction counter
04/07	4 Q	Sales total
	*908.20	
31/07	3 Q	
	*39.20	
***TOTAL	394 Q	Total of transaction counter
	*9225.52	Total of sales total


Compulsory Cash/Check Declaration

If your register has been programmed for compulsory cash/check declaration, you must declare cash/check in drawer in advance according to the type of the declaration when you take clerk Z reports.


Procedure

• Individual clerk Z report

OP X/Z mode

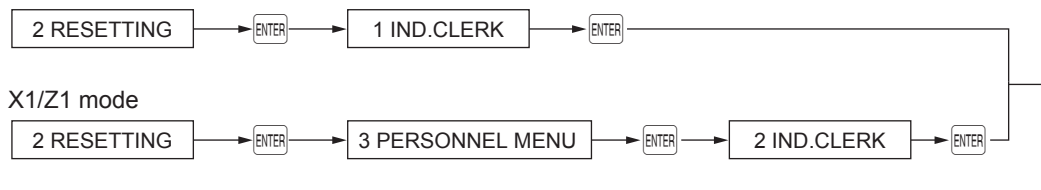

X1/Z1 mode

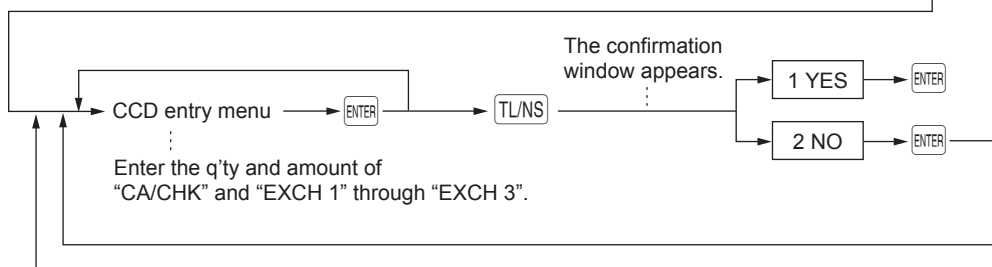

• Full clerk Z report

X1/Z1 mode



NOTE

To use this function, please consult your authorized SHARP dealer.

■ Display sample

— CCD ENTRY —		
CA/CHK IS		*0.00
EXCH1 IS		0.00
EXCH2 IS		0.00
EXCH3 IS		0.00
OPXZ		0002

< CCD data menu window >

— CA/CHK IS —		
QUANTITY		0
AMOUNT		0.00
OPXZ		0002

< CA/CHK data entry window >

— EXCH1 IS —		
QUANTITY		0
AMOUNT		0.00
OPXZ		0002

< Exchange data entry window >

NOTE (QUANTITY) x (AMOUNT) = Total for “CA/CHK” or “EXCH1”

■ Report sample

OPZ		
CCD		
CA/CHK IS	3x	0.01
CA/CHK IS		*0.03
CA/CHK IS	14x	0.10
CA/CHK IS		*1.40
CA/CHK IS	4x	0.50
CA/CHK IS		*2.00
CA/CHK IS	9x	1.00
CA/CHK IS		*9.00
CA/CHK IS	2x	5.00
CA/CHK IS		*10.00
CA/CHK IS	3x	10.00
CA/CHK IS		*30.00
CA/CHK IS		*20.00
CA/CHK IS		*10.00
EXCH1 IS		5.00
EXCH1 IS	3x	10.00
EXCH1 IS		30.00
IND. CLERK		

CCD entry amount

Report title *1

EXCH1	1 Q
	35.00
EXCH1 IS	35.00
CCD DIF.	0.00
DOM. CUR1	*22.57
****CID	
	*58.83
*CH ID	*30.00
CA/CHK ID	*88.83
CA/CHK IS	*82.43
CCD DIF.	-6.40
DIF. TL	-6.40
CHK/CG	*3.60

(1) Cash/check in drawer to be obtained
(2) Declared cash/check in drawer
Difference (2)-(1)
Total of difference *2

*1 When you take a full clerk report, ALL CLERK is printed here.

*2 This is the total of the following:

- Difference of Exchange 1 through 3 (in domestic currency)
- Difference of cash/check

9

Non-accessed EAN Deletion

You can delete EANs that had not been accessed for a certain period. You can program a period in the PGM2 mode.

Follow the procedure shown below.

Non-accessed EAN deletion

1. Select the X1/Z1 mode from the mode selection screen.
2. Select "4 EAN DELETE".
3. Select "1 READING" to take a report, or "2 DELETE" to delete non-accessed EANs.
4. When you select "2 DELETE", select you want to delete all the non-accessed EANs (1 ALL DELETE) or delete the non-accessed EANs individually (2 IND.DELETE).

NOTE It is recommended to take a report first before executing deletion operation.

■ Non-accessed EAN report

*1	*X1*
	EAN DELETE
EAN code	5012345678900# 0.000 Q
Description	ITEM-A *0.00
	Z2 1.000 Q
	*12.50
	5012345698700# 1.000 Q
	ITEM-B *8.80
	5014725836900# 0.000 Q
	ITEM-C *0.00
	Z2 2.000 Q
	*15.98

These lines are printed when there is any sales data to be printed in periodic sales report. *2

*1 When you select "2 DELETE", "Z1" is printed instead of "X1".

*2 When you select "2 DELETE", the EAN data for periodic sales report is also deleted.

10 Prior to Programming

When you are in the PGM1 or PGM2 mode, the keyboard layout will be set to one of the programming layouts as shown below.


Programming Keyboard Layout

■ ER-A411


↑ RECEIPT	↑ JOURNAL				(P↑)	(P↓)	(←)	(→)	↑	MODE
		(TEXT)	•	CL					↓	CANCEL
(BS)		7 SYMBOL	8 ABC	9 DEF					(PREV.)	(NEXT)
(DEL)	(INS)	4 GHI	5 JKL	6 MNO					(COPY)	(PASTE)
(CAPS)		1 PQRS	2 TUV	3 WXYZ					ENTER	ST
(SHIFT)	(DC)	0 SPACE	00 CODE						TL/NS	

■ ER-A421

↑ RECEIPT	↑ JOURNAL	↑	MODE (HOME)			(PAGE UP)	€	¤	+	-	[{	}]	/	\	~	¢	ã	Ä	Ö					
		↓	ESC/ CANCEL	(←)	(→)	(PAGE DOWN)	&	*	-	%	<	>	,	”	,	;	:	!	í	¿						
(PREV. RECORD)	(NEXT RECORD)	⊗	•	CL	(ENTER)		â	Ä	ê	É	î	ô	Ô	û	Û	ä	Ä	ë	È	ï	Ï	ö	Ö	ü	Ü	
(TEXT COPY)	(TEXT PASTE)	7	8	9			á	Á	é	É	í	Í	ó	Ó	Ú	ú	à	À	è	È	ì	Ì	ò	Ò	ù	Ù
		4	5	6		(BACK SPACE)	Q	W	E	R	T	Y	U	I	O	P										
(CAPS)		1	2	3	(INS)	ST	A	S	D	F	G	H	J	K	L	ß										
(SHIFT)	(DC)	0	00 CODE	(SPACE)	(DEL)	TL/NS	Z	X	C	V	B	N	M	ã	Ä	Ç	Ñ	ä	Ä	ç	ñ					



: Used for programming characters. For more information about programming characters, see the section “How to Program Alphanumeric Characters”. Also the (DEL) key is used to delete the record item.



: Used to move the cursor.



: Used to program each setting.



: Used to program each setting and to finalize programming.



: Used to cancel programming and to get back to the previous screen.



: Used to go back to the previous record, e.g., from the department 2 programming window back to the department 1 programming window.



: Used to go to the next record, for example, in order to program unit prices for sequential departments.



: Used to scroll the window to go to the next page.



: Used to scroll the window to go back to the previous page.



: Used to clear the last setting you have programmed or clear the error state.



: Used to toggle between two or more options.



: Used to list those options which you can toggle by the • key.

Numeric keys : Used for entering figures.

* The keys in brackets are those on the ER-A421 keyboard. In the following sections, the procedure and key operation will be described using the keys on the ER-A411 keyboard.

How to Program Alphanumeric Characters

This section discusses how to program alphanumeric characters for various texts.

■ Mobile phone method (ER-A411)/Text keyboard method (ER-A421)

Entering alphanumeric characters

ER-A411 :

To enter a character, use the numeric keys as shown below.

To enter "A", press the "8" key.


To enter "B", press the "8" key twice.

To enter "C", press the "8" key three times.


ER-A421 :


To enter a character, simply press a corresponding character key on the programming keyboard.

Entering double-size characters

 : This key toggles the double-size character mode and the normal-size character mode. The default is the normal-size character mode. When the double-size character mode is selected, the letter "W" appears at the bottom of the display.

Entering upper-case letters


 : You can enter an upper-case letter by using this key. Press this key just before you enter the upper-case letter. You should press this key each time you enter an upper-case letter.

 : You can lock the upper-case letter mode once the this key is pressed.

Entering space

 : Enter a space in the cursor position.

To select a text editing mode

 : Toggles between the insert mode ("_") and the overwrite ("I") mode.

To move the cursor


  : Moves the cursor.

To delete a character or figure

 : Deletes a character or figure in the cursor position.

 : Backs up the cursor for deleting the character or figure at the left of the cursor.

To change the text input mode (ER-A411 only)

 : This key toggles the text input mode, Alphabet (A), European character (Ä), numeric (1), and symbol (*).

Text copy/paste

Copy : Move the cursor to the target text line to copy, and press the  key.

Paste : Move the cursor to the target text line to paste, and press the  key.

■ Entering character codes

Numerals, letters and symbols are programmable by entering the **00** key and character codes. Use the following procedure with the cursor placed at the position where you want to enter characters:

To enter a digit, simply press a corresponding numeric key.

→ **00** → XXX XXX : character code (3 digits)

Character
code:

	032	033	034	035	036	037	038	039	040	041	042	043	044	045	046	047
032 - 047		!	"	#	\$	%	&	'	()	*	+	,	-	.	/
	048	049	050	051	052	053	054	055	056	057	058	059	060	061	062	063
048 - 063	0	1	2	3	4	5	6	7	8	9	:	;	<	=	>	?
	064	065	066	067	068	069	070	071	072	073	074	075	076	077	078	079
064 - 079	@	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
	080	081	082	083	084	085	086	087	088	089	090	091	092	093	094	095
080 - 095	P	Q	R	S	T	U	V	W	X	Y	Z	[\]	^	_
	096	097	098	099	100	101	102	103	104	105	106	107	108	109	110	111
096 - 111	`	a	b	c	d	e	f	g	h	i	j	k	l	m	n	o
	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127
112 - 127	p	q	r	s	t	u	v	w	x	y	z	{	}	~	Δ	
	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143
128 - 143	Ç	ü	é	â	ä	à	ã	ç	ê	ë	è	ï	î	ì	Ä	Å
	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159
144 - 159	É	æ	Œ	ô	ö	ò	û	ù	ÿ	Ö	Ü	ø	ƒ	θ	x	f
	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175
160 - 175	Á	Í	Ó	Ú	Ñ	Ñ	ª	º	¿	®	©	½	¼	¡	«	»
	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191
176 - 191	⋮	⋮	⋮			Á	Â	À	©							
	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207
192 - 207					-								=			
	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223
208 - 223																
	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239
224 - 239																
	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255
240 - 255	-	±	=	¼	¶	§	÷	,	°	·	.	1	3	2	■	(DC)

*(DC) : Double-size character code

11 Programming

This chapter explains how to program various items.


Before you start programming, press the **MODE** key and select PGM1, PGM2, AUTO KEY, SD CARD or iSDC mode from the mode selection screen depending on the item you are going to program.

Basic Instructions

This section illustrates the basic programming by using an example of programming for departments.


■ Programming screen

Opening screen: When you select the PGM1 or PGM2 mode, your display will show a programming opening screen corresponding to the mode you selected.

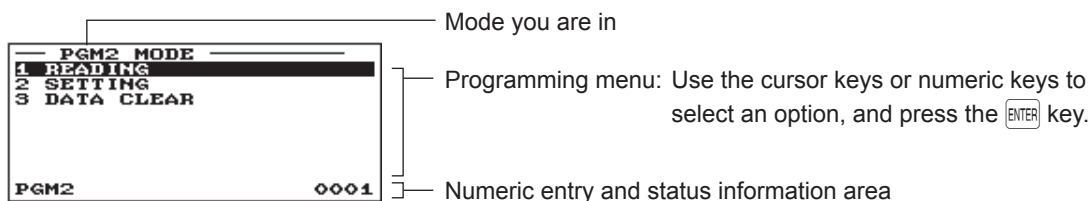


(In case of PGM2)

Code selecting screen (Dept. PLU):

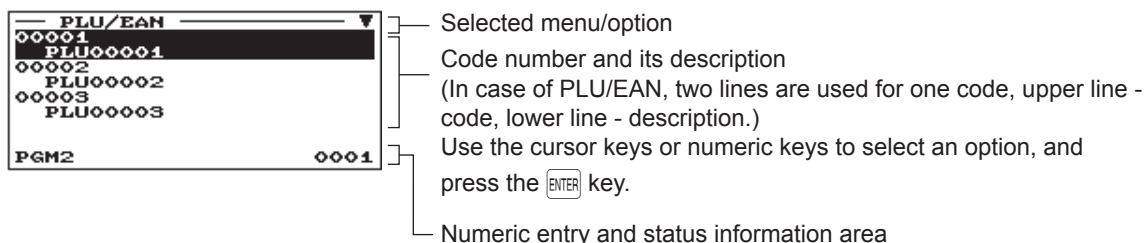

Programming screen:

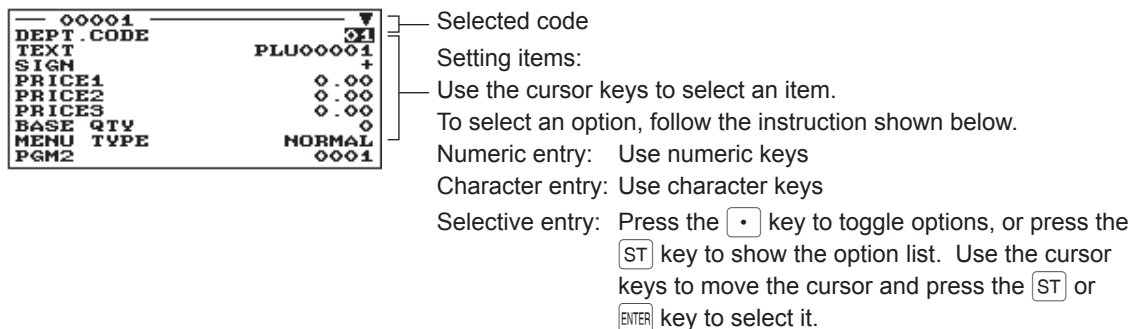

■ Programming example

The following example shows how to program 2.00 for the unit price, "ABCDE" for the description, and "non-taxable 1" for department 1.

Procedure

```

PGM2 MODE
1 READING
2 SETTING
3 DATA CLEAR
PGM2 0001
  
```

ENTER ↓ ↑ CANCEL

```

SETTING
1 ARTICLE
2 DIRECT KEY
3 FUNCTIONS
4 MEDIA
5 TRAINING CLK/CSR
6 FUNCTION TEXT
7 PERSONNEL
PGM2 0001
  
```

ENTER ↓ ↑ CANCEL

```

ARTICLE
1 DEPARTMENT
2 PLU/EAN
3 PLU RANGE
4 SET PLU TABLE
5 LINK PLU/EAN TBL
6 CONDIMENT TABLE
7 PROMOTION TABLE
PGM2 0001
  
```

ENTER ↓ ↑ CANCEL

```

DEPARTMENT
01 DPT.01
02 DPT.02
03 DPT.03
04 DPT.04
05 DPT.05
06 DPT.06
PGM2 0001
  
```

ENTER ↓ ↑ CANCEL

```

01
PRICE 200
TEXT DPT.01
GROUP No. 01
ENTRY TYPE OPEN&PRESET
COMMISSION# 0
OUTPUT KP No.1 NO
OUTPUT KP No.2 NO
SALES TYPE NORMAL
PGM2 0001
  
```



```

01
PRICE 2.00
TEXT ABCDE
GROUP No. 01
ENTRY TYPE OPEN&PRESET
COMMISSION# 0
OUTPUT KP No.1 NO
OUTPUT KP No.2 NO
SALES TYPE NORMAL
PGM2 0001
  
```

(P↓) ↓ ↑ (P↑)

1. In the PGM2 MODE screen, select "2 SETTING" by using the key and press the key.

- The SETTING screen will appear.

NOTE

- You can also select "2 SETTING" by using numeric key "2," then press the key.
- To return to the previous screen, press the key.

2. Select "1 ARTICLE".

- The ARTICLE screen will appear.

NOTE

- The arrow mark in the upper-right corner of the window shows that the window contains more options than are now on the screen. To scroll the window, press the or key.
- To return to the previous page, press the or key.

3. Select "1 DEPARTMENT".

- The DEPARTMENT screen will appear, listing programmable departments.

4. Select "01 DPT.01" to program for department 1.

- The "01" window will appear.

5. On the first page of the "01" window, program the unit price and description as follows:

NOTE

There are three entry patterns for the programming: the numeric entry, character entry, and selective entry.

- Move the cursor to "PRICE," enter "200" by using numeric keys. → Numeric entry
- Move the cursor to "DPT.01," enter "ABCDE" by using character keys. → Character entry

If you want to clear setting, press the key before you press the , , , or .

01		▲▼
OUTPUT KP No.1		NO
OUTPUT KP No.2		NO
SALES TYPE		NORMAL
RECEIPT TYPE		SINGLE
PRINT ON CLK		NO
HALO	999999.99	
VMP No.		0
TAXABLE1		10
PGM2		0001

-
6. Press the key to move the cursor to "TAXABLE 1", then program the machine to set "non-taxable 1" as follows:

- Press the key to select "NO". → Selective entry

NOTE

The key toggles between two options as follows:

NO → YES → NO →

Pressing the key displays all pertinent options.

-
7. Select one of the following actions:



- To cancel the programming, press the key. A confirmation window appears to ask you whether to save the data; select the option you prefer.
- To finalize the programming, press the key, then press the key. You will return to the "DEPARTMENT" window.
- To program for the following department, press the key. The "02" window will appear. To return to the "01" window, press the key.

The following sections describe how to program each item which is contained in a programming group.

Article Programming

Use the following procedure to select any option included in the article programming group:

Procedure

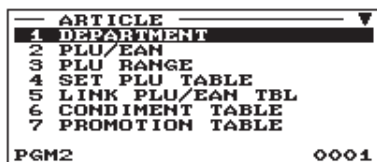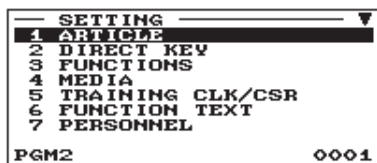


1. In the SETTING window, select “1 ARTICLE”.

- The ARTICLE window will appear.

2. Select any option from the following options list.

1 DEPARTMENT	Departments
2 PLU/EAN	PLUs/EANs
3 PLU RANGE	A range of PLUs
4 SET PLU TABLE	Set PLU table
5 LINK PLU/EAN TBL	Link PLU/EAN table
6 CONDIMENT TABLE	PLU condiment table
7 PROMOTION TABLE	Promotion table
8 EAN NON-PLU	EAN Non-PLU type code format
9 PRESS CODE	Press code
10 PLU/EAN STOCK	PLU/EAN stock quantity
11 EAN DELETE	EAN delete
12 PLU GROUP	PLU group text

The following illustration shows those options included in this programming group.

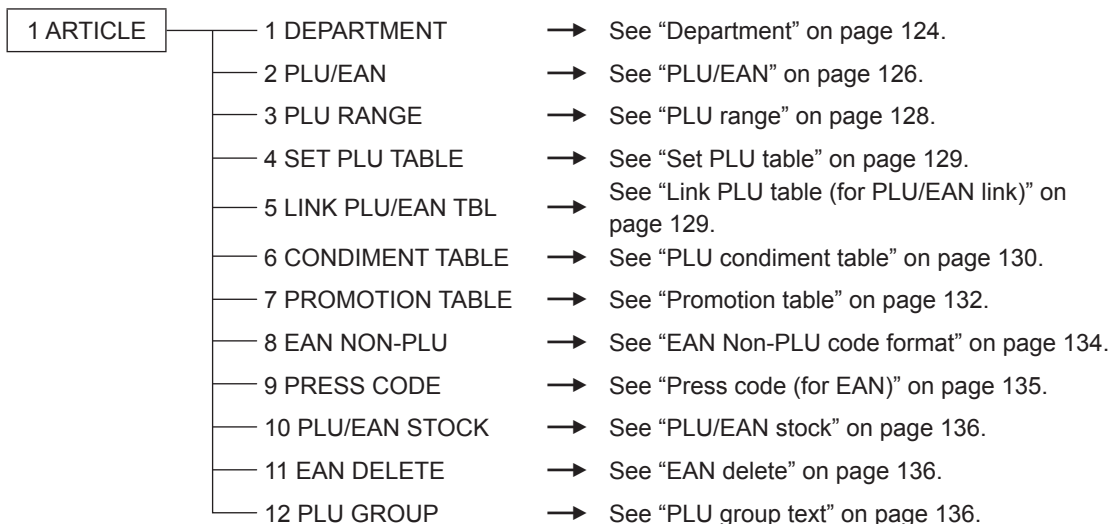

■ Department

The register ER-A411 is equipped with 20 standard departments and the register ER-A421 is equipped with 6 standard departments. They can be equipped with a maximum of 99 departments.

Use the following procedure to program for departments.

NOTE

To delete a department item in the "DEPARTMENT" window, select the item and press the



key. A confirmation window appears to ask you whether to delete the item, select the option you prefer.

Procedure

Select a pertinent dept. code.



01	PRICE	0.00
	TEXT	DPT. 01
	GROUP No.	01
	ENTRY TYPE	OPEN&PRESET
	COMMISSION#	0
	OUTPUT KP No. 1	NO
	OUTPUT KP No. 2	NO
	SALES TYPE	NORMAL
	PGM2	0001

The screen continues.

Program each item as follows:

NOTE

For more information about the entry patterns, see the "Basic Instructions" section.

• PRICE (Use the numeric entry)

Unit price (max. 8 digits)

• TEXT (Use the character entry)

Description for a department. Up to 16 characters can be entered. (Default text: DPT.nn)

• GROUP No. (Use the numeric entry)

- 01-09: Plus department
- 10: Minus department
- 11: Plus hash department
- 12: Minus hash department
- 13: Plus bottle return department
- 14: Minus bottle return department

• ENTRY TYPE (Use the selective entry)

Type of unit price entry for departments

- INHIBIT: Inhibited
- OPEN: Open only
- PRESET: Preset only
- OPEN & PRESET: Open & preset

• COMMISSION# (Use the numeric entry)

Commission group number (1 through 9)

If the number "0" is entered, no commission group number will be assigned to a department.

You can assign each department to a commission group.

• OUTPUT KP No. 1 and 2 (Use the selective entry)

- YES: Prints a receipt on the first/second remote printer when an item which belongs to the department is entered.
- NO: Does not print a receipt on the first/second remote printer when an item which belongs to the department is entered.

• SALES TYPE (Use the selective entry)

Department type selection

- SIF: SIF department
- SICS: SICS department
- NORMAL: Department other than SIF or SICS department

■ Department (continued)

• RECEIPT TYPE (Use the selective entry)

SINGLE: One receipt is printed on the remote printer.

DOUBLE: The same two receipts are printed on the remote printer.

• PRINT ON CLK (Use the selective entry)

YES: Prints the department sales information on the clerk report.

NO: Prints nothing on the clerk report.

• HALO (Use the numeric entry)

This function is intended for prevention of accidentally entered unreasonably amounts.

Limit amount: 0.00 to 999999.99

NOTE *In the initial programming, the HALO function is programmed as "INVALID".*

• VMP No. (Use the numeric entry)

VMP file number for EAN (1 through 3).

If the number "0" is entered, no VMP file number is assigned.

• TAXABLE 1 through 6 (Use the selective entry)

Tax status

YES: Taxable

NO: Non-taxable

NOTE • *The tax system of your register has been factory-set to automatic VAT1 - 6. If you desire to select any of automatic tax 1 - 6, manual VAT1 - 6, manual VAT1, manual tax 1 - 6, and the combination of the automatic VAT 1 - 3 and the automatic tax 4 - 6, contact your authorized SHARP dealer.*

• *When the combination of the automatic VAT1 - 3 and automatic tax 4 - 6 system is selected, one of the taxable 1 - 3 can be selected in combination with taxable 4 - 6.*

• AGE VERIFY (Use the selective entry)

Age verification function

YES: Enables the age verification function.

NO: Disables the age verification function.

■ PLU/EAN

NOTE

- In this manual, the word “EAN” represents EAN (European Article Number) and UPC (Universal Product Code).
- With regard to the EAN codes applicable to this register, please refer to the chapter 13.
- To delete a PLU/EAN item in the “PLU/EAN” window, select the item and press the **[DEL]** key. A confirmation window appears to ask you whether to delete the item, select the option you prefer.

Procedure

Select a pertinent PLU code, or directly enter a PLU code or EAN code.



— 00001	001
DEPT . CODE	PLU00001
TEXT	+
SIGN	0 .00
PRICE1	0 .00
PRICE2	0 .00
PRICE3	0 .00
BASE QTY	0
MENU TYPE	NORMAL
PGM2	0001

The screen continues.

Program each item as follows:

• DEPT. CODE (Use the numeric entry)

Department code to be associated with the entered PLU/EAN (01 through 99)

When a PLU/EAN is associated with a department, the following functions of the PLU/EAN depend on the programming for the department.

- Grouping (group 1 through 14)
- Single item cash sale
- HALO (only for subdepartments)
- Taxability

• TEXT (Use the character entry)

Description for a PLU/EAN. Up to 16 characters can be entered. (Default text: PLUnnnnn (PLU)/ space (EAN))

• SIGN (Use the selective entry)

- + : Plus PLU/EAN
- : Minus PLU/EAN

The function of every PLU/EAN varies according to the combination of its sign and the sign of its associated department as follows:

Department:	+	⌋	Serves as a normal plus PLU/EAN.
PLU/EAN:	+	⌋	
Department:	-	⌋	Serves as a normal minus PLU/EAN.
PLU/EAN:	-	⌋	
Department:	+	⌋	Accepts store coupon entries, but not split-pricing entries.
PLU/EAN:	-	⌋	
Department:	-	⌋	Not valid; not accepted
PLU/EAN:	+	⌋	

• PRICE 1 through 3 (Use the numeric entry)

Unit price of each price level (max. 8 digits).

• BASE QTY (Use the numeric entry)

Base quantity for each PLU/EAN that should be applied only to split-pricing entries (max. 2 digits: 0 to 99)

• MENU TYPE (Use the selective entry)

PLU/EAN menu type selection

- NORMAL: Normal PLU/EAN
- SET: Set PLU/EAN
- LINK: Link PLU/EAN

■ PLU/EAN (continued)

• SET#/LINK# (Use the numeric entry)

Table number for set PLU/EANs/ link PLUs (1 through 99)

If the number "00" is entered, no table number for set PLU/EANs/link PLUs will be assigned to a PLU.

• COND. TBL# (Use the numeric entry)

You can assign a PLU to a condiment table (01 through 99).

If the number "00" is entered, no condiment table number will be assigned to a PLU.

NOTE For EANs, it is fixed to "00".

• COND. TYPE (Use the selective entry)

A condiment type PLU is used only for condiment entry and cannot be entered alone.

YES: Sets a PLU as condiment type.

NO: Does not set a PLU as condiment type.

NOTE For EANs, it is fixed to "NO".

• CONDIMENT (Use the selective entry)

COMPULSORY: Makes condiment entry compulsory.

NON COMPUL.: Makes condiment entry non-compulsory.

NOTE For EANs, it is fixed to "NON COMPUL.".

• COMMISSION# (Use the numeric entry)

You can assign a PLU/EAN to a commission group (1 through 9).

If the number "0" is entered, no commission group number will be assigned to a PLU/EAN.

• OUTPUT KP No. 1 and 2 (Use the selective entry)

YES: Prints a receipt on the first/second kitchen printer when a PLU/EAN is entered.

NO: Does not print a receipt on the first/second kitchen printer when a PLU/EAN is entered.

• ENTRY TYPE (Use the selective entry)

Mode parameter

OPEN: Open price only

INHIBIT: Inhibited

OPEN&PRESET: Open price and preset price

PRESET: Preset price only

NOTE For EAN, it is fixed to "PRESET".

■ PLU/EAN (continued)

• TAXABLE 1 through 6 (Use the selective entry)

YES: Makes the PLU/EAN taxable.

NO: Makes the PLU/EAN non-taxable.

NOTE

- The tax system of your register has been factory-set to automatic VAT1 - 6. If you desire to select any of automatic tax 1 - 6, manual VAT1 - 6, manual VAT1, manual tax 1 - 6, and the combination of the automatic VAT1 - 3 and the automatic tax 4 - 6, contact your authorized SHARP dealer.
- When the combination of the automatic VAT1 - 3 and automatic tax 4 - 6 system is selected, one of the taxable 1 - 3 can be selected in combination with taxable 4 - 6.
- A PLU/EAN not programmed for any of these tax status is registered depending on the tax status of the department which the PLU/EAN belongs to.

• PLU GROUP (Use the numeric entry)

You can assign a PLU to a PLU group (00 through 99).

• AGE VERIFY (Use the selective entry)

YES: Enables the age verification function.

NO: Disables the age verification function.

• NON-ACCESS (Use the selective entry)

NON DEL.: Not delete non-accessed EANs by Z1 report.

DEL. BY Z: Delete non-accessed EANs by Z1 report.

NOTE

For PLU, it is fixed to "NON DEL.".

■ PLU range

You can program PLUs in the designated range.

Procedure

```

— PLU RANGE —
START          00000
END            00000
OPERATION      NEW & MAINT.
PGM2          0001
  
```



```

— 00001-00010 —
DEPT. CODE
TEXT
SIGN
PRICE1
PRICE2
PRICE3
BASE QTY
MENU TYPE
PGM2          0001
  
```

Enter a value or select an option for each item as follows:

• START (Use the numeric entry)

Starting PLU code (max. 5 digits)

• END (Use the numeric entry)

Ending PLU code (max. 5 digits)

• OPERATION (Use the selective entry)

- DELETE: Enables you to delete a specified range of PLUs.
- MAINTENANCE: Enables you to change the setting you have programmed.
- NEW & MAINT.: Enables you to change the current setting when the specified codes have already been created or to create new codes when the specified codes have not been created yet.

The screen continues.

Set PLU table

When you want to make some deduction for set sellings, set PLU should be specified, a PLU (set PLU) can have a maximum of 5 tied PLUs.

Procedure

Select a pertinent set PLU table.



01	
SET PLU #1	00000
SET PLU #2	00000
SET PLU #3	00000
SET PLU #4	00000
SET PLU #5	00000
PGM2	0001

Program each item as follows:

• SET PLU (Use the numeric entry)

Set PLU number (1 through 99)

• SET PLU #X

Enter tied PLU codes (max. 5 PLUs).

- NOTE**
- PLU codes should be defined before programming a Menu PLU.
 - If the **[DEL]** key is pressed on the table number selection menu, the set PLU table in the cursor position will be deleted.

Link PLU table (for PLU/EAN link)

It is possible to link PLUs (linked PLUs) with a PLU or EAN (link PLU/EAN) so that with a single key depression of the link PLU or EAN key. However, the number of linked PLUs is a maximum of 10.

Procedure

Select a pertinent link PLU table.



01	
ITEM #1	00000
ITEM #2	00000
ITEM #3	00000
ITEM #4	00000
ITEM #5	00000
ITEM #6	00000
ITEM #7	00000
ITEM #8	00000
PGM2	0001

The screen continues.

Program each item as follows:

• LINK PLU TABLE (Use the numeric entry)

Link PLU table number (1 through 99)

• ITEM #XX

Enter linked PLU codes (max. 10 PLUs).

- NOTE**
- PLU codes should be defined before programming a link PLU table.
 - If the **[DEL]** key is pressed on the table number selection menu, the selected table will be deleted.

■ PLU condiment table

The “condiment entry” is intended to guide the operator in making menu entries which require special cooking instructions. For example, a clerk can make such entries as “garnishing potato”, “with salad”, and “grilling steak rare”. When a clerk enters a menu-item PLU to which PLUs for the condiment entry have been assigned, these orders (such as “garnishing potato”) will be printed on the receipt.

Before you program for the condiment entry, prepare a condiment table. The following shows an example of a condiment table:

Condiment table

Table number	PLU codes for condiment entry (programmed text)					
01	Message text (HOW COOK?)	23 (RARE)	25 (MED.RARE)	27 (WELLDONE)	...	02
02	Message text (WITH?)	44 (SALAD)	45 (FRUITS)			
⋮	⋮	⋮	⋮	⋮	...	⋮
04	Message text (POTATO?)	33 (P.CHIPS)	37 (MASHED.P)	38 (BAKED.P)	...	99
99	Message text (DRINK?)	63 (TEA)	65 (MILK)	67 (A.JUICE)	...	

Condiment
tables
(Up to 99)

PLUs (Up to 28 for a table)

Next condiment table
number

The condiment table should contain the following:

Condiment table:

The condiment table is a group of condiment PLUs, which is assigned to each menu-item PLU. A table consists of a message text and up to 28 PLUs. Also, you can assign the next condiment table number to a condiment table to link them.

The message text is used for displaying a prompting message. The PLU is used for the special order setting. For example, when a clerk enters a menu-item PLU, a display message programmed for the message text such as “HOW COOK?” will appear. Then specify one of the PLUs programmed for text such as “RARE”.

Table number:

The table number is intended to identify each condiment table.

■ PLU condiment table (continued)

NOTE The condiment PLU programmed in a condiment table can be linked with condiment table (*Item link method*).

For example, if PLU 44 (SALAD) in a table of the above is linked with condiment table 10 (SAUCE), when the condiment PLU 44 (SALAD) is registered, items of the condiment table 10 (SAUCE) will appear.

Table number	PLU codes for condiment entry (programmed text)				
10	Message text (SAUCE)	51 (ITALIAN)	53 (FRENCH)		12

Next condiment table number

Procedure

Select a pertinent condiment table.



01					
TEXT					
NEXT LINK TBL#					
PLU#01					
PLU#02					
PLU#03					
PLU#04					
PLU#05					
PLU#06					
PGM2					

The screen continues.

Program each item as follows:

- **TEXT (Use the character entry)**
Description for a condiment menu.
Up to 16 characters can be entered.
- **NEXT LINK TBL# (Use the numeric entry)**
Enter the next condiment table number (max. 2 digits).
- **PLU#01 through #28**
Enter condiment PLU codes (max. 28 PLUs).

- NOTE**
- The description is used as the display prompt.
 - PLU codes should be defined before programming a condiment table.
 - If the **[DEL]** key is pressed on the table number selection window, the table in the cursor position will be deleted. In the DELETE window, confirm the table number to delete, press the **[ENTER]** key, then select "1 YES" in the message "DO YOU DEL. IT?" to delete it.

Promotion table

There are two types of promotion tables: a global type and a individual type. If you want to change the type, select the type in the “BASIC PRESET” window.

Global type/Individual type selection >

Procedure

Select a pertinent promotion table.

Select “BASIC PRESET”.

Program each item as follows:

- PROMOTION TABLE (Use the numeric entry)**
Promotion table number (1 through 99)
- BASIC PRESET**
To program the text and Global/Individual selection.
- OBJECTED ITEM**
To program the objected item.
- PROMOTION WAY**
To program the detail data.
- TEXT (Use the character entry)**
Description for each promotion table (max. 12 characters)
- TYPE (Use the selective entry)**
GLOBAL: Global type
INDIVIDUAL: Individual type

Objected item programming >

Procedure

Select “OBJECTED ITEM” in the job selection window, and press the key.


The screen continues.

- ITEM #1 through ITEM #10 (Use the numeric entry)**
Enter promotion PLU/EAN codes.

■ Promotion table (continued)

< Detail data programming >

Procedure

Select "PROMOTION WAY" in the job selection window, and press the  key.

< GLOBAL type >

```
— PROMOTION WAY —
WAY      AMOUNT DISC.  0.00
TRIP LEVEL                00
PGM2                      0001
```

< INDIVIDUAL type >

```
— PROMOTION WAY —
WAY      AMOUNT DISC.  0.00
TRIP LEVEL1                00
TRIP LEVEL2                00
TRIP LEVEL3                00
TRIP LEVEL4                00
PGM2                      0001
```

The screen continues.

• WAY (Use the selective entry)

Select the promotion way.

AMOUNT DISC.: Amount discount

% DISCOUNT: % discount

FREE ITEM: Free item

• AMOUNT DISC. (Use the numeric entry)

Discount amount (max. 8 digits)

• % DISCOUNT (Use the numeric entry)

% discount rate (0.00% to 100.00%)

• FREE ITEM (Use the numeric entry)

Free item PLU/EAN code


• TRIP LEVEL (Use the numeric entry) < for GLOBAL type >

Trip level for discount (satisfying count of entered item)
(max. 2 digits)

• TRIP LEVEL1 through 10 (Use the numeric entry) < for INDIVIDUAL type >

Trip level for discount (satisfying count of entered item) for
each promotion PLU/EAN (max. 2 digits)

■ EAN Non-PLU code format

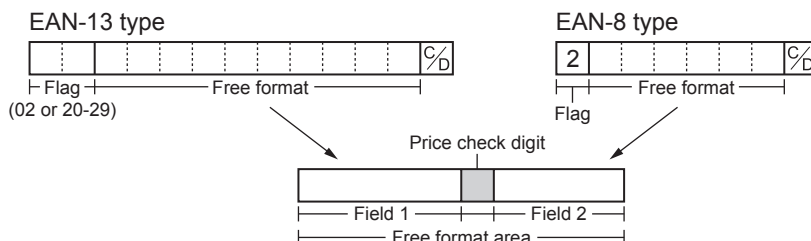

Procedure

Select a arbitrary number, or a pertinent EAN TYPE OF CODE & SYSTEM CODE you set.



01	
TYPE OF CODE	EAN13
SYSTEM CODE	20
LENGTH FLD#1	5
LENGTH FLD#2	4
FLD#1 DATA	FREE
FLD#2 DATA	PRICE
CHECK DIGIT	YES
TAB	2
PGM2	0001

Program each item as follows:

NOTE

To delete a code format in the "EAN NON-PLU" window, select the code format and press the **DEL** key. A confirmation window appears to ask you whether to delete the code format, select the option you prefer.

• TYPE OF CODE (Use the selective entry)

EAN-8: EAN-8 format code (consisting of 8 digits)
 EAN-13 (UPC-A): EAN-13 format code (consisting of 13 digits)

• SYSTEM CODE (Use the numeric entry)

System code (i.e. flag code): EAN-8: 1 digit, EAN-13: 2 digits

NOTE

ISBN/ISSN and press code are always used the fixed format even if code 37, 43, 78, 98, or 97 is entered.

• LENGTH FLD#1 (Use the numeric entry)

Length of field 1 (number of digits): 0 to 9

• LENGTH FLD#2 (Use the numeric entry)

Length of field 2 (number of digits): 0 to 9

• FLD#1 DATA

Meaning of field 1: It is fixed to FREE.

• FLD#2 DATA (Use the selective entry)

Meaning of field 2

PRICE: Price

QUANTITY: Quantity

• CHECK DIGIT (Use the selective entry)

Price check digit

YES: Use the price check digit

NO: Not use the price check digit

• TAB (Use the selective entry)

TAB or decimal point of field: 3/2/1/0

■ Press code (for EAN)

Your register allows to program the press code format.

Procedure

```
— PRESS CODE —  
1 GERMAN TYPE1  
2 U.K.  
3 FRENCH  
4 SWEDEN  
5 GERMAN TYPE2  
  
PGM2 0001
```



```
— GERMAN TYPE1 —  
TYPE OF CODE  NORMAL  
PRICE          ENCODED  
LABEL TYPE    ARTICLE  
  
PGM2 0001
```

Program each item as follows:

• TABLE NUMBER (1 to 5) (Use the selective entry)

- 1: GERMAN TYPE1 (prefix code: 434/439)
- 2: U.K. (prefix code: 988/989)
- 3: FRENCH (prefix code: 378/379)
- 4: SWEDEN (prefix code: 7388)
- 5: GERMAN TYPE2 (prefix code: 414/419)

• TYPE OF CODE (Use the selective entry)

NORMAL: Normal EAN
PRESS: Press code

• PRICE (Use the selective entry)

Price entry method for press code
PRESET: Using the EAN preset price
ENCODED: Using the encoded price
COMPULSORY: Compulsory entry

• LABEL TYPE (Use the selective entry)

Label of record in EAN file

ARTICLE: Prefix + article code

Select this option when you want to summarize the sales of items having press codes by each item.


PREFIX: Prefix only

Select this option when you want to summarize the sales of items having press codes by category.

■ PLU/EAN stock

You can assign a stock quantity to each PLU/EAN code.
Shown below is an example of selecting “1 OVERWRITE”.


Procedure

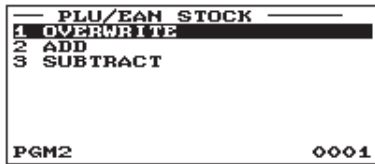

```
— PLU/EAN STOCK —
1 OVERWRITE
2 ADD
3 SUBTRACT

PGM2 0001
```

Select a pertinent PLU code, or directly enter a PLU code or EAN code.

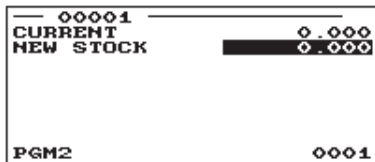

```
— 0001 —
CURRENT 0.000
NEW STOCK 0.000

PGM2 0001
```

- After selecting “1 OVERWRITE,” select a pertinent PLU/EAN code. Then the next screen will appear to show the following items:

• CURRENT (Confirmation only)

The current stock is displayed.

• NEW STOCK (Use the numeric entry)

Enter a new stock quantity (max. 7 digits: 0 to 9999.999)

NOTE

- If you need to add or subtract a stock quantity to or from the current stock quantity, select “2 ADD” or “3 SUBTRACT” and enter a value to be added or subtracted.
- The entry of a new stock value will update to the PLU/EAN stock counter.

■ EAN delete

You can delete the EAN codes which have not been accessed during the period you set in this program when you execute the delete job in EAN DELETE in X1/Z1 mode.

Procedure



```
— EAN DELETE —
PERIOD (DAY) 99

PGM2 0001
```

Program each item as follows:

• PERIOD (DAY) (Use the numeric entry)

Enter the EAN record delete period: 01 to 99 (00: Not delete by the non-accessed deleting job)

■ PLU group text

You can program a maximum of 12 characters for each PLU group (0 to 99).

Procedure

Select a pertinent PLU group from the list.



```
— PLU GROO —
PLU GROO

PGM2 A 0001
```

Program the item as follows:

• TEXT (Use the character entry)

Description for the PLU group. Up to 12 characters can be entered.

Direct Key Programming

Use the following procedure to select direct-key programming.

■ Direct key

You can assign departments and PLUs directly to the keyboard. In the case of PLUs, you may assign up to 3 levels to be accessed directly on the keyboard. For key no. positions, refer to the illustration shown on the next page.

Procedure

```

— SETTING —
1 ARTICLE
2 DIRECT KEY
3 FUNCTIONS
4 MEDIA
5 TRAINING CLK/CSR
6 FUNCTION TEXT
7 PERSONNEL
PGM2 0001
  
```



Press a key on the keyboard.



```

— TYPE —
TYPE
PGM2 0001
  
```



```

— PLU CODE —
LEVEL1 00005
LEVEL2 00000
LEVEL3 00000
PGM2 0001
  
```

In the case of selecting "DIRECT PLU"

1. In the SETTING window, select "2 DIRECT KEY".
 - The DIRECT KEY window will appear.
2. Press a key on the keyboard and program each item as follows:

• TYPE (Use the selective entry)

PLU: Assigns the key as a direct PLU key.
 DEPT: Assigns the key as a direct department key.
 INHIBIT: Non-use

NOTE When selecting a department, the screen on which a department code is to be entered (the message "DEPT. CODE") will appear.

• LEVEL1 through 3 (Use the numeric entry)

Enter a PLU code for each level. For example, if you want to use this key as PLU code 1 (level 1) and PLU code 101 (level 2), enter 1 for "LEVEL1" and 101 for "LEVEL2".

■ Direct key (continued)

The key number positions are shown below:

(ER-A411)

↑ RECEIPT	↑ JOURNAL	16	22	28	34	40	46	52	58	64
5	10	15	21	27	33	39	45	51	57	63
4	9	14	20	26	32	38	44	50	56	62
3	8	13	19	25	31	37	43	49	55	61
2	7	12	18	24	30	36	42	48	54	60
1	6	11	17	23	29	35	41	47	53	59

Departments and PLUs programmable area

(ER-A421)

↑ RECEIPT	↑ JOURNAL	19	26	33	40	47	54	61	68	75	82	89	96	103	110	117
6	12	18	25	32	39	46	53	60	67	74	81	88	95	102	109	116
5	11	17	24	31	38	45	52	59	66	73	80	87	94	101	108	115
4	10	16	23	30	37	44	51	58	65	72	79	86	93	100	107	114
3	9	15	22	29	36	43	50	57	64	71	78	85	92	99	106	113
2	8	14	21	28	35	42	49	56	63	70	77	84	91	98	105	112
1	7	13	20	27	34	41	48	55	62	69	76	83	90	97	104	111

Departments and PLUs programmable area


NOTE

- You can assign departments and PLUs only the “Departments and PLUs programmable area” shown above.
- You cannot assign a department or a PLU to the position to which a function key has been assigned.
- For a double size key, the key number on the right will be assigned.
- To change the key size between single size and double size, consult your authorized SHARP dealer.

Functional Programming

Use the following procedure to select any option included in the functional programming group:

Procedure

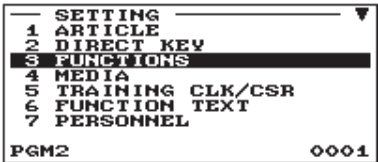


1. In the SETTING window, select “3 FUNCTIONS”.
 - The FUNCTIONS window will appear.

2. Select any option from the following options list.

- | | |
|-------------------|---|
| 1 (-) | Discount key |
| 2 % | Percent key |
| 3 COMMISSION | Commission |
| 4 MISC. FUNCTIONS | Miscellaneous functions
Deposit, Deposit(-), RA, RA2,
PO, PO2, CASH TIP, NON
CASH TIP, CID, CHK/CG |


The following illustration shows those options included in this programming group.

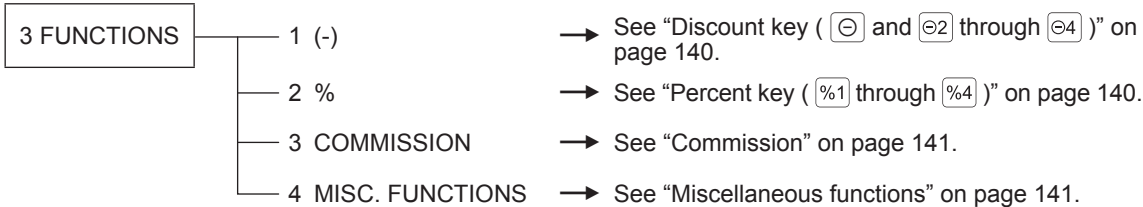

■ Discount key (and through)

Procedure

Select a pertinent discount key from the list.

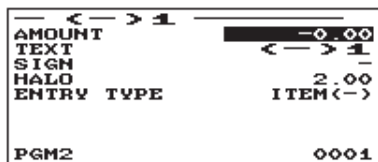


Program each item as follows:

- **AMOUNT (Use the numeric entry)**
Discount amount (max. 8 digits)
- **TEXT (Use the character entry)**
Description for the discount key. Up to 12 characters can be entered.
- **SIGN (Use the selective entry)**
Programming of the + or - sign assigns the premium or discount function to each discount key.
-: Minus amount (discount)
+: Plus amount (premium)
- **HALO (High Amount Lockout) (Use the numeric entry)**
This function is intended for prevention of accidentally entered unreasonably amounts.
Limit amount: 0.00 to 999999.99
- **ENTRY TYPE (Use the selective entry)**
ITEM(-): Item (-)
SBTL(-): Subtotal (-)

■ Percent key (through)

Procedure

Select a pertinent percent key from the list.

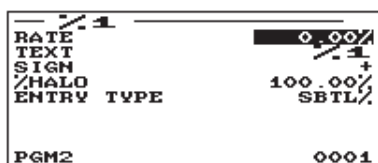

Program each item as follows:

- **RATE (Use the numeric entry)**
Percent rate (0.00 to 100.00)
- **TEXT (Use the character entry)**
Description for the percent key. Up to 12 characters can be entered.
- **SIGN (Use the selective entry)**
Programming of the + or - sign assigns the premium or discount function to each percent key.
-: Minus (discount)
+: Plus (premium)
- **%HALO (High Amount Lockout) (Use the numeric entry)**
HALO (High Amount Lockout) for the percent key (0.00 to 100.00)
- **ENTRY TYPE (Use the selective entry)**
ITEM%: Item %
SBTL%: Subtotal %

■ Commission

Procedure

Select a pertinent commission no. from the list.

▼

COM . SAL1	
RATE	0.000%
TEXT	COM . SAL1
PGM2	
0001	

Program each item as follows:

- **RATE (Use the numeric entry)**
Percent rate (0.000 to 99.999)
- **TEXT (Use the character entry)**
Description for the commission. Up to 12 characters can be entered.

■ Miscellaneous functions

Use the following procedure to select any function in the miscellaneous function group:

Procedure

FUNCTIONS	
1	<->
2	/
3	COMMISSION
4	MISC. FUNCTIONS
PGM2	
0001	

▼

MISC. FUNCTIONS	
1	DEPOSIT
2	DEPO. (-)
3	***RA
4	***RA2
5	***PO
6	***PO2
7	CASH TIP
PGM2	
0001	

The screen continues.

Program each item as follows:

1. In the FUNCTIONS window, select "4 MISC. FUNCTIONS".
 - The MISC. FUNCTIONS window will appear.

2. Select any function from the following functions list.

1	DEPOSIT	Deposit
2	DEPO. (-)	Deposit (-)
3	***RA	RA
4	***RA2	RA2
5	***PO	PO
6	***PO2	PO2
7	CASH TIP	Cash tip
8	NON CASH TIP	Non-cash tip
9	CID	Cash in drawer
10	CHK/CG	Check change

■ Deposit

Procedure

DEPOSIT	
HALO	999999.99
TEXT	DEPOSIT
PGM2	
0001	

Program each item as follows:

- **HALO (High Amount Lockout) (Use the numeric entry)**
This function is intended for prevention of accidentally entered unreasonably amounts.
Limit amount: 0.00 to 999999.99
- **TEXT (Use the character entry)**
Description for the deposit. Up to 12 characters can be entered.

■ RA/RA2

You can program an upper limit amount and description for each received-on-account key.

Procedure

— ***RA —	
HALO	999999.99
TEXT	***RA
PGM2	0001

Program each item as follows:

- **HALO (High Amount Lockout) (Use the numeric entry)**
This function is intended for prevention of accidentally entered unreasonably amounts.
Limit amount: 0.00 to 999999.99
- **TEXT (Use the character entry)**
Description for the received-on-account key. Up to 12 characters can be entered.

■ PO/PO2

You can program an upper limit amount and description for each paid-out key.

Procedure

— ***PO —	
HALO	999999.99
TEXT	***PO
PGM2	0001

Program each item as follows:

- **HALO (High Amount Lockout) (Use the numeric entry)**
This function is intended for prevention of accidentally entered unreasonably amounts.
Limit amount: 0.00 to 999999.99
- **TEXT (Use the character entry)**
Description for the paid-out key. Up to 12 characters can be entered.

NOTE

You can also select a PO key by pressing the corresponding key when it has been placed directly on the keyboard instead of selecting the key from the menu.

■ Cash tip/Non-cash tip

You can program an upper limit amount and description for each tip key.

Procedure

— CASH TIP —	
HALO	999999.99
TEXT	CASH TIP
PGM2	0001

Program each item as follows:

- **HALO (High Amount Lockout) (Use the numeric entry)**
This function is intended for prevention of accidentally entered unreasonably amounts.
Limit amount: 0.00 to 999999.99
- **TEXT (Use the character entry)**
Description for each tip key. Up to 12 characters can be entered.

■ Cash in drawer

You can program the description and the upper limit amounts for cash in drawer (sentinel).

Procedure

— CID —	
TEXT	*****CID
HALO	99999999.99
PGM2	A 0001

Program each item as follows:

- **TEXT (Use the character entry)**

Description for the cash in drawer. Up to 12 characters can be entered.

- **HALO (High Amount Lockout) (Use the numeric entry)**

This function is intended for prevention of accidentally entered unreasonably amounts.

Limit amount: 0.00 to 99999999.99

■ Check change

You can program the description and the upper limit amounts for check change.

Procedure

— CHK/CG —	
TEXT	CHK/CG
HALO	999999.99
PGM2	A 0001

Program each item as follows:

- **TEXT (Use the character entry)**

Description for check change. Up to 12 characters can be entered.

- **HALO (High Amount Lockout) (Use the numeric entry)**



This function is intended for prevention of accidentally entered unreasonably amounts.

Limit amount: 0.00 to 999999.99

Media Key Programming

Use the following procedure to select any option included in the media group:

Procedure

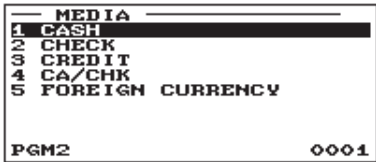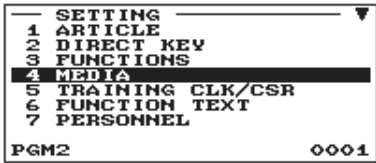

1. In the SETTING window, select “4 MEDIA”.
 - The MEDIA window will appear.
2. Select any option from the following options list.

1 CASH	Cash key
2 CHECK	Check key
3 CREDIT	Credit key
4 CA/CHK	Check cashing
5 FOREIGN CURRENCY	Foreign currency

The following illustration shows those options included in this programming group.



■ Cash key (Cash and Cash2 through 5)

Procedure

Select a pertinent cash key from the cash keys list.



CASH	
TEXT	CASH
HALO	999999.99
BILL PRINT	NON-COMPUL.
FOOTER PRINT	NO
NON-ADD#	NON-COMPUL.
AMOUNT ENTRY	NON-COMPUL.
DRAWER OPEN	YES
PGM2	A 0001

Program each item as follows:

- **TEXT (Use the character entry)**

Description for the cash key. Up to 12 characters can be entered.

- **HALO (High Amount Lockout) (Use the numeric entry)**

This function is intended for prevention of accidentally entered unreasonably amounts.

Limit amount: 0.00 to 999999.99

- **BILL PRINT (Use the selective entry)**

COMPULSORY: Makes bill printing compulsory.

NON-COMPUL.: Makes bill printing non-compulsory.

- **FOOTER PRINT (Use the selective entry)**

This item decides whether or not your register should print a message at the foot of a receipt when a specified cash key is used.

YES: Enables footer printing on the receipt.

NO: Disables footer printing on the receipt.

- **NON-ADD# (Use the selective entry)**

You can enforce the non-add code entry when a cash entry is accepted.

COMPULSORY: Compulsory non-add code entry

NON-COMPUL.: Non-compulsory non-add code entry

- **AMOUNT ENTRY (Use the selective entry)**

COMPULSORY: Compulsory amount tendered entry.

NON-COMPUL.: Non-compulsory amount tendered entry.

- **DRAWER OPEN (Use the selective entry)**

You can program each cash key to open the drawer.


YES: Opens the drawer.

NO: Disables the drawer opening.

■ Check key (Check and Check2 through Check5)

Procedure

Select a pertinent check key from the check keys list.



CHECK	CHECK
TEXT	999999.99
HALO	NON-COMPUL.
BILL PRINT	NON-COMPUL.
FOOTER PRINT	NO
AMOUNT ENTRY	NON-COMPUL.
NON-ADD#	NON-COMPUL.
EFT	NON-COMPUL.
DRAWER OPEN	YES
PGM2	A 0001

The screen continues.

Program each item as follows:

- **TEXT (Use the character entry)**

Description for the check key. Up to 12 characters can be entered.

- **HALO (High Amount Lockout) (Use the numeric entry)**

This function is intended for prevention of accidentally entered unreasonably amounts.

Limit amount: 0.00 to 999999.99

- **BILL PRINT (Use the selective entry)**

COMPULSORY: Compulsory bill printing

NON-COMPUL.: Non-compulsory bill printing

- **FOOTER PRINT (Use the selective entry)**

YES: Enables footer printing on the receipt.

NO: Disables footer printing on the receipt.

- **AMOUNT ENTRY (Use the selective entry)**

COMPULSORY: Compulsory amount tendered entry

NON-COMPUL.: Non-compulsory amount tendered entry

- **NON-ADD# (Use the selective entry)**

COMPULSORY: Compulsory non-add code entry

NON-COMPUL.: Non-compulsory non-add code entry

- **EFT (Use the selective entry)***

COMPULSORY: Makes EFT function compulsory.

NON-COMPUL.: Makes EFT function non-compulsory.

- **DRAWER OPEN (Use the selective entry)**

YES: Opens the drawer.

NO: Disables the drawer opening.

- **CHANGE DUE (Use the selective entry)**

Either change enable or disable can be selected for each check key.

DISABLE: Disables change calculation.



ENABLE: Enables change calculation.

* For details on the use of this device, consult your authorized SHARP dealer.

■ Credit key (Credit1 through Credit9)

Procedure

Select a pertinent credit key from the credit keys list.

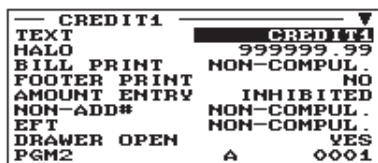

CREDIT1	
TEXT	CREDIT1
HALO	999999.99
BILL PRINT	NON-COMPUL.
FOOTER PRINT	NO
AMOUNT ENTRY	INHIBITED
NON-ADD#	NON-COMPUL.
EFT	NON-COMPUL.
DRAWER OPEN	YES
PGM2	A 0001

The screen continues.

Program each item as follows:

- **TEXT (Use the character entry)**

Description for the credit key. Up to 12 characters can be entered.

- **HALO (High Amount Lockout) (Use the numeric entry)**

This function is intended for prevention of accidentally entered unreasonably amounts.

Limit amount: 0.00 to 999999.99

- **BILL PRINT (Use the selective entry)**

COMPULSORY: Compulsory bill printing

NON-COMPUL.: Non-compulsory bill printing

- **FOOTER PRINT (Use the selective entry)**

This item decides whether or not your register should print a message at the foot of a receipt when a specified credit key is used.

YES: Enables footer printing on the receipt.

NO: Disables footer printing on the receipt.

- **AMOUNT ENTRY (Use the selective entry)**

COMPULSORY: Makes amount tendered entry compulsory.

INHIBITED: Inhibits amount tendered entry.

- **NON-ADD# (Use the selective entry)**

COMPULSORY: Compulsory non-add code entry

NON-COMPUL.: Non-compulsory non-add code entry

- **EFT (Use the selective entry)***

COMPULSORY: Makes EFT function compulsory.

NON-COMPUL.: Makes EFT function non-compulsory.

- **DRAWER OPEN (Use the selective entry)**

YES: Opens the drawer.

NO: Disables the drawer opening.

- **CHANGE DUE (Use the selective entry)**

DISABLE: Disables change calculation.

ENABLE: Enables change calculation.

* For details on the use of this device, consult your authorized SHARP dealer.

■ Check cashing (Check1 through Check5)

You can program the description and the upper limit amounts for check cashing.

Procedure

Select a pertinent check cashing no. from the check cashing numbers list.

▼

CA/CHK1	
TEXT	CA/CHK1
HALO	999999.99
PGM2	0002

Program each item as follows:

- **TEXT (Use the character entry)**

Description for check cashing. Up to 12 characters can be entered.

- **HALO (High Amount Lockout) (Use the numeric entry)**

This function is intended for prevention of accidentally entered unreasonably amounts.

Limit amount: 0 to 999999.99

■ Foreign currency (Foreign1 through Foreign4)

Procedure

Select a pertinent currency exchange key from the currency exchange keys list.

▼

FOREIGN1	
RATE	0.000000
TEXT	EXCH1
TAB	2
SYMBOL	
PGM2	0001

Program each item as follows:

- **RATE (Use the numeric entry)**

Currency exchange rate (0.000000 to 999.999999)

NOTE

Rate programming is disabled for Foreign4.

- **TEXT (Use the character entry)**

Description for the currency exchange key. Up to 12 characters can be entered.

- **TAB (Use the numeric entry)**

Tabulation (0 to 3)

- **SYMBOL (Use the character entry)**

Currency descriptor. Up to 4 characters can be entered.

NOTE

*Currency symbol is printed with (+) amount of foreign currency.
The programmed character is printed at left side of amount.*

EX) Case of "DM":

EXCH1	1.234567
	DM 1.23

↑
Programmed symbol

Training Clerk/Cashier Programming

Select “TRAINING CLK/CSR” in the SETTING window. You can set the text for the training mode title and clerks/cashiers in training.

Procedure

```
— SETTING —
1 ARTICLE
2 DIRECT KEY
3 FUNCTIONS
4 MEDIA
5 TRAINING CLK/CSR
6 FUNCTION TEXT
7 PERSONNEL
PGM2 0001
```



```
— TRAINING CLK/CSR —
CLK/CSR CODE 0000
TITLE TEXT TRAINING
PGM2 0001
```

1. In the SETTING window, select “5 TRAINING CLK/CSR”.

- The TRAINING CLK/CSR window will appear.

2. Program each item as follows:

- **CLK/CSR CODE**

Clerk/cashier code in training (max. 4 digits)

- **TITLE TEXT**



Description for the training mode title.

Up to 12 characters can be entered.

Function Text Programming

You can program a maximum of 12 characters for each function by using the following table:

Procedure

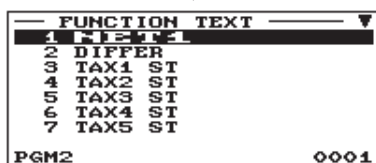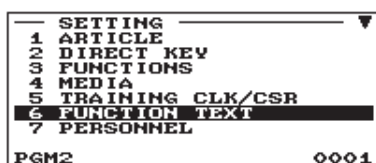

The screen continues.

1. In the SETTING window, select "6 FUNCTION TEXT".
 - The FUNCTION TEXT window will appear.

2. Program the item as follows:
 - **Text (Use the character entry)**
Description for each function. Up to 12 characters can be entered.

List of function text

No.	Function	Default text	No.	Function	Default text
1	Net 1	NET1	24	Refund	REFUND
2	Difference	DIFFER	25	Void	VOID
3	Taxable 1 subtotal	TAX1 ST	26	Void mode	VOID MODE
4	Taxable 2 subtotal	TAX2 ST	27	MGR void	MGR VOID
5	Taxable 3 subtotal	TAX3 ST	28	Subtotal void	SBTL VOID
6	Taxable 4 subtotal	TAX4 ST	29	Hash void	HASH VOID
7	Taxable 5 subtotal	TAX5 ST	30	Hash refund	HASH RF
8	Taxable 6 subtotal	TAX6 ST	31	Bill counter	BILL CNT
9	VAT/tax 1	VAT 1	32	No sale	NO SALE
10	VAT/tax 2	VAT 2	33	PBAL (for GLU)	***PBAL
11	VAT/tax 3	VAT 3	34	NBAL (for GLU)	***NBAL
12	VAT/tax 4	VAT 4	35	Starting cash memory (+)	SCM(+)
13	VAT/tax 5	VAT 5	36	Starting cash memory (-)	SCM(-)
14	VAT/tax 6	VAT 6	37	Guest check copy counter	G.C.COPY CNT
15	Total tax (on report)	TTL TAX	38	Guest (customer/transaction count)	GUEST
16	Net without tax (on report)	NET	39	Order total	ORDER TL
17	VAT shift	VAT SFT	40	Paid total	PAID TL
18	VAT/tax delete	TAX DELE	41	Average	AVE.
19	Net 2	NET2	42	Order total - Paid total	O-P
20	Set PLU discount	SETPLU-	43	Trans out	TRAN.OUT
21	Set EAN discount	SETEAN-	44	Trans in	TRAN.IN
22	Promotion discount	DISCOUNT	45	Tip paid	TIP PAID
23	Coupon-like PLU	CP PLU	46	Check payment for exchange 1	EX1 CHK

No.	Function	Default text
47	Credit payment for exchange 1	EX1 CR
48	Domestic currency 1	DOM.CUR1
49	Domestic currency 2	DOM.CUR2
50	Domestic currency 3	DOM.CUR3
51	Domestic currency 4	DOM.CUR4
52	Domestic currency 1 for check	DOM.CUR1 CHK
53	Domestic currency 1 for credit	DOM.CUR1 CR
54	Check in drawer	*CH ID
55	Cash/check in drawer	CA/CHK ID
56	Group 1	G ROUP01
57	Group 2	G ROUP02
58	Group 3	G ROUP03
59	Group 4	G ROUP04
60	Group 5	G ROUP05
61	Group 6	G ROUP06
62	Group 7	G ROUP07
63	Group 8	G ROUP08
64	Group 9	G ROUP09
65	(+)dept. total	*DEPT TL
66	(-)dept. total	DEPT(-)
67	Hash(+) total	*HASH TL
68	Hash(-) total	HASH(-)
69	Bottle return (+) total	*BTTL TL
70	Bottle return (-) total	BTTL(-)
71	Non-commission sale	NON COM.
72	Commission amount 1	COM.AMT1
73	Commission amount 2	COM.AMT2
74	Commission amount 3	COM.AMT3
75	Commission amount 4	COM.AMT4
76	Commission amount 5	COM.AMT5
77	Commission amount 6	COM.AMT6
78	Commission amount 7	COM.AMT7
79	Commission amount 8	COM.AMT8
80	Commission amount 9	COM.AMT9
81	Commission amount total	COM.TTL
82	Cash/check is	CA/CHK IS
83	Exchange 1 is	EXCH1 IS
84	Exchange 2 is	EXCH2 IS
85	Exchange 3 is	EXCH3 IS

No.	Function	Default text
86	CCD difference	CCD DIF.
87	CCD difference total	DIF. TL
88	Total	***TOTAL
89	Subtotal	SUBTOTAL
90	Old balance	OLD BAL.
91	New balance	BALANCE
92	Starting cash memory total	SCM TTL
93	Open GLU counter	OPEN GLU
94	Final/guest check receipt counter	FINAL/ GCRCPT
95	CCD report title	CCD
96	Town name 1	TOWN NAME
97	Town name 2	TOWN NAME
98	Cash transfer	TRANSFER
99	GLU code text	GLU#
100	Non-add code text	#
101	PLU subtotal (for link PLU %)	ITEM ST
102	Sales q'ty	ITEMS
103	Merchandise subtotal	MDSE ST
104	Net 1 (Taxable 1 - VAT/tax 1)	NET 1
105	Net 2 (Taxable 2 - VAT/tax 2)	NET 2
106	Net 3 (Taxable 3 - VAT/tax 3)	NET 3
107	Net 4 (Taxable 4 - VAT/tax 4)	NET 4
108	Net 5 (Taxable 5 - VAT/tax 5)	NET 5
109	Net 6 (Taxable 6 - VAT/tax 6)	NET 6
110	Total VAT	TTL VAT
111	Difference subtotal	DIFF ST
112	Due (on display)	DUE
113	Tip due (on display)	TIP DUE
114	Change	CHANGE
115	Copy receipt title	COPY
116	Guest check copy title	G.C. COPY
117	Bill transfer title	B.T.
118	Bill separate title	B.S.
119	GLU reading title	INTERMED.
120	Guest check receipt title	BILL
121	Void text on kitchen printer	VOID
122	Refund text on kitchen printer	REFUND
123	Receipt switch	RCP SW.
124	Price change receipt title	PR.CHNG

No.	Function	Default text
125	Overlapped clerk remain	OVCS REMAIN
126	Partial payment	PARTIAL PAY

No.	Function	Default text
127	VAT ID prefix text	VAT ID PRE
128	VAT ID postfix text	VAT ID POST

Personnel Programming

Use the following procedure to select any option included in the personnel group:

Procedure

```

SETTING
1 ARTICLE
2 DIRECT KEY
3 FUNCTIONS
4 MEDIA
5 TRAINING CLK/CSR
6 FUNCTION TEXT
7 PERSONNEL
PGM2 0001

```

1. In the SETTING window, select "7 PERSONNEL".
 - The PERSONNEL window will appear.

```


PERSONNEL
1 CLERK
2 CASHIER
3 MANAGER
4 CLERK KEY
5 CLERK KEY DEL.
PGM2 0001

```

2. Select any option from the following options list.

1 CLERK	Clerk
2 CASHIER	Cashier
3 MANAGER	Manager
4 CLERK KEY	Contactless clerk key
5 CLERK KEY DEL.	Prohibition of the contactless clerk key


The following illustration shows those options included in this programming group.

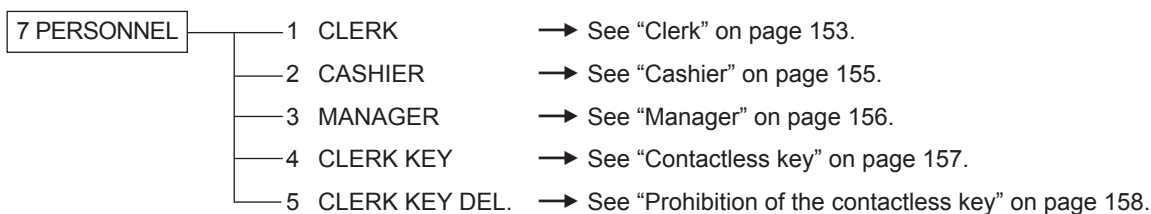

■ Clerk

Procedure

Select a pertinent clerk from the clerks list.



0001	0000
SECRET CODE	CLERK0001
NAME	NON-COMPUL
GLU TYPE	ENABLE
G.C. COPY	NOT
VAT SHIFT	PRICE1
P.SFT START	PRICE3
P.SFT END	DRAWER1
DRAWER No.	0001
PGM2	

The screen continues.

Program each item as follows:

- **SECRET CODE (Use the numeric entry)**

Secret code (max. 4 digits: 0001 to 9999/0000)

- **NAME (Use the character entry)**

Description for the clerk name. Up to 16 characters can be entered.

- **GLU TYPE**

GLU: Makes GLU system compulsory.

NON COMPUL.: Makes GLU system non-compulsory.

- **G.C. COPY (Use the selective entry)**

DISABLE: Disables guest check copy.

ENABLE: Enables guest check copy.

- **VAT SHIFT (Use the selective entry)**

STATE: Enables VAT shift entry.

NOT: Disables VAT shift entry.

- **P.SFT START (Use the selective entry)**

Price level range (start): (PRICE1 through PRICE3)

- **P.SFT END (Use the selective entry)**

Price level range (end): (PRICE1 through PRICE3)

- **DRAWER No. (Use the selective entry)**

DRAWER1/NONE

- **START GLU (Use the numeric entry)**

Starting GLU code (1 to 9999)

If the number "0" is entered, no GLU code will be assigned.

- **END GLU (Use the numeric entry)**

Ending GLU code (1 to 9999)

If the number "0" is entered, no GLU code will be assigned.

- **PGM2 (Use the selective entry)**

DISABLE: Disables operation in the PGM2 mode.

ENABLE: Enables operation in the PGM2 mode.

- **PGM1 (Use the selective entry)**

DISABLE: Disables operation in the PGM1 mode.

ENABLE: Enables operation in the PGM1 mode.

- **X1 (Use the selective entry)**

DISABLE: Disables operation in the X1 mode.

ENABLE: Enables operation in the X1 mode.

- **Z1 (Use the selective entry)**

DISABLE: Disables operation in the Z1 mode.

ENABLE: Enables operation in the Z1 mode.

■ Clerk (continued)

- **X2Z2 (Use the selective entry)**

DISABLE: Disables operation in the X2/Z2 mode.

ENABLE: Enables operation in the X2/Z2 mode.

- **FLASH (Use the selective entry)**

DISABLE: Disables operation in the FLASH mode.

ENABLE: Enables operation in the FLASH mode.

- **AUTO KEY (Use the selective entry)**

DISABLE: Disables operation in the AUTO KEY mode.

ENABLE: Enables operation in the AUTO KEY mode.

- **SD CARD (Use the selective entry)**

DISABLE: Disables operation in the SD CARD mode.

ENABLE: Enables operation in the SD CARD mode.

- **Z1 IN OPX/Z (Use the selective entry)**

DISABLE: Disables resetting operation in OPX/Z mode.

ENABLE: Enables resetting operation in OPX/Z mode.

- **iSDC (Use the selective entry)**

DISABLE: Disables operation in the iSDC mode.

ENABLE: Enables operation in the iSDC mode.

- **AUTO 1 KEY through AUTO 10 KEY (Use the selective entry)**

DISABLE: Disables each AUTO menu key.

ENABLE: Enables each AUTO menu key.


■ Cashier

NOTE

In case that “cashier only system” is applied to your register, use Clerk programming settings instead of this Cashier programming setting.

Procedure

Select a pertinent cashier from the cashiers list.

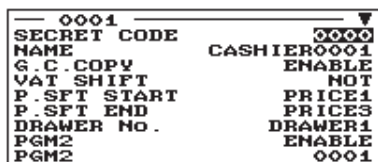

The screen continues.

Program each item as follows:

- **SECRET CODE (Use the numeric entry)**

Secret code (max. 4 digits: 0001 to 9999/0000)

- **NAME (Use the character entry)**

Name for the cashier. Up to 16 characters can be entered.

- **G.C. COPY (Use the selective entry)**

DISABLE: Disables guest check copy.

ENABLE: Enables guest check copy.

- **VAT SHIFT (Use the selective entry)**

STATE: Enables VAT shift entry.

NOT: Disables VAT shift entry.

- **P.SFT START (Use the selective entry)**

Price level range (start): (PRICE1 through PRICE3)

- **P.SFT END (Use the selective entry)**

Price level range (end): (PRICE1 through PRICE3)

- **DRAWER No. (Use the selective entry)**

DRAWER1/NONE

- **PGM2 (Use the selective entry)**

DISABLE: Disables operation in the PGM2 mode.

ENABLE: Enables operation in the PGM2 mode.

- **PGM1 (Use the selective entry)**

DISABLE: Disables operation in the PGM1 mode.

ENABLE: Enables operation in the PGM1 mode.

- **X1 (Use the selective entry)**

DISABLE: Disables operation in the X1 mode.

ENABLE: Enables operation in the X1 mode.

- **Z1 (Use the selective entry)**

DISABLE: Disables operation in the Z1 mode.

ENABLE: Enables operation in the Z1 mode.

- **X2Z2 (Use the selective entry)**

DISABLE: Disables operation in the X2/Z2 mode.

ENABLE: Enables operation in the X2/Z2 mode.

- **FLASH (Use the selective entry)**

DISABLE: Disables operation in the FLASH mode.

ENABLE: Enables operation in the FLASH mode.

- **AUTO KEY (Use the selective entry)**

DISABLE: Disables operation in the AUTO KEY mode.

ENABLE: Enables operation in the AUTO KEY mode.

- **SD CARD (Use the selective entry)**

DISABLE: Disables operation in the SD CARD mode.

ENABLE: Enables operation in the SD CARD mode.

■ Cashier (continued)

• Z1 IN OPX/Z (Use the selective entry)

DISABLE: Disables resetting operation in OPX/Z mode.

ENABLE: Enables resetting operation in OPX/Z mode.

• iSDC (Use the selective entry)

DISABLE: Disables operation in the iSDC mode.

ENABLE: Enables operation in the iSDC mode.

• AUTO 1 KEY through AUTO 10 KEY (Use the selective entry)

DISABLE: Disables each AUTO menu key.

ENABLE: Enables each AUTO menu key.

■ Manager

You can program a secret code for manager.


Procedure

Select a pertinent manager from the managers list.

Program each item as follows:

• SECRET CODE (Use the numeric entry)

Secret code (max. 4 digits: 0001 to 9999/0000)

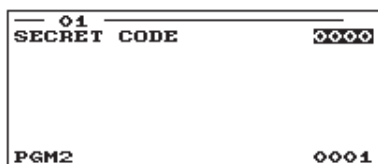

01
SECRET CODE
0000
PGM2
0001

■ Contactless key

You can program a clerk code for each contactless clerk key, and confirm the clerk name.

When you confirm this programming, the corresponding contactless key must be set to the clerk switch.


Procedure



```
SET A KEY <DEFINE>
PGM2                0001
```



```
CLERK KEY
CLERK CODE      0000
PGM2                0001
```

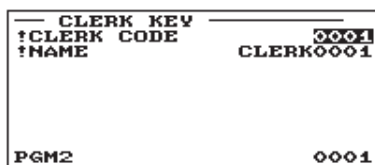

```
CLERK KEY
CLERK CODE      0001
NAME            CLERK0001
PGM2                0001
```



```
SET A KEY <DEFINE>
PGM2                0001
```


1. Set a contactless clerk key.
2. The clerk code currently assigned to the contactless clerk key is displayed.
When no clerk code is assigned, "0000" is displayed.
Program the item as follows:
 - **CLERK CODE (Use the numeric entry)**
Clerk code (max. 4 digits: 0000 to 9999)
3. Confirm the clerk code and name.
4. Press the TL/NS key.
The window will return to the step 1.
When you continue the programming, set another contactless key. (Go to the step 2.)
When you finalize the programming, press the CANCEL key.

■ Prohibition of the contactless key

You can prohibit a disused contactless key, entering the clerk code for the contactless key.


You can perform this programming without the corresponding contactless key.

Procedure

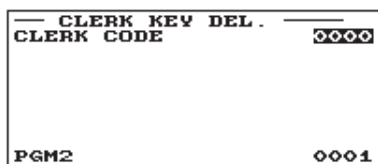

CLERK KEY DEL.
CLERK CODE 0000
PGM2 0001



Enter a clerk code and press the  key. Select "YES" or "NO" in the confirmation window.

Program the item as follows:

• CLERK CODE (Use the numeric entry)

Clerk code (max. 4 digits: 0001 to 9999)

NOTE

When this procedure is performed, all contactless keys which have been assigned to a designated clerk code are prohibited. If you need to activate the prohibited contactless key, program a clerk code by the operation of "Contactless key".

Terminal Programming

Use the following procedure to select any option included in the terminal group:

Procedure

```
SETTING ▲▼
2 DIRECT KEY
3 FUNCTIONS
4 MEDIA
5 TRAINING CLK/CSR
6 FUNCTION TEXT
7 PERSONNEL
8 TERMINAL
PGM2 0001
```





```
TERMINAL
MACHINE# 000000
CONSECUTIVE# 0024
DRAWER ALARM 000
SCREEN SAVE 02
WAITING TIME 000
PGM2 0001
```

1. In the SETTING window, select "8 TERMINAL".
 - The TERMINAL window will appear.
2. Select any option from the following options list:
 - **MACHINE# (Use the numeric entry)**
Machine number (max. 6 digits: 0 to 999999)
 - **CONSECUTIVE# (Use the numeric entry)**
Enter a number (max. 4 digits: 0 to 9999) that is the desired starting number.
 - **DRAWER ALARM (Use the numeric entry)**
Alarm length of time with drawer opening (0 to 255 seconds)
If the number "0" is entered, alarm is disabled.
 - **SCREEN SAVE (Use the numeric entry)**
Screen save mode timer (max. 2 digits: 0 to 99 minutes)
If the number "0" is entered, the register will turn the display off after 100 min., if it remains idle.
 - **WAITING TIME (Use the numeric entry)**
Waiting time until a message starts scrolling on the customer display (max. 3 digits: 0 to 999 seconds)
If the number "0" is entered, no message is displayed.
 - **VAT ID (Use the numeric entry)**
VAT ID is an identifier used in Netherlands, Norway and Sweden.
For Netherlands and Norway, enter 9 digits (000000000 to 999999999).
For Sweden, enter 10 digits (0000000000 to 9999999999).

Date/Time Setting

You can set the date and time for the register.

Procedure

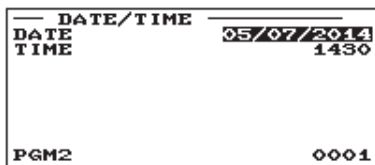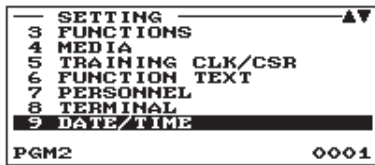


1. In the SETTING window, select "9 DATE/TIME".
 - The DATE/TIME window will appear.
2. Set each item as follows:
 - **DATE (Use the numeric entry)**
Enter the day (2 digits), month (2 digits), and year (2 digits) in this sequence.
 - **TIME (Use the numeric entry)**
Set the time (max. 4 digits) on the 24-hour system. For example, when the time is set to 2:30 AM, enter 0230; and when it is set to 2:30 PM, enter 1430. The time will be printed and displayed.

Optional Feature Selection

Use the following procedure to select any option included in the optional group:

Procedure

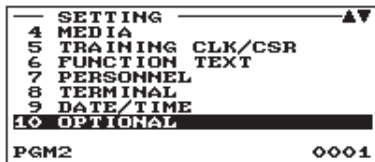


1. In the SETTING window, select "10 OPTIONAL".
 - The OPTIONAL window will appear.

2. Select any option from the following options list.

1 FUNC. PROHIBIT	Function prohibition
2 FUNCTION SELECT	Function selection
3 PRINT SELECT	Print selection
4 EURO	Euro change

The following illustration shows those options included in this programming group.

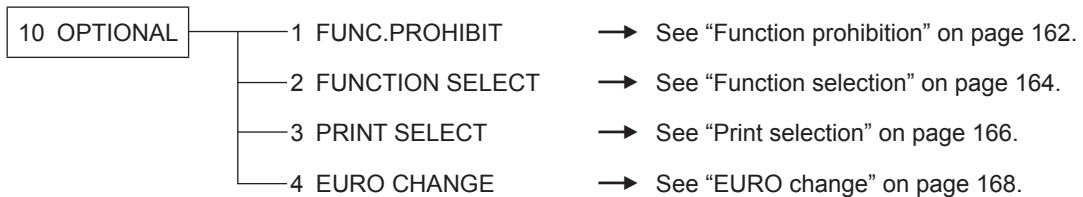

■ Function prohibition

Your register allows you to select whether to enable or disable various functions.

Procedure

FUNC. PROHIBIT	ENABLE
OPX/Z REPORT	PUBLIC
PAID OUT	PUBLIC
REFUND	PUBLIC
ISSUE ITM VD	PUBLIC
NO ISSUED VD	PUBLIC
SBTL VOID	PUBLIC
NO SALE	PUBLIC
INTERMED. GLU	PUBLIC
PGM2	0001

The screen continues.

Program each item as follows:

• OPX/Z REPORT (Use the selective entry)

DISABLE: Disables clerk report printing in the OP X/Z mode.

ENABLE: Enables clerk report printing in the OP X/Z mode.

• PAID OUT (Use the selective entry)

LIMITED: Allowed only in the MGR mode.

PUBLIC: Allowed in the REG and MGR modes.

• REFUND (Use the selective entry)

LIMITED: Allowed only in the MGR mode.

PUBLIC: Allowed in the REG and MGR modes.

• ISSUE ITM VD <Issued item void> (Use the selective entry)

LIMITED: Allowed only in the MGR mode.

PUBLIC: Allowed in the REG and MGR modes.

• NO ISSUED VD <No issued item void> (Use the selective entry)

LIMITED: Allowed only in the MGR mode.

PUBLIC: Allowed in the REG and MGR modes.

• SBTL VOID <Subtotal void> (Use the selective entry)

LIMITED: Allowed only in the MGR mode.

PUBLIC: Allowed in the REG and MGR modes.

• NO SALE (Use the selective entry)

LIMITED: Allowed only in the MGR mode.

PUBLIC: Allowed in the REG and MGR modes.

• INTERMED. GLU <Intermediate GLU> (Use the selective entry)

LIMITED: Allowed only in the MGR mode.

PUBLIC: Allowed in the REG and MGR modes.

• 1ST LAST VD <First last item void> (Use the selective entry)

DISABLE: Disables

ENABLE: Enables

• EAN LEARNING (Use the selective entry)

DISABLE: Disables EAN learning function.

ENABLE: Enables EAN learning function.

• PRICE CHANGE (Use the selective entry)

LIMITED: Allowed only in the MGR mode.

PUBLIC: Allowed in the REG and MGR modes.

• PAYMENT ST=0 (Use the selective entry)

DISABLE: Disables payment operation when the subtotal is "0".

ENABLE: Enables payment operation when the subtotal is "0".

■ Function prohibition (continued)

• PRT/DSP EDIT (Use the selective entry)

NO: All of display and print data is not edited.

YES: Display and print data is edited.

• DRAWER X1Z1 (Use the selective entry)

NOT OPEN: Disables drawer opening in the X1/X2 mode.

OPEN: Enables drawer opening in the X1/X2 mode.

• DRAWER X2Z2 (Use the selective entry)

NOT OPEN: Disables drawer opening in the Z1/Z2 mode.

OPEN: Enables drawer opening in the Z1/Z2 mode.

• DRAWER OPXZ (Use the selective entry)

NOT OPEN: Disables drawer opening in the OP X/Z mode.

OPEN: Enables drawer opening in the OP X/Z mode.

■ Function selection

Your register enables you to select various functional selections.

Procedure

FUNCTION SELECT	
VAT SHIFT	BY SHIFT
LV. SFT MODE	PUBLIC
LV. SFT TYPE	AUTO
RETURN TO L1	RECEIPT
PR. SFT MODE	PUBLIC
PR. SFT TYPE	AUTO
RETURN TO P1	BY ITEM
E. J. FULL	CONTINUE
Pgm2	0001

The screen continues.

Program each item as follows:

• VAT SHIFT (Use the selective entry)

BY SHIFT: Allows VAT shift to be accomplished by the shift key.

BY CLERK: Allows VAT shift to be accomplished by a clerk.

• LV. SFT MODE <Level shift mode> (Use the selective entry)

LIMITED: Allowed only in the MGR mode.

PUBLIC: Allowed in the REG and MGR modes.

• LV. SFT TYPE <Level shift type> (Use the selective entry)

MANUAL: Lock shift mode

AUTO: Automatic return mode

• RETURN TO L1 <Return to level 1> (Use the selective entry)

When the PLU level shift system is set to "AUTO," the PLU level can be returned to level 1 by one of the following methods:

RECEIPT: Returns the PLU level to level 1 by one receipt.

BY ITEM: Returns the PLU level to level 1 by one item.

• PR. SFT MODE <Price shift mode> (Use the selective entry)

LIMITED: Allowed only in the MGR mode.

PUBLIC: Allowed in the REG and MGR modes.

• PR. SFT TYPE <Price shift type> (Use the selective entry)

MANUAL: Lock shift mode

AUTO: Automatic return mode

• RETURN TO P1 <Return to price 1> (Use the selective entry)

When the PLU price level shift method is set to "AUTO," the price level can be returned to price 1 by one of the following methods:

RECEIPT: Returns the price level to price 1 by one receipt.

BY ITEM: Returns the price level to price 1 by one item.

• E.J. FULL (Use the selective entry)

Programming whether or not to lock item entry when the Electronic Journal file is full.

LOCK: Locks the item entry.

CONTINUE: Does not lock the item entry.

• PAY FOR EX1 (Use the selective entry)

Payment for exchange1 amount

CASH: Cash only

ALL: All media

• EX1 CALC. (Use the selective entry)

Exchange1 calculation method

DIVIDE: Division

MULTI.: Multiplication

■ Function selection (continued)

• CR IN RA/PO (Use the selective entry)

- UPDATE: Updates a credit totalizer when finalizing a received-on-account or a paid-out entry by a credit key.
- NON: Does not update a credit totalizer when finalizing a received-on-account or a paid-out entry by a credit key.

• ISBN PRICE (Use the selective entry)

Price entry after ISBN/ISSN code entry

- INHIBIT: Disables price entry after ISBN/ISSN code entry.
- COMPULSORY: Makes price entry after ISBN/ISSN code entry compulsory.

• VMP FULL (Use the selective entry)

VMP EAN entry when the VMP file is full

- ERROR: Disables VMP EAN entry.
- CONTINUE: Does not disable VMP EAN entry.

• ADD-ON FULL (Use the selective entry)

Entry of EAN with add-on code when the EAN ADD-ON file is full.

- ERROR: Disables entry of EAN with add-on code.
- CONTINUE: Does not disable entry of EAN with add-on code.

• EURO NON-PLU (Use the selective entry)

Converting the unit price of EAN NON-PLU codes (suffix code: 21, 22, 23, 27) between EURO and the local currency.

- CONVERT: Converts the unit price.
- NO CONVERT: Does not convert the unit price.

• EURO CONVERT (Use the selective entry)

Converting the unit price of EAN NON-PLU codes (all types of codes) between EURO and the local currency.

- CONVERT: Converts the unit price.
- NO CONVERT: Does not convert the unit price.

■ Print selection

You can program various printing functions.

Procedure

— PRINT SELECT —	▼
PURCHASE NO.	NO
TIME PRINT	YES
JOURNAL SEL.	FULL
JOURNAL TEXT	SMALL
R/J-VAT/TAX	YES
R/J-TAXABLE	YES
R/J-NET	YES
BILL-VAT/TAX	YES
PGM2	0001

The screen continues.

Program each item as follows:

• PURCHASE NO. (Use the selective entry)

NO: Does not print the number of purchases.

YES: Prints the number of purchases.

• TIME PRINT (Use the selective entry)

NO: Does not print the time on the receipt and journal.

YES: Prints the time on the receipt and journal.

• JOURNAL SEL. (Use the selective entry)

PARTIAL: Prints the information on all entries other than normal department entries (entries into “+” departments and their associated “+” PLUs) on the journal.

FULL: Prints the detailed information on the journal.

• JOURNAL TEXT (Use the selective entry)

NORMAL: Prints the normal-size letters on the journal.

SMALL: Prints the compressed-size letters on the journal.

• R/J -VAT/TAX (Use the selective entry)

NO: Does not print VAT or tax amounts on the receipt and journal.

YES: Prints VAT or tax amounts on the receipt and journal.

• R/J -TAXABLE (Use the selective entry)

NO: Does not print taxable amounts on the receipt and journal.

YES: Prints taxable amounts on the receipt and journal.

• R/J -NET (Use the selective entry)

NO: Does not print net amounts on the receipt and journal.

YES: Prints net amounts on the receipt and journal.

• BILL -VAT/TAX (Use the selective entry)

NO: Does not print VAT or tax amounts on the bill.

YES: Prints VAT or tax amounts on the bill.

• BILL -TAXABLE (Use the selective entry)

NO: Does not print taxable amounts on the bill.

YES: Prints taxable amounts on the bill.

• BILL -NET (Use the selective entry)

NO: Does not print net amounts on the bill.

YES: Prints net amounts on the bill.

• BILL -TIME (Use the selective entry)

NO: Does not print the time on the bill.

YES: Prints the time on the bill.

• BILL -TABLE# (Use the selective entry)

NO: Does not print the table number on the bill.

YES: Prints the table number on the bill.

• SEPARATOR LINE (Use the selective entry)

YES: Prints separator lines in the report.

NO: Creates one-line space instead of printing separator lines in the report.

■ Print selection (continued)

• LINK PLU (Use the selective entry)

PARENT+TTL: Prints parent PLU text of linked PLUs with totalizer.
EACH PLU: Prints each PLU text of linked PLUs.

• TOTAL&CHANGE (Use the selective entry)

Exchange1 amount print for total and change
DOMESTIC: Displays in domestic currency only.
WITH EX1: Displays both in domestic and EX1 currencies.

• EJ PRINT (Use the selective entry)

NORMAL: Prints the normal-size letters on the journal.
SMALL: Prints the compressed-size letters on the journal.

• ITEM CODE ON KP (Use the selective entry)

YES: Prints PLU/EAN code on a kitchen printer.
NO: Does not print PLU/EAN code on a kitchen printer.

• PRICE ON KP (Use the selective entry)

YES: Prints price on a kitchen printer.
NO: Does not print price on a kitchen printer.

• AMOUNT ON KP (Use the selective entry)

YES: Prints amount on a kitchen printer.
NO: Does not print amount on a kitchen printer.

• GUEST# ON KP (Use the selective entry)

YES: Prints guest number on a kitchen printer.
NO: Does not print guest number on a kitchen printer.

• QTY=1 ON KP (Use the selective entry)

YES: Prints quantity on a kitchen printer when quantity is 1.
NO: Does not print quantity on a kitchen printer when quantity is 1.

• MAXIMUM TICKET (Use the numeric entry)

Maximum number of ticket issuing (1 to 99)

• DBL RCPT HEADER (Use the selective entry)

NORMAL: Uses normal header for double receipts.
1 LINE: Uses a one-line header for double receipts.

• KP HEADER PRINT (Use the selective entry)

YES: Prints a header on kitchen printer receipts.
NO: Does not print a header on kitchen printer receipts.

■ EURO change

You can program optional functions for EURO change. For the details, refer to EURO Migration Function section.

Procedure

```
— EURO —
DATE          000000
TIME          00
PRICE CONVERT YES
EURO JOB      NON-COMPUL
PGM2          0001
```

Program each item as follows:

• DATE (Use the numeric entry)

Preset the date to execute the automatic EURO modification operation.

Enter the day (2 digits), month (2 digits), and year (2 digits) in this sequence.

• TIME (Use the numeric entry)

Preset the time of the date to execute the automatic EURO modification operation.

Enter the hour (00-23)

• PRICE CONVERT (Use the selective entry)

YES: Converts the preset unit prices of Dept./PLU/EAN in the automatic EURO modification operation.

NO: Does not convert the preset unit prices of Dept./PLU/EAN to the ones of EURO currency in the automatic EURO modification operation.

NOTE *The preset rate of the Exchange 1 is applied as the conversion rate, and the calculation method is set to "division".*

• EURO JOB (Use the selective entry)

NON-COMPUL.: Non-compulsory the automatic EURO modification operation in the X2/Z2 mode after the preset date.


COMPULSORY: Compulsory the automatic EURO modification operation in the X2/Z2 mode after the preset date.

NOTE *When the EURO STATUS of your register is already "D" (i.e. the domestic currency has been changed to EURO in your register), this programming is disabled.*

Report Programming

Use the following procedure to select any option included in the report group:

Procedure

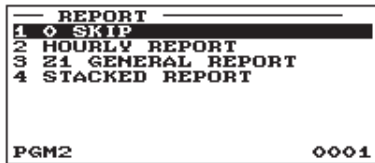

1. In the SETTING window, select "11 REPORT".
 - The REPORT window will appear.

2. Select any option from the following options list:

1 0 SKIP	Zero skip
2 HOURLY REPORT	Hourly report
3 Z1 GENERAL REPORT	Z1 General report
4 STACKED REPORT	Stacked report

The following illustration shows those options included in this programming group.



■ Zero skip

You can program whether or not to skip "0" in each report.

Procedure

— 0 SKIP —	
CLERK	SKIP
CASHIER	SKIP
TRANSACTION	SKIP
DEPARTMENT	SKIP
PLU	SKIP
HOURLY	SKIP
DAILY NET	SKIP
PGM2	0001

Program each item as follows:

• CLERK (Use the selective entry)

- SKIP: Skips those data that are "0" in the clerk report.
NOT SKIP: Does not skip those data that are "0" in the clerk report.

• CASHIER (Use the selective entry)

- SKIP: Skips those data that are "0" in the cashier report.
NOT SKIP: Does not skip those data that are "0" in the cashier report.

• TRANSACTION (Use the selective entry)

- SKIP: Skips those data that are "0" in the transaction report.
NOT SKIP: Does not skip those data that are "0" in the transaction report.

• DEPARTMENT (Use the selective entry)

- SKIP: Skips those data that are "0" in the department report.
NOT SKIP: Does not skip those data that are "0" in the department report.

• PLU (Use the selective entry)

- SKIP: Skips those data that are "0" in the PLU/EAN report.
NOT SKIP: Does not skip those data that are "0" in the PLU/EAN report.

• HOURLY (Use the selective entry)

- SKIP: Skips those data that are "0" in the hourly report.
NOT SKIP: Does not skip those data that are "0" in the hourly report.

• DAILY NET (Use the selective entry)

- SKIP: Skips those data that are "0" in the daily net report.
NOT SKIP: Does not skip those data that are "0" in the daily net report.

■ Hourly report

You can program the memory type and the starting time for the hourly report.

Procedure

— HOURLY REPORT —	
MEMORY TYPE	30MIN
START TIME	00
PGM2	0001

Program each item as follows:

• MEMORY TYPE (Use the selective entry)

- 30MIN: Selects the 30-minute type.
60MIN: Selects the 60-minute type.

• START TIME (Use the numeric entry)

Starting time entry (max. 2 digits: 0 to 23)

■ Z1 General report

Procedure

```
— Z1 GENERAL REPORT —  
SAVE ALL RAM          NO  
0 SKIP SALE DATA     NO  
SAVE DEPT DAILY       NO  
SAVE DEPT TERM        NO  
SAVE PLU DAILY        NO  
SAVE PLU TERM         NO  
SAVE TRNS. DAILY      NO  
SAVE TRNS. TERM       NO  
PGM2                  0001
```

The screen continues.

• SAVE ALL RAM (Use the selective entry)

YES: Saves the all RAM data in the SD card.

NO: Does not save the all RAM data in the SD card.

• 0 SKIP SALE DATA (Use the selective entry)

YES: Skip those data that are “0” sales when saving the sales data in the SD card.

NO: Does not skip those data that are “0” sales when saving the sales data in the SD card.

• SAVE DEPT DAILY (Use the selective entry)

YES: Saves the department report (daily) in the SD card.

NO: Does not save the department report (daily) in the SD card.

• SAVE DEPT TERM (Use the selective entry)

YES: Saves the department report (term) in the SD card.

NO: Does not save the department report (term) in the SD card.

• SAVE PLU DAILY (Use the selective entry)

YES: Saves the PLU report (daily) in the SD card.

NO: Does not save the PLU report (daily) in the SD card.

• SAVE PLU TERM (Use the selective entry)

YES: Saves the PLU report (term) in the SD card.

NO: Does not save the PLU report (term) in the SD card.

• SAVE TRNS. DAILY (Use the selective entry)

YES: Saves the transaction report (daily) in the SD card.

NO: Does not save the transaction report (daily) in the SD card.

• SAVE TRNS. TERM (Use the selective entry)

YES: Saves the transaction report (term) in the SD card.

NO: Does not save the transaction report (term) in the SD card.

• SAVE CLERK DAILY (Use the selective entry)

YES: Saves the clerk report (daily) in the SD card.

NO: Does not save the clerk report (daily) in the SD card.

• SAVE CLERK TERM (Use the selective entry)

YES: Saves the clerk report (term) in the SD card.

NO: Does not save the clerk report (term) in the SD card.

• SAVE CSR DAILY (Use the selective entry)

YES: Saves the cashier report (daily) in the SD card.

NO: Does not save the cashier report (daily) in the SD card.

• SAVE CSR TERM (Use the selective entry)

YES: Saves the cashier report (term) in the SD card.

NO: Does not save the cashier report (term) in the SD card.

• SAVE HOURLY (Use the selective entry)

YES: Saves the hourly report in the SD card.

NO: Does not save the hourly report in the SD card.

■ Z1 General report (continued)

- **SAVE DAILY NET (Use the selective entry)**

YES: Saves the daily net report in the SD card.

NO: Does not save the daily net report in the SD card.

- **SAVE & CLEAR EJ (Use the selective entry)**

YES: Saves the EJ data in the SD card and clears the data from the register.


NO: Does not save the EJ data in the SD card and clear the data from the register.

■ Stacked report

Your register is equipped with the stacked report printing function that enables multiple X/Z reports to be printed in sequence with a single request.


Procedure

Select a stacked report no. from the list.

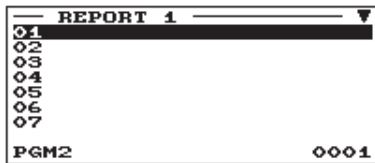

```


REPORT 1
01
02
03
04
05
06
07
PGM2 0001
  
```

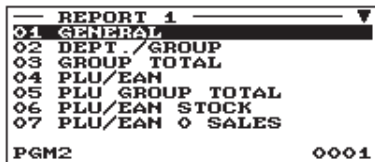

```

REPORT 1
01 GENERAL
02 DEPT./GROUP
03 GROUP TOTAL
04 PLU/EAN
05 PLU GROUP TOTAL
06 PLU/EAN STOCK
07 PLU/EAN 0 SALES
PGM2 0001
  
```

When you are allowed to set the parameter of a report, the following window will appear.

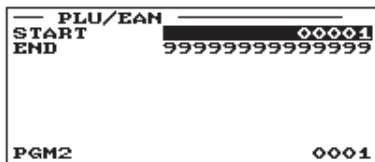

```

PLU/EAN
START 000001
END 9999999999999999
PGM2 0001
  
```

You can select a maximum of twenty reports from the stacked reports list. Some reports can be set their parameters such as "START CODE" and "END CODE".

• 01 GENERAL

General report

• 02 DEPT./GROUP

Full department report

• 03 GROUP TOTAL

Full group total report on departments

• 04 PLU/EAN (Use the numeric entry)

PLU/EAN report by specified range

Parameter: Starting PLU/EAN code/ending PLU/EAN code
(1 through 9999999999999999)

• 05 PLU GROUP TOTAL

Full group total report on PLUs

• 06 PLU/EAN STOCK (Use the numeric entry)

PLU/EAN stock report

Parameter: Starting PLU/EAN code/ending PLU/EAN code
(1 through 9999999999999999)

• 07 PLU/EAN 0 SALES

PLU/EAN zero sales report

• 08 PLU CATEGORY (Use the numeric entry)

PLU/EAN by price category

Parameter: Starting price/ending price

• 09 TRANSACTION

Transaction report

• 10 TL-ID

Total in drawer report

• 11 COMMISSION

Commission sales report

• 12 ALL CLERK

Full clerk report

• 13 ALL CASHIER

Full cashier report

• 14 HOURLY (Use the numeric entry)

Hourly report

Parameter: Starting time/ending time (0 through 2330)

NOTE To take the hourly Z report, you have to specify the full-range hourly report.

■ Stacked report (continued)

- **15 DAILY NET**

Daily net report

- **16 GLU (Use the numeric entry)**

GLU report

Parameter: Starting GLU code/ending GLU code (1 through 9999)

- **17 BALANCE**

Balance report


- **18 EAN DELETE**

EAN delete report (reading)

Message Programming

Use the following procedure to select any option included in the message group:

Procedure

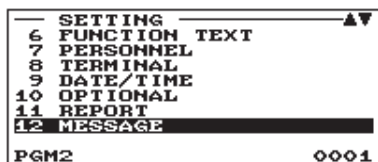


1. In the SETTING window, select "12 MESSAGE".
 - The MESSAGE window will appear.



2. Select any option from the following options list:

1 RECEIPT LOGO	Receipt logo
2 E.BILL MESSAGE	Entertainment bill message
3 SCROLL MESSAGE	Scrolling message for customer display


The following illustration shows those options included in this programming group.

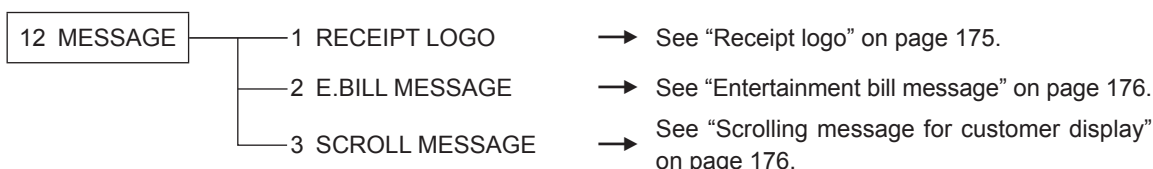

■ Receipt logo

Your register can print programmed messages for customers on every receipt.
The logo text is printed in a centering form on the receipt.

Procedure

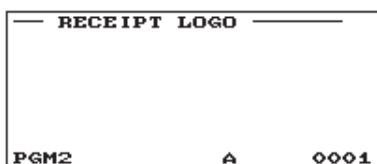

Program each item as follows:

- **RECEIPT LOGO (Use the character entry)**
Logo text for the receipt (max. 30 characters x 6 lines)

NOTE

The register provides the following patterns of receipt logo, and the default is the pattern 6.
At the default, the first 3 lines are used as header, and the last 3 lines are used as footer.

Pattern 1: 3 line text header

Pattern 2: Image logo header

Pattern 3: Image logo header + 3 line text footer

Pattern 4: 6 line text header

Pattern 5: Image logo header + 3 line text header

Pattern 6: 3 line text header + 3 line text footer

To change the receipt logo pattern, consult your authorized SHARP dealer.

Some programmed text may not be printed depending on the pattern.

■ Entertainment bill message

Your register can print programmed entertainment bill messages on the receipt.

Procedure

```

— E.BILL MESSAGE —

```



```

PGM2          A      0001

```

Program each item as follows:

- **E.BILL MESSAGE (Use the character entry)**
Text for the message (max. 30 characters)

■ Scrolling message for customer display

Your register can display programmed scrolling messages on the customer display.

Procedure

```

— SCROLL MESSAGE —
PGM2          A          0001

```

Program each item as follows:

- **SCROLL MESSAGE (Use the character entry)**
Text for the scrolling message (max. 64 characters)

Device Configuration Programming

Use the following procedure to select a device configuration programming:

Procedure

```

7  SETTING
8  PERSONNEL
9  TERMINAL
10 DATE/TIME
11 OPTIONAL
12 REPORT
13 MESSAGE
14 DEVICE CONFIG
PGM2 0001
  
```



```


1 BUILT-IN PRINTER
2 KP#1
3 KP#2
4 BCR(SCANNER)
5 ONLINE
7 CLERK KEY
8 EFT
PGM2 0001
  
```

1. In the SETTING window, select "13 DEVICE CONFIG".
 - The DEVICE CONFIG window will appear.

2. Select any option from the following options list:

1 BUILT-IN PRINTER	Built-in printer
2 KP#1	Remote printer #1
3 KP#2	Remote printer #2
4 BCR(SCANNER)	Scanner
5 ONLINE	On-line
6 CONTROL UNIT	Control unit
7 CLERK KEY	Clerk key
8 EFT	EFT

The following illustration shows those options included in this programming group.

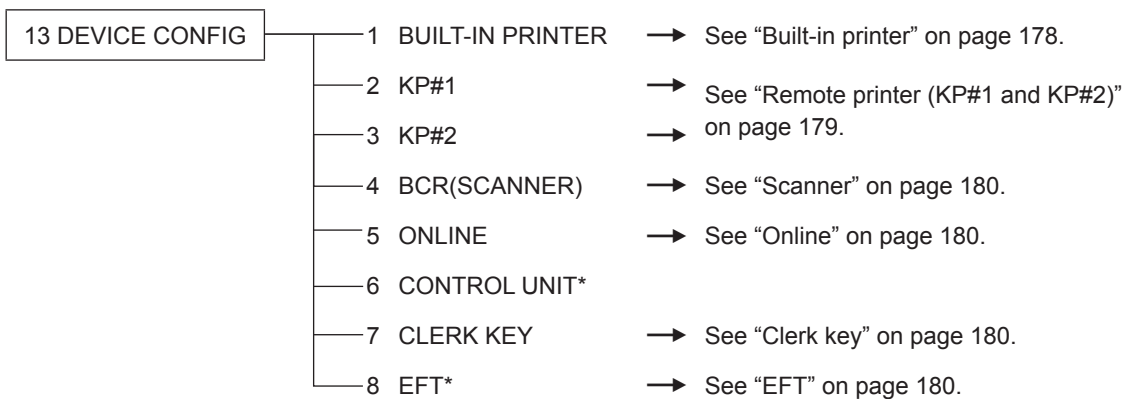

* For details on the use of these devices, consult your authorized SHARP dealer.

■ Built-in printer

Procedure

```
— BUILT-IN PRINTER —
AUTO CUTTER          YES
LIGHT&SHADE          50
IMAGE FOOTER        NOT PRINT
DIFF ST FEED          0

PGM2                  0001
```

Program each item as follows:

- **AUTO CUTTER (Use the selective entry)**

YES: Enables the auto cutter function.

NO: Disables the auto cutter function.

- **LIGHT&SHADE (Use the numeric entry)**

Select a light and shade level. (00 to 99)

00: 75% for standard

50: 100% <standard>

99: 125% for standard

- **IMAGE FOOTER (Use the selective entry)**

PRINT: Prints footer graphic logo.

NOT PRINT: Does not print footer graphic logo.

- **DIFF ST FEED**

Difference subtotal feed line (0 to 9).

■ Remote printer (KP#1 and KP#2)

Procedure

```

  KP#1
CHANNEL#  3
PRINTER  TM-T88<3><4><5>
AUTO CUTTER  YES
PRINT TYPE  ADDITION
SECOND KP    NO
NAME
INITIAL FEED# 00
SORT RCPT. CUT  NO
PGM2          0001

```

The screen continues.

Program each item as follows:

• CHANNEL# (Use the numeric entry)

Channel number (0 through 4)

When you program as "0", no RS-232 channel is assigned.

• PRINTER (Use the selective entry)

Select the printer to be used from the following:

TM-T90

TM-T88(3)/T88(4)/T88(5)

BUILT-IN (Built-in printer)

• AUTO CUTTER (Use the selective entry)

YES: Enables auto cutter function.

NO: Disables auto cutter function.

• PRINT TYPE (Use the selective entry)

Select the type of receipt print formats.

ADDITION: Addition

SINGLE/DOUBLE: Single/Double

ADD+SINGLE: Addition + Single

• SECOND KP (Use the selective entry)

You can assign a second remote printer to which data should be output when the first remote printer encounters an error during transmission of the data.

YES: Assigns the printer as a second remote printer.

NO: Does not assign the printer as a second remote printer.

• NAME (Use the character entry)

Description for the remote printer (max. 12 characters)

• INITIAL FEED# (Use the numeric entry)

Initial line feed for a remote printer (0 to 64)

• SORT RCPT. CUT (Use the selective entry)

Sort receipt cutting between each sort group

YES: Enables sort receipt cutting.

NO: Disables sort receipt cutting.

• SEQUENTIAL PRINT (Use the selective entry)

Sequential print from sort group 1 except header and footer

YES: Enables sequential print.

NO: Disables sequential print.

■ Scanner

Procedure

```
— BCR<SCANNER> —
CHANNEL# 3
BAUD RATE 4800bps
TYPE RS-CD CONTROL
DATA BITS 7 Bits
PARITY 1 ODD
STOP BIT 1 Bit
ITF14 W LENGTH
PGM2 0001
```

Program each item as follows:

- **CHANNEL# (Use the numeric entry)**
Channel number (0 through 4)
When you program as “0”, no RS-232 channel is assigned.
- **BAUD RATE (Use the selective entry)**
Transmission speed (baud rate)
19200 bps/9600 bps/4800 bps
- **TYPE (Use the selective entry)**
Selection of the scanner type
RS-CS CONTROL/RS-CD CONTROL
- **DATA BITS (Use the selective entry)**
Data bit: 7 bits/8 bits
- **PARITY (Use the selective entry)**
Parity bit: NON/ODD/EVEN
- **STOP BIT (Use the selective entry)**
Stop bit: 1 bit/2 bits
- **ITF14 (Use the selective entry)**
W LENGTH: With length
W/O LENGTH: Without length

■ Online

Procedure

```
— ONLINE —
CHANNEL# 3
PGM2 0001
```

Program each item as follows:

- **CHANNEL# (Use the numeric entry)**
Channel number (0 through 4)
When you program as “0”, no RS-232 channel is assigned.

■ Clerk key

Procedure

```
— CLERK KEY —
CHANNEL# 3
PGM2 0001
```

Program each item as follows:

- **CHANNEL# (Use the numeric entry)**
Channel number (0 through 4)
When you program as “0”, no RS-232 channel is assigned.

■ EFT

Procedure

```
— EFT —
CHANNEL# 3
PGM2 0001
```

Program each item as follows:

- **CHANNEL# (Use the numeric entry)**
Channel number (0 through 4)
When you program as “0”, no RS-232 channel is assigned.


GLU Code Programming

You can program the range of GLU code:

Procedure



```
SETTING
8 TERMINAL
9 DATE/TIME
10 OPTIONAL
11 REPORT
12 MESSAGE
13 DEVICE CONFIG
14 AUTO GENE. GLU
PGM2 0001
```

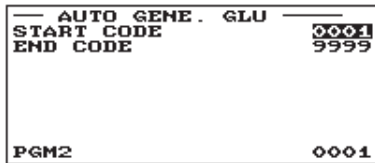

```
AUTO GENE. GLU
START CODE 0001
END CODE 9999
PGM2 0001
```

1. In the SETTING window, select "14 AUTO GENE. GLU".
 - The AUTO GENE. GLU window will appear.

2. Program each item as follows:
 - **START CODE (Use the numeric entry)**
Start GLU code (1 through 9999)
 - **END CODE (Use the numeric entry)**
End GLU code (1 through 9999)

Tax Programming

Use the following procedure to select any option included in the tax group:

Procedure

```
SETTING
9 DATE/TIME
10 OPTIONAL
11 REPORT
12 MESSAGE
13 DEVICE CONFIG
14 AUTO GENE. GLU
15 TAX
PGM2 0001
```



```
TAX
1 TAX1
2 TAX2
3 TAX3
4 TAX4
5 TAX5
6 TAX6
PGM2 0001
```

1. In the SETTING window, select “15 TAX”.
 - The TAX window will appear.
2. Select any option from the following options list:

1 TAX1	Tax1
2 TAX2	Tax2
3 TAX3	Tax3
4 TAX4	Tax4
5 TAX5	Tax5
6 TAX6	Tax6

■ Tax 1 through 6

Procedure

```
TAX1
RATE SIGN
TAX RATE
LOWER TAX
PGM2 0001
```

Program each item as follows:

- **RATE SIGN (Use the selective entry)**
 - +: Plus rate
 - : Minus rate
- **TAX RATE (Use the numeric entry)**
 - Tax rate (max. 7 digits: 0.0000 to 999.9999%)
- **LOWER TAX (Use the numeric entry)**
 - Lowest taxable amount (max. 5 digits: 0.00 to 999.99)
 - This option is not available in the VAT system.

On-line Configuration Programming

Use the following procedure to select the on-line configuration programming.
Please consult your dealer for more details.

Procedure

```
11 SETTING
12 REPORT
13 MESSAGE
14 DEVICE CONFIG
15 AUTO GENE. GLU
16 TAX
17 ONLINE CONFIG
18 VMP CONFIG
PGM2 0001
```



```
ONLINE CONFIG
TERMINAL No. 000001
CI SIGNAL NON
BAUD RATE 57600 bps
START CODE 002
END CODE 013
TIME OUT 007
PGM2 0001
```

1. In the SETTING window, select “16 ONLINE CONFIG”.

- The ONLINE CONFIG window will appear.

2. Program each item as follows:

- **TERMINAL NO. (Use the numeric entry)**
Terminal number (1 to 999999).
- **CI SIGNAL (Use the selective entry)**
Sensing of the CI signal
NON
SENSING
- **BAUD RATE (Use the selective entry)**
Transmission data rate
57600 bps 38400 bps
19200 bps 9600 bps
4800 bps
- **START CODE (Use the numeric entry)**
Start code (0 to 127)
- **END CODE (Use the numeric entry)**
End code (0 to 127)
- **TIME OUT (Use the numeric entry)**
Programming of the time-out time (1 to 255 sec.)

VMP Configuration Programming

Procedure

```
— SETTING —▲
11 REPORT
12 MESSAGE
13 DEVICE CONFIG
14 AUTO GENE. GLU
15 TAX
16 ONLINE CONFIG
17 VMP CONFIG
PGM2 0001
```



```
— VMP CONFIG —
PASSWORD 0000
VMP1 PASSWORD 0000
VMP2 PASSWORD 0000
VMP3 PASSWORD 0000
VMP1 ID 0000000000
VMP2 ID 0000000000
VMP3 ID 0000000000
PGM2 0001
```

1. In the SETTING window, select “17 VMP CONFIG”.

- The VMP CONFIG window will appear.

2. Program each item as follows:

- **PASSWORD (Use the numeric entry)**
Normal password (0 through 9999)/“0”: No password
- **VMP1 PASSWORD (Use the numeric entry)**
VMP1 password (0 through 9999)/“0”: No password
- **VMP2 PASSWORD (Use the numeric entry)**
VMP2 password (0 through 9999)/“0”: No password
- **VMP3 PASSWORD (Use the numeric entry)**
VMP3 password (0 through 9999)/“0”: No password
- **VMP1 ID (Use the numeric entry)**
VMP1 ID (max. 10 digits)
- **VMP2 ID (Use the numeric entry)**
VMP2 ID (max. 10 digits)
- **VMP3 ID (Use the numeric entry)**
VMP3 ID (max. 10 digits)

Automatic Sequencing Key Programming

If you program frequently performed key operations for the AUTO keys, you can enter those key operations simply by pressing the corresponding AUTO keys in key operations.

■ Basic Preset

Procedure

Select "7 AUTO KEY MODE" from the mode selection window.

▼

```
— AUTO KEY —
01 AUTO 1
02 AUTO 2
03 AUTO 3
04 AUTO 4
05 AUTO 5
06 AUTO 6
07 AUTO 7
AUTO 0001
```

▼

```
— AUTO 1 —
1 BASIC PRESET
2 KEY SEQUENCE
AUTO 0001
```

▼

```
— AUTO 1 —
TEXT AUTO 1
SECRET CODE 0000
AUTO A 0001
```

1. In the mode selection window, select "7 AUTO KEY MODE".

- The AUTO KEY window will appear.

2. Select the pertinent AUTO key from the key list.

3. Select "1 BASIC PRESET".

4. Program each item as follows:

• **TEXT (Use the character entry)**

Description for an AUTO key. Up to 12 characters can be entered. (Default text: AUTO n)





• **SECRET CODE (Use the numeric entry)**

Secret code (max. 4 digits: 0001 to 9999/0000)

Key Sequence

Procedure

Select "7 AUTO KEY MODE" from the mode selection window.

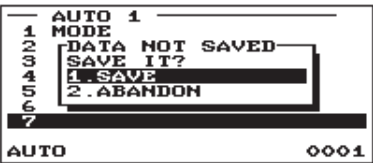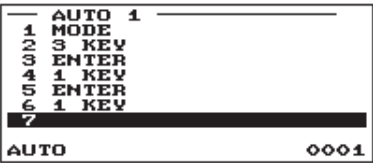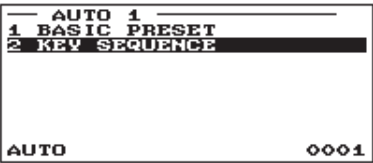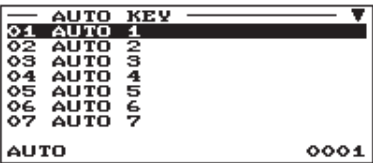

1. In the mode selection window, select "7 AUTO KEY MODE".
 - The AUTO KEY window will appear.
2. Select the pertinent AUTO key from the key list.
3. Select "2 KEY SEQUENCE".
4. Enter the key data and press the **ENTER** key.

Your register allows to program up to 50 key operations.


<Key type>	<Key data>
Function key:	Key code* (up to 3 digits: 1 to 136)
Department key:	Department code (4 digits: 00XX)
PLU key:	PLU code (5 digits: XXXXX)

* See "Function key list" on the next page.
5. To terminate the procedure, press the **TL/NS** or **CANCEL** key. When you press the **CANCEL** key, the confirmation window will appear for data saving.

Select "SAVE" or "ABANDON".

Example

In case of the X1 General report printing

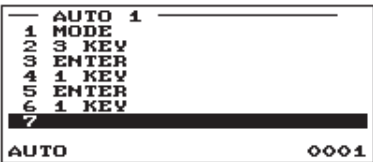

Key operation

Programmed key

17 **ENTER**
4 **ENTER**
20 **ENTER**
2 **ENTER**
20 **ENTER**
2 **ENTER**
TL/NS

MODE key
3 key
ENTER key
1 key
ENTER key
1 key

To select X1/Z1 MODE
To select READING
To select GENERAL

■ Function key list

Key code	Function key
1	0
2	1
3	2
4	3
5	4
6	5
7	6
8	7
9	8
10	9
11	00
12	000
13	. (decimal point)
14	(X)
15	CANCEL
16	CL
17	MODE
18	↑
19	↓
20	ENTER
21	PAGE UP
22	PAGE DOWN
23	ST
24	TL/NS
25	FUNC MENU
26	% MENU
27	(-) MENU
28	PAYMENT MENU
29	CASH MENU
30	CHECK MENU
31	CREDIT MENU
32	EXCHANGE MENU
33	LEVEL#
34	L1
35	L2
36	L3
37	PRICE SHIFT#
38	PRICE SHIFT 1
39	PRICE SHIFT 2
40	PRICE SHIFT 3
41	PLU/EAN
42	DEPT#
43	INQ

Key code	Function key
44	PRICE CHANGE
45	AMOUNT
46	CONDIMENT NEXT
47	REPEAT [+]
48	VOID [-]
49	REFUND
50	%1
51	%2
52	%3
53	%4
54	(-)1
55	(-)2
56	(-)3
57	(-)4
58	RA
59	RA 2
60	PO
61	PO 2
62	NO SALE
63	# (Non-Add)
64	G.C. COPY
65	RCPT
66	VAT
78	CASH 2
79	CASH 3
80	CASH 4
81	CASH 5
82	CHECK 1
83	CHECK 2
84	CHECK 3
85	CHECK 4
86	CHECK 5
87	CREDIT 1
88	CREDIT 2
89	CREDIT 3
90	CREDIT 4
91	CREDIT 5
92	CREDIT 6
93	CREDIT 7
94	CREDIT 8
95	CREDIT 9
96	EXCHANGE 1
97	EXCHANGE 2

Key code	Function key
98	EXCHANGE 3
99	EXCHANGE 4
100	VAT SHIFT ITEM
101	VAT SHIFT TRANS.
102	DIFFER ST
103	CSR#
104	CLK#
105	CLERK 1
106	CLERK 2
107	CLERK 3
108	CLERK 4
109	CLERK 5
110	CLERK 6
111	CLERK 7
112	CLERK 8
113	CLERK 9
114	CLERK 10
115	MGR#
116	GLU
117	NBAL

Key code	Function key
118	FINAL
119	GUEST#
120	DEPO (+)
121	DEPO (-)
122	B.T.
123	B.S. ITEM
124	B.S. AMOUNT
125	B.S. PERSON
126	TRANS OUT
127	TRANS IN
128	INTER MED.
129	GC RCPT
130	E.BILL
131	CASH TIP
132	NON CASH TIP
133	TIP PAID
134	RCPT.SW
135	EJ VIEW
136	BANK CONSOLE

Reading of Stored Programs

You can read programs stored in the PGM1 or PGM2 mode.

■ Program reading sequence

To read those programs stored in the PGM1 or PGM2 mode, use the following procedure:

1. Select "5 PGM1 MODE" or "6 PGM2 MODE" from the mode selection window.
2. Select "1 READING" from the mode menu to display the items list.
3. Select an item listed in the table shown below.
4. Where "RANGE" and/or "PICK UP" are displayed on the screen, select either option. Select "RANGE" to read program by range, and "PICK UP" to read program by picking up codes. The procedure to specify a range or to pick up codes are the same as the one in sales report.
On the table, for the item you can specify a range, "^{*1}" is indicated, and for the item you can pick up codes, "^{*2}" is indicated.
5. The item indicated with "^{*3}" does not issue a report.

Item:	Description:	Available mode:
1 DEPARTMENT ^{*1}	Department	PGM1 or PGM2
2 PLU/EAN ^{*1*2}	PLU/EAN	PGM1 or PGM2
3 SET PLU TABLE ^{*1}	Set PLU table	PGM2
4 LINK PLU/EAN TBL ^{*1}	Link PLU/EAN table	PGM2
5 CONDIMENT TABLE ^{*1}	Condiment table	PGM2
6 PROMOTION TABLE ^{*1}	Promotion table	PGM2
7 EAN OTHERS	EAN other functions	PGM2
8 PLU GROUP	PLU group text	PGM2
9 FUNCTIONS	Function	PGM1 or PGM2
10 MEDIA	Media key	PGM2
11 TRAINING CLK/CSR	Training clerk/cashier	PGM2
12 CLERK	Clerk	PGM1 or PGM2
13 CASHIER	Cashier	PGM1 or PGM2
14 MANAGER	Manager	PGM2
15 CLERK KEY ^{*3}	Contactless clerk key	PGM2
16 OPTIONAL	Optional feature	PGM2
17 REPORT	Report	PGM2
18 FUNCTION TEXT	Function text	PGM2
19 MESSAGE	Message	PGM2
20 AUTO GENE. GLU	GLU code	PGM2
21 TAX	Tax	PGM2
22 AUTO KEY	Automatic sequencing key	PGM2
23 DEVICE CONFIG	Device configuration	PGM2
24 DIRECT KEY	Direct key	PGM2
25 ONLINE CONFIG	On-line configuration	PGM2
26 VMP CONFIG	VMP configuration	PGM2
27 ROM VERSION	ROM version	PGM2

■ Sample printouts

• Departments (PGM1 or PGM2 mode)

Operating mode *	*PGM2*				
Report title	DEPARTMENT				
Dept. code	D01			5. 00	Tax status
Description	DPT. 01	T1	G01		Unit price
	03000	KP10V0COL	999999. 99		Group no.
	D02		2. 50		
	DPT. 02	T 2	G01		Print on the kitchen printers (1: Yes, 0: No)
	13010	KP00V0COL	999999. 99		KP10
	D03		3. 00		Print on the second kitchen printer
	DPT. 03		G01		Print on the first kitchen printer
	03100	KP00V0COL	999999. 99		VMP no. / Commission group / HALO limit
	D04		8. 60		
	DPT. 04		G01		
	03000	KP00V0COL	999999. 99		
	D05		1. 60		Function programming
	DPT. 05		G01		03000
	03000	KP00V0COL	999999. 99		Receipt type (0: Single, 1: Double)
	D06		-2. 25		Print on clerk report (0: No, 1: Yes)
	DPT. 06		G10		Age verification (0: No, 1: Yes)
	03000	KP00V0COL	999999. 99		Amount entry type (0: Inhibit, 1: Open, 2:Preset, 3: Open & Preset)
					Sales type (0: Normal, 1: SICS, 2: SIF)

* When you take this report in the PGM1 mode, the PGM2 indication is replaced by "PGM1".

• PLU/EAN (PGM1 or PGM2 mode)

Report title	PLU/EAN	*PGM2*	Associated dept. code
PLU code	P00001	(01)	Commission group
PLU group no.	G01 T1	#00/ 0	Base q'ty
	PLU00001	C0 KP00	Print on the first/second kitchen printer (0: No, 1: Yes)
		1.90	
		2.20	Sign and price 1 through 3
		1.99	
Tax status	0020 C00	S 0.000	Stock
	P00002	(02) S#01/ 0	
	G01 T 2	C0 KP00	Menu type (blank: normal PLU, L: link PLU and link PLU table no., S: set PLU and set PLU table no.)
Description	PLU00002	0.79	
Condiment table no.		0.00	
	0030 C00	S 0.000	
	P00003	(05) #00/ 0	
	G01	C0 KP00	
	PLU00003	-1.65	Function programming
		0.00	0 0 3 0
		0.00	Age verification (0: No, 1: Yes)
	0030 C00	S 0.000	Amount entry type (0: Inhibit, 1: Open, 2: Preset, 3: Open & Preset)
			Condiment entry to menu item (0: Non-compulsory, 1: Compulsory)
			Condiment type (0: No, 1: Yes)
	5012345678900#(02)	#00/ 0	
	G01	C0 KP00	
	DPT. 02	8.00	
		0.00	
		0.00	
	0020 C00	S 0.000	
EAN code	5045678912304#(04)	#00/ 0	
	G01	C0 KP00	
	Item A	7.40	
		0.00	
		0.00	
	0020 C00	S 0.000	
	5074185296300#(01)	#00/ 0	
	G01 T1	C0 KP00	
	Item B	9.10	
		0.00	
		0.00	
	0020 C00	S 0.000	
	5098765432100#(01)	#00/ 0	
	G01	C0 KP00	
	Item C	12.00	
		0.00	
		0.00	
	0020 C00	S 0.000	
	491991641875#(03)	#00/ 0	
	*G01	C0 KP00	
	Item D	5.20	
		0.00	Non-accessed EAN delete method (*: Non-delete, blank: Delete in the Z1 mode)
		0.00	
	0021 C00	S 0.000	

NOTE

The EAN codes are printed out in the sequence shown below.

EAN-13
EAN-8
UPC-A
UPC-E
ITF-14

• Set PLU table (PGM2 mode)

PGM2		Report title
SET PLU TABLE		
#01	P00001 P00002 P00003 P00004 P00005	Set PLU table no. Assigned PLU codes
#02	P00011 P00012 P00013	

• Condiment table (PGM2 mode)

PGM2		Report title
CONDIMENT TABLE		
#01	P00023 P00025 P00027	Condiment table no. Assigned PLU codes
HOW COOK? #02	#02 P00044 P00045 P00046 P00047	Next condiment table no. Description
WITH? #03	#03 P00033 P00037 P00038	
POTATO? #04	#04 P00063 P00064 P00065	
DRINK?	#00	

• Link PLU/EAN table (PGM2 mode)

PGM2		Report title
LINK PLU/EAN TBL		
#01	P00001 P00002 P00003	Link PLU/EAN table no. Assigned PLU/EAN codes
#02	5012345678900# 5012369874500#	

• Promotion table (PGM2 mode)

PGM2		Report title
PROMOTION TABLE		
#01		Promotion table no.
Promo A	GLOBAL	Description
01	P00005	Promotion type
02	P00006	Assigned PLU/EAN codes
03	P00007	
04	P00008	
	05	Trip level
AMOUNT DISC.	1.20	Discount amount
#02		
Promo B	INDIVIDUAL	Promotion way
01	5045678912304#	
02	5012345678900#	
01/02 02/03 03/00 04/00 05/00		Trip level
06/00 07/00 08/00 09/00 10/00		
% DISCOUNT	5.00%	Discount percentage
#03		
Promo C	GLOBAL	
01	P00011	
02	P00012	
03	P00013	
04	P00014	
	03	
FREE ITEM	P00020	Free item PLU/EAN code

• EAN functions (PGM2 mode)

PGM2	
EAN OTHERS	Report title
EAN NON-PLU	
20	*1
02	*2
EAN DELETE	
	99
	Delete period
PRESS CODE	
1	*3
2	
3	*4
4	
5	

*1 System code
1 digit: EAN-8
2 digits: EAN-13

*2 Non-PLU format setting
5 4 0 0 1 2
5: Tab or decimal point of field 2
4: Price check digit (1: Yes, 0: No)
0: Meaning of field 2 (1: Quantity, 0: Price)
0: Meaning of field 1 (0: Free)
1: Length of field 2
2: Length of field 1

*3 Press code types
1: German type 1
2: U.K.
3: French
4: Sweden
5: German type 2

*4 Press code function
0 0 1
0: Label of record in EAN file
(1: Prefix + Article, 0: Prefix code only)
0: Price entry method for press code
(2: Price entry compulsory,
1: Using the programmed price in EAN file,
0: Using the encoded price)
0: Type of code
(1: Press code, 0: Normal EAN code)

• PLU group text (PGM2 mode)

PGM2	
PLU GROUP TEXT	Report title
PLU GR00	Default text
PLU GR01	Preset text
PLU GR02	
PLU GR90	
PLU GR97	
PLU GR98	
PLU GR99	

• Functions (PGM1 or PGM2 mode)

PGM2	
FUNCTIONS	Report title
Discount A	Function text
I	Sign and amount
Discount B	
S	Entry type (I: Item, S: Subtotal)
LATE-NIGHT	
S	
(-) 4	
S	
%1	Sign and Rate
I	
%2	
I	
%3	
S	
%4	
S	
COM. SAL1	Commission rate
COM. SAL2	
COM. SAL3	
COM. SAL4	
COM. SAL5	
COM. SAL6	
COM. SAL7	
COM. SAL8	
COM. SAL9	
CASH TIP	
NOCA TIP	
DEPOSIT	
DEPO. (-)	
***RA	HALO limit
***RA2	
***PO	
***PO2	
***CTD	
CHK/CG	


• Media (PGM2 mode)

• Training clerk/cashier (PGM2 mode)


PGM2		Report title
MEDIA		Function text
CASH	999999.99 00000	HALO limit
CASH2	999999.99 11111	
CASH3	999999.99 00000	
CASH4	999999.99 00000	Function programming for cash
CASH5	999999.99 00000	0 0 0 0 0
CHECK	999999.99 0000000	Entry of amount tendered (0: Non-compulsory, 1: Compulsory)
CHECK2	999999.99 1111111	Drawer opening (0: Yes, 1: No)
CHECK3	999999.99 0000000	Non-add code entry (0: Non-compulsory, 1: Compulsory)
CHECK4	999999.99 0000000	Footer print on receipt (0: No, 1: Yes)
CHECK5	999999.99 0000000	Bill print (0: Non-compulsory, 1: Compulsory)
CREDIT1	999999.99 0000000	
CREDIT2	999999.99 1111111	
CREDIT3	999999.99 0000000	Function programming for check/credit
CREDIT4	999999.99 0000000	0 0 0 0 0 0 0
CREDIT5	999999.99 0000000	Entry of amount tendered (0: Non-compulsory (for check) or Inhibit (for credit), 1: Compulsory)
CREDIT6	999999.99 0000000	Drawer opening (0: Yes, 1: No)
CREDIT7	999999.99 0000000	Change due (0: Enable, 1: Disable)
CREDIT8	999999.99 0000000	Non-add code entry (0: Non-compulsory, 1: Compulsory)
CREDIT9	999999.99 0000000	Footer print on receipt (0: No, 1: Yes)
FOREIGN CURRENCY		Bill print (0: Non-compulsory, 1: Compulsory)
EXCH1	0.728520 2	EFT function (0: Non-compulsory, 1: Compulsory)
EXCH2	0.000000 2	
EXCH3	0.000000 2	
EXCH4	0.000000 2	Tab
		Rate

PGM2	
TRAINING CLK/CSR	
TRAINING CODE	0010
TRAINING TEXT	TRAINING


• Clerk (PGM1 or PGM2 mode)

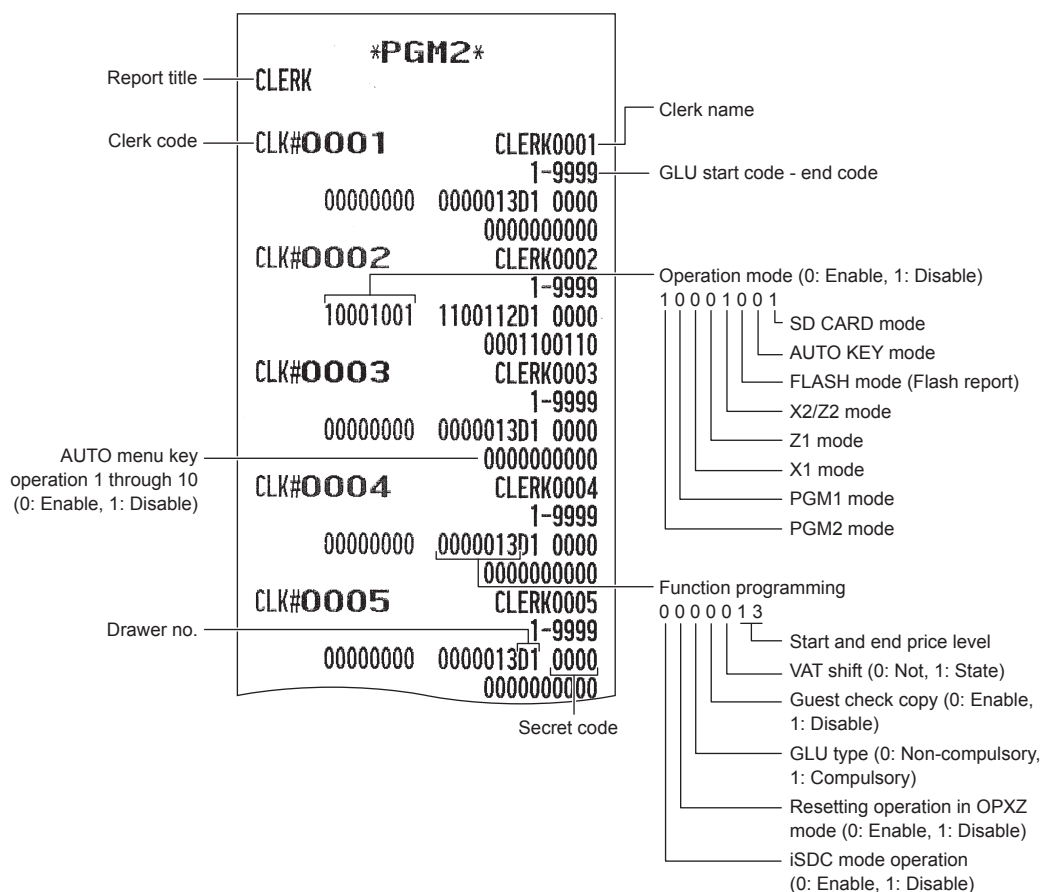

• Cashier (PGM1 or PGM2 mode)

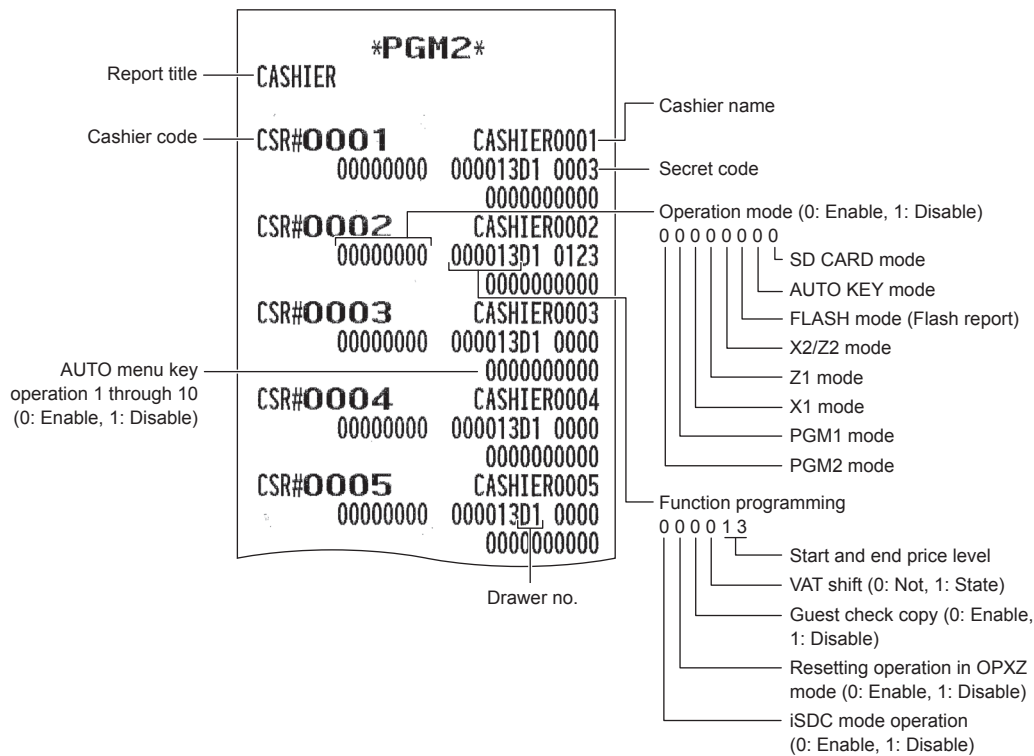

• Manager (PGM2 mode)

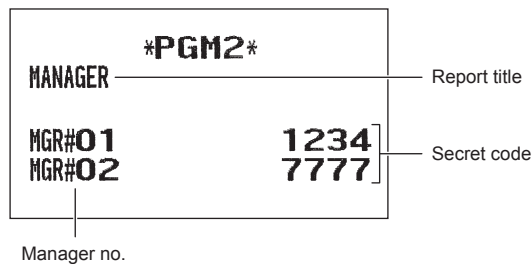

• Optional features (PGM2 mode)

PGM2			Report title
OPTIONAL			
OPTIONAL		Item	
FUNC. PROHIBIT			
OPX/Z REPORT	ENABLE	Setting	
PAID OUT	PUBLIC		
REFUND	LIMITED		
ISSUE ITM VD	PUBLIC		
NO ISSUED VD	PUBLIC		
SBTL VOID	LIMITED		
NO SALE	LIMITED		
INTERMED. GLU	PUBLIC		
1ST LAST VD	ENABLE		
EAN LEARNING	ENABLE		
PRICE CHANGE	PUBLIC		
PAYMENT ST=0	DISABLE		
PRT/DSP EDIT	YES		
DRAWER X121	OPEN		
DRAWER X222	NOT OPEN		
DRAWER OPXZ	NOT OPEN		
FUNCTION SELECT			
VAT SHIFT	BY CLERK		
LV.SFT MODE	PUBLIC		
LV.SFT TYPE	MANUAL		
RETURN TO L1	RECEIPT		
PR.SFT MODE	PUBLIC		
PR.SFT TYPE	AUTO		
RETURN TO P1	BY ITEM		
E. J. FULL	CONTINUE		
PAY FOR EX1	CASH		
EX1 CALC.	MULTI.		
CR IN RA/PO	NON		
ISBN PRICE	COMPULSORY		
VMP FULL	CONTINUE		
ADD-ON FULL	ERROR		
EURO NON-PLU	NO CONVERT		
EURO CONVERT	CONVERT		

PRINT SELECT	
PURCHASE NO.	YES
TIME PRINT	YES
JOURNAL SEL.	PARTIAL
JOURNAL TEXT	SMALL
R/J-VAT/TAX	YES
R/J-TAXABLE	YES
R/J-NET	YES
BILL-VAT/TAX	YES
BILL-TAXABLE	YES
BILL-NET	YES
BILL-TIME	YES
BILL-TABLE#	NO
SEPARATOR LINE	NO
LINK PLU	EACH PLU
TOTAL&CHANGE	DOMESTIC
EJ PRINT	SMALL
ITEM CODE ON KP	YES
PRICE ON KP	YES
AMOUNT ON KP	NO
GUEST# ON KP	NO
QTY=1 ON KP	YES
MAXIMUM TICKET	15
DBL RCPT HEADER	1 LINE
KP HEADER PRINT	NO
EURO	
DATE	00/00/2000
TIME	00
PRICE CONVERT	YES
EURO JOB	NON-COMPUL.
TERMINAL	
DRAWER ALARM	000
SCREEN SAVE	2
WAITING TIME	000


• Report (PGM2 mode)

PGM2		Report title
REPORT		
0 SKIP		Item
CLERK	SKIP	Setting
CASHIER	SKIP	
TRANSACTION	SKIP	
DEPARTMENT	NOT SKIP	
PLU	SKIP	
HOURLY	NOT SKIP	
DAILY NET	SKIP	
HOURLY REPORT		
MEMORY TYPE	30	
START TIME	00	
Z1 GENERAL REPORT		
SAVE ALL RAM	YES	
0 SKIP SALE DATA	NO	
SAVE DEPT DAILY	NO	
SAVE DEPT TERM	YES	
SAVE PLU DAILY	NO	
SAVE PLU TERM	YES	
SAVE TRNS. DAILY	NO	
SAVE TRNS. TERM	YES	
SAVE CLERK DAILY	NO	
SAVE CLERK TERM	YES	
SAVE CSR DAILY	NO	
SAVE CSR TERM	YES	
SAVE HOURLY	NO	
SAVE DAILY NET	YES	
SAVE & CLEAR EJ	NO	
STACKED REPORT		
1		
GENERAL		
GROUP TOTAL		
TRANSACTION		
2		


• Function text (PGM2 mode)

PGM2		Report title
FUNCTION TEXT		Function text (default)
NET1	NET1	Text
TAX1 ST	TAX1 ST	
TAX2 ST	TAX2 ST	
TAX3 ST	TAX3 ST	
TAX4 ST	TAX4 ST	
TAX5 ST	TAX5 ST	
TAX6 ST	TAX6 ST	
VAT 1	VAT 1	
VAT 2	VAT 2	
VAT 3	VAT 3	
VAT 4	VAT 4	
VAT 5	VAT 5	
VAT 6	VAT 6	
TTL TAX	TTL TAX	
NET	NET	
VAT SFT	VAT SFT	
TAX DELE	TAX DELE	
NET2	NET2	
SETPLU-	SETPLU-	
SETEAN-	SETEAN-	
DISCOUNT	DISCOUNT	
CP PLU	CP PLU	
REFUND	REFUND	
VOID	VOID	
VOID MODE	VOID MODE	
MGR VOID	MGR VOID	
SBTL VOID	SBTL VOID	
BILL CNT	BILL CNT	
NO SALE	NO SALE	
***PBAL	***PBAL	
***NBAL	***NBAL	
SCM(+)	SCM(+)	
SCM(-)	SCM(-)	
G.C.COPY CNT	G.C.COPY CNT	
GUEST	GUEST	
ORDER TL	ORDER TL	
PAID TL	PAID TL	
AVE.	AVE.	
O-P	O-P	
TRAN.OUT	TRAN.OUT	
TRAN.IN	TRAN.IN	
TIP PAID	TIP PAID	
DOM.CUR1	DOM.CUR1	
DOM.CUR2	DOM.CUR2	
DOM.CUR3	DOM.CUR3	
DOM.CUR4	DOM.CUR4	
*CH ID	*CH ID	
CA/CHK ID	CA/CHK ID	
GROUP01	GROUP01	
GROUP02	GROUP02	
GROUP03	GROUP03	
GROUP04	GROUP04	
GROUP05	GROUP05	
GROUP06	GROUP06	
GROUP07	GROUP07	
GROUP08	GROUP08	
GROUP09	GROUP09	
*DEPT TL	*DEPT TL	
DEPT (-)	DEPT (-)	
NON COM.	NON COM.	
COM.AMT1	COM.AMT1	
COM.AMT2	COM.AMT2	
COM.AMT3	COM.AMT3	
COM.AMT4	COM.AMT4	
COM.AMT5	COM.AMT5	
COM.AMT6	COM.AMT6	
COM.AMT7	COM.AMT7	
COM.AMT8	COM.AMT8	
COM.AMT9	COM.AMT9	
COM.TTL	COM.TTL	
***TOTAL	***TOTAL	
SUBTOTAL	SUBTOTAL	
OLD BAL.	OLD BAL.	
BALANCE	BALANCE	
SCM TTL	SCM TTL	
TOWN NAME	TOWN NAME	
TOWN NAME	TOWN NAME	
TRANSFER	TRANSFER	
GLU#	GLU#	
#	#	
ITEM ST	ITEM ST	
ITEMS	ITEMS	
MDSE ST	MDSE ST	
NET 1	NET 1	
NET 2	NET 2	
NET 3	NET 3	
NET 4	NET 4	
NET 5	NET 5	
NET 6	NET 6	
DIFF ST	DIFF ST	
DUE	DUE	
TIP DUE	TIP DUE	
CHANGE	CHANGE	
COPY	COPY	
G.C. COPY	G.C. COPY	
B. T.	B. T.	
B. S.	B. S.	
INTERMED.	INTERMED.	
BILL	BILL	
VOID	VOID	
REFUND	REFUND	
RCP SW.	RCP SW.	
PR.CHNG	PR.CHNG	
PARTIAL PAY	PARTIAL PAY	


• Message (PGM2 mode)

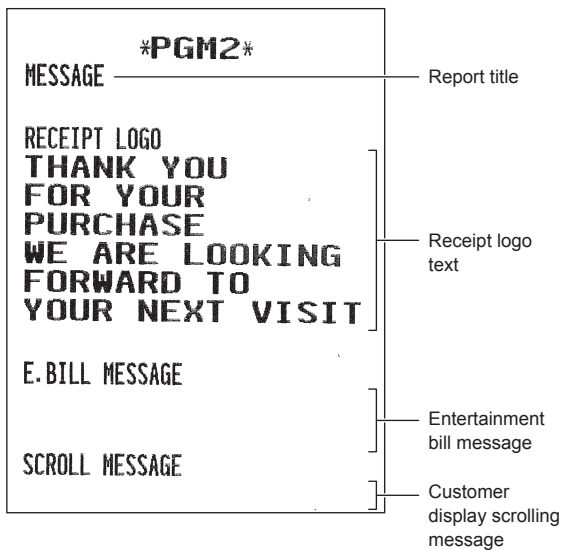


• AUTO key (PGM2 mode)

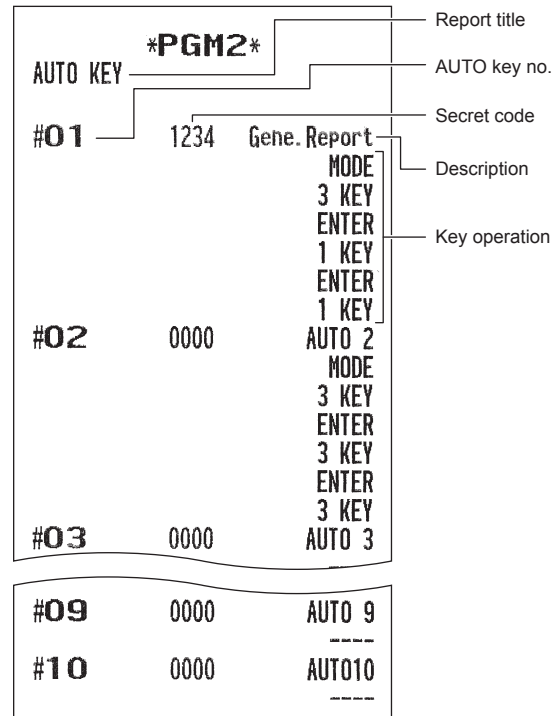

• Tax rate (PGM2 mode)

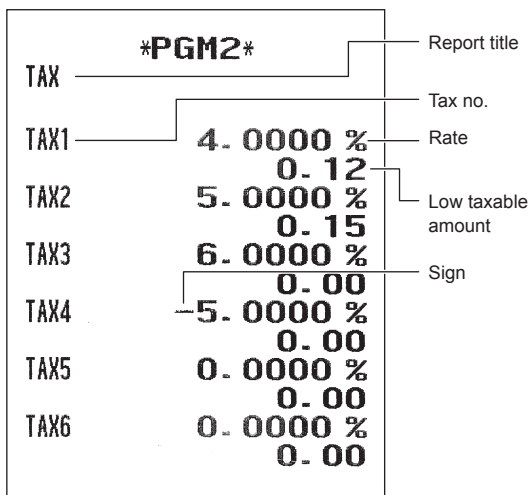

• GLU code (PGM2 mode)

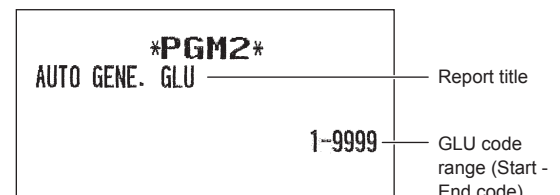

- **Device configuration (PGM2 mode)**

PGM2		
DEVICE CONFIG		Report title
BUILT-IN PRINTER		Item
AUTO CUTTER	YES	Setting
LIGHT&SHADE	50	
IMAGE FOOTER	NOT PRINT	
DIFF ST FEED	1	
KP#1	C#2	Channel no.
PRINTER	BUILT_IN	
AUTO CUTTER	YES	
PRINT TYPE	S/D	
SECOND KP	NO	
NAME		
INITIAL FEED#	00	
SORT RCPT. CUT	NO	
SEQUENTIAL PRINT	YES	
KP#2	C#0	
BCR(SCANNER)	C#1	
TYPE	RS-CD CONTROL	
BAUD RATE	9600bps	
DATA BITS	7 Bits	
PARITY	ODD	
STOP BIT	1 Bit	
ITF14	W LENGTH	
ONLINE	C#0	
CLERK KEY	C#0	
EFT	C#0	

- **Direct key (PGM2 mode)**

The diagram shows a report form with the following structure:

- Report title:** *PGM2*
- Section 1:**
 - Header: DIRECT KEY
 - Items: 001, 002, 003, 004, 005
- Section 2:**
 - Header: Key no.
 - Items: 031, 032, 033, 034, 035, 036, 037, 038, 039, 040, 041
 - Dept. code: D01, D02, D03, D04
- Section 3:**
 - Header: L 3
 - Items: 111, 112, 113, 114, 115, 116
 - PLU code (Level 1 through 3): P00203, P00065, P00135, P00205, P00066, P00136, P00206, P00067, P00137, P00207, P00068, P00138, P00208, P00069, P00139, P00209

• On-line configuration (PGM2 mode)

PGM2		Report title
ONLINE CONFIG		
TERMINAL No.	000001	
CI SIGNAL	NON	
BAUD RATE	57600 bps	
START CODE	002	
END CODE	013	
TIME OUT	007	

• VMP configuration (PGM2 mode)

PGM2		Report title
VMP PRESET		
PASSWORD	0000	
VMP1 PASSWORD	0000	
VMP2 PASSWORD	0000	
VMP3 PASSWORD	0000	
VMP1 ID	0000000000	
VMP2 ID	0000000000	
VMP3 ID	0000000000	

• ROM version (PGM2 mode)

PGM2		Report title
VERSION		
PROGRAM Version	ER-A411/A421V Ver1.01	
TEXT Version	Text V.1.00	

SD CARD Mode

The register's data can be saved to the SD memory card, and the programming data can be loaded from the SD memory card.

To use the SD card function, select the "8 SD CARD MODE" mode in the mode selection window and perform the following operations.

■ Inserting and removing an SD memory card


The SD card slot is located on the front side of your register.

Inserting an SD memory card

Insert an SD memory card into the SD card slot with the printed SD logo facing upwards. Push the card in steady with a finger until it clicks and release it slowly.

Removing the SD memory card

Push the card in gently with a finger and release it. The card will come out.

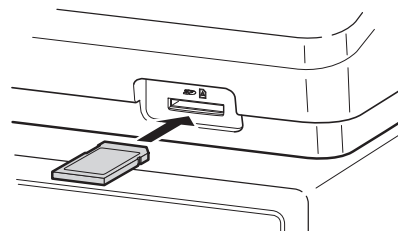

NOTE

- This model supports SDHC cards (4GB~32GB) only. Use of any other types of SD memory cards such as mini SD, micro SD, etc. with an adapter is not supported.
- When inserting or removing the SD memory card, be sure to release it slowly. Otherwise, the card may pop out and injure your finger.
- Never touch or remove the SD memory card while it is accessed, otherwise the data stored in it may be damaged.
- Formatting the SD memory card erases all the data in it.

CAUTION: Never turn the power off, while the SD memory card is accessed.

■ SD card formatting

When the SD card is not formatted yet, take the formatting operation.

Procedure

- (1) Select "4 FORMATTING" in the SD CARD mode, the confirmation window is displayed.
- (2) To perform the format operation, select OK and press the **ENTER** key.
To cancel the operation, select CANCEL and press the **ENTER** key.

■ Folder creating

The master folder can be created for the data file.

(/SHARP/ECRXXX16/nnnnnnnn/:nnnnnnnn /folder name)

Procedure

- (1) Select "3 FOLDER CONTROL" in the SD CARD mode and press the **ENTER** key.
- (2) Select "1 CREATE FOLDER", the folder name entry window is displayed.
- (3) Enter the required folder name and press the **ENTER** key.
To cancel the operation, press the **CANCEL** key.

■ Folder name selecting

Procedure

- (1) Select "3 FOLDER CONTROL" in the SD CARD mode and press the key, the FOLDER CONTROL window is displayed.
- (2) Select "2 SELECT FOLDER", the folder name list window is displayed.
- (3) Select the required folder name from the list, and press the key.
To cancel the operation, press the key.

■ Data saving

The sales data, EJ data, data or programming data can be saved to the SD card.

Procedure

- (1) Select "1 SAVING" in the SD CARD mode, the selection window "SAVE" or "SAVE FOR ONLINE" is displayed.

1. SAVE: Saves data
2. SAVE FOR ONLINE: Saves and adds data to existing file and clears the data at the register

Select the operation "SAVE" or "SAVE FOR ONLINE" and press the key; the following data list window is displayed. (If you selected "SAVE FOR ONLINE", only "EJ DATA" is displayed.)


Text	Data list
SALES DATA	Sales data (CSV format)
EJ DATA	Electronic journal data
IND. PROGRAM	Select the individual programming data: DEPARTMENT, PLU/EAN GRAPHIC LOGO LOGO TEXT TAX
ALL PROGRAM	All programming data
ALL RAM DATA	All RAM data

- (2) Select the data menu from the list and press the key, the confirmation window is displayed.
To save the required data file, select OK and press the key.
To cancel the operation, select CANCEL and press the key.




■ Data loading

The programming data can be loaded from the SD card.

Procedure

- (1) Select “2 LOADING” in the SD CARD mode and press the  key. The following selection window is displayed.

Text	Data list
IND. PROGRAM	Select the individual programming data: DEPARTMENT, PLU/EAN GRAPHIC LOGO LOGO TEXT TAX
ALL PROGRAM	All programming data
ALL RAM DATA*	All RAM data

- (2) Select the data menu from the list and press the  key, the confirmation window is displayed.
To load the programming data file, select OK and press the  key.
To cancel the operation, select CANCEL and press the  key.

* When “ALL RAM DATA” is selected, the register resets the program in the last save point after loading all the RAM data.

NOTE *The loading operation must be circumspect in execution, the sales data and/or all programming data will be recovered with the back-up data.*

iSDC Mode


In the iSDC mode, you can save and load the data of your register to and from the server using a WiFi SD card.

This section describes the items that can be programmed for the iSDC mode, and how to terminate the communication in the iSDC mode.

For details on the specification of WiFi SD card and the use of iSDC mode, consult your authorized SHARP dealer.

■ Host preset

Procedure

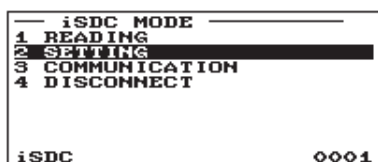

The screen continues.

1. In the mode selection window, select “9 iSDC MODE”.

2. Select “2 SETTING”.

3. Select “1 HOST PRESET”.

4. Program each item as follows:

- **USER ID (Use the character entry)**

User ID for communication service. Up to 12 characters can be entered.

- **PASS (Password) (Use the character entry)**

Password for communication service. Up to 16 characters can be entered.

- **SCHEME (Use the selective entry)**

Resource URI scheme
HTTP/HTTPS

- **HOST (Use the character entry)**

Server host name. Up to 30 characters can be entered.

■ Host preset (continued)

- **AUTH (Use the character entry)**

Resource path for authentication. Up to 30 characters can be entered.

- **UPLOAD (Use the character entry)**

Resource path for uploading sales data. Up to 30 characters can be entered.

- **DOWNLOAD (Use the character entry)**

Resource path for downloading presets. Up to 30 characters can be entered.

- **EJ (Use the character entry)**

Resource path for uploading EJ data. Up to 30 characters can be entered.

- **CONNECT (Use the character entry)**

Resource path for checking communication. Up to 30 characters can be entered.

■ Send item

Procedure

SETTING	
1	HOST PRESET
2	SEND ITEM
3	REPORT
iSDC 0001	



SEND ITEM		TRANSACTION
EJ		
GENERAL Z1		NO
GENERAL Z2		NO
PLU/EAN Z1		NO
PLU/EAN Z2		NO
STOCK		NO
CLERK Z1		NO
CLERK Z2		NO
iSDC		0001

The screen continues.

1. In the mode selection window, select "9 iSDC MODE".

2. Select "2 SETTING".

3. Select "2 SEND ITEM".

4. Program each item as follows:

- **EJ (Use the selective entry)**

TRANSACTION: Sends the EJ data after the transaction.
GENERAL Z1: Sends the EJ data when the General Z1 report is issued.

NO: Does not send the EJ data.

- **GENERAL Z1 (Use the selective entry)**

YES: Sends the general Z1 report.

NO: Does not send the general Z1 report.

- **GENERAL Z2 (Use the selective entry)**

YES: Sends the general Z2 report.

NO: Does not send the general Z2 report.

- **PLU/EAN Z1 (Use the selective entry)**

YES: Sends the PLU/EAN Z1 report.

NO: Does not send the PLU/EAN Z1 report.

- **PLU/EAN Z2 (Use the selective entry)**

YES: Sends the PLU/EAN Z2 report.

NO: Does not send the PLU/EAN Z2 report.

■ Send item (continued)

- **STOCK (Use the selective entry)**

YES: Sends the PLU/EAN stock report.

NO: Does not send the PLU/EAN stock report.

- **CLERK Z1 (Use the selective entry)**

YES: Sends the clerk Z1 report.

NO: Does not send the clerk Z1 report.

- **CLERK Z2 (Use the selective entry)**

YES: Sends the clerk Z2 report.

NO: Does not send the clerk Z2 report.

- **CASHIER Z1 (Use the selective entry)**

YES: Sends the cashier Z1 report.

NO: Does not send the cashier Z1 report.

- **CASHIER Z2 (Use the selective entry)**

YES: Sends the cashier Z2 report.

NO: Does not send the cashier Z2 report.

- **HOURLY (Use the selective entry)**

YES: Sends the hourly report.

NO: Does not send the hourly report.


- **DAILY NET (Use the selective entry)**

YES: Sends the daily net report.

NO: Does not send the daily net report.

■ Report

Procedure

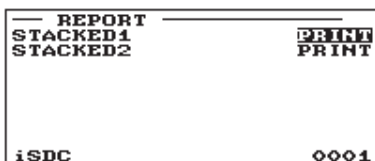

1. In the mode selection window, select “9 iSDC MODE”.

2. Select “2 SETTING”.

3. Select “3 REPORT”.

4. Program each item as follows:

- **STACKED1 (Use the character entry)**

PRINT: Prints all reports included in the stacked report 1 are printed.

NOT PRINT: Does not print the reports.

- **STACKED2 (Use the character entry)**



PRINT: Prints all reports included in the stacked report 2 are printed.

NOT PRINT: Does not print the reports.

■ Terminating the communication

When the communication in the iSDC mode is completed, be sure to terminate the communication in the following procedure before removing the SD card or turning off the register.

Procedure

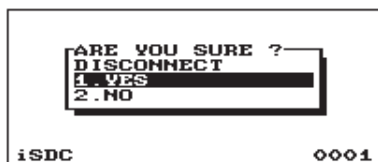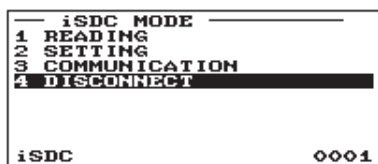

1. In the mode selection window, select "9 iSDC MODE".

2. Select "4 DISCONNECT".

- The confirmation window will appear.

3. Select "1. YES".

12 Electronic Journal

■ Electronic journal

This function is intended to record the journal data in the electronic journal file (memory) instead of journal paper.

• Recording data

The register records the printing output to the journal printer in all modes into the electronic journal file.

• Reporting (X report)

The register reports the journal data (same as normal journal formats) in the electronic journal file by the report printer.

Operation: Select the reading operation "E.JOURNAL" in X1/Z1 or OPXZ (only printing) mode.

It is possible to use filter functions (consecutive no./date/time/clerk code).

C.C. No. (Consecutive no.): ALL or RANGE (designate start no./end no.)

DATE (Date): ALL or RANGE (designate start date/end date)

TIME (Time): ALL or RANGE (designate start time/end time)

CLERK (Clerk code): ALL or INDIVIDUAL (designate clerk code)

• Resetting (Z report)

It is possible to take the resetting report of the journal data in the electronic journal file by the report printer.

Operation: Select the resetting operation "E.JOURNAL" in X1/Z1 or OPXZ mode.

The filter functions (consecutive no./date/time/clerk code) can not be used.

13

European Article Number (EAN) or Universal Product Code (UPC)

■ EAN or UPC code

Your machine can transact the following codes:

- UPC-A (Number system character: 0, 2, 3, 4)
- UPC-E
- EAN-8
- EAN-13
- Internal code EAN-8/EAN-13
- ITF-14

For the codes used in-store marking, there are two types of PLU type (treated as a code like PLU code) and Non-PLU type (price/quantity information is included in the code).

When a code is non-PLU type, the price/quantity in the code is read for sales entry (in case of quantity, "quantity multiplies preset unit price" is processed to obtain price.)




UPC-A

- Number system character: 0 <used in the source marking>
- Number system character: 3 <used as NDC or HRI>

For entry, a full 12 digits number or 11 digits number (omitting the check digits) must be entered.


- Number system character: 2 <In-store marking Non-PLU type>
You can program the format in "EAN NON-PLU" in ARTICLE setting.
- Number system character: 4 <In-store marking PLU type>

For entry, a full 12 digits number, 11 digits number (omitting the check digit), or a leading zero plus 12 digits number must be entered. (Any numbers are allowed for the digits marked with *, and on the receipt/journal, non-PLU type code is printed like 2020008**** (****: price information).)

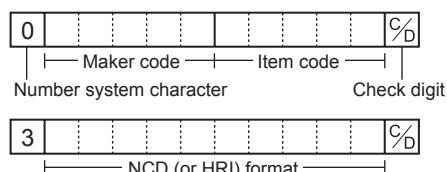

UPC-E

- UPC-E is a zero-suppressed version of UPC-A that conforms to the UPC-E Standards. This code is used for marking small package.




For entry, a 6 digits number or a leading zero plus 6 digits number must be entered.

EAN-8



- Ordinary EAN-8 code (flag: neither 0 nor 2) <used in the source marking>

For entry, a full 8 digits number must be entered.



- Internal code (flag 2) <in-store marking non-PLU short type>
Program the format in "EAN NON-PLU" in ARTICLE setting.
- Internal code (flag 0) <in-store marking PLU short type>


For entry, a full 8 digits number must be entered. On the receipt/journal, non-PLU type code is printed like 208**** (****: price/quantity information)




EAN-13

- Ordinary EAN-13 code (used in the source marking)


For entry, you must enter a full of 13 digits number.



- Internal code (used in the in-store marking, the flag character number: 20 through 29 and 02)
Program the format in "EAN NON-PLU" in ARTICLE setting.



ITF-14



■ Add-on code

UPC-A and EAN-13 may be followed by a two digits number or a five digits number as add-on code, excepting UPC-A without a check digit plus two or five digits add-on code.

Therefore, the total number of digits enterable for sales entries are as shown below:

Code entry	No add-on code	2-digit add-on code	5-digit add-on code
UPC-A	12	14	17
UPC-A w/leading zero	13	15	18
UPC-A w/o check digit	11	—	—
UPC-E	6	—	—
EAN-8	8	—	—
EAN-13	13	15	18

14

EURO Migration Function

Basically your register can be automatically modified to correspond to the introduction of EURO by executing the operation “EURO STATUS” in X2/Z2 mode. However, there are several options you must set depending on your need. Carefully conduct necessary settings.

EURO status:

You can select status from following 4 types ((A), (B), (C), or (D)). And the selectable type is decided as follows for each status. Type (A) is the base status (initial status).

From type (A) — selectable —> Type (B), (C), or (D)
 From type (B) — selectable —> Type (C), (D)
 From type (C) — selectable —> Type (D)

	Items	Type (B)	Type (C)	Type (D)
1	General Z1 report	ISSUE	ISSUE	ISSUE
2	General Z2 report	ISSUE	ISSUE	ISSUE
3	GT1/2/3 & Training GT	—	CLEAR	CLEAR
4	Convert the unit price of DEPT/PLU*	—	CONVERTING	CONVERTING
5	EX1 amount printing for total and change	YES	YES	NO
6	EX1 calculation method	DIVISION	MULTI.	MULTI.
7	EX1 currency symbol	[EURO]	The current domestic currency symbol	—
8	EX1 TAB	2	The current domestic TAB	—
9	Domestic currency symbol	—	[EURO]	[EURO]
10	Domestic TAB	—	2	2
11	Rounding system (Denmark/Sweden/Normal)	—	Normal	Normal
12	Rounding up/down of the unit digits of amount	—	No	No
13	Lowest digit entering limitation of item	—	Arbitrary	Arbitrary
14	Lowest digit entering limitation of payment	—	Arbitrary	Arbitrary
15	Difference memory	—	No	No
16	Rounding of foreign currency for EX1	ROUND OFF (4DOWN-5UP)	ROUND OFF (4DOWN-5UP)	ROUND OFF (4DOWN-5UP)

The marked items “—” is remaining the current data.

*: The preset rate of the Exchange1 is applied as the conversion rate, and the calculation method is set to “division”. When the conversion has been made, the message “PRICE CONVERTED” is printed on the report.

Setting the date and time when the automatic EURO modification operation should be executed

To certainly execute the automatic modification operation, you can program the scheduled date and time to execute the automatic EURO modification operation. From two days before the preset date, the remaining days are printed at the bottom of the daily full resetting report.

****CID	*570.36
*CH ID	*248.02
CA/CHK ID	*818.38
CHK/CG	*16.52
EURO START	
01/08/2014 12:00:00	
DAYS TO EURO	<2>

Date and time setting will be reset after the execution of automatic modification operation, and again you can program the date and time for the next automatic modification operation.

Also you can make the automatic EURO modification operation compulsory. When the above-mentioned preset date and time has come, and also when you start an entry in the REG/MGR mode, the error message "EURO CHANGE ENTRY COMPULSORY" will be displayed. You cannot start any operation in the REG/MGR mode until you make the operation.

Automatic EURO modification operation

1. Select "4 X2/Z2 MODE".
2. Select "3 EURO STATUS" from the menu.
3. Select the status you want to set (B, C or D) referring to the table on the previous page. Press the ☐ key to toggle the options.
Please note that once you set a status, you cannot return to the previous status(es).

Important note

As for the miscellaneous keys, such as ☐ and ☐ keys, and for the HALO setting, the automatic conversion will not be made. You need to change the % rates or amounts in the PGM mode after the execution of the automatic modification operation for EURO so that they are based on amounts in EURO.

It is executed some of following operation which is needed for each status.

NOTE

1) Issue General Z1 report. 2) Issue General Z2 report. 3) Clear GT1/2/3 and Training GT. 4) Convert the unit price of departments/PLUs/EANs from LOCAL currency to EURO. If new unit price is over the max digits, its price is set as "0.00". 5) Change PGM function "EX1 amount printing for total and change YES/NO". 6) Change PGM function "EX1 calculation method DIVISION/MULTIPLICATION". 7) Set "EX1 currency symbol" as the suitable data. 8) Set "EX1 TAB" as the suitable data. 9) Set "Domestic currency symbol" as EURO SYMBOL. 10) Set "Domestic TAB" as "2". 11) Set "Rounding SYSTEM (Denmark/Sweden/Normal)" as "Normal". 12) Set "Rounding up/down of the unit digits of AMOUNT" as "No". 13) Set "Lowest digit entering limitation of item" as "Arbitrary". 14) Set "Lowest digit entering limitation of payment" as "Arbitrary". 15) Set "Difference memory" as "No". 16) Set "Rounding of foreign currency for EX" as "Round off(4-DOWN,5-UP)". (EURO Regulation)

NOTE

This job cannot set the following additional EURO function. You must set the following items by each programming after executing the automatic EURO modification operation.

- 1) Exchange1 rate, (2) "Check, Credit operation for Exchange1 — YES/NO"

15 Operator Maintenance

In Case of Power Failure

When power is lost, the register retains its memory contents and all information on sales entries.

- When power failure is encountered in register idle state or during an entry, the register returns to the normal state of operation after power recovery.
- When power failure is encountered during a printing cycle, the register carries out the correct printing procedure after power recovery.

In Case of Printer Error

If the printer runs out of paper, the printer will stall, and “PAPER EMPTY” will appear on the display. Key entries will not be accepted. Referring to “Replacing the Paper Roll” in this chapter, install a new paper roll in the proper position, then press the **CL** key. The printer will print the power failure symbol and resume printing.

If the print roller arm comes up, the printer stalls, and “HEAD UP” will appear on the display. Key entries will not be accepted. Push down the arm until it is securely locked, then press the **CL** key. The printer will print the power failure symbol and resume printing.

Cautions in Handling the Printer and Recording Paper

■ Cautions in handling the printer

- Avoid the following environments:
 - Dusty and humid places
 - Direct sunlight
 - Iron powder (A permanent magnet and electromagnet are used in this machine.)
- Never pull the paper when the print roller arm is locked. First lift up the arm, and then remove the paper.
- Never touch the surface of the print head and print roller.

■ Cautions in handling the recording paper (thermal paper)

- Use only the paper specified by SHARP.
- Do not unpack the thermal paper until you are ready to use it.
- Avoid heat. The paper will color at around 70°C.
- Avoid dusty and humid places for storage. Avoid direct sunlight.
- The printed text on the paper can discolor under the following conditions:
 - Exposure to high humidity and temperature
 - Exposure to the direct sunlight
 - Contact with glue, thinner or a freshly copied blueprint.
 - Heat caused by friction from scratching or other such means.
 - Contact with a rubber eraser or adhesive tape.
- Be very careful when handling the thermal paper. If you want to keep a permanent record, copy the printed text with a photocopier.

Replacing the Paper Rolls

■ Recording paper specifications

Be sure to use paper rolls specified by SHARP.


The use of any other paper rolls than specified could cause paper jamming, resulting in register malfunction.

Paper specification

Paper width:	57.5 ± 0.5 mm
Max. outside diameter:	80 mm
Quality:	High quality (0.06 to 0.08 mm thickness)


- Be sure to set a paper roll prior to using your machine, otherwise it may cause a malfunction.
- Be careful then to set the roll correctly.

(How to set the paper roll)



■ Removing the paper rolls


When a red dye appears on the paper roll, it is time to replace the existing paper roll. Replace the paper roll with a new one. If you plan not to use your register for an extended period of time, remove the paper roll, and store it in the appropriate place.

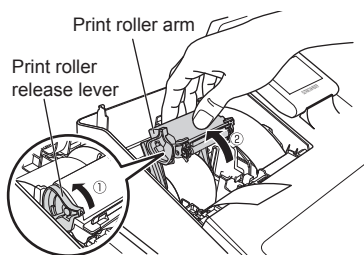


1. Remove the printer cover.


<Receipt side>

2. ① Lift up the print roller release lever to open the print roller arm of the receipt side.
② Open the print roller arm of the receipt side.
3. Remove the paper roll from the paper roll cradle of the receipt side.





<Journal side>

4. Press the  key to advance the journal paper until its printed part is out of the way.
5. Cut the paper and remove the take-up spool from the bearing.




6. Lift up the print roller arm of the journal side.
7. Remove the paper roll from the paper roll cradle of the journal side.
8. Remove the paper holding plate of the take-up spool, and remove the printed journal roll from the spool.

■ Installing the paper rolls



<Receipt side>

1. Remove the printer cover and open the print roller arm of the receipt side by following the steps in "Removing the paper rolls".
2. Set a paper roll in the paper roll cradle of the receipt side as per the diagram.





3. Feed the end of the paper along with the paper positioning guides as per the diagram.
4. While holding down the paper, slowly close the print roller arm of the receipt side, and push down the **(PUSH)** mark on the arm until you hear a click locking the arm.

NOTE If the print roller arm is not securely locked, printing is not done right. If this problem occurs, open the arm, and close the arm as instructed above.


5. Wait until the excess paper is automatically cut off, and remove it.

NOTE Do not remove the excess paper until the receipt cutter stops completely. Trying to remove the paper before the cutter stops completely could cause paper jamming.




Paper positioning guides

Paper holding plate




<Journal side>

6. Lift up the print roller arm of the journal side.
7. Set a paper roll in the paper roll cradle of the journal side as per the diagram.





8. While holding down the paper, slowly close the print roller arm of the journal side, and push down the arm until you hear a click locking the arm.

9. ① Remove the paper holding plate from the spool.

② Insert the end of the paper into the slit in the spool. (Press the  key to feed more paper if required.)

③ Wind the paper two or three turns around the spool shaft.



10. ④ Mount the paper holding plate onto the take-up spool.
- ⑤ Set the spool on the bearing, and press the journal paper feed key to take up excess slack in the paper.
11. Replace the printer cover.
12. Press the  key to make sure the paper end comes out of the printer cover and clean paper appears.0

NOTE

If the paper end does not come out, open the printer cover, and pass the paper end between the paper cutter and the paper guide of the printer cover, and replace the printer cover.


■ Removing a Paper Jam

1. Remove the printer cover.
2. Lift up the print roller arm.
3. Remove the paper jam. Check for and remove any shreds of paper that may remain in the printer.
4. Reset the paper roll correctly by following the steps in “Installing the paper rolls”.

Cleaning the Printer (Printer Head/Sensor/Roller)

When the printed text is getting dark or faint, paper dust may be stuck to the printer head, sensor and/or roller. Clean them as follows:



CAUTION: Never touch the printer head with a tool or anything hard as it may damage the head.
The paper cutter is mounted on the printer cover. Be careful not to cut yourself.

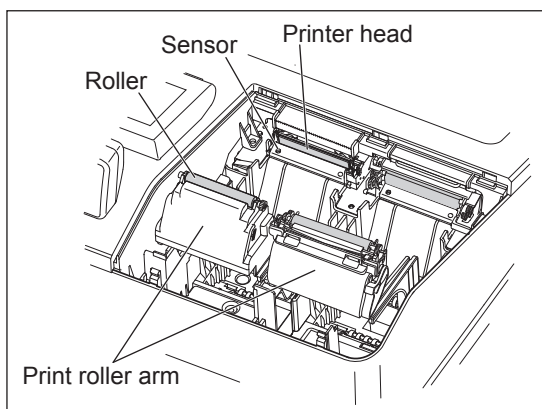

1. Disconnect the main plug of register.
2. Remove the printer cover.
3. Lift up the print roller arm.
4. Remove the paper roll referring to the "Removing the paper roll" section.
5. Clean the printer head with a cotton swab or soft rag moistened with ethyl alcohol or isopropyl alcohol.
Clean the roller and the sensor in the same manner.
6. Reset the paper roll correctly by following the steps in "Installing the paper roll".


Removing the Till and the Drawer

The till in the register is detachable. After closing your business for the day, remove the till from the drawer and keep the drawer open. The coin case is also detachable from the till. To detach the drawer, pull it forward fully with the till removed, and remove it by lifting it up.

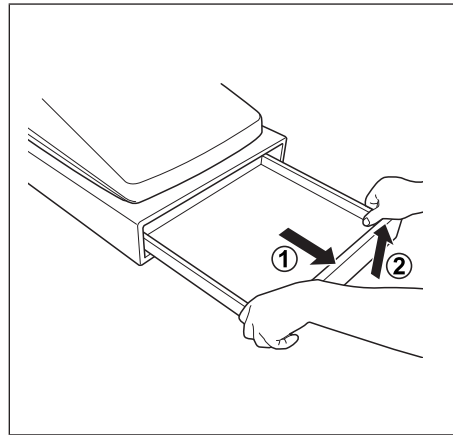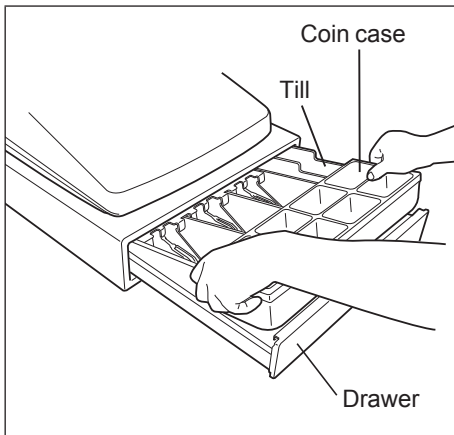


Opening the Drawer by Hand

The drawer automatically opens in the usual way. However, when power failure is encountered or the machine becomes out of order, slide the lever located on the bottom of the machine in the direction of the arrow. (See the figure below.) The drawer will not open, if it is locked with a drawer lock key.

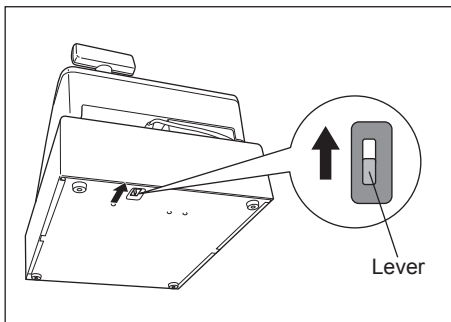

Drawer Lock Key


This key locks and unlocks the drawer.
To lock it, turn 90 degrees counterclockwise.
To unlock it, turn 90 degrees clockwise.



Installing the Fixing Angle Bracket


To prevent the register from moving when the drawer opens, the fixing angle bracket is supplied with the register. By attaching the bracket to the table where the register is installed, you can hook the register on this bracket and secure the register to its position.

How to install the fixing angle bracket

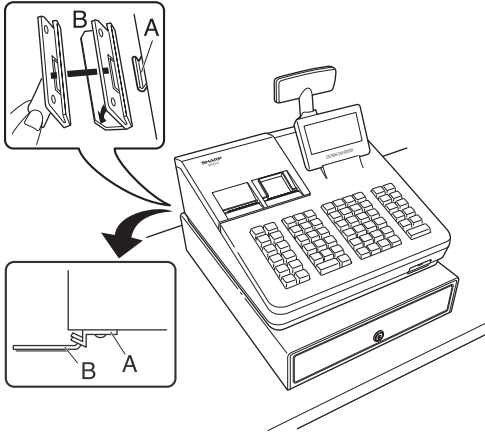

1. Thoroughly clean the location where the fixing angle bracket (B) is to be placed.
2. Peel off the adhesive tape on the fixing angle bracket.
3. Hook the angle bracket onto the hook (A) that is located at the bottom rear of the register.
4. Firmly stick the fixing angle bracket to the table surface that you cleaned above.

How to remove the register from the fixing angle bracket

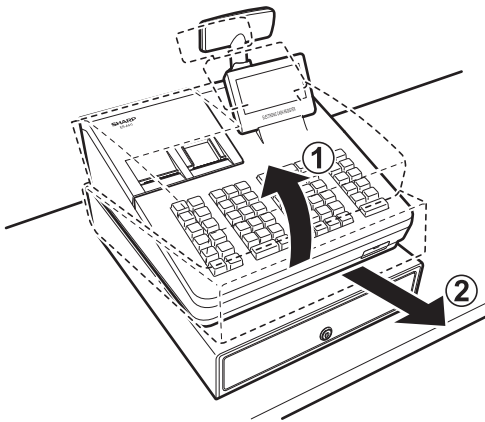

1. Lift up the front of the register and pull the register towards you.

Before Calling for Service

If you encounter any of the following problems, please read below before calling for service.

Fault	Checking
• The display does not illuminate.	<ul style="list-style-type: none">• Is power supplied to the electric outlet?• Is the power cord plug out or loosely connected to the electric outlet?• Is the register in screen-save mode?
• The display is illuminated, but the whole machine refuses entries.	<ul style="list-style-type: none">• Is a cashier code assigned to the register?• Is a clerk code assigned to the register?• Is the register in the REG mode?
• No receipt is issued.	<ul style="list-style-type: none">• Is the receipt paper roll properly installed?• Is there a paper jam?• Is the receipt function in the “OFF” status?• Is the print roller arm securely locked?
• No journal paper is taken up.	<ul style="list-style-type: none">• Is the take-up spool installed on the bearing properly?• Is there a paper jam?
• Printing is unusual.	<ul style="list-style-type: none">• Are the printer head/sensor/roller clean?• Is the paper roll properly installed?

16 Specifications

Model:	ER-A411/ER-A421	
Dimensions:	360(W) × 425(D) × 365(H)* mm * With the customer display popped up. When it is completely lowered, the height is 330 mm.	
Weight:	Approx. 12.0 kg	
Power Source:	Official (nominal) voltage and frequency	
Power Consumption:	Stand-by: 7.1 W (When the official voltage is 220 to 230 V, 50 Hz/60 Hz) 7.3 W (When the official voltage is 230 to 240 V, 50 Hz) Operating: 31.6 W (max.) (When the official voltage is 220 to 230 V, 50 Hz/60 Hz) 28.1 W (max.) (When the official voltage is 230 to 240 V, 50 Hz)	
Working Temperature:	0 to 40 °C (32 to 104 °F)	
Humidity:	20 % to 90 %	
Display:	Operator display:	LCD display with Tilt mechanism 192(W) × 80(H) dots
	Customer display:	2-line LCD display
Printer:	Type:	Two-station thermal printer
	Printing speed:	Approx. 15 lines/second
	Printing capacity:	30 digits each for receipt/journal paper
	Other functions: - Receipt (ON-OFF) function - Compression print for the journal and electronic journal - Receipt and journal independent paper feed function	
Logo:	Graphic logo printing:	
	Size:	130 (H) x 360 (W) pixel Area of black must be less than 35% of all area.
	Logo message printing:	Logo message for the receipt (max. 30 characters x 6 lines)
Paper Roll:	Width:	57.5 ± 0.5 mm
	Max. diameter:	80 mm
	Quality:	High quality (0.06 to 0.08 mm thickness)
Cash Drawer:	5 slots for bills and 8 for coin denominations	
Accessories:	Basic User Manual:	1 copy
	Paper roll:	2
	Take-up spool:	1
	Paper holding plate:	1
	Drawer lock key:	2
	Standard key sheet:	1 (for ER-A421 only)
	Programming key sheet:	1 (for ER-A421 only)
	Fixing angle bracket:	1

* Specifications and appearance are subject to change without notice for improvement.

Warning

This is a Class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

— **FOR CUSTOMERS IN U.K.** —

IMPORTANT

The wires in this mains lead are coloured in accordance with the following code:

BLUE:	Neutral
BROWN:	Live

As the colours of the wires in the mains lead of this apparatus may not correspond with the coloured markings identifying the terminals in your plug proceed as follows.

The wire which is coloured **BLUE** must be connected to the terminal which is marked with the letter **N** or coloured black.

The wire which is coloured **BROWN** must be connected to the terminal which is marked with the letter **L** or coloured red.

The apparatus must be protected by a 3A fuse in the mains plug or distribution board.

CAUTION: DO NOT CONNECT THE LIVE (BROWN) WIRE OR THE NEUTRAL (BLUE) WIRE TO THE EARTH TERMINAL OF YOUR 3-PIN MAINS PLUG.

Shielded interface cables must be used with this equipment to maintain compliance with EMC regulations.

Noise level LpA: 57.6 dB(A-weighted)

Measured according to EN ISO 7779:2001

[Maximum value if the cash drawer springs open LpAI: 77.0 dB(A-weighted)]

SHARP®

SHARP ELECTRONICS (Europe) Ltd.

4 Furzeground Way, Stockley Park Uxbridge,
UB11 1 EZ, United Kingdom

SHARP CORPORATION