



Self contained emergency

PROF SM BKD LED2S EXIT SIGN M3 ELD IP65

Maintained or non-maintained selectable.
 UV resistant & optional interchangeable legends.
 IP65 Rated.
 Efficient and reliable LED light source.

Product data

| General information | |
|-------------------------|--------------------|
| Emergency Lumens | 223lm |
| Emergency Duration | 3 hours |
| Emergency Type | ELD |
| Battery | LiFePO4 6.4V 1.5Ah |
| Glow Wire Testing | 850° |
| Temperature | 0~45°C |
| LED Chip Lifetime (L70) | >50,000hrs |
| CCT | 4992K±352K |
| CRI | >80 |
| Power Factor | >0.3 |
| Running Current | 0.028A |
| Inrush Current | 18A |

Operating and electrical

| | |
|---------------|--|
| Input Voltage | 220-240V |
| Wattage | 6W (Charging power) 2W (Emergency mode) |
| Lumens P/Watt | >110lm/W |

Mechanical and housing


| | |
|-------------------------|------------------------|
| Material / Finish (RAL) | PC / RAL9016 |
| Class / IP / IK | Class II / IP65 / IK08 |
| Beam Angle | 120° |

| | |
|---------------------|---------------|
| Installation Method | Surface mount |
|---------------------|---------------|

Product data

| | |
|--------------|--|
| Order code | 919013004998 |
| Product name | PROF SM BKD LED2S EXIT SIGN M3 ELD IP65 |

Dimensional drawing

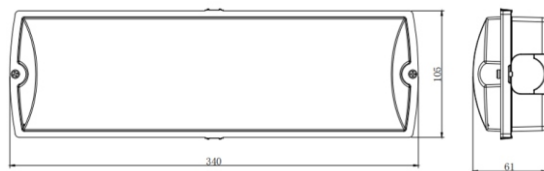

Interchangeable self-adhesive legends

Photometry

*Without legend

