


## GENERAL PLANTING GUIDELINES

1. All plants must be healthy, vigorous material, free of pests & diseases & Florida #1 grade or better, unless otherwise

- 2. All plants must be container grown or balled & burlapped (B&B) as indicated in the plant list.
- 3. All trees must be straight trunked, full-headed & meet all requirements specified. 4. All plants are subject to approval of the landscape designer & property owner before, during, & after installation until
- the date of the final acceptance. 5. All trees are to be guyed or staked as instructed by designer.
- 6. All plants & planting areas must be completely mulched to a minimum depth of 3" using Pine Bark mini nugget. 7. Prior to construction, the landscape contractor shall be responsible for locating all underground utilities, structure,
- site appurtenances, etc. that is or could be effected by the landscape construction.
- 3. The landscape contractor is responsible for verifying all quantities shown on these plans. 9. The landscape contractor is responsible for maintaining all plantings (including, but not limited to: watering, spraying,
- mulching, fertilizing, etc.) of planting areas and lawns until the work is accepted in total by the landscape designer and 10. Any plant material which dies, runs brown or defoliates (prior to total acceptance of the work) shall be promptly removed from the site and replaced with material of the same species, quantity, size, and meeting all plant list
- specifications. Normal plant material shall be warranted for a period of 3 months after completion. Palms and trees shall be warrantied for (1) year. Warranty period starts after latest replacement is accepted. 11. All disturbed areas of existing sod, shall be re-sodded, sod type to be St. Augustine Floratam if existing sod cannot be
- 12. Landscape contractor shall verify the plant quantities. Plant symbols on the landscape construction plan supersede quantities in the plant list.
- 13. In size grading B&B trees, caliper shall take precedence over height. 14. In size grading multi-stem trees, height shall take precedence over caliper.
- 15. All mulch (Pine Bark Mini Nugget) to be approved by the landscape designer and the owner. Provide samples to the landscape designer for review and approval prior to installation of much. Mulch shall be free of foreign debris or
- deleterious material. Mulch shall not be treated with any compound harmful to plants or wildlife. 16. All existing plant material not shown on this landscape plan is subject to removal and to be included in services of the landscape contractor. All existing plant material to be salvaged will be established during the preliminary
- walkthrough with the landscape designer and owner representative all plant material marked in orange pain to be removed by landscape contractor. Approval of all existing vegetation to be removed is required by the landscape designer and property owner representative prior to removal.
- 17. Excessive plant material shown on plan and not installed shall be deducted from final invoice.


| GUID        | E FOR     | EST. | IMATI | NG A      | ND  | PLANT | ING        |     |     |
|-------------|-----------|------|-------|-----------|-----|-------|------------|-----|-----|
| nches Apart | 32 Plants |      |       | 64 Plants |     |       | 100 Plants |     |     |
| 6"          | 8         | sq.  | ft.   | 16        | sq. | ft.   | 25         | sq. | ft. |
| 8"          | 14        | sq.  | ft.   | 28        | sq. | ft.   | 44         | sq. | ft. |
| 10"         | 22.5      | sq.  | ft.   | 45        | sq. | ft.   | 7.0        | sq. | ft. |
| 12"         | 32        | sq.  | ft.   | 64        | sq. | ft.   | 100        | sq. | ft. |
| 15"         | 50        | sq.  | ft.   | 100       | sq. | ft.   | 156        | sq. | ft. |
| 18"         | 72        | sq.  | ft.   | 144       | sq. | ft.   | 225        | sq. | ft. |
| 24"         | 128       | sq.  | ft.   | 256       | sq. | ft.   | 400        | sq. | ft. |
|             | RMULAS I  |      |       |           |     |       | -          |     |     |
|             | Triang    | les: | Area= | =1/2 X    | Hei | aht.  |            |     |     |




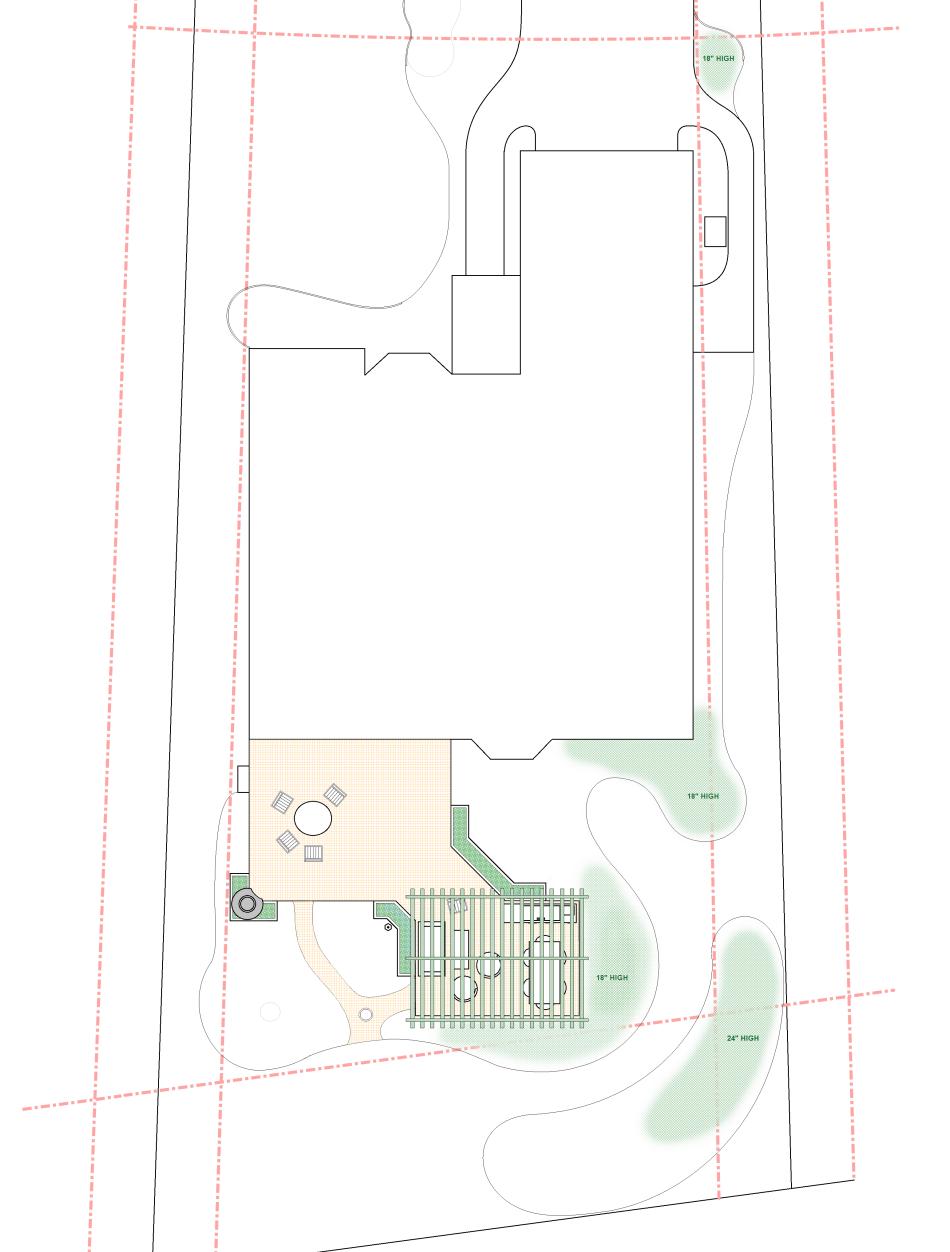


CLEARMEADOW DRIVE ----




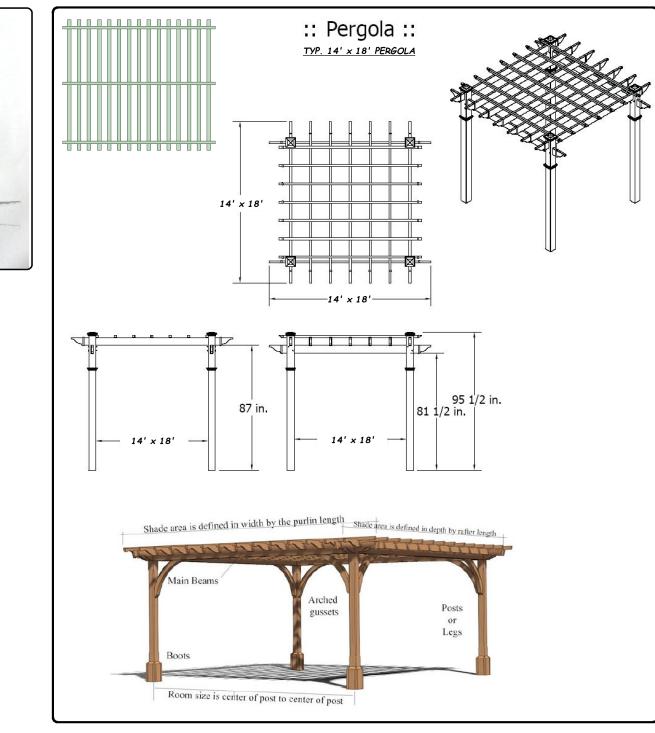

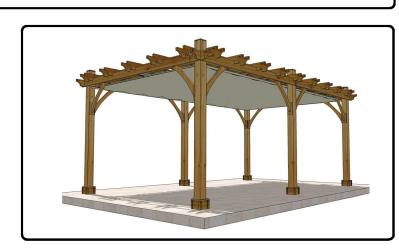


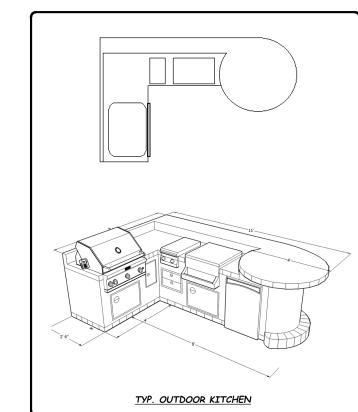



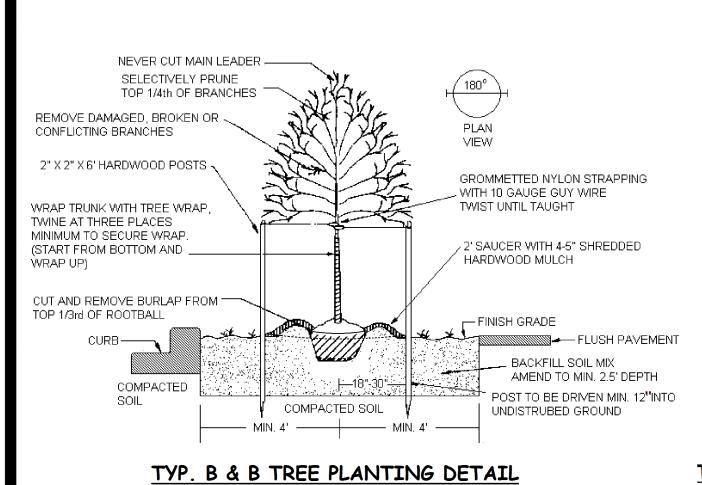


 EQUAL SPACING BETWEEN PLANTINGS. (3) FINISH SURFACE W/3" THICK MULCH NOTE: SEE PLANS SPECIFICATIONS. NOTE: SEE PLANS FOR (4) AMENDED SOIL, SEE PLANS FOR SOIL PREPARATION. SPACING DETAILS. ② GROUND COVER / PLANT MATERIAL ⑤ PLANTING SPACING X .86 TRIANGULAR EQUIDISTANT SPACING TYP. GROUND COVER PLANTING DETAL

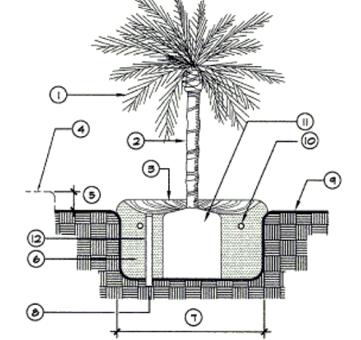

- FRONDS TIE WITH SINGLE STRAND OF ORGANIC MATERIAL UNTIE AT END OF MAINTENANCE PERIOD
- 2 PALM TRUNK
- 4" HIGH WATERING BASIN (IF REQ'D)
- TOP OF PAVING
- 1" IN TURF AREAS
- BACKFILL MIX 100% WASHED SAND ② 2 X WIDTH OF ROOTBALL
- O UNDISTURBED NATIVE SOIL
- (4) FINISH GRADE PLANT TABLETS (SEE SPECS)

TYP. PALM PLANTING DETAIL

- ② 3" DIA. X 3" DEEP PERFORATED PVC BREATHER TUBE W/ NDS DRAIN GRATE

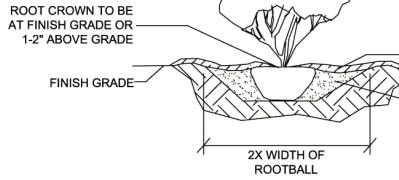

TYP. SHRUB PLANTING DETAIL


2" SETTLED

LAYER OF MULCH

TILLED OR BROKEN

UP SOIL MIN 12" DEEP







**REVISIONS** 





D. DAMERON NAOMI 08/12/2020 SCALE 1" - 10' JOB NO. 20-0008