



# Self contained emergency

## PROF SM TWIN SPOT LED120S NM3 ELD IP65

IP65 rated durable PC Construction.  
 Two adjustable LED lamp heads.  
 Compact structure for easy installation.  
 DALI emergency testing and monitoring  
 Ideal for commercial and industrial application.

### Product data

#### General information

Emergency Lumens	1286lm
Emergency Duration	3 hours
Emergency Type	ELD
Battery	LiFePO4 6.4 V 6Ah
Glow Wire Testing	850°
Temperature	0~45°C
LED Chip Lifetime (L70)	>50,000hrs
CCT	4992K±352K
CRI	>80
Power Factor	>0.3
Running Current	0.041A
Inrush Current	18A

#### Operating and electrical

Input Voltage	220-240V
Wattage	9W (Charging power) 9W (Emergency mode)
Lumens P/Watt	>130lm/W

#### Mechanical and housing


Material / Finish (RAL)	PC / RAL9016
Class / IP / IK	Class II / IP65 / IK06
Beam Angle	110°

Installation Method	Surface mount
---------------------	---------------

#### Product data

Order code	919013005011 - DALI Version
Product name	PROF SM TWIN SPOT LED120S NM3 ELD IP65

#### Dimensional drawing

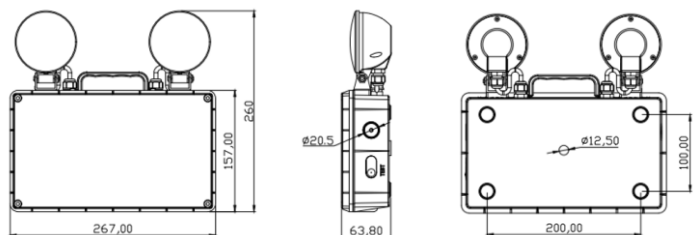

#### Photometry

