



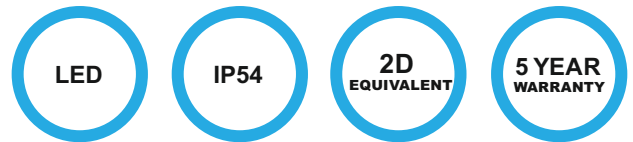

Lighting-Power-Control

## OPTIO LED

Surface Mount Polycarbonate Round Bulkhead

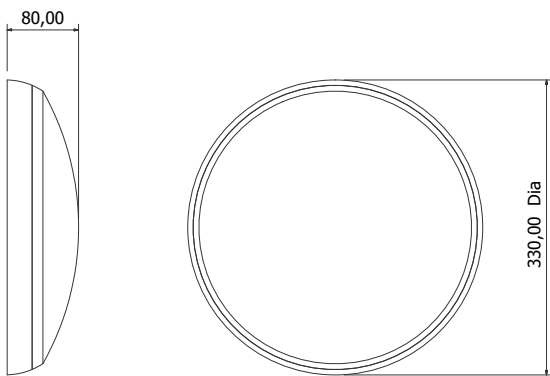

### TECHNICAL DETAILS

Part Number	Description	Replaces	Weight (kg)	No. Per 10A Breaker	Inrush Current (A)	Circuit Watts (W)	Board Lumens	Luminaire Lumens	LI/cW
RDF-W35504K-HE	White Body	16W 2D	1.4	100	8A 80µs	6	1041	812	135.3
RDF-S35504K-HE	Silver Body	16W 2D	1.4	100	8A 80µs	6	1041	812	135.3
RDF-W35704K-HE	White Body	28W 2D	1.4	100	8A 80µs	10	1734	1353	135.3
RDF-S35704K-HE	Silver Body	28W 2D	1.4	100	8A 80µs	10	1734	1353	135.3

### FEATURES

- Polycarbonate construction LED replacement for 2D fittings
- Dimming control gear with DALI and DATA2
- Integral 3-hour emergency versions including standard, auto-test (self-test), DALI and TM DATA2
- Addressable central battery version available for the TM-CBA
- Satin silver body or white versions
- Suitable as bathroom zone 2 luminaire





Lighting-Power-Control

# KEY FEATURES



## OPTIONS AND ACCESSORIES

- EM** Integral Emergency (1W)
- EMST** Integral Emergency Self Test (1W)
- EMD2** Integral Emergency DATA2 (1W)
- EMCB** Addressable TM Central Battery
- CF** Corridor Function
- MWP** Remotely Programmable Microwave
- DD** SwitchDIM/DALI
- 3K** 3000K Colour Temperature
- 5K** 5000K Colour Temperature

## PHOTOMETRIC AND DIMENSION

