

### RECIPE SAVE TO USB from EMail:


- You will need 2 USBs – one for grinder recipe, one for ICB recipe.
- USBs will need to be new/blank. Will need to format if you are not sure.
- If you format - Verify file system is “FAT32”
- **Important: Do not attempt to open the recipe file. Only save it or drag and drop to the USB.**
- **Make sure to right click and eject USB after loading recipe.**
- Must call Bunn tech support for any assistance needed. U.S. Tech Services: (800) 286-6070
- Grinder recipe file will appear as the following: BUNN\_USB



- ICB recipe file will appear as the following: Infus323.37


### MHG GRINDER:

- To access grinder USB port/Burr Adjustment, remove set screws from front control panel.

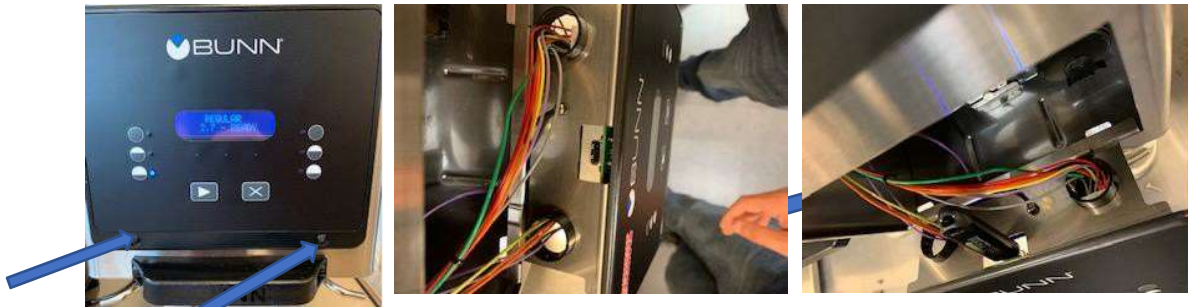

### BURR ADJUSTMENT:

- Enter the Service Menu “TEST OUTPUTS” - “GRIND MOTOR”.
- Turn grinder motor ON.
- After all the coffee in the grind chamber is used, slowly turn the adjusting screw in a clockwise direction until a metallic whine is heard due to the rubbing of the grinding burrs. (reverse the adjusting screw until the whining sound stops).
- Turn plastic grind indicator until screw slot lines up with “0” on the indicator.
- Once you have it set to Zero – using a flat head screwdriver turn the adjustment screw counterclockwise to #10.

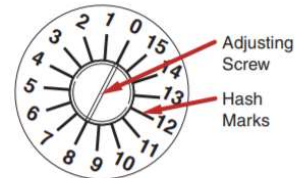

### RECIPE UPLOAD:


- Once the USB is inserted, the grinder will recognize the USB and prompt you to install. Select YES to download recipe.



### RENAMING MHG HOPPERS

- You will need to manually name each hopper to match the recipe name.

- To rename MHG hoppers you will need to access the programming menu by holding the hidden button. The button labeled c (right) in the below picture is the hidden program button.

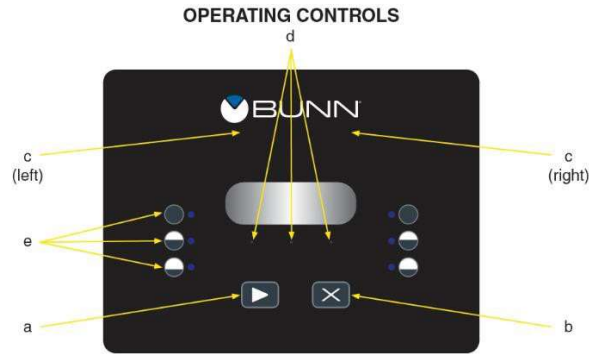

**Grind Pad (a)** – Pressing initiates a timed grind cycle.  
**Stop Pad (b)** – Pressing ends the operation of the grinder.  
**Pads (c right)** – Hold “Hidden” button 2 seconds to ENTER programming, then use to navigate setup and programming menus.  
**(c left)** – Use “Hidden” button to navigate setup and programming menus.

- The first screen should read “NAME HOPPER”. Press SELECT to enter this option.
- The next screen will ask which side to name (left of right hopper). Select LEFT or RIGHT. You can always revisit this step.
- Make sure the name and gate time match the recipe setting.
  - TIERRA: SMALL BREW GATE TIME 8.5 – MED BREW GATE TIME 19.8
  - ALTECO: SMALL BREW GATE TIME 10.8 – MED BREW GATE TIME 24
- The next screen will ask “Are you sure?”. Select YES to save the name.



- Fill grinder hoppers with beans and apply hopper decals.
  - Brown – Tierra Brasile
  - Green – Tierra Alteco
- Grind and weigh beans – Adjust gate times as necessary to achieve these grind weights for each :

- Small – 4.75 oz
- Medium – 9.5 oz
- Large – not used
- Decaf is a fracpack

Approximate Gate Times:  
 ½ batch - 17.6 seconds  
 ¼ batch - 7.2 seconds  
 Weigh and adjust as necessary to hit weights.

