




Lighting-Power-Control

PRIMO E 30E to 80E

Multiple Size Metal Surface Mount Exit Box

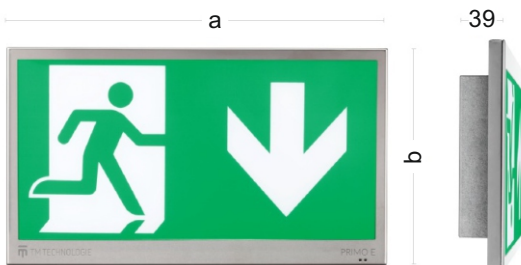

		a (mm)	b (mm)
PRIMO E	30	322	184
PRIMO E	40	422	234
PRIMO E	60	622	334
PRIMO E	80	822	434

PARAMETERS

Standards	EN 60598-1, EN 60598-2-22, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 55015, EN 61000-3-2, EN 62031, EN 62471, EN 1838
Warranty	5 years battery 3 years
IP	IP20
IK	IK05
Version	standard or auto-test
Power supply	210 to 250 V AC 50 to 60 Hz
Temperature range	+10 to 35 °C
Material	metal (with optional powder coat)
Colour	polished steel, satin steel, white or black
Duration time	3 hours
Operating mode	M (maintained / non-maintained)
Maximum light power	0.9 W to 3.6 W
Active power	2.5 W to 7.9W
Insulation class	1
Luminance	>200 cd/m ²
Viewing Distance	30, 40, 60 and 80m versions
Battery	long life; LiFePO ₄ /C

FEATURES

- Four different sizes available (see table above)
- Standard, auto-test (self-test), DATA2 addressable and DALI versions available
- Recessing kit available, details on request

